

Decomposing visual masking into stimulus type, masking type, and general visual factors:

Only the general factor relates to cognitive performance

Shanglin Yang¹, Jeffrey N. Rouder¹, & Rean Du¹

¹ University of California, Irvine

Author Note

Version 1, September, 2026.

Correspondence concerning this article should be addressed to Jeffrey N. Rouder.

E-mail: jrrouder@uci.edu

Abstract

ABSTRACT

Keywords: WORDS

Decomposing visual masking into stimulus type, masking type, and general visual factors:

Only the general factor relates to cognitive performance

Introduction

Understanding how fundamental perceptual abilities interrelate and contribute to cognitive performance is one of the central topics in cognitive psychology and individual-differences research. Perhaps the best-known finding in this literature concerns inspection time (IT), the minimum exposure duration at which an observer can reliably make a simple perceptual discrimination. Vickers, Nettelbeck, and Willson (1972) first introduced this paradigm. In its classic form, participants briefly view a stimulus consisting of two vertical lines of clearly unequal length joined at the top (hereafter, the Pi stimulus) and indicate which line is longer. By varying the exposure duration of the Pi stimulus and using a backward mask to prevent further visual processing, the minimum exposure duration required for accurate discrimination can be estimated. Nettelbeck and Lally (1976) subsequently reported that IT correlated negatively with Performance IQ. This negative relation has since been replicated many times across age groups, sensory modalities, and measures of intelligence (Deary, Caryl, Egan, & Wight, 1989; Deary & Stough, 1996; Osmon & Jackson, 2002). Meta-analyses place the uncorrected correlation between IT and intelligence at about $-.3$, rising to about $-.5$ after correction for measurement error and range restriction (Grudnik & Kranzler, 2001; Kranzler & Jensen, 1989). The standard interpretation of this association is in terms of *processing speed*. Because the mask interrupts further processing of the target, performance depends on how much target information the observer can extract before the mask arrives; individuals who process information faster therefore require shorter exposures to discriminate the stimulus accurately (Vickers & Smith, 1986). Faster information processing, in turn, may benefit cognitive performance across a wide range of tasks (Vernon, 1983), resulting in negative correlations between IT and cognitive performance.

Backward masking is therefore a key manipulation for limiting how much target information can be extracted. As the interval between target onset and mask onset shortens, only observers who process information quickly can extract enough information from the target before the mask disrupts further processing. The situation changes, however, when target and mask are presented at the same time and remain on the screen for a sufficient duration. The target is then embedded in the mask rather than interrupted by it, a procedure known as *simultaneous masking*. In simultaneous masking, processing time is no longer the limiting factor; performance instead depends on how precisely the relevant features of the target can be extracted from the concurrent noise. This taps the same sensory discrimination ability assessed by classic sensory discrimination tasks, in which observers judge which of two stimuli is higher in pitch or longer in length (Deary, 1994b; Deary, Bell, Bell, Campbell, & Fazal, 2004). In both cases, performance is limited by how precisely the signal is represented relative to noise, whether that noise is added to the display or arises within the sensory system (Pelli & Farell, 1999). We therefore treat simultaneous masking as a measure of sensory discrimination and use this term throughout the remainder of the paper.

Sensory discrimination, like processing speed, has long been linked to cognitive performance. Galton (1883) proposed that finer sensory acuity supplies the raw material for intelligent judgment, and Spearman (1904) found that discrimination of pitch, light, and weight loaded on a general factor of intelligence, which he termed *g*. Subsequent studies have reported reliable correlations between single discrimination tasks and intelligence. (Mikellidou, Lambrou, Georgiou, & Avraamides, 2023; Mosing, Pedersen, Madison, & Ullén, 2014; Raz, Willerman, & Yama, 1987). Deary et al. (2004) reported a latent correlation of .92 between general discrimination and general intelligence

Although both processing speed and sensory discrimination have shown reliable correlations with cognitive performance, few studies have measured them in the same participants, and none, to our knowledge, has done so with the same stimuli and masks.

The closest precedent is Tsukahara, Harrison, Draheim, Martin, and Engle (2020), which measured both constructs in the same participants. However, their sensory discrimination tasks required auditory judgments of the pitch, loudness, or duration of tones, whereas their processing speed tasks required speeded comparisons of visually presented letter and digit strings. When stimulus, sensory modality, and construct vary together, two alternative interpretations cannot be ruled out. First, individual differences may be partly stimulus-specific. Studies that administer batteries of visual tasks to the same observers typically find weak correlations among tasks (Cappe, Clarke, Mohr, & Herzog, 2014; Tulver, 2019), so an observer may perform well with one type of stimulus but poorly with another. An apparent dissociation between processing speed and sensory discrimination may then reflect differences between the materials rather than between the processes. Second, the variance that the two kinds of tasks share may reflect a general perceptual factor rather than two distinct abilities (Deary, 1994a), in which case the distinction between sensory discrimination and processing speed would not hold at the level of individual differences. In the present study, we addressed both possibilities by holding the stimulus constant while varying only the masking procedure. We used three stimulus types, a Gabor patch, a letter, and the Pi stimulus, and each was presented with an identical mask under both backward masking and simultaneous masking. This fully crossed 2 (masking procedure) $\times$ 3 (stimulus type) design follows the logic of the multitrait-multimethod matrix (Campbell & Fiske, 1959): because every stimulus appears under both masking procedures, variance associated with the masking procedure can be separated from variance associated with the stimulus. If sensory discrimination and processing speed are distinct abilities, tasks that share a masking procedure should correlate more strongly than tasks that share a stimulus; if individual differences are instead organized by stimulus content, the reverse should hold.

Participants also completed three complex span tasks of working memory (Conway et al., 2005; Pahor, Seitz, & Jaeggi, 2022; Unsworth, Heitz, Schrock, & Engle, 2005) and a matrix reasoning test of fluid intelligence (Pahor, Stavropoulos, Jaeggi, & Seitz, 2019),

which together served as our measures of cognitive performance. This allowed us to ask, in addition, whether sensory discrimination and processing speed share their relation to cognitive performance, and whether that relation depends on stimulus content.

Task description

To assess the sensory discrimination ability and processing speed, the experiment contained six visual masking tasks: three employing backward masking (Figure 1) and three employing simultaneous masking (Figure 2). Both sets of tasks used the same stimulus classes (a Gabor stimulus, a letter stimulus, and a Pi stimulus) and mask classes. The critical difference was the masking procedure: in the backward masking tasks, the mask followed the stimulus after a variable stimulus-onset asynchrony (SOA), whereas in the simultaneous masking the stimulus and mask were presented simultaneously.

To assess cognitive performance, participants completed three complex span tasks of working memory (OSPAN, CSPAN, and SSPAN) and one matrix reasoning test of fluid intelligence (UCMRT). Because working memory capacity and fluid intelligence are strongly related constructs (Kane, Hambrick, & Conway, 2005), and because our main goal was to examine how sensory discrimination and processing speed relate to cognitive performance as a whole rather than to its specific components, we treated the four tasks as joint indicators of a single construct, which we refer to as *cognitive performance*.

Sensory discrimination tasks

Gabor. Participants completed a two-alternative forced-choice orientation discrimination task. On each trial, a fixation cross was presented for 485 ms, followed by a centrally presented, random-phase Gabor patch ($\pm 45^\circ$ orientation) embedded in white noise, which remained on the screen for another 485 ms. Participants indicated whether the grating was tilted up-left or up-right by pressing the keyboard. Task difficulty was

adaptively adjusted by varying stimulus contrast.

Letter. Participants performed a forced-choice letter identification task using the keys A–L (second keyboard row). Each trial began with a 485 ms fixation cross, followed by a centrally presented target letter (one of A, S, D, F, G, H, J, K, L) displayed for 485 ms. The letter was embedded in a frequency-matched letter noise mask constructed as follows: We constructed the mask by first computing the pixelwise average of the nine possible letters and then perturbing its Fourier spectrum with complex Gaussian noise. After inverse transformation and normalization, this yielded a structured noise pattern with the same overall spatial frequency profile as the average letter image. On each trial, the target letter was linearly blended with this mask, and participants identified the letter using the corresponding keyboard key. Task difficulty was adaptively adjusted by varying the target weight in the letter–noise blend.

Pi. Participants performed a forced-choice judgment on a Π -shaped (Pi) target, indicating which vertical “leg” was longer (left vs. right). Each trial began with a 485 ms fixation cross, followed by a centrally presented Π stimulus for 485 ms. The mask was composed of random oblique line segments arranged to form a Π -like clutter. Short line elements (randomized in length and orientation within $\pm 10^\circ$ – 45°) were placed in two vertical columns aligned with the legs of the Π and around the crossbar region. Equal numbers of lines were drawn on each side, although their random placement could introduce local asymmetries. On each trial, the target Π was superimposed on this cluttered mask, and participants indicated which leg appeared longer using the keyboard. Task difficulty was adaptively controlled by varying the leg-length difference.

Processing Speed Tasks

Gabor. The task matched the simultaneous Gabor-orientation discrimination task. Each trial began with a 485 ms fixation cross, followed by a centrally presented,

random-phase Gabor patch ($\pm 45^\circ$ orientation). After a variable SOA, the target was replaced by a dynamic sequence of five white noise masks (48 ms each). Participants indicated whether the grating was tilted up-left or up-right by pressing the keyboard. Task difficulty was adaptively adjusted by SOA.

Letter. The task matched the simultaneous letter-identification condition. Each trial began with a 485 ms fixation cross, followed by a centrally presented target letter (one of A, S, D, F, G, H, J, K, L). After a variable SOA, the target was replaced by a dynamic sequence of five frequency-matched letter noise masks (48 ms each). Participants identified the letter using the corresponding keyboard key. Task difficulty was adaptively adjusted by varying SOA.

Pi. The task matched the simultaneous II-leg discrimination condition. Each trial began with a 485 ms fixation cross, followed by a centrally presented II stimulus. After a variable SOA, the target was replaced by a dynamic sequence of five clutter masks composed of randomly oriented oblique line segments (48 ms each). Participants indicated which leg appeared longer using the keyboard. Task difficulty was adaptively controlled by varying SOA.

Cognitive tasks

OSPAN. Participants completed an automated OSPAN task (Unsworth et al., 2005) combining simple math operations with working memory recall for letter sequence. Each set contained 3–7 letters, with each set size presented three times, yielding 15 memory sets in total. Before the main task, participants completed three practice sets of size three to familiarize themselves with the procedure. In the main task, set sizes 3–7 were each presented three times in randomized order (15 sets total). Within each set, trials alternated between (i) a math operation screen (e.g., “ $6 + 2 = ?$ ”), after which the participant clicked to continue, and (ii) a proposed answer screen showing a single digit;

participants judged whether the digit correctly solved the operation by clicking true/false. A single uppercase letter was then shown for 800 ms, and the sequence continued until the set ended. At recall, participants clicked the letters in serial order from a matrix. For each set, participants earned points equal to the set size only if (a) all math operations are solved less than their average solving time in practice trials plus 2.5 SD, (b) no math errors occurred for that set, and (c) all letters were recalled in the correct order. Sets failing either criterion scored 0. The final OSPAN score was the sum of points across all sets.

CSPAN. Participants completed a CSPAN task (Conway et al., 2005) combining serial counting with working memory recall for number sequence. Each display contained a set of target items (green circles) intermixed with distractors (yellow circles). Participants counted the number of targets in each display, after which the participant clicked to continue to the next display. At recall, participants were prompted to recall the sequence of counts (e.g., “3–5–2”) in the exact order they were encountered. Responses were made by clicking the digits from a matrix. The procedure began with three practice sets of size 2. The main task then presented set sizes 3–7, each three times in randomized order (15 sets total). A set contributed points equal to its size only if the final recall sequence was accurate in both values and order. The final CSPAN score was the sum of points across all sets.

SSPAN Participants completed a SSPAN task adapted from the Corsi block-tapping paradigm to assess both storage and processing aspects of spatial working memory (Pahor et al., 2022). On each trial, cartoon gophers appeared sequentially in one of 12 possible screen locations, each presented for 1,500 ms with a 500 ms inter-stimulus interval. Participants were required to reproduce the sequence by tapping the corresponding locations in the exact order. Between each gopher presentation participants performed a secondary sorting task, dragging an item to the left or right, thereby imposing concurrent processing demands and limiting reliance on mnemonic strategies. Sequence length ranged adaptively from 2 to 10 items, increasing or decreasing in difficulty depending

on accuracy. The final SSPAN score was the total successfully recalled items across all sets.

UCMRT. Participants completed the UCMRT (Pahor et al., 2019), a measure of fluid intelligence modeled after Raven’s Progressive Matrices. Each trial presented a 3×3 matrix of abstract visual patterns with the bottom-right cell missing, and participants selected the option that best completed the matrix from eight alternatives displayed below. UCMRT was chosen because it was especially developed for young adults with above-average performance on matrix reasoning tasks, providing a more sensitive and efficient assessment of individual differences in fluid intelligence in this population. The task consisted of 23 problems of varying difficulty, including 2 two-relation items, 3 three-relation items with a single transformation, 6 three-relation items with two transformations, 6 three-relation items with three transformations, and 6 logic items. Performance was scored as accuracy, defined by the number of correctly solved matrices.

Method

Apparatus

Participants were tested individually in a dimly lit cubicle, seated approximately 100 cm from a 24-inch BenQ LED gaming monitor (1920×1080 pixels, 165 Hz refresh rate, 6.06 ms per frame). Stimuli were generated with PsychoPy3 (Peirce et al., 2019) in Python 3.8, running on a PC with Ubuntu Linux 22.04. The background was a uniform mid-gray with a luminance of approximately 100 cd/m².

Participants

Eighty-three undergraduate students at the University of California, Irvine, participated in exchange for \$50 in total compensation. Four participants withdrew before completing all sessions, leaving a final sample of 79. All participants reported normal or corrected-to-normal vision and provided informed consent. The study was approved by the

Institutional Review Board of the University of California, Irvine (Study ID: STUDY00000064).

Procedure

The experiment consisted of three sessions of approximately one hour each, conducted on separate days within one week. Each session comprised three blocks, with short breaks permitted between blocks. The first and third blocks were visual masking blocks, and the middle block contained the cognitive tasks for that session: OSPAN on the first day, CSPAN on the second day, SSPAN task and the UCMRT on the third day.

Within each visual masking block, participants completed all six visual masking tasks in random order. Each task consisted of 50 trials, on which a two-down–one-up and a three-down–one-up staircase strictly alternated, yielding 25 trials per staircase. Because the two staircases converge on different performance levels, approximately 70.7% and 79.4% correct, respectively (Levitt, 1971), alternating them allowed the psychometric function to be estimated more precisely. In total, each participant completed 300 trials per task (6 blocks $\times$ 50 trials). The first masking block served as practice and was excluded from analysis, leaving 250 trials per task (125 per staircase) and 1,500 masking trials per participant for analysis.

Data Exclusion

Data were screened separately for each participant and each masking task. A participant’s data on a given task were excluded from further analysis if either of two criteria was met. First, the participant’s raw threshold, computed as the mean stimulus level across the 250 analyzed trials, deviated by more than four standard deviations from the group mean threshold for that task. Second, the observed accuracy on either staircase deviated by more than 5 percentage points from its target accuracy (70.7% for the

two-down-one-up staircase and 79.4% for the three-down-one-up staircase), indicating that the staircase had not converged as intended. In total, 14 task datasets from 10 participants were excluded. These participants’ remaining tasks were retained in the analysis.

Hierarchical psychometric model

Individual thresholds on the perceptual tasks and the correlations among them were estimated with a hierarchical psychometric model (Rouder & Mehrvarz, 2026). The model estimates individual thresholds and their correlations simultaneously from trial-level data, thereby accounting for trial-to-trial noise and avoiding the attenuation of correlations caused by measurement error.

At the data level, let y_{ijk} denote the binary correctness outcome on the k -th trial of participant i in task j . We assume

$$y_{ijk} \sim \text{Bernoulli}(F(s_{ijk}; \theta_{ij}, \beta_j)),$$

where the success probability is given by a task-specific psychometric function, modeled as a cumulative normal function of log stimulus strength with a lower asymptote at chance:

$$F(s_{ijk}; \theta_{ij}, \beta_j) = \gamma_j + (1 - \gamma_j) \Phi(\beta_j (s_{ijk} - \theta_{ij})).$$

Here, $\Phi(\cdot)$ denotes the standard normal cumulative distribution function, and γ_j is the guessing rate for task j , fixed at .5 for the two-alternative Gabor and Pi tasks and at 1/9 for the nine-alternative letter tasks. The variable s_{ijk} denotes the log-transformed stimulus strength on trial k for participant i on task j . In the backward masking tasks, stimulus strength was the SOA; in the simultaneous masking tasks, it was the Gabor contrast, the target weight α in the letter–noise blend, and the leg-length difference ΔL of

the Pi stimulus, respectively. The parameter θ_{ij} denotes the latent threshold of participant i on task j , expressed on the same log scale as s_{ijk} , and β_j denotes the slope of the psychometric function for task j .

At the latent level, each participant is characterized by a vector of ten person-level parameters: the six latent thresholds from the masking tasks and the standardized scores on the four cognitive tasks,

$$\boldsymbol{\theta}_i = (\theta_{i1}, \dots, \theta_{i6}, c_{i1}, \dots, c_{i4})^\top,$$

where c_{im} denotes the standardized score of participant i on cognitive task m . These ten parameters are assumed to follow a multivariate normal distribution,

$$\boldsymbol{\theta}_i \sim \mathcal{N}_{10}(\boldsymbol{\mu}, \boldsymbol{\Sigma}),$$

where $\boldsymbol{\mu}$ captures the mean of each task and $\boldsymbol{\Sigma}$ captures the covariance among tasks. The covariance matrix is given a scaled inverse-Wishart (SIW) prior (Huang & Wand, 2013) which is robust to differences in the measurement scales of the tasks and is computationally efficient to estimate (Yang & Rouder, 2026). Full details of the model specification are provided in Appendix A.

The model was implemented in Stan (Carpenter et al., 2017). We ran 4 chains, each with 10,000 tuning steps followed by 20,000 drawing steps. Convergence was assessed with the rank-normalized $\hat{R}$ statistic (Vehtari, Gelman, Simpson, Carpenter, & Bürkner, 2021), which was below 1.01 for all parameters.

Results

Individual differences and their correlational structure

Figure 3 summarizes the model-estimated scores for the six masking tasks and the four cognitive tasks. All scores were standardized before plotting. The distributions on the diagonal were unimodal and roughly symmetric, with substantial spread across participants. Thus, all ten tasks captured meaningful individual differences. The lower triangle of Figure 3 shows the model-estimated correlations among the ten tasks. All 45 correlations were positive with a single exception between the backward Letter task and SSPAN ($r = -.02$). The mean correlation was .39 among the six masking tasks, .35 among the four cognitive task, and .26 between the masking tasks and the cognitive tasks.

It is worth noting that the three same-stimulus pairs, in which the same stimulus was tested under backward and simultaneous masking, showed the three highest correlations among the masking tasks (mean $r = .52$). By comparison, the mean correlation was .40 between tasks that shared a masking procedure but differed in stimulus, and .31 between tasks that differed in both. This pattern suggests that stimulus type plays a substantial role in individual differences in masking performance. More direct evidence comes from hierarchical clustering, an unsupervised method that groups tasks according to their similarity without imposing any a priori structure (see Figure 4). The first three merges each joined the two masking procedures of the same stimulus; only after these pairs had formed did they combine with one another. By comparison, neither the three backward masking tasks nor the three simultaneous masking tasks formed a cluster of their own. The four cognitive tasks formed a separate cluster, which joined the masking tasks only at the final step. Thus, individual differences in masking performance were organized primarily by stimulus rather than by masking procedure.

Structural decomposition of masking performance

Hierarchical clustering showed the structure among the masking tasks is best described by grouping by stimulus type. The next question is whether stimulus type or masking procedure contributes to cognitive performance. These two questions are different because the covariance that determines how tasks cluster need not be the covariance that predicts cognitive performance. Tasks sharing a stimulus may cluster together because of stimulus-specific variance, while their relation to cognitive performance may instead be carried by other sources of variance, for example, variance from the masking procedure or variance from a common visual factor.

To answer this question, we retained the data level of the hierarchical psychometric model and replaced the covariance matrix Σ at the latent level with a structural equation model. For the six masking tasks, the thresholds θ_{ij} remain linked to the trial-level data through the psychometric function $F(s_{ijk}; \theta_{ij}, \beta_j)$; what changes is how the person-level vector θ_i is generated. In the new latent structure, θ_i is expressed as a function of seven latent factors,

$$\boldsymbol{\eta}_i = \left(\eta_i^V, \eta_i^{\text{Bwd}}, \eta_i^{\text{Sim}}, \eta_i^{\text{Let}}, \eta_i^{\text{Gab}}, \eta_i^{\text{Pi}}, \eta_i^C \right)^\top,$$

where η_i^V is a general visual factor shared by all six masking tasks; η_i^{Bwd} and η_i^{Sim} are masking factors, each shared by the three tasks that use the same masking procedure; η_i^{Let} , η_i^{Gab} , and η_i^{Pi} are stimulus factors, each shared by the two tasks that use the same stimulus; and η_i^C is a cognitive factor measured by the four cognitive tasks.

The measurement model relates the ten person-level parameters to these factors,

$$\boldsymbol{\theta}_i = \boldsymbol{\mu} + \boldsymbol{\Lambda} \boldsymbol{\eta}_i + \boldsymbol{\epsilon}_i, \quad \boldsymbol{\epsilon}_i \sim \mathcal{N}_{10}(\mathbf{0}, \boldsymbol{\Delta}), \quad \boldsymbol{\Delta} = \text{diag}(\delta_1^2, \dots, \delta_{10}^2),$$

where $\mathbf{\Lambda}$ is a 10×7 matrix of factor loadings and δ_j^2 is the variance unique to task j . With the rows of $\mathbf{\Lambda}$ ordered as in $\boldsymbol{\theta}_i$ (backward Letter, Gabor, and Pi; simultaneous Letter, Gabor, and Pi; OSPAN, CSPAN, SSPAN, and UCMRT) and the columns ordered as in $\boldsymbol{\eta}_i$,

$$\mathbf{\Lambda} = \begin{pmatrix} \lambda_1^V & \lambda_1^M & 0 & \lambda_1^S & 0 & 0 & 0 \\ \lambda_2^V & \lambda_2^M & 0 & 0 & \lambda_2^S & 0 & 0 \\ \lambda_3^V & \lambda_3^M & 0 & 0 & 0 & \lambda_3^S & 0 \\ \lambda_4^V & 0 & \lambda_4^M & \lambda_4^S & 0 & 0 & 0 \\ \lambda_5^V & 0 & \lambda_5^M & 0 & \lambda_5^S & 0 & 0 \\ \lambda_6^V & 0 & \lambda_6^M & 0 & 0 & \lambda_6^S & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & \lambda_7^C \\ 0 & 0 & 0 & 0 & 0 & 0 & \lambda_8^C \\ 0 & 0 & 0 & 0 & 0 & 0 & \lambda_9^C \\ 0 & 0 & 0 & 0 & 0 & 0 & \lambda_{10}^C \end{pmatrix}.$$

Each masking task thus loads on the general visual factor (λ_j^V), on the factor for its masking procedure (λ_j^M), and on the factor for its stimulus (λ_j^S), and each cognitive task loads on the cognitive factor (λ_m^C). All other loadings are fixed at zero.

The structural model specifies the relations among the factors,

$$\boldsymbol{\eta}_i = \mathbf{B} \boldsymbol{\eta}_i + \boldsymbol{\zeta}_i, \quad \boldsymbol{\zeta}_i \sim \mathcal{N}_7(\mathbf{0}, \boldsymbol{\Psi}), \quad \boldsymbol{\Psi} = \mathbf{I}_7,$$

where $\mathbf{B}$ is a 7×7 matrix of regression weights among the factors. The cognitive factor is regressed on all six visual factors:

$$\mathbf{B} = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ b_V & b_{\text{Bwd}} & b_{\text{Sim}} & b_{\text{Let}} & b_{\text{Gab}} & b_{\text{Pi}} & 0 \end{pmatrix},$$

so that $\eta_i^C = b_V \eta_i^V + b_{\text{Bwd}} \eta_i^{\text{Bwd}} + b_{\text{Sim}} \eta_i^{\text{Sim}} + b_{\text{Let}} \eta_i^{\text{Let}} + b_{\text{Gab}} \eta_i^{\text{Gab}} + b_{\text{Pi}} \eta_i^{\text{Pi}} + \zeta_i^C$. Setting $\Psi = \mathbf{I}_7$ fixes the variances of the six visual factors and makes the six visual factors mutually orthogonal. Because the visual factors are orthogonal and have unit variance, this structure separates the two questions raised above. First, the variance of each masking task decomposes additively,

$$\text{Var}(\theta_{ij}) = (\lambda_j^V)^2 + (\lambda_j^M)^2 + (\lambda_j^S)^2 + \delta_j^2,$$

so the proportion of variance due to each source is its term divided by $\text{Var}(\theta_{ij})$. Second, the relation of each visual factor to cognitive performance is captured by its regression weight, and the corresponding correlation is

$$\text{Var}(\eta_i^C) = \sum_k b_k^2 + 1, \quad \rho_k = \frac{b_k}{\sqrt{\text{Var}(\eta_i^C)}}.$$

Full details of the model specification are provided in Appendix B. Derivations for variation decomposition equations are provided in Appendix C. The model was implemented in Stan. We ran 4 chains, each with 10,000 tuning steps followed by 20,000 drawing steps. Convergence was assessed with the rank-normalized $\hat{R}$ statistic, which was below 1.01 for all parameters.

Sources of variance in masking performance. Table 1 shows how the variance of each masking task was distributed across the general visual factor, the masking factors, the stimulus factors, and task-unique variance. The general visual factor was the largest shared source of variance. It accounted for 32% of the variance on average. The stimulus factors were the second largest shared source, accounting for 18% of the variance on average. The masking factors accounted for the smallest share, accounting for 11% of the variance on average. In addition, the task-unique variance accounted for 40% of the variance on average.

The decomposition shows two results: first, masking-specific variance was small, accounting for roughly a third of the share of the general visual factor. Backward and simultaneous masking were thus largely held together by the general visual factor rather than forming distinct sources of individual differences. Second, stimulus-specific variance tended to be larger than masking-specific variance (posterior probability = .84), in line with the clustering by stimulus reported above.

Contributions to cognitive performance. Table 2 shows the correlation of each visual factor with cognitive performance. Bayes factors are Savage–Dickey density ratios. We interpreted them following Kass and Raftery (1995): BF_{10} values above 3 provide positive evidence for a relation, and values above 20 provide strong evidence. Only the general visual factor was reliably related to cognitive performance, $r = .58$, 95% CI [.22, .82]“, and the Bayes factor provided strong evidence for this relation, $BF_{10} = 34.1$.

None of the specific factors showed a comparable relation. All five credible intervals included zero, and the correlations did not share a common sign. All Bayes factors fell in the inconclusive range. Thus, the data provided no evidence that stimulus-specific or masking-specific variance contributes to cognitive performance.

Taken together, stimulus content accounted for a substantial share of individual differences in masking performance, yet this stimulus-specific variance showed no evidence

of a relation to cognitive performance. The relation between masking performance and cognitive performance was instead carried by the general visual factor shared by all six masking tasks.

Discussion

We asked whether sensory discrimination and processing speed, as indexed by simultaneous and backward masking of the same stimuli, reflect separable sources of individual differences. Three findings emerged. First, backward and simultaneous masking were largely held together by a general visual factor, which was the largest shared source of variance in the masking tasks; variance specific to the masking procedure was small. Second, there was a clear stimulus effect: tasks that shared a stimulus correlated most strongly, clustered together, and shared stimulus-specific variance beyond the general factor. Third, despite this stimulus effect, only the general visual factor was related to cognitive performance, whereas neither stimulus-specific nor masking-specific variance showed evidence of such a relation. Thus, varying the masking procedure did not reveal distinct abilities, and varying the stimulus introduced substantial variance that was unrelated to cognitive performance.

Sensory discrimination and processing speed are largely not separable

Sensory discrimination and processing speed have been studied in two largely separate literatures, each of which has been taken to reveal a distinct elementary source of cognitive ability (Deary, 1994a). Our design held the stimulus and the mask constant and varied only whether performance was limited by the time available to encode the target (backward masking) or by the spatial overlap of target and mask (simultaneous masking). Under these conditions, the two procedures shared most of their reliable variance through a single general factor, and the variance specific to each procedure was small. If sensory

discrimination and processing speed were distinct abilities, the masking factors should have been substantial, however they were not.

A stimulus effect that does not reach cognitive performance

The second finding concerns the role of the stimulus. The novel finding is that this stimulus-specific variance showed no evidence of a relation to cognitive performance.

What does the general visual factor reflect?

Methodological implications

The present analysis combined a trial-level psychometric model with a structural equation model at the latent level. Thresholds were estimated directly from trial-level responses, so the correlations among tasks were not attenuated by trial-to-trial noise (Rouder & Mehrvarz, 2026). Placing the factor model at the latent level, rather than fitting it to a matrix of estimated correlations, extended the uncertainty of the thresholds into the variance decomposition and the regression weights. The same approach can be applied whenever abilities are measured with psychophysical thresholds.

Appendix A: Hierarchical Psychometric Model With an Unstructured Covariance Matrix

Model Specification. Let $i = 1, \dots, I$ denote individuals, $j \in \{1, 2, 3, 4, 5, 6\}$ denote six masking tasks, and $k = 1, \dots, K$ denote trials. Let y_{ijk} denote the binary correctness outcome on the k -th trial of participant i in masking task j . The data level model is then given by

$$y_{ijk} \sim \text{Bernoulli}(F(s_{ijk}; \theta_{ij}, \beta_j)),$$

where the success probability is given by a task-specific psychometric function, modeled as a cumulative normal function of log stimulus strength with a lower asymptote at chance:

$$F(s_{ijk}; \theta_{ij}, \beta_j) = \gamma_j + (1 - \gamma_j) \Phi(\beta_j (s_{ijk} - \theta_{ij})).$$

Here, $\Phi(\cdot)$ denotes the standard normal cumulative distribution function, and γ_j is the guessing rate for task j , fixed at .5 for the two-alternative Gabor and Pi tasks and at 1/9 for the nine-alternative letter tasks. The variable s_{ijk} denotes the log-transformed stimulus strength on trial k for participant i on task j . In the backward masking tasks, stimulus strength was the SOA; in the simultaneous masking tasks, it was the Gabor contrast, the target weight in the letter–noise blend, and the leg-length difference of the Pi stimulus, respectively. For each masking task, the stimulus strength on each trial was log-transformed and then standardized across all trials and participants of that task. The parameter θ_{ij} denotes the latent threshold of participant i on task j , expressed on the same log scale as s_{ijk} . β_j denotes the slope of the psychometric function for task j .

At the latent level, each participant is characterized by a vector of ten person-level parameters: the six latent thresholds from the masking tasks and the standardized scores

on the four cognitive tasks,

$$\boldsymbol{\theta}_i = (\theta_{i1}, \dots, \theta_{i6}, c_{i1}, \dots, c_{i4})^\top,$$

where c_{im} denotes the standardized score of participant i on cognitive task m . These ten parameters are assumed to follow a multivariate normal distribution

$$\boldsymbol{\theta}_i \sim \mathcal{N}_{10}(\boldsymbol{\mu}, \boldsymbol{\Sigma}).$$

The cognitive scores enter the model as observed values of the last four elements of $\boldsymbol{\theta}_i$. Specifically, the observed standardized score x_{im} of participant i on cognitive task m is modeled as

$$x_{im} \sim \mathcal{N}(c_{im}, \tau^2), \quad \tau = 0.01,$$

so that c_{im} is constrained to be essentially equal to the observed score. In this way, the cognitive tasks contribute to the estimation of $\boldsymbol{\Sigma}$ in the same model as the masking tasks. Before entering the model, the score on each cognitive task was standardized across participants and multiplied by -1 , so that, as for the thresholds, higher values indicate poorer performance.

Prior specification. Priors are needed for the task means $\boldsymbol{\mu}$, the slopes β_j , and the covariance matrix $\boldsymbol{\Sigma}$. The task means and slopes were given weakly informative normal priors,

$$\mu_t \sim \mathcal{N}(0, 5^2), \quad t = 1, \dots, 10, \quad \beta_j \sim \mathcal{N}(0, 5^2), \quad j = 1, \dots, 6,$$

which are wide relative to the standardized scale of s_{ijk} and of the cognitive scores. The covariance matrix was given a scaled inverse-Wishart prior [(Huang & Wand, 2013)]. In this prior, $\boldsymbol{\Sigma}$ is decomposed into a vector of scale parameters and an unscaled covariance matrix,

$$\boldsymbol{\Sigma} = \mathbf{D} \boldsymbol{\Sigma}_0 \mathbf{D}, \quad \mathbf{D} = \text{diag}(\sigma_1, \dots, \sigma_{10}),$$

with

$$\Sigma_0 \sim \text{Inverse-Wishart}(\nu_0, \mathbf{I}_{10}), \quad \nu_0 = 12, \quad \sigma_t \sim \text{Half-}t_3(0, 2.5), \quad t = 1, \dots, 10.$$

Equivalently, the person-level parameters are written as $\theta_{it} = \mu_t + \sigma_t z_{it}$, with $\mathbf{z}_i \sim \mathcal{N}_{10}(\mathbf{0}, \Sigma_0)$. The inverse-Wishart component with $\nu_0 = 12$ degrees of freedom and an identity scale matrix is weakly informative about the correlations, and the separate half- t priors on σ_t allow the standard deviation of each task to be determined by its own data rather than by the inverse-Wishart, which would otherwise couple the variances and correlations of all tasks. The correlations reported in the main text are those of Σ , $\Omega_{tt'} = \Sigma_{tt'} / \sqrt{\Sigma_{tt} \Sigma_{t't'}}$, which do not depend on how Σ is split into $\mathbf{D}$ and Σ_0 .

Appendix B: Hierarchical Psychometric Model With a Structural Equation Model at the Latent Level

Model specification. The data level of this model is identical to that described in Appendix A: the trial-level outcomes y_{ijk} of the six masking tasks follow the psychometric function $F(s_{ijk}; \theta_{ij}, \beta_j)$, with stimulus strength s_{ijk} log-transformed and standardized within each task. The two models differ only at the latent level. In Appendix A, the person-level vector $\boldsymbol{\theta}_i$ followed a multivariate normal distribution with an unstructured covariance matrix Σ . Here, $\boldsymbol{\theta}_i$ is generated by the measurement and structural models described in the main text,

$$\boldsymbol{\theta}_i = \boldsymbol{\mu} + \mathbf{A} \boldsymbol{\eta}_i + \boldsymbol{\epsilon}_i, \quad \boldsymbol{\epsilon}_i \sim \mathcal{N}_{10}(\mathbf{0}, \boldsymbol{\Delta}),$$

$$\boldsymbol{\eta}_i = \mathbf{B} \boldsymbol{\eta}_i + \boldsymbol{\zeta}_i, \quad \boldsymbol{\zeta}_i \sim \mathcal{N}_7(\mathbf{0}, \mathbf{I}_7),$$

with $\mathbf{A}$ and $\mathbf{B}$ as given in the main text. The last four elements of $\boldsymbol{\theta}_i$ are the observed standardized and sign-reversed cognitive scores, so that each cognitive task is modeled as

$$c_{im} = \mu_{6+m} + \lambda_{6+m}^C \eta_i^C + \epsilon_{i,6+m}.$$

Prior specification. Priors are needed for the task means $\boldsymbol{\mu}$, the slopes β_j , the free factor loadings in $\mathbf{\Lambda}$, the unique variances in $\mathbf{\Delta}$, and the regression weights in $\mathbf{B}$. The task means and slopes were given the same priors as in Appendix A,

$$\mu_t \sim \mathcal{N}(0, 5^2), \quad t = 1, \dots, 10, \quad \beta_j \sim \mathcal{N}(0, 5^2), \quad j = 1, \dots, 6.$$

Each free loading was given a half-normal prior, which fixes the sign of each factor,

$$\lambda_j^V, \lambda_j^M, \lambda_j^S, \lambda_m^C \sim \mathcal{N}^+(0, 1),$$

and the loadings fixed at zero in $\mathbf{\Lambda}$ were held at zero. Each unique variance was given an inverse-gamma prior through its precision,

$$\delta_t^{-2} \sim \text{Gamma}(0.5, 0.5), \quad t = 1, \dots, 10.$$

Each of the six free regression weights in $\mathbf{B}$ was given a standard normal prior,

$$b_k \sim \mathcal{N}(0, 1), \quad k \in \{V, \text{Bwd}, \text{Sim}, \text{Let}, \text{Gab}, \text{Pi}\}.$$

Because the regression weight of the residual ζ_i^C is one, a unit change in b_k corresponds to a change in the cognitive factor equal to the standard deviation of its residual, and the prior places most of its mass on weights that correspond to correlations between $-.70$ and $.70$.

Bayes factors. The Bayes factor for the hypothesis that factor k is unrelated to cognitive performance compares a model in which b_k is free to a nested model in which $b_k = 0$, with all other parameters unchanged. Because the nested model is obtained by fixing a single parameter, the Bayes factor equals the Savage–Dickey density ratio

(Wagenmakers, Lodewyckx, Kuriyal, & Grasman, 2010),

$$\text{BF}_{01} = \frac{p(b_k = 0 \mid \text{data})}{p(b_k = 0)}, \quad \text{BF}_{10} = 1/\text{BF}_{01},$$

where the numerator is the posterior density of b_k at zero, estimated from the posterior draws with a logspline density estimator, and the denominator is the prior density at zero, $1/\sqrt{2\pi}$.

Appendix C: Derivation of the Variance Decomposition

This appendix derives the two quantities reported in the main text: the proportion of variance of each masking task due to each source, and the correlation of each visual factor with the cognitive factor. Both follow from the moments of the latent factors implied by the structural model.

Moments of the latent factors. Rearranging the structural model gives

$$\boldsymbol{\eta}_i = (\mathbf{I}_7 - \mathbf{B})^{-1} \boldsymbol{\zeta}_i, \quad \text{Cov}(\boldsymbol{\eta}_i) = (\mathbf{I}_7 - \mathbf{B})^{-1} \boldsymbol{\Psi} (\mathbf{I}_7 - \mathbf{B})^{-\top}.$$

Because only the last row of $\mathbf{B}$ is nonzero, this can be written element by element. No paths lead into the six visual factors, so each equals its own residual, $\eta_i^k = \zeta_i^k$ for $k \in \{V, \text{Bwd}, \text{Sim}, \text{Let}, \text{Gab}, \text{Pi}\}$, and the cognitive factor is

$$\eta_i^C = \sum_k b_k \eta_i^k + \zeta_i^C.$$

With $\boldsymbol{\Psi} = \mathbf{I}_7$, the moments are therefore

$$\text{Var}(\eta_i^k) = 1, \quad \text{Cov}(\eta_i^k, \eta_i^l) = 0 \quad (k \neq l), \quad \text{Cov}(\eta_i^k, \eta_i^C) = b_k,$$

$$\text{Var}(\eta_i^C) = \sum_k b_k^2 \text{Var}(\eta_i^k) + \text{Var}(\zeta_i^C) = \sum_k b_k^2 + 1.$$

Variance decomposition of the masking tasks. Masking task j loads on the general factor, on one masking factor $m(j)$, and on one stimulus factor $s(j)$,

$$\theta_{ij} = \mu_j + \lambda_j^V \eta_i^V + \lambda_j^M \eta_i^{m(j)} + \lambda_j^S \eta_i^{s(j)} + \epsilon_{ij}.$$

Because ϵ_{ij} is independent of the factors, its variance is

$$\begin{aligned} \text{Var}(\theta_{ij}) = & (\lambda_j^V)^2 \text{Var}(\eta_i^V) + (\lambda_j^M)^2 \text{Var}(\eta_i^{m(j)}) + (\lambda_j^S)^2 \text{Var}(\eta_i^{s(j)}) \\ & + 2\lambda_j^V \lambda_j^M \text{Cov}(\eta_i^V, \eta_i^{m(j)}) + 2\lambda_j^V \lambda_j^S \text{Cov}(\eta_i^V, \eta_i^{s(j)}) + 2\lambda_j^M \lambda_j^S \text{Cov}(\eta_i^{m(j)}, \eta_i^{s(j)}) + \delta_j^2. \end{aligned}$$

The two constraints in $\Psi = \mathbf{I}_7$ simplify this expression in different ways. The zero covariances among the visual factors remove the three cross-product terms, so that no variance is shared between two factors and each term can be attributed to a single source. The unit variances remove the factor variances from the remaining terms, which gives

$$\text{Var}(\theta_{ij}) = (\lambda_j^V)^2 + (\lambda_j^M)^2 + (\lambda_j^S)^2 + \delta_j^2.$$

The unit variances also give the loadings their meaning. Without a constraint on the factor variances, the contribution of a factor to task j would be $\lambda^2 \text{Var}(\eta)$, and only this product, not the loading itself, would be determined by the data: multiplying a loading by a constant c and dividing the factor variance by c^2 leaves the contribution unchanged. Fixing $\text{Var}(\eta_i^k) = 1$ removes this indeterminacy, so each squared loading is itself the variance that the factor contributes to the task, in the units of θ_{ij} . Dividing each term by the total variance therefore gives the proportion of variance due to each source,

$$\pi_j^V = \frac{(\lambda_j^V)^2}{\text{Var}(\theta_{ij})}, \quad \pi_j^M = \frac{(\lambda_j^M)^2}{\text{Var}(\theta_{ij})}, \quad \pi_j^S = \frac{(\lambda_j^S)^2}{\text{Var}(\theta_{ij})}, \quad \pi_j^U = \frac{\delta_j^2}{\text{Var}(\theta_{ij})},$$

which sum to one. These proportions are the values reported in Table 1. Because they are ratios of variances in the same units, they do not depend on the scale of the stimulus

strength.

Contribution of each visual factor to cognitive performance. From the moments above, the correlation between visual factor k and the cognitive factor is

$$\rho_k = \frac{\text{Cov}(\eta_i^k, \eta_i^C)}{\sqrt{\text{Var}(\eta_i^k) \text{Var}(\eta_i^C)}} = \frac{b_k}{\sqrt{\sum_l b_l^2 + 1}}.$$

Here, too, the unit variances matter: because $\text{Var}(\eta_i^k) = 1$, the regression weight b_k is itself the covariance between factor k and the cognitive factor, and ρ_k is obtained by dividing it by the standard deviation of the cognitive factor alone. Moreover, because the visual factors are orthogonal, the variance of the cognitive factor splits into one term per visual factor and a residual,

$$\text{Var}(\eta_i^C) = b_V^2 + b_{\text{Bwd}}^2 + b_{\text{Sim}}^2 + b_{\text{Let}}^2 + b_{\text{Gab}}^2 + b_{\text{Pi}}^2 + 1,$$

so the proportion of variance in the cognitive factor due to factor k is

$$\frac{b_k^2}{\text{Var}(\eta_i^C)} = \rho_k^2, \quad \text{and} \quad R^2 = \sum_k \rho_k^2$$

is the total proportion explained by the six visual factors. This additivity is what allows the relation of each visual factor to cognitive performance to be evaluated separately: if the visual factors were correlated, $\text{Var}(\eta_i^C)$ would contain cross-product terms $2b_k b_l \text{Cov}(\eta_i^k, \eta_i^l)$ that could not be assigned to either factor.

Relation of each masking task to cognitive performance. The same moments give the covariance between masking task j and the cognitive factor,

$$\text{Cov}(\theta_{ij}, \eta_i^C) = \lambda_j^V b_V + \lambda_j^M b_{m(j)} + \lambda_j^S b_{s(j)},$$

so that the relation of each task to cognitive performance is the sum of three paths, one

through each factor on which the task loads. A stimulus factor can therefore have a large loading λ_j^S , and thus account for a large share of the variance of task j , while contributing nothing to the relation of that task with cognitive performance if $b_{s(j)} = 0$.

Declarations

Funding: JNR was supported by ONR N00014-23-1-2792.

Conflict of Interest: None.

Ethical Approval: Something

Consent to Participate: Something

Consent for Publication: Something

Data Availability: Something

Code Availability: All data and code required to reproduce the analyses are available at .

Author Contributions: Something

Declaration of generative AI and AI-assisted technologies in the manuscript preparation process:

During the preparation of this work the authors used Claude and ChatGPT in order to check the grammar and spelling, as well as for verifying some mathematical calculations. After using this tool/service, the authors reviewed and edited the content as needed and took full responsibility for the content of the published article.

Reference

- Campbell, D. T., & Fiske, D. W. (1959). Convergent and discriminant validation by the multitrait-multimethod matrix. *Psychol. Bull.*, *56*(2), 81–105. Retrieved from <https://www.ncbi.nlm.nih.gov/pubmed/13634291>
- Cappe, C., Clarke, A., Mohr, C., & Herzog, M. H. (2014). Is there a common factor for vision? *J. Vis.*, *14*(8), 4. doi:10.1167/14.8.4
- Carpenter, B., Gelman, A., Hoffman, M. D., Lee, D., Goodrich, B., Betancourt, M., ... Riddell, A. (2017). Stan: A Probabilistic Programming Language. *Journal of Statistical Software*, *76*, 1–32. doi:10.18637/jss.v076.i01
- Conway, A. R. A., Kane, M. J., Bunting, M. F., Hambrick, D. Z., Wilhelm, O., & Engle, R. W. (2005). Working memory span tasks: A methodological review and user's guide. *Psychon. Bull. Rev.*, *12*(5), 769–786. doi:10.3758/BF03196772
- Deary, I. J. (1994a). Intelligence and auditory discrimination: Separating processing speed and fidelity of stimulus representation. *Intelligence*, *18*(2), 189–213. doi:10.1016/0160-2896(94)90027-2
- Deary, I. J. (1994b). Sensory Discrimination and Intelligence: Postmortem or Resurrection? *Am. J. Psychol.*, *107*(1), 95. doi:10.2307/1423292
- Deary, I. J., Bell, P. J., Bell, A. J., Campbell, M. L., & Fazal, N. D. (2004). Sensory Discrimination and Intelligence: Testing Spearman's Other Hypothesis. *Am. J. Psychol.*, *117*(1), 1. doi:10.2307/1423593
- Deary, I. J., Caryl, P. G., Egan, V., & Wight, D. (1989). Visual and auditory inspection time: Their interrelationship and correlations with IQ in high ability subjects. *Personal. Individ. Differ.*, *10*(5), 525–533. doi:10.1016/0191-8869(89)90034-2
- Deary, I. J., & Stough, C. (1996). Intelligence and inspection time: Achievements, prospects, and problems. *Am. Psychol.*, *51*(6), 599–608. doi:10.1037/0003-066X.51.6.599
- Galton, F. (1883). *Inquiries into human faculty and its development* (pp. xii, 387). New

- York, NY, US: MacMillan Co. doi:10.1037/14178-000
- Grudnik, J. L., & Kranzler, J. H. (2001). Meta-analysis of the relationship between intelligence and inspection time. *Intelligence*, 29(6), 523–535. doi:10.1016/S0160-2896(01)00078-2
- Huang, A., & Wand, M. P. (2013). Simple Marginally Noninformative Prior Distributions for Covariance Matrices. *Bayesian Anal.*, 8(2), 439–452. doi:10.1214/13-BA815
- Kane, M. J., Hambrick, D. Z., & Conway, A. R. A. (2005). Working Memory Capacity and Fluid Intelligence Are Strongly Related Constructs: Comment on Ackerman, Beier, and Boyle (2005). *Psychological Bulletin*, 131(1), 66–71. doi:10.1037/0033-2909.131.1.66
- Kass, R. E., & Raftery, A. E. (1995). Bayes Factors. *Journal of the American Statistical Association*, 90(430), 773–795. doi:10.1080/01621459.1995.10476572
- Kranzler, J. H., & Jensen, A. R. (1989). Inspection time and intelligence: A meta-analysis. *Intelligence*, 13(4), 329–347. doi:10.1016/S0160-2896(89)80006-6
- Levitt, H. (1971). Transformed Up-Down Methods in Psychoacoustics. *J. Acoust. Soc. Am.*, 49, 467–477. doi:10.1121/1.1912375
- Mikellidou, K., Lambrou, N., Georgiou, E., & Avraamides, M. (2023). Visual orientation discrimination skills are tightly linked with specific aspects of human intelligence. *PLOS ONE*, 18(10), e0289590. doi:10.1371/journal.pone.0289590
- Mosing, M. A., Pedersen, N. L., Madison, G., & Ullén, F. (2014). Genetic Pleiotropy Explains Associations between Musical Auditory Discrimination and Intelligence. *PLOS ONE*, 9(11), e113874. doi:10.1371/journal.pone.0113874
- Nettelbeck, T., & Lally, M. (1976). INSPECTION TIME AND MEASURED INTELLIGENCE. *Br. J. Psychol.*, 67(1), 17–22. doi:10.1111/j.2044-8295.1976.tb01493.x
- Osmon, D. C., & Jackson, R. (2002). Inspection time and IQ: Fluid or perceptual aspects of intelligence? *Intelligence*, 30(2), 119–127. doi:10.1016/S0160-2896(01)00083-6
- Pahor, A., Seitz, A. R., & Jaeggi, S. M. (2022). Near transfer to an unrelated N-back task

- mediates the effect of N-back working memory training on matrix reasoning. *Nat. Hum. Behav.*, 6(9), 1243–1256. doi:10.1038/s41562-022-01384-w
- Pahor, A., Stavropoulos, T., Jaeggi, S. M., & Seitz, A. R. (2019). Validation of a matrix reasoning task for mobile devices. *Behav. Res. Methods*, 51(5), 2256–2267. doi:10.3758/s13428-018-1152-2
- Peirce, J., Gray, J. R., Simpson, S., MacAskill, M., Höchenberger, R., Sogo, H., . . . Lindeløv, J. K. (2019). PsychoPy2: Experiments in behavior made easy. *Behavior Research Methods*, 51(1), 195–203. doi:10.3758/s13428-018-01193-y
- Pelli, D. G., & Farell, B. (1999). Why use noise? *JOSA A*, 16(3), 647–653. doi:10.1364/JOSAA.16.000647
- Raz, N., Willerman, L., & Yama, M. (1987). On sense and senses: Intelligence and auditory information processing. *Personal. Individ. Differ.*, 8(2), 201–210. doi:10.1016/0191-8869(87)90175-9
- Rouder, J. N., & Mehrvarz, M. (2026). Random-effects psychophysics for studying individual differences in perception and cognition. *Psychon. Bull. Rev.*, 33(5), 144. doi:10.3758/s13423-026-02890-y
- Spearman, C. (1904). 'General intelligence,' objectively determined and measured. *Am. J. Psychol.*, 15(2), 201–293. doi:10.2307/1412107
- Tsukahara, J. S., Harrison, T. L., Draheim, C., Martin, J. D., & Engle, R. W. (2020). Attention control: The missing link between sensory discrimination and intelligence. *Atten. Percept. Psychophys.*, 82(7), 3445–3478. doi:10.3758/s13414-020-02044-9
- Tulver, K. (2019). The factorial structure of individual differences in visual perception. *Conscious. Cogn.*, 73, 102762. doi:10.1016/j.concog.2019.102762
- Unsworth, N., Heitz, R. P., Schrock, J. C., & Engle, R. W. (2005). An automated version of the operation span task. *Behav. Res. Methods*, 37(3), 498–505. doi:10.3758/BF03192720
- Vehtari, A., Gelman, A., Simpson, D., Carpenter, B., & Bürkner, P.-C. (2021).

- Rank-Normalization, Folding, and Localization: An Improved $\hat{R}$ for Assessing Convergence of MCMC (with Discussion). *Bayesian Analysis*, 16(2), 667–718. doi:10.1214/20-BA1221
- Vernon, P. A. (1983). Speed of information processing and general intelligence. *Intelligence*, 7(1), 53–70. doi:10.1016/0160-2896(83)90006-5
- Vickers, D., Nettelbeck, T., & Willson, R. J. (1972). Perceptual indices of performance: The measurement of "inspection time" and "noise" in the visual system. *Perception*, 1(3), 263–295. doi:10.1068/p010263
- Vickers, D., & Smith, P. L. (1986). The rationale for the inspection time index. *Personal. Individ. Differ.*, 7(5), 609–623. doi:10.1016/0191-8869(86)90030-9
- Wagenmakers, E.-J., Lodewyckx, T., Kuriyal, H., & Grasman, R. (2010). Bayesian hypothesis testing for psychologists: A tutorial on the Savage–Dickey method. *Cognitive Psychology*, 60, 158–89. doi:10.1016/j.cogpsych.2009.12.001
- Yang, S., & Rouder, J. N. (2026). Estimating correlations across tasks in experimental psychology. *Behavior Research Methods*, 58(4), 100. doi:10.3758/s13428-026-02990-6

Table 1

Proportion of variance of each masking task due to each source.

Task	Visual	Masking	Stimulus	Unique
Backward Letter	.19 [.01, .46]	.14 [.00, .42]	.23 [.01, .53]	.44 [.21, .71]
Backward Gabor	.28 [.04, .57]	.14 [.00, .44]	.19 [.00, .52]	.39 [.16, .68]
Backward Pi	.38 [.11, .66]	.05 [.00, .22]	.18 [.00, .50]	.39 [.18, .65]
Simultaneous Letter	.34 [.09, .60]	.10 [.00, .34]	.16 [.00, .40]	.41 [.21, .66]
Simultaneous Gabor	.41 [.14, .65]	.06 [.00, .23]	.09 [.00, .29]	.45 [.27, .66]
Simultaneous Pi	.33 [.05, .67]	.15 [.00, .49]	.20 [.00, .54]	.31 [.11, .60]
Average	.32 [.20, .45]	.11 [.03, .20]	.18 [.08, .29]	.40 [.30, .51]

Table 2
Correlation of each visual factor with cognitive performance.

Factor	r	BF ₁₀
General visual factor	.58 [.22, .82]	34.1
Backward masking	-.06 [-.46, .38]	0.50
Simultaneous masking	.21 [-.25, .61]	0.79
Letter	-.22 [-.55, .20]	0.86
Gabor	.31 [-.16, .68]	1.47
Pi	.10 [-.29, .48]	0.53

Note. Bayes factors are Savage–Dickey density ratios. BF₁₀ values above 3 provide positive evidence for a relation, and values above 20 provide strong evidence.

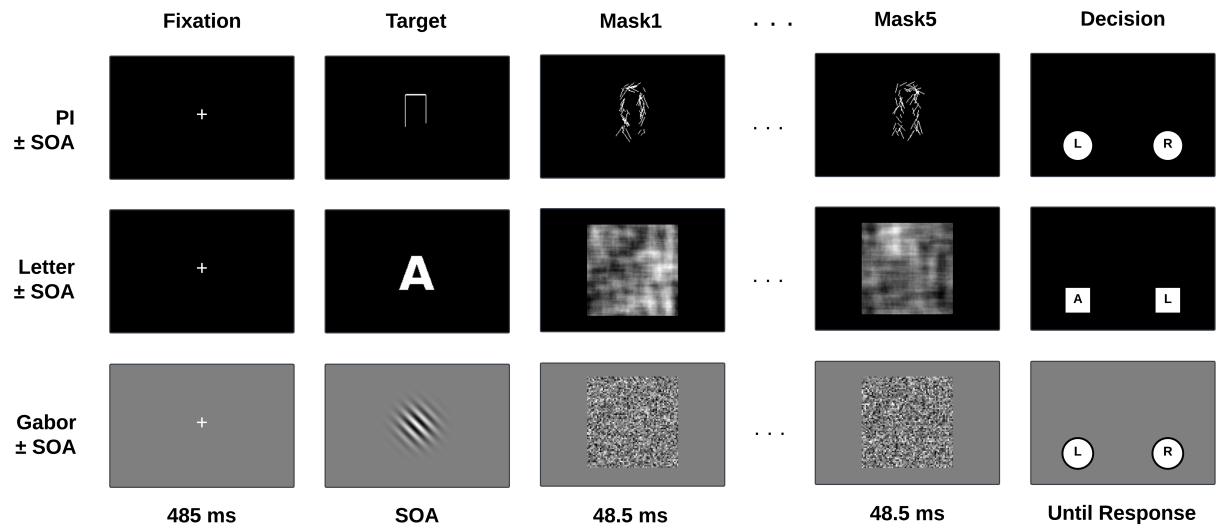


Figure 1. Backward visual masking tasks.

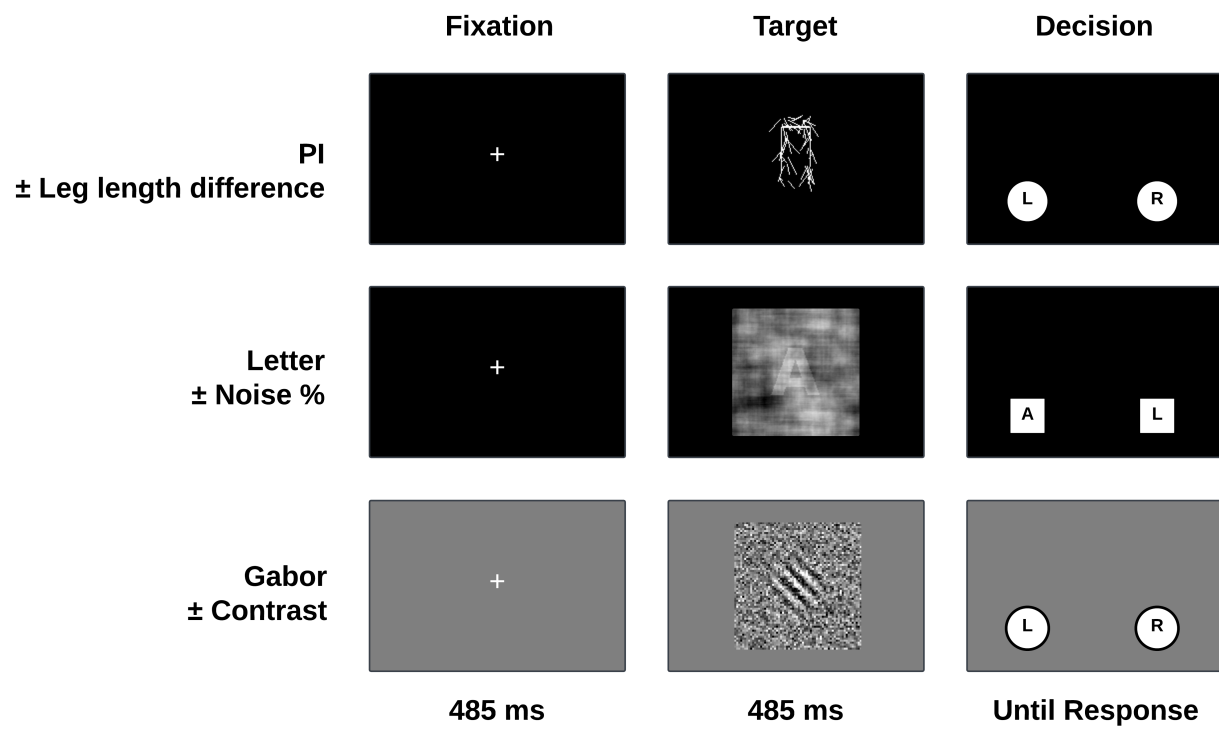


Figure 2. Simultaneous visual masking tasks.

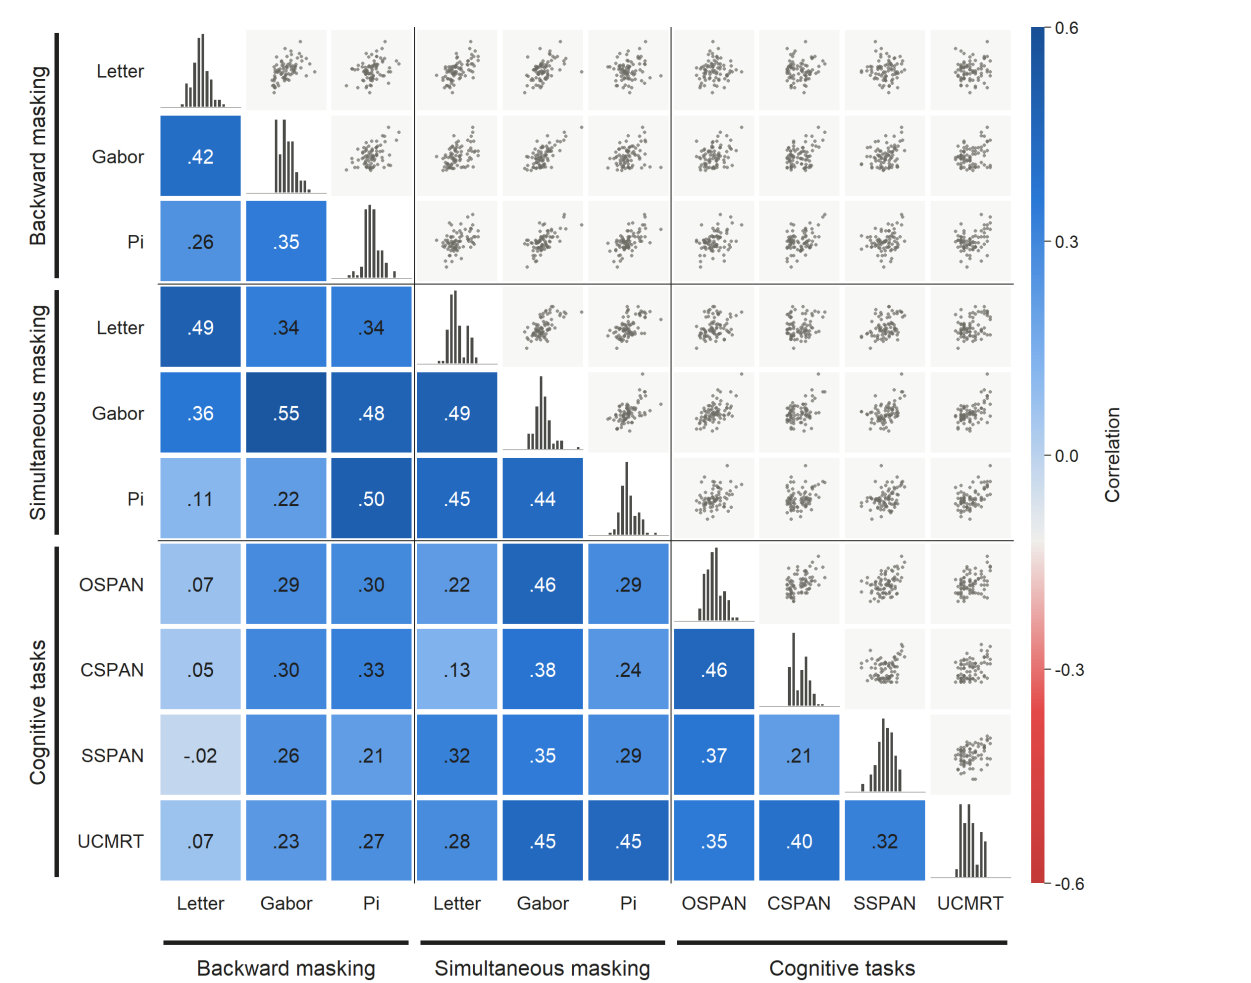


Figure 3. corr plot

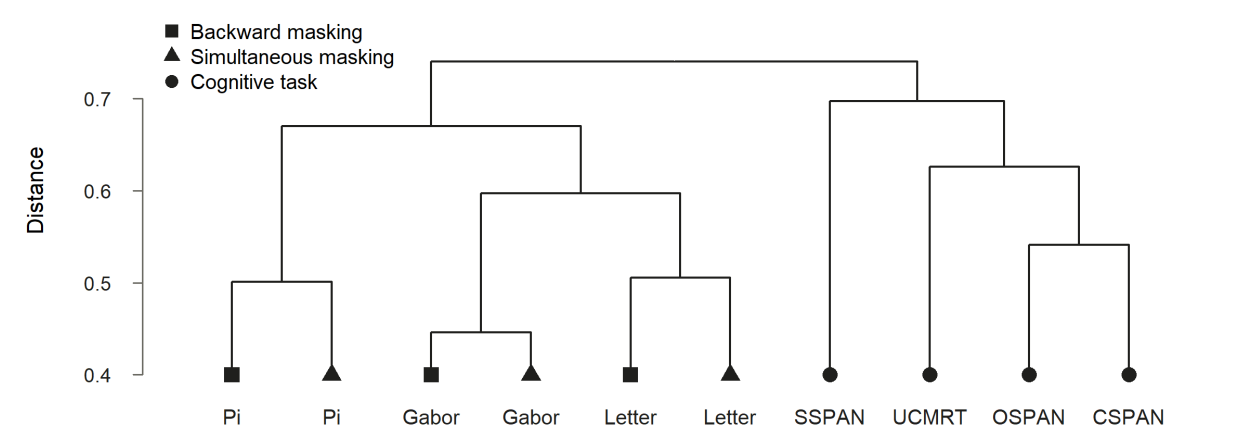


Figure 4. hcluster