

Angular Template Syntax and Data Binding



Jim Cooper

Software Engineer

@jimthecoop | jcoop.io



What Is Change Detection?

```
@Component(...)  
class MyComponent {  
    age = 0;  
  
    changeAge() {  
        this.age = 5;  
    }  
}
```

Template:


```
<h1>My age is: {{ age }}</h1>  
<button (click)="changeAge()">  
    Change Age  
</button>
```

My age is: 5


Change Age




Automatic Change Detection

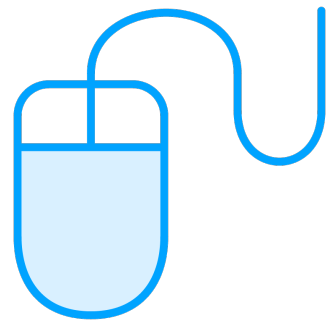


Mouse Click Events

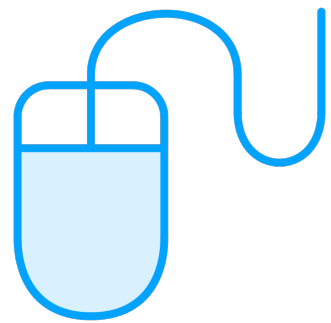

Mouse Move Events

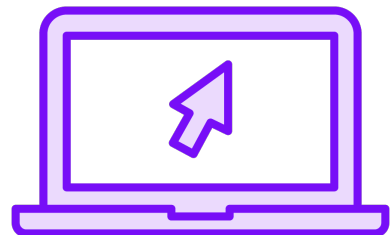

Router/Navigation Events

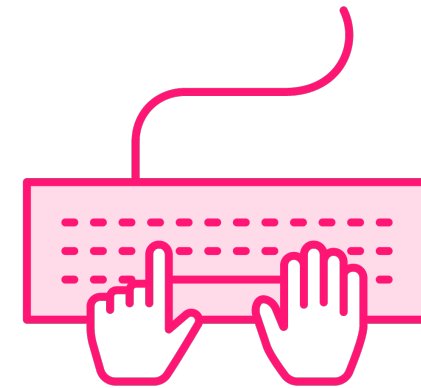

Keypress Events



Input/Change Events



Form Related Events



Undetectable Changes

`setTimeout()`

`setInterval()`


Promises

API Response



What Is Change Detection?

```
@Component(...)  
class MyComponent {  
  age = 5; //changed  
  changeAge() {  
    setTimeout(  
      () => this.age = 5,  
      1000  
    );  
  }  
}
```

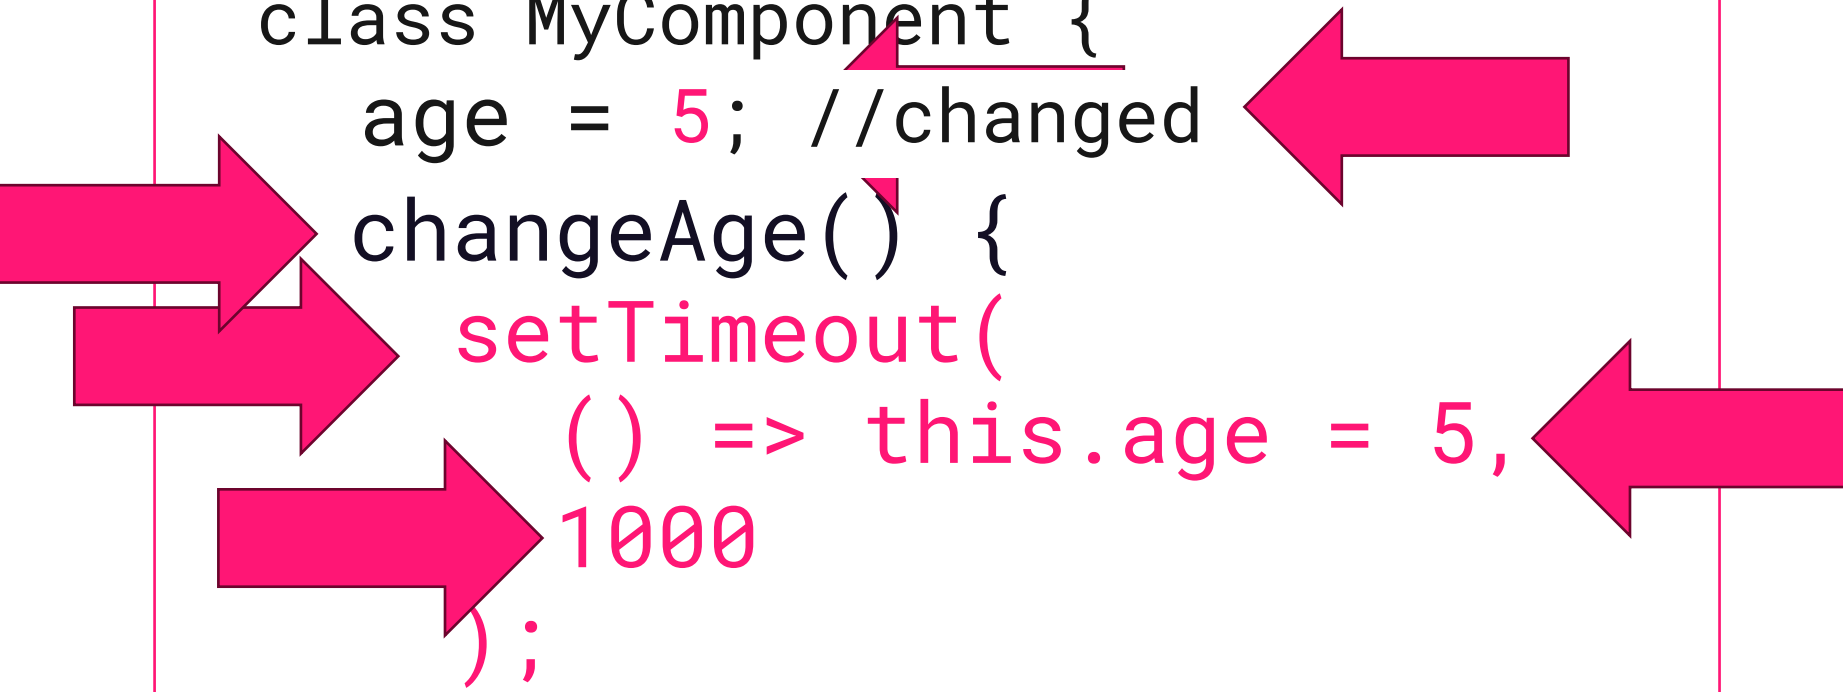A diagram illustrating code changes. Three large pink arrows point to the code: one to the initial value '5' in 'age = 5;', one to the 'setTimeout' function call, and one to the updated value '5' in 'this.age = 5,'. A fourth pink arrow points to the 'age' property in the class definition.

Template:

```
<h1>My age is: {{ age }}</h1>  
<button (click)="changeAge()">  
  Change Age  
</button>
```

