

MY DIABOLICAL PLAN

TITLE OF THESIS

By SHERLOCK HOLMES , M.A.

A Thesis Submitted to the School of Graduate Studies In Partial Fulfillment of the
Requirements for
the Degree Doctor of Philosophy

McMaster University © By Sherlock Holmes, July 2000

McMaster University DOCTOR OF PHILOSOPHY (2000) Hamilton, Ontario (Economics)

TITLE: Title of Thesis

AUTHOR: Sherlock Holmes,

M.A. (University of Cool); B.A. (Univeristy of Awesome)

ADVISOR: Advisor A Awesome

NUMBER OF PAGES: xix , 31

Lay Abstract

This is the Lay Abstract which should be limited to 150 words.

Abstract

The preface pretty much says it all.

Second paragraph of abstract starts here. This is cool.

Acknowledgements

This is the Acknowledgements y'all

Table of Contents

Chapter 1: R Markdown Basics	1
1.1 Lists	1
1.2 Line breaks	2
1.3 R chunks	2
1.4 Inline code	3
1.5 Including plots	3
1.6 Loading and exploring data	4
1.7 Additional resources	7
1.8 How to include numbering to figures and tables	8
1.8.1 Figures	8
1.8.2 Tables	10
Chapter 2: Mathematics and Science	13
2.1 Math	13
2.2 Chemistry 101: Symbols	14
2.2.1 Typesetting reactions	15
2.2.2 Other examples of reactions	15
2.3 Physics	15
2.4 Biology	16
Chapter 3: Tables, Graphics, References, and Labels	17

3.1	Tables	17
3.2	Figures	19
3.3	Footnotes and Endnotes	21
3.4	Bibliographies	22
3.5	Anything else?	23
	Conclusion	25
	Appendix A: The First Appendix	27
	Appendix B: The Second Appendix, for Fun	29
	References	31

List of Tables

1.1	Max Delays by Airline	6
1.2	Correlation of Inheritance Factors for Parents and Child	10
1.3	Max Delays by Airline	11
3.1	Correlation of Inheritance Factors for Parents and Child	17

List of Figures

1.1	Old Faithful	9
1.2	Plot for Old Faithful	10
3.1	McMaster logo	19
3.2	Mean Delays by Airline	20
3.3	Subdiv. graph	21
3.4	A Larger Figure, Flipped Upside Down	21

List of Abbreviations and Symbols

This is to list all of the commonly used abbreviations and symbols that are found throughout the dissertation.

- ABD: All But Dissertation
- DMV: Department of Motor Vehicles
- TLC: The Learning Channel

Declaration of Academic Achievement

This is the declaration of academic achievement y'all

Chapter 1

R Markdown Basics

Here is a brief introduction into using *R Markdown*. *Markdown* is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. *R Markdown* provides the flexibility of *Markdown* with the implementation of **R** input and output. For more details on using *R Markdown* see <http://rmarkdown.rstudio.com>.

Be careful with your spacing in *Markdown* documents. While whitespace largely is ignored, it does at times give *Markdown* signals as to how to proceed. As a habit, try to keep everything left aligned whenever possible, especially as you type a new paragraph. In other words, there is no need to indent basic text in the Rmd document (in fact, it might cause your text to do funny things if you do).

1.1 Lists

It's easy to create a list. It can be unordered like

- Item 1
- Item 2

or it can be ordered like

1. Item 1

2. Item 2

Notice that I intentionally mislabeled Item 2 as number 4. *Markdown* automatically figures this out! You can put any numbers in the list and it will create the list. Check it out below.

To create a sublist, just indent the values a bit (at least four spaces or a tab). (Here's one case where indentation is key!)

1. Item 1

2. Item 2

3. Item 3

- Item 3a
- Item 3b

1.2 Line breaks

Make sure to add white space between lines if you'd like to start a new paragraph. Look at what happens below in the outputted document if you don't:

Here is the first sentence. Here is another sentence. Here is the last sentence to end the paragraph. This should be a new paragraph.

Now for the correct way:

Here is the first sentence. Here is another sentence. Here is the last sentence to end the paragraph.

This should be a new paragraph.

1.3 R chunks

When you click the **Knit** button above a document will be generated that includes both content as well as the output of any embedded **R** code chunks within the document. You can embed an **R** code chunk like this (`cars` is a built-in **R** dataset):

	speed		dist
Min.	: 4.0	Min.	: 2.00
1st Qu.:	12.0	1st Qu.:	26.00
Median	:15.0	Median	: 36.00
Mean	:15.4	Mean	: 42.98
3rd Qu.:	19.0	3rd Qu.:	56.00
Max.	:25.0	Max.	:120.00

1.4 Inline code

If you'd like to put the results of your analysis directly into your discussion, add inline code like this:

The `cos` of 2π is 1.

Another example would be the direct calculation of the standard deviation:

The standard deviation of `speed` in `cars` is 5.2876444.

One last neat feature is the use of the `ifelse` conditional statement which can be used to output text depending on the result of an **R** calculation:


The standard deviation is less than 6.

Note the use of `>` here, which signifies a quotation environment that will be indented.

As you see with `2π` above, mathematics can be added by surrounding the mathematical text with dollar signs. More examples of this are in Mathematics and Science if you uncomment the code in Math.

1.5 Including plots

You can also embed plots. For example, here is a way to use the base **R** graphics package to produce a plot using the built-in `pressure` dataset:

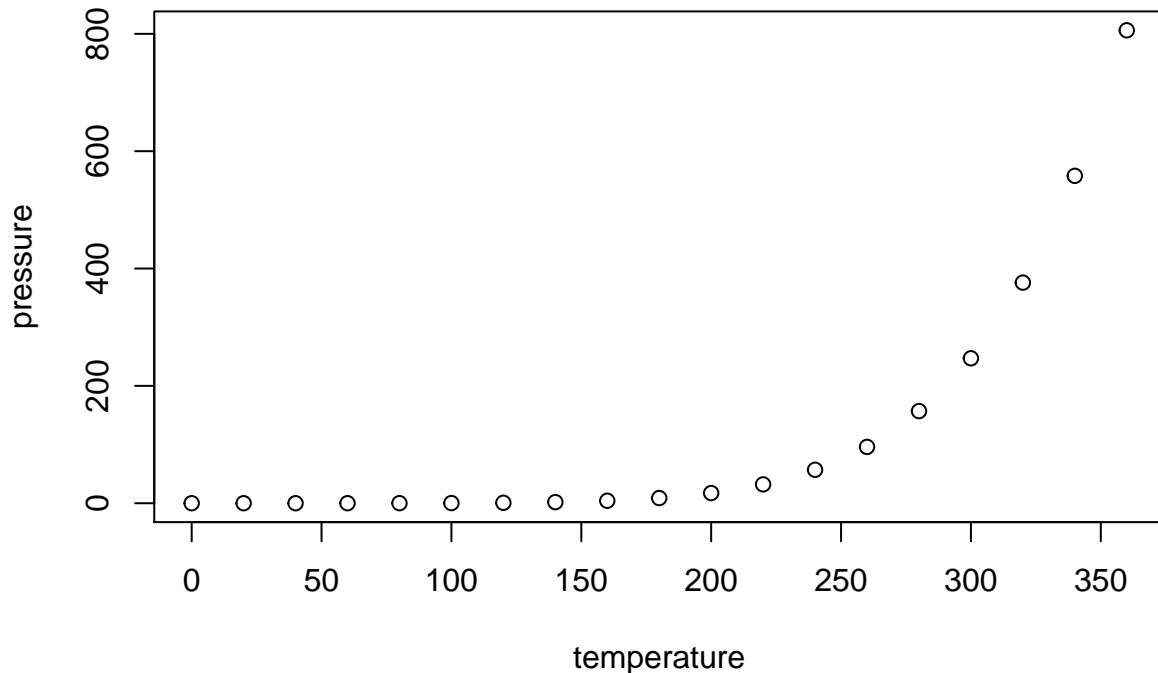

Note that the `echo=FALSE` parameter was added to the code chunk to prevent printing of the **R** code that generated the plot. There are plenty of other ways to add chunk options. More information is available at <http://yihui.name/knitr/options/>.

Another useful chunk option is the setting of `cache=TRUE` as you see here. If document rendering becomes time consuming due to long computations or plots that are expensive to generate you can use knitr caching to improve performance. Later in this file, you'll see a way to reference plots created in **R** or external figures.

1.6 Loading and exploring data

Included in this template is a file called `flights.csv`. This file includes a subset of the larger dataset of information about all flights that departed from Seattle and Portland in 2014. More information about this dataset and its **R** package is available at <http://github.com/ismayc/pnwflights14>. This subset includes only Portland flights and only rows that were complete with no missing values. Merges were also done with the `airports` and `airlines` data sets in the `pnwflights14` package to get more

descriptive airport and airline names.

We can load in this data set using the following command:

The data is now stored in the data frame called `flights` in **R**. To get a better feel for the variables included in this dataset we can use a variety of functions. Here we can see the dimensions (rows by columns) and also the names of the columns.

```
[1] 52808      16

[1] "month"      "day"        "dep_time"    "dep_delay"
[5] "arr_time"    "arr_delay"  "carrier"     "tailnum"
[9] "flight"     "dest"       "air_time"    "distance"
[13] "hour"       "minute"     "carrier_name" "dest_name"
```

Another good idea is to take a look at the dataset in table form. With this dataset having more than 50,000 rows, we won't explicitly show the results of the command here. I recommend you enter the command into the Console *after* you have run the **R** chunks above to load the data into **R**.

While not required, it is highly recommended you use the `dplyr` package to manipulate and summarize your data set as needed. It uses a syntax that is easy to understand using chaining operations. Below I've created a few examples of using `dplyr` to get information about the Portland flights in 2014. You will also see the use of the `ggplot2` package, which produces beautiful, high-quality academic visuals.

We begin by checking to ensure that needed packages are installed and then we load them into our current working environment:

The example we show here does the following:

- Selects only the `carrier_name` and `arr_delay` from the `flights` dataset and then assigns this subset to a new variable called `flights2`.
- Using `flights2`, we determine the largest arrival delay for each of the carriers.

A useful function in the `knitr` package for making nice tables in *R Markdown* is called `kable`. It is much easier to use than manually entering values into a table by copying and pasting values into Excel or LaTeX. This again goes to show how nice reproducible documents can be! (Note the use of `results="asis"`, which will produce the table instead of the code to create the table.) The `caption.short` argument is used to include a shorter title to appear in the List of Tables.

Table 1.1: Maximum Delays by Airline

Airline	Max Arrival Delay
Alaska Airlines Inc.	338
American Airlines Inc.	1539
Delta Air Lines Inc.	651
Frontier Airlines Inc.	575
Hawaiian Airlines Inc.	407
JetBlue Airways	273
SkyWest Airlines Inc.	421
Southwest Airlines Co.	694
United Air Lines Inc.	472
US Airways Inc.	347
Virgin America	366


The last two options make the table a little easier-to-read.

We can further look into the properties of the largest value here for American Airlines Inc. To do so, we can isolate the row corresponding to the arrival delay of 1539 minutes for American in our original `flights` dataset.

Can we reference this table 1.1.

	<code>dep_time</code>	<code>dep_delay</code>	<code>arr_time</code>	<code>tailnum</code>	<code>flight</code>	<code>dest</code>	<code>air_time</code>	<code>distance</code>
1	1403	1553	1934	N595AA	1568	DFW	182	1616

We see that the flight occurred on March 3rd and departed a little after 2 PM on its way to Dallas/Fort Worth. Lastly, we show how we can visualize the arrival delay of all departing flights from Portland on March 3rd against time of departure.

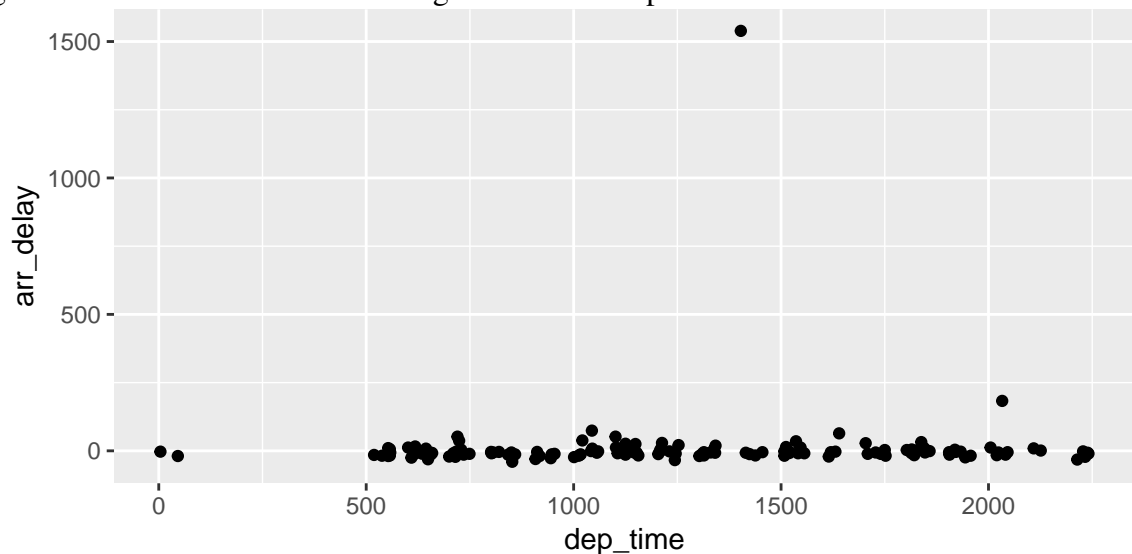

1.7 Additional resources

- *Markdown Cheatsheet* - <https://github.com/adam-p/markdown-here/wiki/Markdown-Cheatsheet>
- *R Markdown Reference Guide* - <https://www.rstudio.com/wp-content/uploads/2015/03/rmarkdown-reference.pdf>
- *Introduction to dplyr* - <https://cran.rstudio.com/web/packages/dplyr/vignettes/introduction.html>

- ggplot2 Documentation - <http://docs.ggplot2.org/current/>


1.8 How to include numbering to figures and tables

1.8.1 Figures

Starting with numbering for figures that were generated outside of your thesis mark-down file (though this goes against reproduceability) we can use a latex command `\addfigure` which is unique to this template. There are five arguments as follows: `\addfigure{<name>}{<Top caption>}{<Bottom caption>}{<size usually use 0.8>}{<label>}`. The label number will appear at the top and if you do not want a caption or a label then leave then blank. Keep in mind that you must fill in the file name, and size so that at a bare minimum the command will be `\addfigure{filename}{}{}{0.8}{}{}`. I have generated a plot showing eruptions and wait times from Old Faithful and saved it as a .png file in the *figure* directory. I have used the `\addfigure` command to include it below.¹

¹If you want to see how `\addfigure` was created visit, but do not alter, *Mactemplate.cls*.

Figure 1.1: Old Faithful

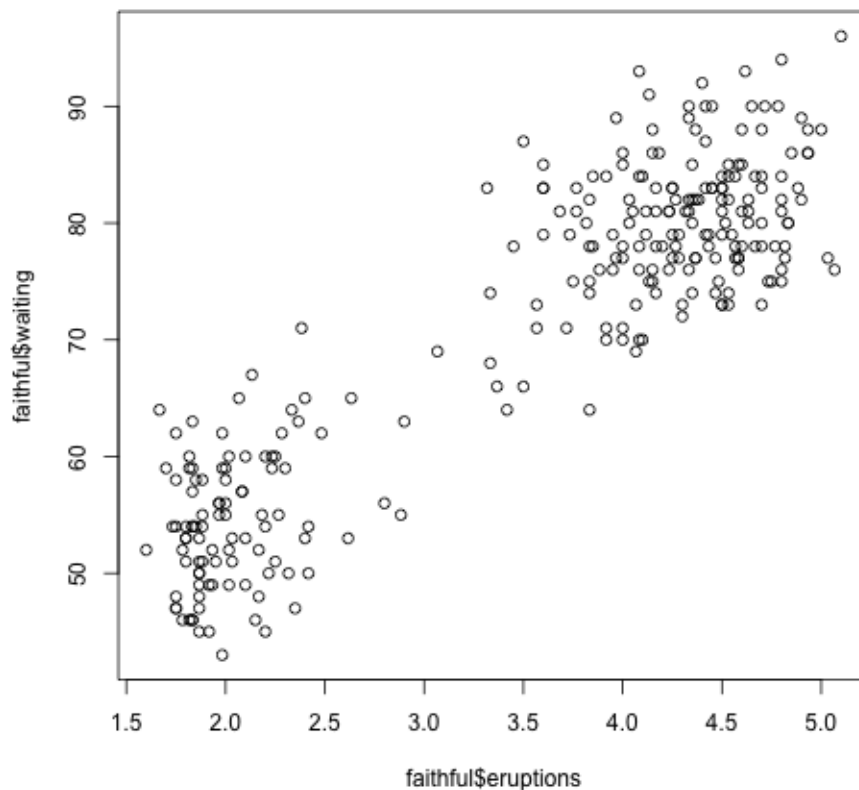

Plotting eruptions and waiting for old faithful

So now we can reference our Old Faithful figure as Figure 1.1. Notice that the way in which we have to reference figures from the `\addfigure` command, or more specifically from any `LATEX` command is `\ref{<label>}` whereas normally throughout markdown we use `\@ref(fig:<label>)` and `\ref(tab:<label>)` for figures and tables, respectively.

Now let's do the same thing but considering reproducibility where we will generate the Old Faithful plot within an R chunk. Notice in the header of the chunk we first state that we are using R and then we give this chunk, which is dedicated to generating our plot, a label from which we can reference the figure later in our document.

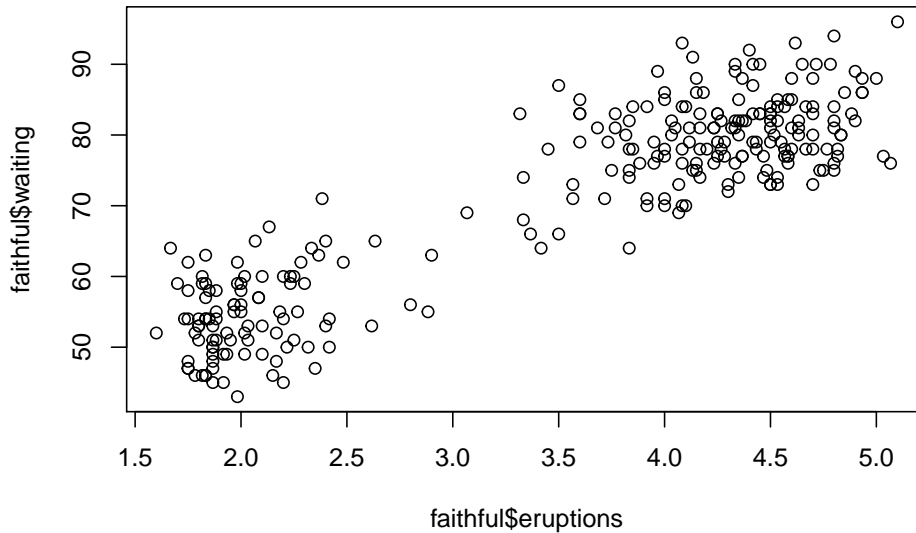


Figure 1.2: Plot for Old Faithful

Now let's reference this figure as Figure 1.2. Notice though that you must include a *fig.cap* in the chunk header for it to be given a table number.

IMPORTANT: When you give a table or a figure a label, it MUST be alphanumeric with not underscores or spaces!

Clearly the second method of including figures is ideal however if you generate figures in other programs or from data centres where you can only take an image of the plot then the first where you use `\addfigure` will work well. Just to make things more confusing, you should have noticed that you reference using `\@ref()` or `\ref{}`, be careful.

1.8.2 Tables

Now for a table that is generated using the basic markdown table generation.

Table 1.2: Correlation of Inheritance Factors for Parents and Child

Factors	Correlation between Parents & Child	Inherited
Education	-0.49	Yes
Socio-Economic Status	0.28	Slight
Income	0.08	No

Factors	Correlation between Parents & Child	Inherited
Family Size	0.18	Slight
Occupational Prestige	0.21	Slight

So to reference the table we just add Table 1.2 and then you can reference tables.

If we want to use the *kable* library we can also easily label and reference tables.

Table 1.3: Maximum Delays by Airline

Airline	Max Arrival Delay
Alaska Airlines Inc.	338
American Airlines Inc.	1539
Delta Air Lines Inc.	651
Frontier Airlines Inc.	575
Hawaiian Airlines Inc.	407
JetBlue Airways	273
SkyWest Airlines Inc.	421
Southwest Airlines Co.	694
United Air Lines Inc.	472
US Airways Inc.	347
Virgin America	366

Can we reference this table 1.3. I'm sure many will use *stargazer* which is a `LaTeX` command. Be sure to include the label option and then you can reference your regression output easily.

Chapter 2

Mathematics and Science

2.1 Math

T_EX is the best way to typeset mathematics. Donald Knuth designed T_EX when he got frustrated at how long it was taking the typesetters to finish his book, which contained a lot of mathematics. One nice feature of *R Markdown* is its ability to read LaTeX code directly.

If you are doing a thesis that will involve lots of math, you will want to read the following section which has been commented out. If you're not going to use math, skip over or delete this next commented section.

$$\sum_{j=1}^n (\delta\theta_j)^2 \leq \frac{\beta_i^2}{\delta_i^2 + \rho_i^2} \left[2\rho_i^2 + \frac{\delta_i^2 \beta_i^2}{\delta_i^2 + \rho_i^2} \right] \equiv \omega_i^2$$

From Informational Dynamics, we have the following (Dave Braden):

After n such encounters the posterior density for θ is

$$\pi(\theta | X_1 < y_1, \dots, X_n < y_n) \propto \pi(\theta) \prod_{i=1}^n \int_{-\infty}^{y_i} \exp\left(-\frac{(x - \theta)^2}{2\sigma^2}\right) dx$$

Another equation:

$$\det \begin{vmatrix} c_0 & c_1 & c_2 & \dots & c_n \\ c_1 & c_2 & c_3 & \dots & c_{n+1} \\ c_2 & c_3 & c_4 & \dots & c_{n+2} \\ \vdots & \vdots & \vdots & & \vdots \\ c_n & c_{n+1} & c_{n+2} & \dots & c_{2n} \end{vmatrix} > 0$$

Lapidus and Pindar, Numerical Solution of Partial Differential Equations in Science and Engineering. Page 54

$$\int_t \left\{ \sum_{j=1}^3 T_j \left(\frac{d\phi_j}{dt} + k\phi_j \right) - kT_e \right\} w_i(t) dt = 0, \quad i = 1, 2, 3.$$

L&P Galerkin method weighting functions. Page 55

$$\sum_{j=1}^3 T_j \int_0^1 \left\{ \frac{d\phi_j}{dt} + k\phi_j \right\} \phi_i dt = \int_0^1 k T_e \phi_i dt, \quad i = 1, 2, 3$$

Another L&P (p145)

$$\int_{-1}^1 \int_{-1}^1 \int_{-1}^1 f(\xi, \eta, \zeta) = \sum_{k=1}^n \sum_{j=1}^n \sum_{i=1}^n w_i w_j w_k f(\xi, \eta, \zeta).$$

Another L&P (p126)

$$\int_{A_e} (\cdot) dx dy = \int_{-1}^1 \int_{-1}^1 (\cdot) \det[J] d\xi d\eta.$$

2.2 Chemistry 101: Symbols

Chemical formulas will look best if they are not italicized. Get around math mode's automatic italicizing in LaTeX by using the argument `$\mathrm{formula here}$` , with your formula inside the curly brackets. (Notice the use of the backticks here which enclose text that acts as code.)

So, $\text{Fe}_2^{2+}\text{Cr}_2\text{O}_4$ is written $\mathrm{\text{Fe}_2^{\text{2+}}Cr_2O_4}$.

Exponent or Superscript: O^-

Subscript: CH_4

To stack numbers or letters as in Fe_2^{2+} , the subscript is defined first, and then the superscript is defined.

Bullet: $\text{CuCl} \bullet 7\text{H}_2\text{O}$

Delta: Δ


Reaction Arrows: \longrightarrow or $\xrightarrow{\text{solution}}$

Resonance Arrows: \leftrightarrow

Reversible Reaction Arrows: \rightleftharpoons


2.2.1 Typesetting reactions

You may wish to put your reaction in an equation environment, which means that LaTeX will place the reaction where it fits and will number the equations for you.



We can reference this combustion of glucose reaction via Equation (2.1).

2.2.2 Other examples of reactions



2.3 Physics

Many of the symbols you will need can be found on the math page <http://web.reed.edu/cis/help/latex/math.html> and the Comprehensive

LaTeX Symbol Guide (<http://mirror.utexas.edu/ctan/info/symbols/comprehensive/symbols-letter.pdf>).

2.4 Biology

You will probably find the resources at <http://www.lecb.ncifcrf.gov/~toms/latex.html> helpful, particularly the links to bsts for various journals. You may also be interested in TeXShade for nucleotide typesetting (<http://homepages.uni-tuebingen.de/beitz/txe.html>). Be sure to read the proceeding chapter on graphics and tables.

Chapter 3

Tables, Graphics, References, and Labels

3.1 Tables

In addition to the tables that can be automatically generated from a data frame in **R** that you saw in R Markdown Basics using the `kable` function, you can also create tables using *pandoc*. (More information is available at <http://pandoc.org/README.html#tables>.) This might be useful if you don't have values specifically stored in **R**, but you'd like to display them in table form. Below is an example. Pay careful attention to the alignment in the table and hyphens to create the rows and columns.

Table 3.1: Correlation of Inheritance Factors for Parents and Child

Factors	Correlation between Parents & Child	Inherited
Education	-0.49	Yes
Socio-Economic Status	0.28	Slight
Income	0.08	No
Family Size	0.18	Slight

Factors	Correlation between Parents & Child	Inherited
Occupational Prestige	0.21	Slight

We can also create a link to the table by doing the following: Table 3.1. If you go back to Loading and exploring data and look at the `kable` table, we can create a reference to this max delays table too: Table 1.1. The addition of the `(\#tab:inher)` option to the end of the table caption allows us to then make a reference to `Table \@ref(tab:label)`. Note that this reference could appear anywhere throughout the document after the table has appeared.

3.2 Figures

If your thesis has a lot of figures, *R Markdown* might behave better for you than that other word processor. One perk is that it will automatically number the figures accordingly in each chapter. You'll also be able to create a label for each figure, add a caption, and then reference the figure in a way similar to what we saw with tables earlier. If you label your figures, you can move the figures around and *R Markdown* will automatically adjust the numbering for you. No need for you to remember! So that you don't have to get too far into LaTeX to do this, a couple **R** functions have been created for you to assist. You'll see their use below.

In the **R** chunk below, we will load in a picture stored as `mcmaster.jpg` in our main directory. We then give it the caption of "McMaster logo", the label of "mcmasterlogo", and specify that this is a figure. Make note of the different **R** chunk options that are given in the R Markdown file (not shown in the knitted document).



Figure 3.1: McMaster logo

Here is a reference to the Reed logo: Figure 3.1. Note the use of the `fig:` code here. By naming the **R** chunk that contains the figure, we can then reference that figure later as done in the first sentence here. We can also specify the caption for the figure via the R chunk option `fig.cap`.

Below we will investigate how to save the output of an **R** plot and label it in a way similar to that done above. Recall the `flights` dataset from Chapter 1. (Note that we've shown a different way to reference a section or chapter here.) We will next explore a bar graph with the mean flight departure delays by airline from Portland for 2014. Note also the use of the `scale` parameter which is discussed on the next page.

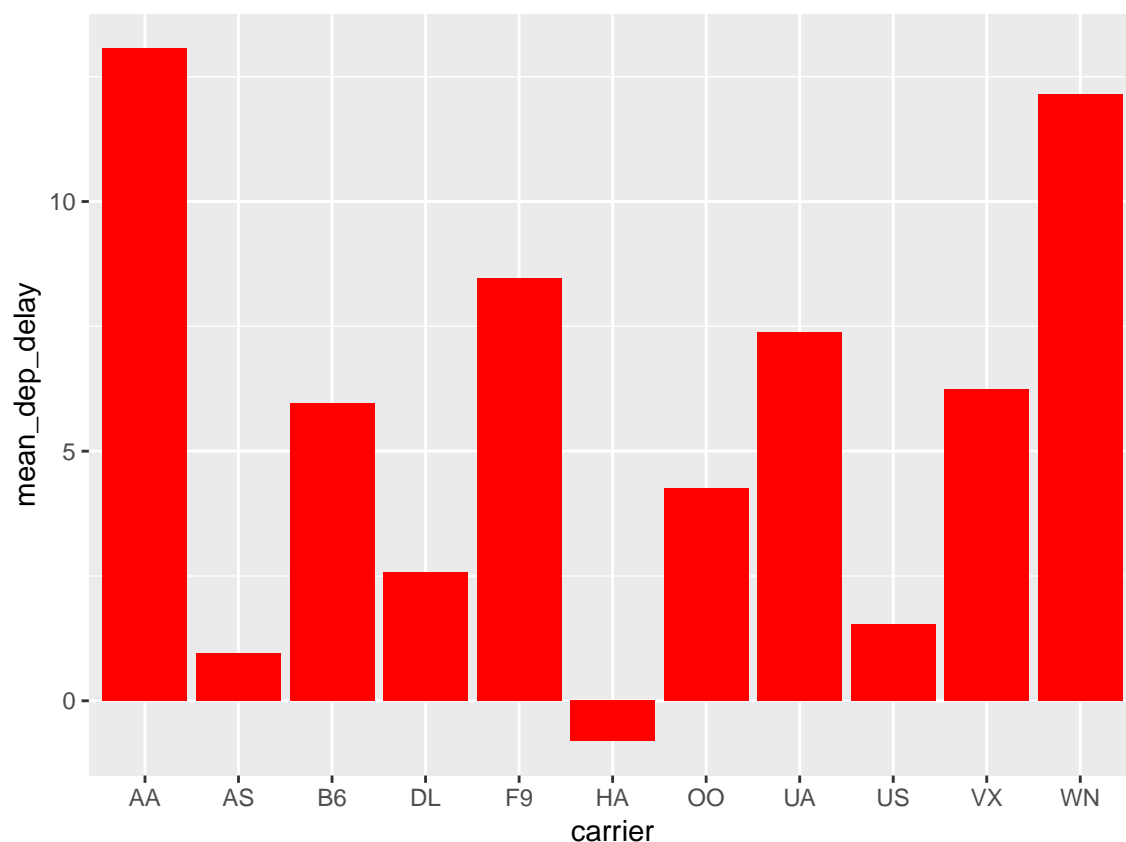


Figure 3.2: Mean Delays by Airline

Here is a reference to this image: Figure 3.2.

A table linking these carrier codes to airline names is available at <https://github.com/ismayc/pnwflights14/blob/master/data/airlines.csv>.

Next, we will explore the use of the `out.extra chunk` option, which can be used to shrink or expand an image loaded from a file by specifying `"scale= "`. Here we use the mathematical graph stored in the “subdivision.pdf” file.

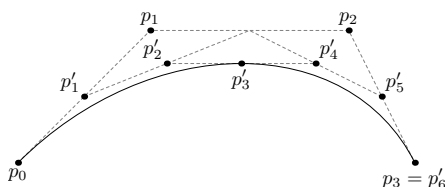


Figure 3.3: Subdiv. graph

Here is a reference to this image: Figure 3.3. Note that `echo=FALSE` is specified so that the **R** code is hidden in the document.

More Figure Stuff

Lastly, we will explore how to rotate and enlarge figures using the `out.extra chunk` option. (Currently this only works in the PDF version of the book.)

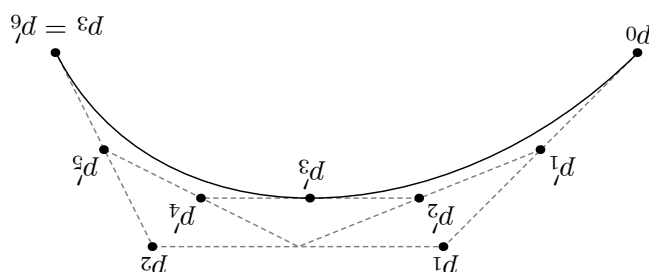


Figure 3.4: A Larger Figure, Flipped Upside Down

As another example, here is a reference: Figure 3.4.

3.3 Footnotes and Endnotes

You might want to footnote something.¹ The footnote will be in a smaller font and placed appropriately. Endnotes work in much the same way. More information can be found about both on the CUS site or feel free to reach out to `data@reed.edu`.

¹footnote text

3.4 Bibliographies

Of course you will need to cite things, and you will probably accumulate an armful of sources. There are a variety of tools available for creating a bibliography database (stored with the .bib extension). In addition to BibTeX suggested below, you may want to consider using the free and easy-to-use tool called Zotero. The Reed librarians have created Zotero documentation at <http://libguides.reed.edu/citation/zotero>. In addition, a tutorial is available from Middlebury College at <http://sites.middlebury.edu/zoteromiddlebury/>.

R Markdown uses *pandoc* (<http://pandoc.org/>) to build its bibliographies. One nice caveat of this is that you won't have to do a second compile to load in references as standard LaTeX requires. To cite references in your thesis (after creating your bibliography database), place the reference name inside square brackets and precede it by the "at" symbol. For example, here's a reference to a book about worrying: (Molina & Borkovec, 1994). This `Molina1994` entry appears in a file called `thesis.bib` in the `bib` folder. This bibliography database file was created by a program called BibTeX. You can call this file something else if you like (look at the YAML header in the main .Rmd file) and, by default, is to placed in the `bib` folder.

For more information about BibTeX and bibliographies, see our CUS site (<http://web.reed.edu/cis/help/latex/index.html>)². There are three pages on this topic: *bibtex* (which talks about using BibTeX, at <http://web.reed.edu/cis/help/latex/bibtex.html>), *bibtexstyles* (about how to find and use the bibliography style that best suits your needs, at <http://web.reed.edu/cis/help/latex/bibtexstyles.html>) and *bibman* (which covers how to make and maintain a bibliography by hand, without BibTeX, at <http://web.reed.edu/cis/help/latex/bibman.html>). The last page will not be useful unless you have only a few sources.

If you look at the YAML header at the top of the main .Rmd file you can see that we

²Reed College (2007)

can specify the style of the bibliography by referencing the appropriate csl file. You can download a variety of different style files at <https://www.zotero.org/styles>. Make sure to download the file into the csl folder.

Tips for Bibliographies

- Like with thesis formatting, the sooner you start compiling your bibliography for something as large as thesis, the better. Typing in source after source is mind-numbing enough; do you really want to do it for hours on end in late April? Think of it as procrastination.
- The cite key (a citation's label) needs to be unique from the other entries.
- When you have more than one author or editor, you need to separate each author's name by the word "and" e.g. Author = {Noble, Sam and Youngberg, Jessica},.
- Bibliographies made using BibTeX (whether manually or using a manager) accept LaTeX markup, so you can italicize and add symbols as necessary.
- To force capitalization in an article title or where all lowercase is generally used, bracket the capital letter in curly braces.
- You can add a Reed Thesis citation³ option. The best way to do this is to use the phdthesis type of citation, and use the optional "type" field to enter "Reed thesis" or "Undergraduate thesis."

3.5 Anything else?

If you'd like to see examples of other things in this template, please contact the Data @ Reed team (email data@reed.edu) with your suggestions. We love to see people using *R Markdown* for their theses, and are happy to help.

³Noble (2002)

Conclusion

If we don't want Conclusion to have a chapter number next to it, we can add the `{-}` attribute.

More info

And here's some other random info: the first paragraph after a chapter title or section head *shouldn't be* indented, because indents are to tell the reader that you're starting a new paragraph. Since that's obvious after a chapter or section title, proper typesetting doesn't add an indent there.

Appendix A

The First Appendix

This first appendix includes all of the R chunks of code that were hidden throughout the document (using the `include = FALSE` chunk tag) to help with readability and/or setup.

In the main Rmd file

```
# This chunk ensures that the thesisdown package is  
# installed and loaded. This thesisdown package includes  
# the template files for the thesis.  
if(!require(devtools))  
  install.packages("devtools", repos = "http://cran.rstudio.com")  
if(!require(thesisdown))  
  devtools::install_github("ismayc/thesisdown")  
library(thesisdown)
```

In Chapter 3:

```
# This chunk ensures that the thesisdown package is  
# installed and loaded. This thesisdown package includes  
# the template files for the thesis and also two functions  
# used for labeling and referencing
```

```
if(!require(devtools))  
  install.packages("devtools", repos = "http://cran.rstudio.com")  
if(!require(dplyr))  
  install.packages("dplyr", repos = "http://cran.rstudio.com")  
if(!require(ggplot2))  
  install.packages("ggplot2", repos = "http://cran.rstudio.com")  
if(!require(ggplot2))  
  install.packages("bookdown", repos = "http://cran.rstudio.com")  
if(!require(thesisdown)){  
  library(devtools)  
  devtools::install_github("ismayc/thesisdown")  
}  
library(thesisdown)  
flights <- read.csv("data/flights.csv")
```

Appendix B

The Second Appendix, for Fun

References

Angel, E. (2000). *Interactive computer graphics : A top-down approach with opengl*. Boston, MA: Addison Wesley Longman.

Angel, E. (2001a). *Batch-file computer graphics : A bottom-up approach with quicktime*. Boston, MA: Wesley Addison Longman.

Angel, E. (2001b). *Test second book by angel*. Boston, MA: Wesley Addison Longman.

Molina, S. T., & Borkovec, T. D. (1994). The Penn State worry questionnaire: Psychometric properties and associated characteristics. In G. C. L. Davey & F. Tallis (Eds.), *Worrying: Perspectives on theory, assessment and treatment* (pp. 265–283). New York: Wiley.

Noble, S. G. (2002). *Turning images into simple line-art* (Undergraduate thesis). Reed College.

Reed College. (2007, March). LaTeX your document. Retrieved from <http://web.reed.edu/cis/help/LaTeX/index.html>