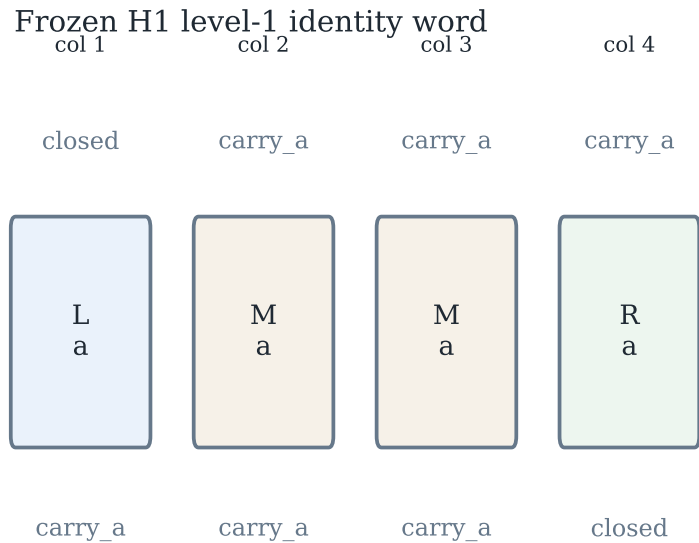



a

Interfaces compose only by exact equality; the left seed is unique.

b

Compiled corridor instance

$$f_1(1) = z, f_2(1, \underline{c}) = u, f_2(2, c) = \underline{u}0, T = \emptyset.$$

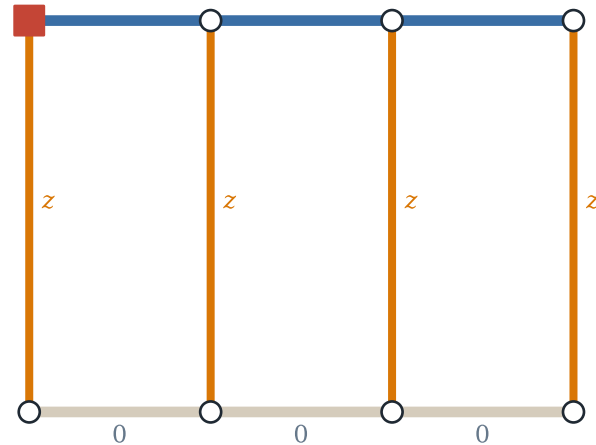

Every edge contributes zero total label; only the seed contributes nonzero total mass.