
The Spin the Web Project

Philosophy, Specification, and Implementation

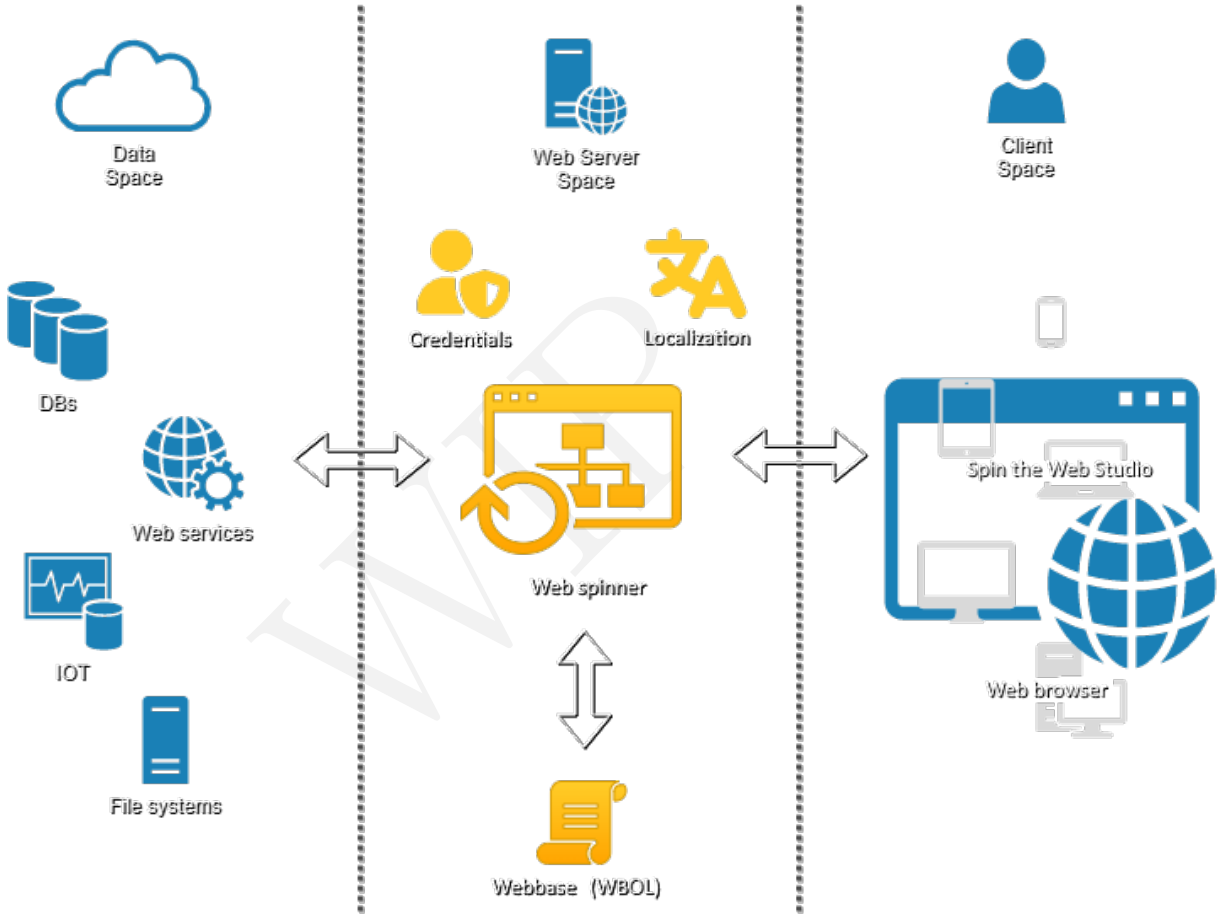

Spin the Web Project

Visualize, then Realize: Weave Web Portals to Shape Brands Identities.

Compiled on 2026-11-14 11:26:28+01:00

WIP

License

Copyright © 1998-2026 Giancarlo Trevisan

This work is licensed under the
Creative Commons Attribution–ShareAlike 4.0 International
(CC BY–SA 4.0).

To view a copy of this license, visit
https://creativecommons.org/licenses/by-sa/4.0/

WIP

You are free to share and adapt the material for any purpose, even commercially, provided that you give appropriate credit and distribute your contributions under the same license as the original. For attribution, cite the work as: "Spin the Web (Morphic Edition), Giancarlo Trevisan, 2026."

Note: This license applies to the book's content. The Spin the Web framework itself is intended to remain free to use under the stewardship of the Spin the Web Project, which publishes and maintains the specifications and reference implementations.

WIP

To the Internet, a neverending source of knowledge.
To the open source community, a wonderful group that shares passions in hacks and code.

Abstract

The Spin the Web Project is first a philosophy: **eBranding**, the discipline of virtualizing all virtualizable aspects of an organization into a single, coherent digital channel. **Spin the Web** is the open source framework the Project stewards to realize that philosophy in practice, providing the tools to build **Enterprise Web Portals** ("portal"). In this book, a portal is a single access point that unifies the capabilities of websites and web applications: it aggregates and personalizes information, exposes interactive and transactional workflows, and serves as the enterprise brand's primary digital harbor. It addresses the persistent challenge of unifying heterogeneous enterprise systems (ERP, CRM, BPMS, and MRP systems) behind a single, role-aware digital channel, providing consistent abstractions over disparate backends. The objective is not to replace but to harmonize: envision a future where software vendors focus on product logic and expose APIs, while specialized UI integrators build the user interfaces on top of them.

The framework itself has three core components:

1. **Webbase Ontology Language (WBOL)**: A declarative language for modeling portal structure, content, and behavior.
2. **Web Spinner**: A runtime that interprets WBOL (webbase) dynamically generating user experiences with real-time content delivery and role-based authorization.
3. **Spin the Web Studio**: An webbaselet for in-place editing of webbases; it also serves as a laboratory for exercising the Web Spinner.

The framework advances the **Virtualized Enterprise paradigm**: a unified portal interface for customers, employees, suppliers, partners, and governance stakeholders, with the primary objective of digitally harboring the brand (eBranding).

This book combines foundational concepts with practical guidance for developers, integrators, and technology leaders seeking to modernize digital channels.

Keywords: enterprise web portals; ebranding; webbase; webbaselets; framework; Spin the Web Project; STW.

WIP

WIP

Preface

Why This Book

In the rapidly evolving landscape of enterprise software, organizations find themselves trapped in a web of disparate systems, each with its own interface, data model, and user experience paradigm. Employees struggle to navigate between multiple applications, customers face fragmented touchpoints, and partners encounter inconsistent integration patterns. The promise of digital transformation often falls short because these systems remain fundamentally siloed.

Spin the Web emerged from real-world frustration with this fragmentation. After building custom integrations, developing multiple user interfaces, and watching organizations struggle with the complexity of their own digital ecosystems, it became clear that a fundamentally different approach was needed.

What Makes This Different

Before it is a framework, Spin the Web is a philosophy: eBranding, the practice of virtualizing all virtualizable aspects of an organization—its brand, processes, and relationships—into a single, coherent digital channel. The Spin the Web Project stewards this philosophy; the **Spin the Web framework** (`WBOL`, the *Web Spinner*, and the *Spin the Web Studio*) is how the Project turns it into working software. The philosophy comes first because it defines the goal—a unified digital identity for the organization—while the framework is simply the current, evolving means to that goal.

This book introduces a paradigm shift: instead of trying to integrate disparate systems only at the data level, let's integrate them also at the experience level! The `WBOL` specification provides a way to describe portal structures that can encompass any type of enterprise system. The *Web Spinner* runtime interprets WBOL to enable real-time content delivery. The *Spin the Web Studio* provides the tools to build and maintain these portals efficiently.

What sets this approach apart is the concept of the "virtualized enterprise"—a single, coherent digital interface that adapts to each user's role[s] and needs, whether they are a customer, employee, supplier, or partner. This isn't just another portal framework; it's a complete rethinking of how organizations should present themselves digitally, i.e., how they should be eBranded.

At its core is a simple principle: the digital ecosystem must be rendered adaptable to the enterprise, not the enterprise to the ecosystem.

WIP

Who Should Read This Book

This book is written for professional software developers, enterprise architects, and technology leaders who are responsible for building or maintaining complex webbased systems. While the concepts are accessible to developers with basic web development experience, the focus is on enterprise-grade solutions that require sophisticated understanding of system integration, security, and scalability.

Specifically, this book will be valuable to:

- Full-stack developers building enterprise web applications
- System architects designing portal solutions
- Development team leads planning integration strategies
- Technology consultants working with enterprise clients
- CIOs and CTOs evaluating portal technologies

How This Book Is Organized

The book follows a four-part progression: philosophy and foundations, the technical framework, portal implementation, and expansion into a network of portals.

Part I: The Foundations introduces the eBranding philosophy and the historical and conceptual foundations of Spin the Web.

Part II: The Framework develops the technical foundations: the `WBOL`, `WBPL`, and `WBLL` languages, the *Web Spinner* runtime, and the *Spin the Web Studio* development environment.

Part III: The Portal applies the framework to portal implementation, covering content structure, presentation, user experience, and practical methods.

Part IV: A Network of Portals looks beyond individual portals to their expansion and interconnection through agentic AI, interoperability, and machine-to-machine communication.

Each part builds upon previous concepts while remaining sufficiently self-contained for reference use.

About the Spin the Web Project

The Spin the Web Project is, above all, the steward of the eBranding philosophy: the conviction that an organization's digital presence should be one coherent, role-aware channel rather than a patchwork of disconnected systems. Its mission is to divulge, manage, and evolve that philosophy and the Spin the Web framework built to serve it, while keeping both free to use. The Project stewards specifications (`WBOL`, `WBPL`, `WBLL`), reference implementations (the *Web Spinner* and *Spin the Web Studio*), and ecosystem guidance so that individuals and organizations can adopt, extend, and interoperate without vendor lock-in.

To that end, this book documents the conceptual model and provides practical, implementation-oriented guidance. Where contributions, governance, or trademark policies are relevant, they are handled transparently by the Project.

WIP

Project repository: https://github.com/spintheweb.

Acknowledgments

The practical insights in this book were refined through collaboration with enterprises, integration partners, and the broader community of developers working to solve real-world portal challenges—a journey that dates back to 1998.

Giancarlo Trevisan

2026-11-14

WIP

WIP

Contents

Abstract v

Preface vii

I The Foundations 1

Introduction to Part I: The Foundations 3

1 Genesis and History 5

2 Introduction to Enterprise Portal Challenges 13

3 Web Portals as Virtualized Enterprises 19

4 Architecture Overview 25

II The Framework 31

Introduction to Part II: The Framework 33

5 Webbase Ontology Language (WBOL) 35

6 Webbase Placeholders Language (WBPL) 41

7 Webbase Layout Language (WBLL) 45

8 Webbase and Webbaselets 49

9 The Web Spinner 55

10 Spin the Web Studio: An Integrated Development Environment 65

11 Technology Stack and Implementation 69

WIP

III The Portal 73

Introduction to Part III: The Portal 75

12 Enterprise 77

13 Implementing Portal Contents: Structure, Semantics, and Information Flow 81

14 Implementing Portal Visuals: Presentation, Layout, and Interaction 85

IV A Network of Portals 91

Introduction to Part IV: A Network of Portals 93

15 Interconnected Portals 95

Appendices 103

A WBOL XML Schema Reference 103

B WBLL Token Reference 109

C Webbase Placeholders Language (WBPL) 127

D Webbaselets: BPMS, PLM, and Ticketing 131

E Webbaselet Use Cases 139

Glossary 147

WIP

Part I

The Foundations

WIP

WIP

Introduction to Part I: The Foundations

> *"The best way to predict the future is to create it."*
> — Peter Drucker

Before Spin the Web is a framework, it is a philosophy: **eBranding**, the discipline of virtualizing all virtualizable aspects of an organization into a single, coherent digital channel. The Spin the Web Project stewards this philosophy, and the Spin the Web framework—`WBOL`, the *Web Spinner*, and the *Spin the Web Studio*—exists to realize it. In this opening part, we explore the historical origins and fundamental challenges that led to Spin the Web, and introduce the conceptual foundations that guide its approach to enterprise portal development.

We begin with the project's genesis in the late 1990s, tracing how a practical business challenge produced the first technical building blocks, which in turn crystallized into the eBranding philosophy that now precedes and guides the framework. We then examine the current landscape of enterprise software, where organizations struggle with fragmented user experiences across multiple systems. Next, we introduce the concept of the "virtualized enterprise"—a unified digital interface that adapts to each stakeholder's role[s] and needs.

Finally, we provide an overview of the core architecture that makes this vision possible: the `WBOL` specification for describing portal structures, the *Web Spinner* runtime for dynamic content delivery, and the *Spin the Web Studio* for development and maintenance.

Chapter 1: Genesis and History (§ 1) – Explores the real-world origins of Spin the Web, from its birth in an Italian jewelry business in the late 1990s through the evolution of the eBranding concept. This chapter provides crucial context for understanding both the technical innovations and business philosophy underlying the framework.

Chapter 2: Introduction to Enterprise Portal Challenges (§ 2) – Examines the contemporary challenges facing modern enterprises in their digital transformation journeys and introduces the foundational concepts of Spin the Web.

Chapter 3: Web Portals as Virtualized Enterprises (§ 3) – Introduces the concept of portals as "virtualized enterprises"—unified digital interfaces that provide role-based access to all organizational functions, serving diverse stakeholders from employees to customers to partners.

Chapter 4: Architecture Overview (§ 4) – Provides an overview of the core architecture that makes the virtualized enterprise vision possible: the `WBOL` specification, the *Web Spinner* runtime, and the *Spin the Web Studio* development environment.

These foundational concepts lay the groundwork for the technical exploration presented in subsequent parts of the book.

WIP

WIP

Chapter 1

Genesis and History

This chapter explores the real-world origins of Spin the Web, tracing its evolution from a practical business challenge in the late 1990s to the systematic framework presented in this book. Understanding this genesis provides context for appreciating both the technical innovations and the business philosophy that underpin the project.

1.1 The Italian Jewelry Business Challenge

In the late 1990s, the digital landscape was vastly different from today's interconnected world. Enterprise software was fragmented, web technologies were in their infancy, and businesses struggled to integrate their complex operational structures into cohesive digital experiences.

It was during this period that the seeds of Spin the Web were planted through a consulting engagement with an Italian jewelry business. This enterprise represented the complexity typical of many organizations: a nationwide sales force, distributed points of sale, international suppliers, in-house and national jewelry designers and manufacturers, a help desk, and a call center. Each component of this business ecosystem had its own requirements, processes, and stakeholders.

The challenge was clear: how to network this intricate structure in a way that would enable seamless collaboration, efficient information flow, and unified business processes across all participants in the ecosystem.

1.2 From Lotus Notes to Web Technologies

1.2.1 The Lotus Notes Solution

To address their networking needs, the enterprise's IT department had implemented **Lotus Notes**, a collaborative client-server software platform developed at IBM. This choice was both sensible and forward-thinking for its time:

- **Effective Use of Available Connectivity**: Lotus Notes made intelligent use of the limited connectivity options available in the late 1990s
- **Data Replication**: The platform successfully replicated data stored in a proprietary NoSQL database across distributed locations

- **Development Environment**: It provided a respectable development environment for building front-ends to interact with business data
- **Collaborative Features**: Beyond data management, Lotus Notes offered collaborative features that enhanced team communication
- **Multi-Purpose Platform**: The sales force and points of sale used it to browse product catalogs and place orders, while the help desk and call center leveraged it as a knowledge base

1.2.2 The Hybrid Solution Challenge

When tasked with developing a solution to interface with the manufacturers, a significant technical challenge emerged. Lotus Notes did not handle SQL data particularly well, creating a mismatch between the platform's strengths and the manufacturers' data systems.

The solution adopted was a hybrid approach—a compromise that bridged the gap between the Lotus Notes environment and SQL-based manufacturing systems. While this approach was functional and met the immediate business needs, it highlighted a fundamental limitation: the difficulty of creating truly unified interfaces when working with disparate systems and technologies.

This experience planted the first seeds of what would later become the *webbaselet* concept—the idea that different business systems could be unified through a common interface layer without requiring them to abandon their underlying architectures.

1.3 The Dynamic Web Pages Revelation

1.3.1 The Internet Evolution

As this project unfolded, the Internet was undergoing a revolutionary transformation. Dynamic web pages were making their debut[1], fundamentally changing how browser-based applications could be conceived and implemented.

A dynamic web page represented a paradigm shift: rather than serving static HTML content, web servers could now assemble pages on-demand in response to specific client requests. This concept proved to be profoundly powerful and opened up entirely new possibilities for enterprise applications.

1.3.2 The Conceptual Breakthrough

The revelation came through understanding the full implications of dynamic page generation:

- **Universal Data Access**: Connectors in general could be queried by the web server in response to client requests
- **On-Demand Rendering**: Fetched data could be rendered as HTML before being sent to the client

[1]The technologies primarily referenced are ASP and PHP, which made dynamic pages easier to build. CGI had been available for some time and could accomplish similar functionality, but these newer technologies significantly lowered the barrier to entry.

- **Intuitive Data Interaction**: Clients could inspect data intuitively and perform insertions, updates, and deletions (CRUD operations)
- **Unified Interface**: The same web page could host data coming from disparate connectors in a coherent, tailored graphical user interface

This led to a pivotal insight: web technologies could be used not just for public-facing websites, but as the foundation for enterprise portals.

1.4 The Portal Vision Emerges

1.4.1 Beyond Traditional Websites

While developing a proof of concept for this dynamic approach, a transformative idea crystallized: use web technologies inside the enterprise to build a **portal**—a digital space whose target audience extended far beyond the general public.

This portal would serve:

- **Enterprise Employees**: Access to internal systems, processes, and information
- **Sales Force**: Product catalogs, order management, and customer relationship tools
- **Suppliers**: Integration points for inventory, orders, and collaboration
- **Customers**: Self-service capabilities and direct business interaction

The vision was compelling: a single, webbased interface that could accommodate the diverse needs of all stakeholders in the business ecosystem, while maintaining security, personalization, and role-based access control.

1.4.2 The Systematic Approach Imperative

The idea was undoubtedly sound, but implementing it successfully required more than ad-hoc development. What was needed was a **systematic approach**—a framework that could handle the complexity of enterprise portals in a consistent, scalable, and maintainable way.

This realization marked the beginning of what would eventually become Spin the Web's core mission: developing the tools, languages, and methodologies necessary to transform the portal vision into practical reality.

1.5 The Birth of WBOL

1.5.1 Language Requirements

The systematic approach demanded the definition of a specialized language capable of describing portals with unprecedented detail and flexibility. This language would need to handle:

- **Complex Portal Structure**: Hierarchical organization of areas, pages, and content
- **Routing Logic**: URL-to-content mapping and navigation flows
- **Authorization Rules**: Role-based access control and visibility management
- **Internationalization**: Multi-language support for global enterprises

WIP

- **Data Integration**: Connections to diverse connectors and systems

This language would need to be structured enough to handle complex enterprise realities while remaining flexible enough to evolve with changing business needs. This language was named **WBOL** (Webbase Ontology Language).

1.5.2 Interpreter Requirement

Alongside the language definition, a second critical requirement emerged: the development of an **interpreter**—the Web Spinner—that could take a URL request, fetch the associated `WBOL` fragment, and render it dynamically.

The analogy was clear and powerful: just as HTML is interpreted by a web browser to create user-facing web pages, `WBOL` would be interpreted by a Web Spinner to create complete portal experiences.

This interpreter would need to:

- Parse and understand `WBOL` documents
- Handle user authentication and authorization
- Manage connectors and queries
- Render content appropriately for different users and contexts
- Maintain high performance under enterprise-scale loads

1.6 Evolution and Persistence of the Vision

1.6.1 Timeless Principles

Since its inception, `WBOL` has demonstrated remarkable resilience and relevance. The core principles identified in the late 1990s have proven to be enduring:

- **Descriptive Power**: `WBOL` can describe sites with the same ease today as it could in the past
- **Technology Independence**: The framework remains relevant despite the rapidly evolving Internet landscape
- **Systematic Consistency**: Much like HTML, `WBOL` provides a stable foundation that transcends specific technological implementations

This persistence suggests that the project identified fundamental patterns and requirements that are intrinsic to enterprise portal development, rather than merely addressing temporary technological limitations.

1.6.2 Continuous Refinement

While the core vision has remained stable, Spin the Web has been able to manage new insights, technologies, and best practices. This evolution has been guided by real-world implementation experiences and the changing needs of enterprise software development.

The framework's ability to adapt while maintaining its essential character speaks to the soundness of its foundational principles and architectural decisions.

WIP

1.7 The eBranding Concept

1.7.1 Defining eBranding

The practical experiences and technical innovations of Spin the Web eventually crystallized into a broader business philosophy: **eBranding**.

eBranding is defined as *the act of virtualizing all virtualizable aspects of an entity, be it an organization, an enterprise, a trade, or a group*. This concept extends far beyond traditional web presence or digital marketing.

1.7.2 The Ultimate eBranding Goal

The ultimate goal of eBranding is to build a **portal** whose target audience encompasses:

- **Public**: General public and media
- **Customers**: Primary market and service recipients
- **Suppliers**: Business partners and service providers
- **Shareholders/Investors**: Financial stakeholders and governance bodies
- **Regulators**: Compliance and oversight entities
- **Partners**: Strategic allies and collaborators
- **Distributors**: Channel partners and intermediaries
- **Contractors**: Service providers and consultants
- **Employees**: Internal workforce and management
- **Community**: Local and industry communities
- **Developers**: Technical contributors and integrators
- **Other Portals**: System-to-system integration points

This portal serves as an **all-encompassing channel for any kind of interaction with the entity**—a digital manifestation of the organization that evolves continuously with the business itself.

1.7.3 Integration Philosophy

Spin the Web's approach to eBranding is fundamentally integrative rather than disruptive. The framework's intentions are:

- **Not to Replace**: Existing systems and processes remain valuable and should be preserved where appropriate
- **But to Integrate**: Everything should be brought together in a unified environment
- **Enable Evolution**: The brand and its digital presence should be able to evolve naturally over time
- **Leverage the Internet**: Use Internet technologies as the foundation for this integration

This philosophy recognizes that most enterprises have significant investments in existing systems and processes. Rather than requiring wholesale replacement, Spin the Web provides a framework for unifying these disparate elements into a coherent whole.

1.8 The Evolution of Webbase Concept

1.8.1 From Relational Database to Schema-Defined Structures

The conceptual foundation of Spin the Web has its roots in a pioneering approach first developed in 1998. The initial breakthrough came with the introduction of the term **webbase**—a specialized relational database whose schema was specifically designed to define and manage web structures.

This original webbase encompassed all the essential aspects of web presence:

Structure : Hierarchical organization of areas, pages, and contents
Connector : Connections to databases
Content : Text, media, and interactive elements
Layout : Visual presentation and responsive design patterns
Localization : Multi-language support and cultural adaptation
Navigation : User journey flows and interaction patterns
Security : Access control and authorization paradigms

1.8.2 The Schema Revolution: From Relational Database to XML

While the relational database approach proved effective, it presented challenges for portability and interoperability. To address these limitations, the webbase concept underwent a fundamental transformation—it was formalized into a schema-based language structure, described by a standard **XML Schema (XSD)**, which introduced two crucial concepts:

Webbase Ontology Language (WBOL) : An XML vocabulary, governed by an XSD, that formally defines how portals should be structured, replacing the relational database schema with a portable, standardized, and strictly validated format.

Webbaselet : A modular fragment of a webbase that could be independently developed, maintained, and integrated.

The choice of XML was deliberate: an XSD can express constraints that a data-interchange format alone cannot—cross-references between GUIDs (e.g., a page's `mainpage` resolving to an actual page, an option's `target` resolving to a navigable element), mixed content for multilingual text, and namespaces for safe composition of *webbaselet*s. At runtime, the *Web Spinner* parses this XML into an optimized in-memory object graph; XML is the source of truth on disk, while the in-memory representation is an implementation detail of the runtime. This transition from database schema to a validated XML format laid the foundation for the modular approach that characterizes Spin the Web today.

1.8.3 Content Management System Integration

The formalization of `WBOL` positioned it as a fundamental language for Content Management Systems (CMS). This integration capability addresses several critical enterprise needs:

- **Separation of Concerns**: Content structure is independent of presentation technology
- **Version Control**: Portal configurations can be managed with standard software development practices

- **Workflow Integration**: Content approval and publishing processes integrate naturally with `WBOL` structures
- **Multi-Channel Publishing**: The same webbase can serve web, mobile, and API clients

1.9 From Vision to Reality

The journey from the late 1990s Italian jewelry business challenge to the framework presented in this book represents several years of refinement, implementation, and evolution. The core insights discovered during that initial project have proven to be both durable and expandable.

What began as a practical solution to a specific business networking challenge evolved into a systematic framework, and it was building and using that framework that crystallized the eBranding philosophy described above. Today the relationship is reversed: the Spin the Web Project is first and foremost the steward of eBranding as a philosophy, and the Spin the Web framework is the means, continually refined, by which that philosophy is put into practice.

The following chapters in this book detail the technical implementation of these insights, providing the practical tools and methodologies needed to transform the eBranding philosophy into working enterprise portals.

Next: In § 2, we explore the contemporary enterprise portal challenges that Spin the Web addresses, setting the stage for understanding how this historical foundation applies to today's digital landscape.

WIP

WIP

Chapter 2

Introduction to Enterprise Portal Challenges

"The single biggest problem in communication is the illusion that it has taken place."
— George Bernard Shaw

2.1 The Enterprise Software Dilemma

In today's digital economy, businesses operate through a complex web of disparate software systems—ERPs, CRMs, BPMSs, MRPs, and much more. While individually capable, these systems often create siloed user experiences, forcing employees, customers, and partners to navigate multiple interfaces to perform their tasks. This fragmentation leads to inefficiency, poor user adoption, and a disjointed view of the enterprise.

The Spin the Web Project addresses this challenge head-on, guided by its eBranding philosophy: an organization's digital presence should be one coherent, role-aware channel, not a patchwork of siloed systems. **Spin the Web**, the framework, is how that philosophy is realized in practice. The word "Spin" is used in the sense of "to weave," as a spider dynamically weaves a web. The project is designed to weave together disparate systems and user experiences into a single, coherent whole, based on Internet technologies. It introduces a new paradigm for developing web portals centered on three core components: a specialized language, the **Webbase Ontology Language (WBOL)**; a server-side rendering engine, the **Web Spinner**; and a specialized *webbaselet* for editing *webbase*s, the **Spin the Web Studio**. The project's core mission is to enable the creation of unified, role-based web portals that act as a "virtualized enterprise"—a single, coherent digital channel for all business interactions.[1]

[1]Enterprises like SAP should prioritize robust data structures and business logic, exposing them through well-documented APIs rather than enforcing rigid user interfaces. While their ambition to "include the world" is commendable, the resulting environments often suffer from visual incoherence and operational friction with the enterprise's unique needs. *Spin the Web* advocates a modular approach: let foundational systems focus on data integrity and process orchestration, while role-based portals handle presentation, interaction, and organizational identity. See Sections 2.3 and 2.6 for a deeper exploration of this architectural separation.

WIP

It is important to note that Spin the Web is a professional framework. It is not a low-code/no-code platform for the general public, but rather a toolset for engineers building bespoke, enterprise-grade web portals. On this subject we could open a parenthesis: low-code/no-code platforms often promise ease of use and rapid development but frequently fall short when it comes to scalability, customization, and integration with existing systems. Spin the Web aims to fill this gap by providing a robust framework that empowers developers to create highly tailored solutions without being constrained by the limitations of low-code/no-code environments.

2.2 Understanding Web Portals

The development of an enterprise portal has two main goals: to **document how things are done** and to **provide a means for doing them**. It is an all-encompassing digital channel wrapped in a uniform, shared, accessible, and protected environment. It is crucial to understand that "uniform" should not be interpreted as monotonous or uncreative; on the contrary, it refers to a consistent and coherent user experience that reduces cognitive load and enhances usability.

Portals expand on the concept of a traditional website by serving a diverse, segmented audience that includes not only the general public but also internal and external stakeholders like employees, clients, suppliers, governance bodies, and developers. They function as **virtualized enterprises**, allowing individuals, based on their specific role[s], to interact with every facet of the organization—from administration and logistics to sales, marketing, human resources, and production. It is a comprehensive framework for:

Multi-Audience Communication : Providing tailored content and functionality for different user groups

Bi-directional Data Interaction : Enabling users to not only consume data but also to input, manage, and interact with it, effectively participating in business processes

Centralized Access : Acting as a single point of access to a wide array of enterprise information, applications, and services

Role-Based Personalization : Ensuring that the experience is secure and customized, granting each user access only to the information and tools relevant to their role

System-to-System Integration : Exposing its functionalities as an API, allowing it to be contacted by other portals or external systems, which can interact with it programmatically

`WBOL` is the language specifically designed to model the complexity of portals, defining their structures, data integrations, and authorization rules that govern this dynamic digital ecosystem.

2.3 The Integration Vision

> *It is not the Enterprise that has to adapt to the digital ecosystem; it is the ecosystem that has to be rendered adaptable to the enterprise.*

This principle does not ask an enterprise to resist change. It sets the direction of fit: the digital environment should accommodate the enterprise's purpose, processes, roles, and identity, and evolve as those needs change.

The concept of the ***webbaselet*** opens the door to a vision for the future of enterprise software. In this vision, monolithic and disparate systems like Enterprise Resource Planning (ERP), Customer Relationship Management (CRM), Business Process Management Systems (BPMS), and Manufacturing Resource Planning (MRP) no longer need to exist in separate silos with their own disjointed user interfaces.

Instead, the front-end of each of these critical business systems could be engineered as a self-contained ***webbaselet***. These *webbaselet*s could then be seamlessly integrated into a single, unified enterprise ***webbase***.

The result would be a high level of coherence and consistency across the entire enterprise software landscape. Users would navigate a single, familiar portal environment, moving effortlessly between what were once separate applications. This approach would not only improve the user experience but also simplify the development, deployment, and maintenance of enterprise front-ends.

Extending large platforms can be costly. Spin the Web excels at adding smaller, targeted features that are often prohibitively expensive for major vendors to implement.

2.4 The Book Analogy

To better understand the structure of a portal defined in WBOL, it's helpful to use the analogy of a book. The portal is organized hierarchically, much like a book is divided into chapters, pages, and paragraphs. However, the book analogy ends there: web technologies introduce hyperlinks and dynamic routing that open a new, non-linear dimension. The sequence in which users traverse the portal is not fixed; it changes based on navigational setups—menus, breadcrumbs, deep links, search results, role-based visibility, and workflow-driven redirects—so journeys adapt to context, permissions, and intent.

Areas (`STWArea`) : These are the main sections of the portal, analogous to the **chapters** of a book. An area groups related pages together but also other areas.

Pages (`STWPage`) : Contained within Areas, these are the individual **pages** of the book. Each page holds the actual content that users will see.

Content (`STWContent`) : These are the building blocks of a page, analogous to **paragraphs**. They could be tables, trees, menus, tabs, calendars, lists, plots, or any other content that presents data but also interacts with data (APIs); for example, the command of a content, as we'll see later, could be lines of code.

`STWArea`, `STWPage`, and `STWContent` are all specialized types that inherit from the base `STWElement`, sharing its common properties while also having their own specific attributes and behaviors.

2.5 Portal Organization and User Journeys

The structure of a portal built with WBOL is typically organized around the core functions of the business it represents. This creates a logical and intuitive navigation system for all users. Common top-level **Areas (`STWArea`)** would include:

- Sales

- Administration
- Backoffice
- Technical Office
- Logistics
- Products & Services (often publicly viewable)

The full potential of the portal is revealed when we consider the specific journeys of different users, or **personas**. The portal uses a role-based system to present a completely different experience to each user, tailored to their needs and permissions.

2.5.1 Example User Journeys

The Customer:

- Logs into the portal and is directed to a personalized "Customer Dashboard" page
- Can view their complete order history in a dedicated "My Orders" area
- Can track the real-time status of current orders (e.g., "Processing," "Shipped")
- Can initiate a video chat with their designated sales representative directly from the portal
- Can open a support ticket or schedule a consultation with the Technical Office

The Supplier:

- Logs in and sees a "Supplier Dashboard"
- Can access a "Kanban View" page to see which materials or components require replenishment
- Can submit new quotations through an integrated form
- Can view the status of their invoices and payments

The Employee:

- Logs in and is presented with an "Employee Self-Service" area
- Can access a "Welfare Management" page to view and adjust their benefits
- Can view internal enterprise news, submit vacation requests, and access HR documents

The CEO:

- Logs in to a high-level "Executive Dashboard"
- Can view key performance indicators (KPIs) for the entire enterprise, such as sales figures, production output, and financial health
- Can access detailed reports from various departments

These user journeys demonstrate how `WBOL`'s hierarchical structure and role-based visibility rules work together to create a highly functional and personalized portal that serves as a central hub for the entire business ecosystem.

WIP

2.6 The Greater Vision: eBranding Through Portal Development

This book's mission extends beyond technical instruction: the framework described in these pages exists in service of a philosophy, eBranding, that precedes it. Creating coherent digital brand experiences in an era of fragmented enterprise systems is the goal; `WBOL`, the *Web Spinner*, and the *Spin the Web Studio* are the means. The Spin the Web approach represents a perspective that organizations can present unified digital identities through thoughtful portal architecture, even when their underlying systems remain disparate. Rather than accepting the status quo of disconnected interfaces that force stakeholders to navigate multiple, inconsistent touchpoints, this framework proposes that portals can serve as the primary vehicle for eBranding—where an organization's digital presence reflects its true character and values. By embedding business processes, quality management principles, and organizational knowledge directly within portal structures, the framework suggests that portals can evolve from mere functional interfaces into authentic digital representations of the organization itself. This approach to portal development prioritizes stakeholder experience and organizational coherence, viewing the portal not as a collection of features but as an expression of how the organization wishes to engage with its various communities in the digital realm.

2.7 Looking Forward

This introduction has laid out the core problems of enterprise software fragmentation and presented the Spin the Web vision as a solution. But how does this vision translate from an abstract concept into a concrete digital entity? How can a portal truly become a "virtualized enterprise"?

The next chapter explores this concept in depth, detailing how the project's components work in concert to transform complex business structures into a tangible, unified digital experience.

WIP

WIP

Chapter 3

Web Portals as Virtualized Enterprises

> *"The future belongs to organizations that can turn today's information into tomorrow's insight."*
> — Unknown

The concept of web portals as **virtualized enterprises** represents a fundamental shift in how we think about enterprise digital presence. Rather than maintaining separate interfaces for different stakeholders, a virtualized enterprise presents a unified, role-based digital environment that encompasses all aspects of business interaction.

3.1 Understanding Virtualized Enterprises

A virtualized enterprise is more than just a website, a traditional web portal or even a web application. It is a comprehensive digital representation of the entire organization, providing **role-specific access** to all business functions, data, and processes through a single, coherent interface.

Web portals functioning as virtualized enterprises exhibit several defining characteristics:

Unified Access Point : All organizational functions are accessible through a single portal, eliminating the need for users to navigate multiple systems or interfaces.

Role-Based Personalization : Each user sees only the information, tools, and functions relevant to their role[s] within the organization, whether they are employees, customers, suppliers, or partners.

Bi-directional Data Flow : Users can both consume and contribute data, participating actively in business processes rather than simply viewing static information.

Dynamic Content Assembly : The portal dynamically assembles content and functionality based on user context, current business state, and real-time data from multiple sources.

Process Integration : Business processes flow seamlessly across traditional departmental boundaries, with the portal orchestrating multi-step workflows that may involve multiple stakeholders.

WIP

3.2 The Multi-Audience Challenge

Traditional enterprise software solutions are typically designed for specific user groups or business functions. A virtualized enterprise portal must serve a much more diverse audience:

3.2.1 Internal Stakeholders

Executives and Management : Require high-level dashboards, strategic analytics, and enterprise-wide performance metrics

Department Heads : Need departmental dashboards, resource management tools, and cross-departmental collaboration features

Employees : Access to task management, communication tools, enterprise resources, and role-specific applications

IT and System Administrators : System monitoring, user management, configuration tools, and technical diagnostics

3.2.2 External Stakeholders

Customers : Product catalogs, ordering systems, support portals, account management, and service tracking

Suppliers and Vendors : Supply chain interfaces, order management, quality reporting, and vendor portals

Partners and Distributors : Partner resources, marketing materials, commission tracking, and collaboration tools

Regulatory Bodies : Compliance reporting, audit trails, and required documentation

Investors and Stakeholders : Financial reports, governance information, and strategic communications

WIP

3.3 Business Function Integration

A truly virtualized enterprise portal integrates all major business functions into a cohesive whole:

3.3.1 Core Business Areas

Sales and Marketing : Lead management, opportunity tracking, campaign management, customer analytics, and marketing automation

Operations and Production : Manufacturing schedules, quality control, inventory management, and supply chain coordination

Finance and Accounting : Financial reporting, budgeting, expense management, and financial analytics

Human Resources : Employee management, recruitment, performance tracking, and organizational development

Customer Service : Support ticket management, knowledge bases, customer communication, and service analytics

Research and Development : Project management, resource allocation, intellectual property management, and innovation tracking

3.3.2 Cross-Functional Processes

The virtualized enterprise portal excels at supporting processes that span multiple departments:

- **Order-to-Cash**: From initial customer inquiry through order fulfillment and payment processing
- **Procure-to-Pay**: From supplier selection through purchase order management and invoice processing
- **Hire-to-Retire**: Complete employee lifecycle management from recruitment to retirement
- **Idea-to-Market**: Innovation management from concept development through product launch
- **Issue-to-Resolution**: Comprehensive problem management across all business areas

3.4 Technical Architecture Implications

Supporting a virtualized enterprise model requires sophisticated technical architecture:

3.4.1 Data Integration Requirements

- Real-time integration with multiple backend systems
- Data transformation and normalization across different formats
- Master data management to ensure consistency
- Event-driven architecture for real-time updates

3.4.2 Security and Access Control

- Fine-grained role-based access control
- Dynamic permission evaluation
- Audit trails for all user actions
- Data encryption and secure communication

3.4.3 Performance and Scalability

- Efficient caching strategies
- Load balancing across multiple servers
- Asynchronous content loading
- Database optimization and command performance

3.5 Benefits of the Virtualized Enterprise Model

Organizations that successfully implement virtualized enterprise portals typically experience significant benefits:

WIP

3.5.1 Operational Efficiency

- Reduced training time for new users
- Faster task completion through unified interfaces
- Elimination of duplicate data entry
- Streamlined approval processes

3.5.2 Improved User Experience

- Single sign-on across all functions
- Consistent user interface and navigation
- Personalized content and functionality
- Mobile-responsive design for anywhere access

3.5.3 Business Intelligence

- Comprehensive analytics across all business functions
- Real-time dashboards and reporting
- Cross-departmental visibility
- Data-driven decision making

3.5.4 Competitive Advantage

- Faster response to market changes
- Improved customer service and satisfaction
- Enhanced partner and supplier relationships
- Greater organizational agility

3.6 Implementation Challenges

While the benefits are significant, implementing a virtualized enterprise portal presents several challenges:

3.6.1 Technical Complexity

- Integration with legacy systems
- Managing diverse data formats and sources
- Ensuring system reliability and uptime
- Maintaining security across all functions

3.6.2 Organizational Change

- Resistance to changing established workflows
- Training requirements across diverse user groups
- Coordinating across multiple departments
- Managing stakeholder expectations

WIP

3.6.3 Ongoing Maintenance

- Keeping pace with business changes
- Maintaining data quality and consistency
- Performance optimization and scaling
- Security updates and compliance

3.7 The Spin the Web Approach

Spin the Web addresses these challenges through its unique approach:

`WBOL` Language : Provides a declarative way to define complex portal structures and relationships

Web Spinner Engine : Handles the runtime complexity of role-based content delivery and system integration

Modular Architecture : Enables incremental implementation and easy maintenance

Developer-Focused Tools : Provides professional-grade tools for enterprise developers

3.8 The Portal as the Enterprise's Soul

Ultimately, a web portal built with the Spin the Web philosophy becomes more than just a digital tool; it becomes the natural container for the enterprise's **quality management principles and manuals**. It is the living embodiment of the corporate soul.

By defining not only *what* an enterprise does but also *how* it does it, the portal transforms abstract procedural documents into interactive, enforceable workflows. It ensures that the enterprise's core principles are not just written down, but are actively practiced and experienced by every stakeholder in every interaction. This fusion of documentation and execution is what elevates a web portal from a simple utility to the very heart of the virtualized enterprise.

WIP

WIP

Chapter 4

Architecture Overview

"Architecture is about the important stuff. Whatever that is."
— Ralph Johnson

Spin the Web is built upon a core architectural foundation that enables the creation of sophisticated portals. This architecture aligns to three book parts for coherence: the Foundations, the Framework, and the Portal. Together, they transform complex business requirements into unified, role-based digital experiences.

WIP

4.1 The Core Components

The architecture consists of three core components:

Webbase Ontology Language (`WBOL`) : A declarative language for modeling complex portal structures, data relationships, and business logic

Web Spinner Runtime : A runtime that interprets `WBOL` specifications and delivers dynamic, role-based content

Spin the Web Studio : A specialized *webbaselet* for creating, editing, and managing *webbase* definitions with in-place editing capabilities

4.2 Foundations: Webbase Ontology Language (`WBOL`)

`WBOL` forms the declarative foundation of the entire system. Unlike traditional approaches that mix structure, presentation, and logic, `WBOL` provides a clean separation of concerns through a hierarchical, schema-based approach.

4.2.1 Core Principles

Declarative Definition : Developers describe *what* the portal should do, not *how* it should do it

Data-Driven Structure : Portal elements are defined in terms of their data relationships and business semantics

Role-Based Access : Security and personalization are built into the language specification

Technology Agnostic : `WBOL` abstracts away implementation details, focusing on business requirements

4.2.2 Key Components

WBOL defines several fundamental element types:

STWPortal : The root element containing global configuration, connector, and portal-wide settings

STWArea : Logical groupings of related functionality, typically corresponding to business domains

STWPage : Individual pages within areas, defining layout sections and content organization

STWContent : Atomic content elements that encapsulate data queries, business logic, and presentation rules

4.2.3 Benefits of the Declarative Approach

- **Maintainability**: Changes to business requirements can be implemented through configuration rather than code changes
- **Consistency**: Standard element types ensure consistent behavior across the entire portal
- **Reusability**: Content elements can be reused across multiple pages and contexts
- **Testability**: Declarative definitions are easier to validate and test than imperative code

4.3 Framework: Web Spinner

The Web Spinner runtime serves as the execution layer that brings WBOL specifications to life. It handles the complex orchestration of data retrieval, security enforcement, and content delivery that makes dynamic portals possible.

4.3.1 Core Responsibilities

Configuration Interpretation : Parsing and optimizing WBOL documents for runtime execution

Request Routing : Mapping incoming URLs to appropriate portal elements based on the *webbase* structure

Security Enforcement : Implementing role-based access control and content filtering

Data Integration : Orchestrating queries across multiple connectors and systems

Content Assembly : Dynamically composing responses based on user context and permissions

4.3.2 Runtime Architecture

The Web Spinner operates through several key subsystems:

Webbase Loader : Loads and parses WBOL documents into optimized in-memory structures

Authorization Module : Evaluates role-based visibility rules in real-time

Command Processor : Handles WBPL placeholder resolution and connector command execution

Content Cache : Manages caching strategies for improved performance

Session Manager : Maintains user state and authentication information

WIP

4.3.3 Role-Based Visibility (Overview)

Spin the Web enforces authorization using a *role-based visibility* (RBV) model. Rather than returning explicit authorization errors, elements not visible to the requester are treated as non-existent and yield a `200 OK` with an empty response. This privacy-by-design approach applies uniformly to contents, pages, areas, and the portal.

Key characteristics:

- **Declarative rules in `WBOL`**: visibility is defined per element and can be inherited.
- **Inheritance**: when a role setting is `undefined`, visibility is inherited recursively from the parent up to the root.
- **Three-state roles**: `true` (granted), `false` (denied), `undefined` (inherit).
- **Safe defaults**: unauthenticated users receive the `guest` role by default; elements are invisible unless made visible via rules or inheritance.

For operational details see § 9.3 in the Web Spinner chapter, and for the formal schema see the `WBOL` appendix (Appendix A).

Side note: `rwx` and RBV The familiar UNIX-style `rwx` access paradigm can be expressed with RBV: a content that supports reading, writing, or executing (in any combination) can be exposed to specific roles. In practice, "read" aligns with viewing content, while "write" and "execute" align with content operations (e.g., mutations or actions). RBV governs *visibility* of these capabilities per role; the concrete enforcement of operation-level permissions is handled at runtime by the Web Spinner security layer (see § 9.3).

4.3.4 Performance and Scalability

- **Asynchronous Processing**: Content elements are fetched independently for optimal loading times
- **Intelligent Caching**: Multi-level caching strategies reduce connector load
- **Connection Pooling**: Efficient resource management for database and API connections
- **Horizontal Scaling**: Support for load-balanced, multi-instance deployments

4.4 Portal: Spin the Web Studio

The Spin the Web Studio is a specialized *webbaselet* designed for editing and managing *webbase* definitions. As a *webbaselet*, it can be seamlessly integrated into any *webbase* to provide in-place editing capabilities, enabling professional developers to create and maintain complex portal structures efficiently.

The Studio is dynamically added to the portal *webbase* when users with developer permissions log in, remaining dormant until activated via the **Alt+F12** keyboard shortcut. Upon activation, it transforms the portal interface into a development environment that includes action bars, side panels, status displays, and a main editing area where the live portal remains visible in a persistent browser tab.

WIP

4.4.1 Development Capabilities

Visual Design Interface : Graphical tools for designing portal structure and navigation through an interactive *webbase* hierarchy displayed in the side bar

Code Assistance : Intelligent editing support for `WBOL` and `WBPL` syntax with multi-tab file editing capabilities

Connector Integration : Tools for connecting to and testing various connectors, accessible through portal primary folder contents

Preview and Testing : Real-time preview capabilities with role simulation in the persistent browser tab that displays the live portal

Version Control : Integration with standard source control systems through the side bar source control panel

Comprehensive Search : Unified search capabilities across both *webbase* definitions and folder contents

Integrated Debugging : Built-in debugging tools for `WBPL` queries and *webbaselet* execution

4.4.2 Professional Developer Focus

Unlike low-code/no-code platforms, the Studio is designed specifically for professional developers:

- **Full Control**: Complete access to all `WBOL` features and capabilities
- **Extensibility**: Support for custom components and specialized functionality
- **Integration**: Seamless integration with standard development workflows
- **Performance Tools**: Profiling and optimization capabilities for enterprise-scale deployments

4.5 Architectural Interactions

Foundations, Framework, and Portal work together through well-defined interfaces and protocols:

4.5.1 Design-Time to Runtime

1. Developers use the Studio to create and modify *webbase* definitions
2. `WBOL` documents are saved and versioned using standard development practices
3. The Web Spinner runtime loads updated *webbase* definitions and applies changes
4. Changes take effect immediately without requiring system restarts

4.5.2 Runtime Operations

1. User requests arrive at the Web Spinner runtime
2. The runtime consults the in-memory *webbase* structure to route the request
3. Authorization rules defined in `WBOL` are evaluated against user roles
4. Appropriate `STWContent` elements are identified and executed
5. Responses are assembled and delivered to the client

WIP

4.5.3 Feedback Loops

- Runtime performance metrics inform Studio optimization recommendations
- User behavior analytics guide design decisions
- Error logs and debugging information flow back to the development environment
- A/B testing capabilities enable data-driven design refinements

4.6 Architectural Benefits

This architectural model provides several key advantages over traditional portal development methods:

4.6.1 Separation of Concerns

- Business logic is separated from presentation concerns
- Security policies are defined declaratively rather than embedded in code
- Data access patterns are standardized and centrally managed
- UI rendering is handled consistently across all portal components

4.6.2 Development Efficiency

- Faster development cycles through declarative configuration
- Reduced debugging time due to standardized runtime behavior
- Easier maintenance through centralized configuration management
- Lower training requirements for new team members

4.6.3 Enterprise Scalability

- Proven performance characteristics for large-scale deployments
- Built-in support for high availability and disaster recovery
- Comprehensive monitoring and operational management capabilities
- Integration with enterprise identity and security systems

4.7 Implementation Patterns

Common implementation patterns emerge when working with this architecture:

4.7.1 Incremental Development

1. Start with core portal structure and basic navigation
2. Add key business areas one at a time
3. Implement critical content elements first
4. Gradually add advanced features like real-time updates and complex workflows

4.7.2 Modular Design

- Design `STWContent` elements as reusable components

- Create area-specific templates for consistent user experience
- Develop shared connector configurations for common data patterns
- Build libraries of common UI components and layouts

4.7.3 Testing and Validation

- Use Studio preview capabilities for immediate design feedback
- Implement automated testing for critical business logic
- Perform role-based testing to validate security configurations
- Conduct performance testing under realistic load conditions

4.8 Looking Forward

With the high-level architecture of the Foundations, Framework, and Portal defined, our focus must now turn to the underlying engineering. How are these components built? What are the technical specifications of the languages and the internal mechanics of the runtime?

The next part of this book is dedicated to a deep dive into the framework's implementation. We will explore the complete specifications of the languages and the architectural details of the Web Spinner runtime.

WIP

Part II

The Framework

WIP

WIP

Introduction to Part II: The Framework

"The limits of my language mean the limits of my world."
— Ludwig Wittgenstein

This part opens the hood of the Spin the Web framework, examining its specifications. We will dissect the core components introduced in the architecture overview: the languages that serve as the framework's instruction set, the modular design that enables scalability, and the mechanics of the engine that brings it all to life.

Chapter 5: The WBOL Language (Chapter 5) – Provides a comprehensive introduction to the Webbase Ontology Language, including its XML Schema (XSD) definitions, element hierarchy, and practical usage patterns.

Chapter 6: The WBPL Language (§ 6) – Explores the Webbase Placeholders Language, which enables dynamic content injection and template-based portal generation.

Chapter 7: The WBLL Language (§ 7) – Defines the Webbase Layout Language, presentation layer, tokens, helpers, and compilation model used to render data into accessible, responsive HTML.

Chapter 8: Webbase and Webbaselets (§ 8) – Examines the modular component system that allows for reusable portal elements and cross-platform integration.

Chapter 9: The Web Spinner (§ 9) – Details the runtime engine that processes WBOL specifications and generates dynamic web portals, including its architecture, processing pipeline, and performance characteristics.

Chapter 10: The Spin the Web Studio (§ 10) – Introduces the integrated development environment for building and managing webbases.

Chapter 11: Technology Stack and Implementation (§ 11) – Documents the concrete technology stack (Node.js/JavaScript) of the reference Web Spinner, showing how the theoretical mechanics are realized in a working system.

Mastering these specifications is the first step toward building robust, enterprise-grade portals. This section serves as the definitive reference for the framework's specifications, runtime, and tools.

WIP

WIP

Chapter 5

Webbase Ontology Language (WBOL)

> *"The limits of my language mean the limits of my world."*
> — Ludwig Wittgenstein

WBOL is formally defined using a standard **XML Schema (XSD)**. A webbase is an XML document validated against this schema; the schema's `key`/`keyref` constraints enforce referential integrity across the GUIDs that tie the document together (homepages, mainpages, shortcut targets, option targets, and role references), something a plain data-interchange format cannot guarantee on its own.

5.1 WBOL Ecosystem

While WBOL serves as the declarative language for describing portals, it operates within a comprehensive ecosystem of associated technologies and APIs that enhance its capabilities:

5.1.1 Layout API

WBOL includes an associated Layout API that provides programmatic control over content presentation and styling. This API works in conjunction with the declarative STWLayout elements to enable:

- Dynamic layout adjustments based on content type and user preferences
- Responsive design patterns that adapt to different screen sizes and devices
- Integration with external CSS frameworks and design systems
- Runtime modification of layout properties based on data characteristics

The Layout API ensures that content presentation remains consistent across different contexts while allowing for necessary flexibility in complex enterprise environments.

5.1.2 Text Preprocessor

The WBOL text preprocessor is a powerful engine that processes textual content before rendering, enabling:

- Placeholder substitution using the **Webbase Placeholders Language (WBPL)**
- Localization and internationalization support
- Dynamic text generation based on context and user data

WIP

- Integration with external content management systems
- Markdown and other markup language processing

This preprocessor is particularly crucial for the `command` attributes in `STWContent` elements, where it replaces placeholders with actual values from various sources before command execution.

5.1.3 Visual Component Library (VCL)

The Visual Component Library provides a standardized set of UI components that correspond to the different content categories and subtypes. The VCL ensures:

- Consistent visual presentation across different portal implementations
- Accessibility compliance through standardized component behavior
- Cross-platform compatibility for various front-end frameworks
- Extensibility for custom component development

5.1.4 Content Management Integration

`WBOL` is designed as a fundamental language for Content Management Systems (CMS), providing:

- Structured content definition that separates presentation from data
- Version control capabilities for portal configurations
- Workflow management for content approval processes
- Integration points for external content repositories

This integration capability makes `WBOL` particularly suitable for enterprise environments where content management workflows are critical to business operations.

WIP

5.2 Spin the Web Studio

The third and final component of Spin the Web is the **Spin the Web Studio**. Alongside the **`WBOL`** and the **Web Spinner**, it completes the framework. The Spin the Web Studio is a specialized *webbaselet* engineered for editing *webbase*s. To use it, you simply add the *webbaselet* to the *webbase* you wish to edit, enabling direct, in-place modification.

5.3 The Common Element Structure

Every `WBOL` element—`webbase`, `area`/`webbaselet`, `page`, and `content`/`shortcut`—shares a common shape: a `guid` identity attribute, a localized `name`, optional `visibility` and `documentation`, and, where applicable, a `children` element. In the runtime (see § 9), these XML elements are parsed into the `STWPortal`, `STWArea`, `STWPage`, and `STWContent` in-memory classes respectively; the class hierarchy is an implementation detail of the *Web Spinner*, not a second schema. The full XSD is in Appendix A (see Appendix: WBOL XML Schema Reference).

5.3.1 Property Description

guid : A unique identifier for the element, encoded as an attribute (GUID). Each element kind uses a distinct prefix (e.g., `w...` for webbases, `a...` for areas, `p...` for pages, `c...` for content), which the schema uses to type-check references.

element name : The specific kind of the element is given by its XML tag itself—`webbase`, `area`, `webbaselet`, `page`, `content`, or `shortcut`—rather than by a separate discriminator attribute.

name : A localizable name for the element: a `name` element containing one or more `text` children, each qualified with an `xml:lang` attribute (e.g., `en`, `it`) and, for `name`, a required `slug` attribute. Example: `<name><text xml:lang="en" slug="rd">Research \&` `↪ Development</text></name>`

slug : A localizable, URL-friendly identifier, carried as the `slug` attribute on each `name/text` entry (one slug per language). Slugs contain only lowercase letters, numbers, periods, and hyphens.

keywords : Localizable keywords for SEO, structured like `name` but without the `slug` attribute.

description : A localizable description of the element, structured like `keywords`.

visibility : Defines the visibility rules for the element based on user roles: a `visibility` element containing `role` entries, each pairing a role `id` with a `visibility` value (`true`, `false`, or a visibility function call). If a rule for a role is not defined, the visibility is determined by checking the parent element's visibility rules. This hierarchical check continues up to the root element. If no rule is found, the element is not visible by default.

children : A `children` element containing an ordered mix of nested `area`, `webbaselet`, `page`, `content`, and `shortcut` elements, as constrained by the parent's type.

5.4 WBOL Element Types

This section describes the specialized element types available in `WBOL`.

5.4.1 STWPortal

`STWPortal` is a singleton element that represents the entire portal. It inherits from `STWElement` and acts as the root element of the portal structure.

Property Description

langs : A list of supported languages for the portal. The first of the list is the default portal language.

connector : Defines the connector used by the portal.

mainpage : The GUID of the `STWPage` that serves as the main entry point for the portal.

version : A version string for the portal.

Connectors and Groups

The `connectors` element within the webbase root provides a flexible framework for defining how the portal connects to and manages external systems. Beyond simple connection definitions, `WBOL` supports advanced data organization concepts:

Connector Configuration : Each `connector` element is configured with an `id`, a `queryLanguage`, and a `connection-string`. WBOL does not constrain the backend vendor or data model. The current Webspinner runtime provides adapters for:

- MySQL, PostgreSQL, and Microsoft SQL Server
- MongoDB document databases
- REST APIs and web services
- Shell commands

Other backends can be integrated through connector adapters that implement their native query language and data operations. The `stwinsert`, `stwupdate`, and `stwdelete` actions share a CRUD contract across the supported database adapters.

Data Groups : Connectors can be organized into logical groups that facilitate:

- Access control and security policies
- Performance optimization through connection pooling
- Load balancing across redundant connector
- Backup and failover configurations
- Administrative grouping for different business units

Accessibility Integration : The connector framework includes provisions for accessibility compliance:

- Metadata enrichment for screen readers and assistive technologies
- Alternative data representations for different accessibility needs
- Command result formatting that supports accessibility standards
- Integration with accessibility frameworks and tools

This comprehensive approach to connector management ensures that `WBOL` can integrate seamlessly with complex enterprise data environments while maintaining accessibility and security standards.

WIP

5.4.2 STWArea

`STWArea` represents a logical grouping of pages, analogous to a chapter in a book. It extends the base `STWElement`.

Property Description

mainpage : The GUID of the `STWPage` that serves as the main entry point for this area.
version : A version string for the area.

5.4.3 STWPage

`STWPage` represents a single page in the portal. It extends the base `STWElement` but restricts its `children` to only `STWContent` elements.

5.4.4 STWContent

`STWContent` represents a piece of content on a page, parsed from a `content` (or `shortcut`) element. It extends the base structure but is not allowed to have any `children`. It adds several attributes for data binding and layout control.

Property Description

type : The content's `type` attribute, fixed to one of the schema's content kinds (see Appendix A).

subtype : Specifies the type of content to be rendered, which determines the component used on the front-end. Possible values include `Text`, `Form`, `Table`, `Tree`, `Calendar`, and `Breadcrumbs`.

cssClass : An optional CSS class (the `class` attribute) to apply to the content element for styling.

section : The name of the page section where this content should be rendered (e.g., "header", "main", "sidebar").

sequence : A number that determines the order of content within a section.

connector : The `connector` attribute on the `query` element, which identifies a specific connector configured in the webbase root.

command : The text of the `query` element, executed against the specified connector. Before execution, this text is processed by the **Webbase Placeholders Language (`WBPL`)** processor. This processor replaces placeholders within the command with values sourced from several locations: the `parameters` element, the URL querystring, session variables, global variables, and HTTP headers. After this substitution, the resulting command is executed by the connector using its native language (e.g., SQL for a relational database, or JSONata if the connector is a JSON-based API).

params : The `parameters` element, a string formatted as a standard querystring (e.g., `key1=value1&key2=value2`).

layout : The `layouts` element that defines, per language, how the fetched data should be rendered.

Content Categories

Contents are the fundamental elements of `WBOL` and represent interactive data units that fall into four distinct categories, each serving a specific purpose in the portal's user interface:

Sensorial Contents : These render data in human-readable formats for information consumption and input. They include:

- Free text displays
- Forms for data input
- Lists and tables for structured data presentation
- Plots and charts for data visualization
- Maps for geographical data
- Timelines for temporal data
- Media elements (images, videos, audio)

Navigational Contents : These render data as interactive links and navigation elements, facilitating movement through the portal structure:

- Menus (primary and secondary navigation)
- Table of contents (TOC)
- Breadcrumbs for hierarchical navigation
- Slicers for data filtering
- Image maps with clickable regions
- Pagination controls

WIP

Organizational Contents : These wrap and organize other contents in structured manners, providing logical grouping and presentation:

- Tabs for content organization
- Calendars for date-based content
- Trees for hierarchical data
- Graphs for relationship visualization
- Accordions for collapsible sections
- Carousels for sequential content display

Special Contents : These provide specialized functionalities:

- Shortcuts are contents that point to other contents. It's a form of content reuse.
- Client-side code are execution blocks (JavaScript)
- Server-side code are execution blocks (API)

All content types explicitly declare or request the data they interact with, and their rendering behavior is determined by their category and specific subtype. The content categorization ensures consistency in user interface patterns and enables the Web Spinner to apply appropriate rendering logic and security policies.

5.4.5 STWContentWithOptions

`STWContentWithOptions` is similar to `STWContent`, it contains a list of `option` elements (GUIDs). This type is useful for scenarios like menus and tabs where the content is sourced from other elements.

Property Description

subtype : Specifies the type of content to be rendered. Possible values include `Menu`, `Tabs`, and `Accordion`.

5.5 Looking Forward

A static portal, however well-structured, has limited utility in a dynamic business environment. The true power of an enterprise portal lies in its ability to present real-time, contextualized data. But how do we bridge the gap between the static structure of `WBOL` and the dynamic data living in enterprise systems?

The next chapter introduces the **Webbase Placeholders Language (`WBPL`)**, a specialized language designed to embed dynamic queries and data-driven logic directly within your `WBOL` definitions. We will explore how `WBPL` turns your static templates into living, breathing documents.

WIP

Chapter 6

Webbase Placeholders Language (WBPL)

"The real problem is not whether machines think but whether men do."
— B.F. Skinner

The Webbase Placeholders Language (`WBPL`) is a string processing language designed for serving dynamic data queries. It works by taking a template string and a map of placeholders, then producing a final string by substituting placeholders and conditionally including or excluding parts of the template based on whether the placeholders have values.

WIP

6.1 Core Functionality

Here is a breakdown of `WBPL` functionality:

6.1.1 Placeholder Syntax

`WBPL` identifies placeholders using an `@` symbol. Placeholders start with either `@` or `@@`, e.g., @id, @@lastname, @@URL, where single `@` reference querystring parameters or cookies in that order, while double `@@` references recordset fields value, session, application or server variables in that order. Placeholders can be enclosed in single (') or double quotes ("), more on this later.

6.1.2 Substitution Mechanisms

Simple Substitution : For unquoted placeholders like `@name`, the engine directly replaces them with the corresponding value from the placeholders map.

Quoted Substitution : For quoted placeholders like `'@name'`, the engine replaces them with the value, automatically ensuring the value is correctly quoted and that any internal quotes are escaped. This is useful for safely embedding string values in languages like SQL.

List Expansion : A special syntax exists for quoted placeholders followed by an ellipsis (...), such as `'@ids'...'`. This is designed to expand a comma-separated value into a properly quoted, comma-separated list (e.g., expanding a string `"1,2,3"` into `'1','2','3'`). This is particularly useful for generating SQL `IN` clauses.

6.1.3 Conditional Blocks

The language supports two types of conditional blocks that control whether a piece of text is included in the final output.

Curly Braces {...}

Text inside curly braces is included **only if** at least one placeholder within it is successfully replaced with a non-empty value. If all placeholders inside are empty or non-existent, the entire block (including the braces) is removed. This is useful for including optional text that depends on a value being present.

Square Brackets [...]

This block behaves similarly to curly braces, but with an added feature for cleaning up command syntax. If the block is removed because its placeholders are empty, the engine will also intelligently remove a single adjacent keyword (like `AND`, `OR`). This is designed to handle optional conditional clauses in SQL.

For example, in `SELECT * FROM users WHERE 1=1 AND [user_id = @id]`, the `AND` keyword and the entire bracketed expression will be removed if `@id` has no value.

6.1.4 Escaping

- The language respects escaped at-symbols (`\@`), treating them as literal `@` characters rather than the start of a placeholder.
- It correctly handles and escapes quotes within values during substitution to prevent syntax errors or potential injection vulnerabilities.

6.2 Security Features

In essence, `WBPL` is a security-conscious templating engine tailored for serving dynamic queries and other text formats where parts of the content are conditional. Key security features include:

- Automatic quote escaping to prevent for example SQL injection attacks
- Input validation and sanitization
- Safe handling of user-provided parameters
- Proper encoding for different target languages (SQL, JSON, etc.)

6.3 Usage Examples

6.3.1 Basic Placeholder Substitution

```
SELECT * FROM users WHERE username = '@username'
```

Listing 6.1: Simple WBPL Substitution

With placeholder `username = "john_doe"`, this becomes:

WIP

```
SELECT * FROM users WHERE username = 'john_doe'
```

6.3.2 Conditional Command Clauses

```
SELECT * FROM products
WHERE 1=1
AND [category = '@category']
AND [price >= @min_price]
AND [price <= @max_price]
```

Listing 6.2: WBPL Conditional Blocks

If only `category = "electronics"` is provided, this becomes:

```
SELECT * FROM products
WHERE 1=1
AND category = 'electronics'
```

6.3.3 List Expansion for IN Clauses

```
SELECT * FROM orders WHERE status IN ('@states'...)
```

Listing 6.3: WBPL List Expansion

With placeholder `states = "pending,shipped,delivered"`, this becomes:

```
SELECT * FROM orders WHERE status IN ('pending','shipped','delivered')
```

6.4 Integration with WBOL

`WBPL` is primarily used by `STWContent` elements in `WBOL` documents. The `command` attribute of an `STWContent` element contains a template string that is processed by the `WBPL` engine before being executed against the specified connector.

The placeholder values are sourced from multiple locations in order of precedence:

1. The `params` attribute of the `STWContent` element
2. URL querystring parameters
3. Session variables (user context, roles, preferences)
4. Global variables (portal configuration, system settings)
5. HTTP headers (for device type, language preferences, etc.)

6.5 Performance Considerations

The WBPL processor is optimized for high-performance scenarios:

- Template parsing is cached to avoid repeated compilation
- Placeholder resolution is optimized for minimal overhead
- Command plans may be cached when placeholder patterns are stable
- Security validation is performed efficiently without sacrificing safety

6.6 Looking Forward

While WBOL provides the structure and WBPL injects dynamic data, a critical question remains: how do we manage the complexity of a large-scale enterprise portal? How do we ensure that different parts of the portal can be developed, maintained, and deployed independently without causing system-wide disruptions?

The next chapter introduces the concepts of ***webbases*** and ***webbaselets***—the architectural solution for modularity and scalability in the Spin the Web ecosystem. We will see how these concepts allow for a "divide and conquer" approach to portal development.

WIP

Chapter 7

Webbase Layout Language (WBLL)

"Simplicity is the ultimate sophistication."
— Leonardo da Vinci

In WBOL, the portal is specified *macroscopically*: from *Portal* to *Area* to *Page*, and for each Page the set of *Contents*. For every Content, WBOL declares its *subtype* (for example: table, calendar, tree, menu, form), the *connector*, and the *command* to run. WBLL operates *microscopically*, describing how the queried data should be rendered within that Content's shape.

7.0.1 Rendering One Record at a Time

WBLL renders one record per invocation. It does not iterate the primary recordset or decide how rendered fragments are assembled into the surrounding content. Those responsibilities belong to the WBOL content subtype and its runtime renderer: for example, a table renderer may invoke WBLL for each row, while a calendar or tree renderer may invoke it for each event or node and place the resulting fragment in the appropriate structure.

Each invocation receives the current record's field values and placeholders. A WBLL symbol may also use a secondary connector query to obtain choices for a control in that record. This query supplies option data; it does not change WBLL's one-record rendering boundary or make WBLL responsible for iterating the primary content records.

7.0.2 Data Context and Field Cursor

The WBOL content definition declares the primary connector and command. The runtime executes that command and passes the resulting recordset to the content subtype, which invokes WBLL for the records it renders. Each invocation receives the current record and the ordered field names; both field names and their sequence are important for rendering.

The WBLL interpreter maintains a **field cursor** that tracks the current position within the recordset fields. Many tokens operate on the field at the current cursor position if no explicit field name is provided; tokens that specify a field name use that field without moving the cursor. Some tokens may also vary their behavior based on the content subtype; this is documented with each token where relevant.

WIP

Cursor movement rule By convention, the field cursor advances if and only if a token implicitly consumes the active field (i.e., it reads a field value without naming a field explicitly). Tokens that only render constants, or that reference a field by name, do not move the cursor.

- Cursor-advancing (implicit field): a token used without a field name consumes the active field and advances the cursor.
  Example: `h` renders `<input type="hidden" name="<active>" value="<value>">` and advances.
- Non-advancing (explicit field): a token that names a field uses that field but leaves the cursor unchanged.
  Example: `h('type;area')` renders `<input type="hidden" name="type" value="area">` and does not advance.
- Non-consuming: tokens that render only literals or structural markup do not touch the cursor.
  Example: `t('Hello World!')` does not advance.

Implementations typically mark a token as having consumed the active field only if it bound to it implicitly; explicit bindings and literal-only tokens leave the cursor position intact.

7.0.3 Choice Data and Presentation

Choice symbols use a common option-data model but render it differently according to the symbol. After WBPL expands placeholders in the symbol's arguments, the expanded arguments are interpreted either as inline options or as a connector name and query (`connector;query`). WBPL performs substitution; it does not execute the query. The connector layer executes a choice query in the current record's context.

Inline options specify an arity of 1, 2, or 3. With arity 1, each option supplies its own value and label; with arity 2, each option supplies a value and label; with arity 3, each option also specifies a group. For a connector query, up to three result columns map to value, label, and group; the number of columns determines the arity. A symbol may support only a subset of these arities.

The symbol determines how the options are presented. Select controls render groups as `<optgroup>` elements. Checkbox and radio controls (`c` and `r`) render each group in a `<fieldset>`. Other choice symbols use the same option data for their own presentation, such as plain-text mappings or datalist options.

This chapter establishes the presentation-layer contracts. In the next chapters we detail modular composition (§ 8) and the runtime (§ 9).

7.0.4 Language Internals

At its core, WBLL is a compact, token-based templating language. Unlike tag-based languages like HTML, WBLL uses a sequence of single-character mnemonics and special commands to define the structure and appearance of content. This design prioritizes conciseness and efficient processing.

For a given WBLL invocation, the rendering process involves two main stages:

1. **Lexing (Tokenization):** The WBLL source string is first parsed by a lexer, which uses a comprehensive regular expression to break the text into a series of tokens. Each token represents a specific layout element, such as a link (`a`), a button (`b`), a form input (`e`), or a simple text block (`t`). The lexer also captures arguments, attributes, and parameters associated with each token. Any unrecognized characters result in a syntax error.
2. **Compilation and Rendering:** The resulting array of tokens is then compiled into a dynamic JavaScript render function. This function is specifically generated to produce HTML from the token sequence. When executed, it walks the tokens, uses the current record's values and session placeholders, and constructs the HTML fragment for that invocation. The enclosing content renderer—not this function—decides which records to render and how to embed each fragment. This just-in-time compilation allows for highly efficient rendering, as the logic is tailored precisely to the given layout.

7.0.5 Token Reference

For the complete, uniform catalog of tokens (syntax, description, and examples), see Appendix B.

WIP

WIP

Chapter 8

Webbase and Webbaselets

> *"The whole is more than the sum of its parts."*
> — Aristotle

A complete `WBOL` document, representing a full portal, is called a ***webbase***. A key requirement for a valid *webbase* is that it must contain exactly one `webbase` element, which serves as the root of the entire structure.

However, it is also possible to create smaller, modular `WBOL` files called ***webbaselet*s**. A *webbaselet* is a `WBOL` document that does *not* contain a `webbase` element. Instead, its root element must be a `webbaselet` (structurally an `area`, with an independent `version`). *webbaselet*s are designed to be portable fragments that can be imported or included within a larger *webbase*.

This modularity ensures that the portal can evolve without requiring a monolithic update, promoting agility and long-term maintainability.

WIP

8.1 Webbase Structure

A *webbase* represents a complete, self-contained portal. It includes:

Portal Configuration : The root `webbase` element containing global settings, supported languages, and connector definitions

Navigation Hierarchy : A complete tree of areas, pages, and content elements that define the portal structure

Security Model : Comprehensive visibility rules and role-based access controls throughout the hierarchy

Data Integration : Connector configurations and command templates for dynamic content generation

8.1.1 Webbase Example Structure

```
<?xml version="1.0" encoding="UTF-8"?>
<webbase xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="w1234567890123456789012" homepage="p876543210987654321"
    protocol="https://" defaultLanguage="en">
  <connectors>
```

```
    <connector id="main" queryLanguage="SQL" connection-string="..." />
  </connectors>
  <roles>
    <role id="root" /><role id="administrator" /><role id="guest" />
    <role id="user" /><role id="developer" /><role id="leaddeveloper" /><role id="seo" />
  </roles>
  <name><text xml:lang="en" slug="portal">Corporate Portal</text></name>
  <children>
    <area guid="a..." origin="w1234567890123456789012">
      <name><text xml:lang="en" slug="area">Area</text></name>
    </area>
  </children>
</webbase>
```

Listing 8.1: Basic Webbase Structure in XML

8.1.2 Webbaselet Definition

A *webbaselet* is a valid `WBOL` document whose root element is a `webbaselet`.

```
<webbaselet xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="aHRWebbaseletRoot1" version="1.0.0">
  <name><text xml:lang="en" slug="human-resources">Human Resources</text></name>
  <children>
    <page guid="pHRDirectory0001" origin="aHRWebbaseletRoot1">
      <name><text xml:lang="en" slug="directory">Employee Directory</text></name>
      <keywords><text xml:lang="en">directory</text></keywords>
      <description><text xml:lang="en">Employee directory</text></description>
    </page>
  </children>
</webbaselet>
```

Listing 8.2: Example of a Webbaselet in XML

8.1.3 Namespace Isolation

Each *webbaselet* is imported under its own subtree, rooted at its `webbaselet` element's `guid`; slugs are scoped to that subtree so different *webbaselet*s can reuse the same slug without colliding.

```
<webbaselet xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="aHRWebbaseletRoot1" version="1.0.0">
  <name><text xml:lang="en" slug="human-resources">Human Resources</text></name>
</webbaselet>
```

Listing 8.3: Webbaselet slug scoping

When this *webbaselet* is integrated, the final URL for the page could be resolved to `/human-resources/directory`, with the engine managing any potential conflicts.

8.2 Development Workflow

The *webbase*/*webbaselet* architecture enables sophisticated development workflows:

8.2.1 Modular Development

Different teams can work on separate *webbaselet*s simultaneously:

- HR team develops employee self-service *webbaselet*
- Sales team develops customer portal *webbaselet*
- IT team develops system administration *webbaselet*
- Each team can test independently before integration

8.2.2 Versioning and Release Management

*webbaselet*s support independent versioning:

- Each *webbaselet* maintains its own version number
- Compatible versions can be mixed within a single *webbase*
- Rollback capabilities for individual *webbaselet*s
- A/B testing of different *webbaselet* versions

8.2.3 Testing and Quality Assurance

Modular architecture improves testing:

- Unit testing of individual *webbaselet*s
- Integration testing of *webbaselet* combinations
- Isolated regression testing when updating specific *webbaselet*s
- Performance testing of high-traffic *webbaselet*s

8.3 Governance and Security

The modular architecture supports enterprise governance requirements:

8.3.1 Access Control

*webbaselet*s can implement their own security models:

- Role-based permissions specific to *webbaselet* functionality
- Integration with enterprise identity providers
- Audit trails for *webbaselet*-specific actions
- Data loss prevention for sensitive *webbaselet*s

8.3.2 Compliance

Different *webbaselet*s can meet different compliance requirements:

- GDPR compliance for EU customer data *webbaselet*s
- SOX compliance for financial reporting *webbaselet*s

WIP

- HIPAA compliance for healthcare-related *webbaselet*s
- Industry-specific regulations for specialized *webbaselet*s

8.3.3 Change Management

webbaselet deployment can be controlled through governance processes:

- Approval workflows for *webbaselet* updates
- Automated testing before *webbaselet* deployment
- Rollback procedures for problematic *webbaselet*s
- Change impact analysis for *webbaselet* modifications

8.4 Performance and Scalability

The modular architecture provides performance benefits:

8.4.1 Selective Loading

The Web Spinner can optimize performance by:

- Loading only *webbaselet*s relevant to the current user's roles
- Lazy loading of *webbaselet*s when first accessed
- Caching frequently used *webbaselet*s in memory
- Unloading unused *webbaselet*s to conserve resources

8.4.2 Distributed Deployment

*webbaselet*s can be deployed across multiple servers:

- High-traffic *webbaselet*s on dedicated servers
- Geographic distribution of region-specific *webbaselet*s
- Load balancing based on *webbaselet* usage patterns
- Failover capabilities for critical *webbaselet*s

8.5 Future Evolution

The *webbase*/*webbaselet* architecture is designed to support future enhancements:

8.5.1 Marketplace Integration

A future ecosystem could include:

- Third-party *webbaselet* marketplace
- Certified *webbaselet*s from trusted vendors
- Community-contributed open-source *webbaselet*s
- Enterprise *webbaselet* repositories

WIP

8.5.2 AI-Driven Development

Future tools could provide:

- Automated *webbaselet* generation from requirements
- Intelligent *webbaselet* recommendations based on usage patterns
- Automatic optimization of *webbaselet* performance
- Predictive analytics for *webbaselet* maintenance

8.6 Looking Forward

We have now defined the languages (`WBOL`, `WBPL`, `WBLL`) and the modular architecture (*webbaselet*s) that form the static blueprint of a Spin the Web portal. But how is this blueprint brought to life? What is the machinery that parses these definitions, executes queries, enforces security, and renders the final user interface?

The next chapter provides a detailed look at the ***Web Spinner* Engine**, the high-performance runtime that serves as the heart of the Spin the Web project. We will explore its internal architecture, from request handling to final HTML rendering.

WIP

WIP

Chapter 9

The Web Spinner

"The web of our life is of a mingled yarn, good and ill together."
— William Shakespeare

`WBOL` is processed by a server-side engine called the **Web Spinner**. In a direct analogy to how a client-side web browser renders HTML into a user-facing webpage, the Web Spinner interprets `WBOL` descriptions to generate and manage the portal on the server. It is the runtime engine of the project, complemented by the **Spin the Web Studio**, which serves as the design-time tool for creating and modifying the *webbase* itself. This architecture allows for dynamic, data-driven portal generation based on the `WBOL` specification.

When the Web Spinner starts, it loads the *webbase* (an XML document validated against the `WBOL` XSD) into memory. This *webbase* is transformed into an optimized, in-memory object, allowing for fast access and manipulation of the portal's structure.

9.1 Primary Roles and Responsibilities

The Web Spinner's primary roles are routing and content delivery:

1. **URL-Based Routing:** It maps the incoming URL directly to a *webbase* object. For example, a URL like `https://portal.acme.com/areaslug/areaslug/pageslug` is interpreted as a path to a specific `STWPage` element within the *webbase* hierarchy.
2. **Page Composition:** When a user requests a page, the Web Spinner acts as the initial router. It identifies the requested page and its associated `STWContent` elements. Crucially, it checks the `visibility` rules for the page and each content element against the user's roles. Elements that are not visible to the user are filtered out and never sent to the client. The spinner then returns the list of slugs for the visible contents.
3. **Asynchronous Content Fetching:** The client receives the list of content slugs and proceeds to request each one asynchronously and individually. For instance, it would request `https://portal.acme.com/areaslug/areaslug/pageslug/contentslug`. This approach allows the main page structure to load quickly while content is fetched in parallel, improving perceived performance.
4. **Dynamic Content:** A content element is not limited to rendering data but also managing data like an API.

WIP

This architecture ensures that the server handles the core logic of structure, routing, and security, while the client is responsible for the final rendering, leading to a flexible and performant portal.

9.2 System Startup and Initialization

When the Web Spinner starts up, it performs several critical initialization steps:

9.2.1 Webbase Loading

The engine loads the complete `WBOL` document (*webbase*) from disk, stored as XML and validated against the `WBOL` XSD. This document contains the entire portal structure, including all areas, pages, content definitions, and configuration data.

9.2.2 In-Memory Optimization

The loaded *webbase* is parsed and transformed into an optimized in-memory object graph. This transformation includes:

- Resolving all GUID references between elements
- Building navigation hierarchies for fast traversal
- Pre-compiling visibility rules for rapid role-based filtering
- Indexing elements by slug for efficient URL routing

9.2.3 Connector Configuration

All connectors defined in the `STWPortal` element are initialized and connection pools are established. This includes databases, `REST` APIs, file systems, and any other external data providers.

9.2.4 Route Table Generation

A comprehensive routing table is built from the *webbase* structure, mapping URL patterns to specific `STWPage` and `STWContent` elements.

9.3 Security

Security in Spin the Web encompasses both **authentication** and **authorization**.

- **Authentication** verifies that an entity is who it claims to be.
- **Authorization** determines whether an authenticated entity can access a given service.

9.3.1 Authentication

Spin the Web supports native authentication via:

- **User/password pairs**
- **Service-based credentials** (e.g., API tokens or external identity providers)

Authenticated entities are assigned one or more roles.

WIP

Initial Role Assignment When a portal is accessed, the requester is automatically treated as a **guest user**.

- The guest user is assigned the `guest` role by default.
- This role governs visibility for unauthenticated users.
- Content not explicitly visible to `guest` will return a `200 OK` with an empty response.

This ensures safe default behavior and prevents metadata leakage.

9.3.2 Authorization: The Visibility Paradigm

Authorization in Spin the Web is based on **visibility**. Content is either:

- **Visible** → served to the requester
- **Invisible** → treated as non-existent, returning a `200 OK` with an empty response

This paradigm simplifies access control and enforces privacy by design.

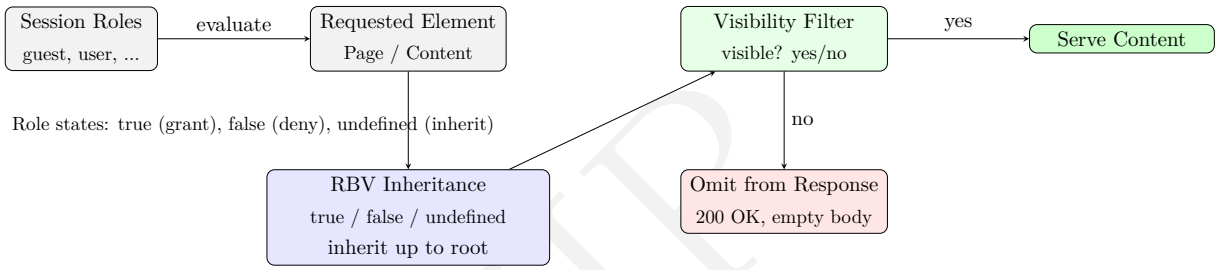


Figure 9.1: Role-Based Visibility flow: roles are evaluated against element RBV with inheritance; invisible elements are omitted without error.

Role States Each role can be in one of three states:

`true` explicitly granted
`false` explicitly denied
`undefined` inherited from parent elements

Inheritance follows a recursive model from the content up to the portal root.

Role Assignment Roles can be assigned to:

- Individual contents
- Pages
- Areas
- Entire portal

If no role is explicitly assigned, it inherits from its parent.

Default Role: Guest The `guest` role is automatically assigned to the portal home page and its contents. All other elements are invisible to users with the guest role unless explicitly made visible.

9.3.3 Predefined Roles

Spin the Web defines the following non-deletable roles:

- `root` *superuser; see override below*
- `administrator`
- `guest`
- `user`
- `developer`
- `leaddeveloper`
- `seo`

You may define additional roles as needed. A good starting point is your organizational chart.

Superuser override (`root`) The `root` role represents a trusted superuser. When a session includes `root`, the "no assignment found up to the portal level" condition does *not* cause a deny; instead, evaluation proceeds to the element's `visible` flag. This does not change the semantics of `visible=false` (which still hides the element).

9.3.4 RBV Decision Procedure

With reference to Figure 9.1, the Web Spinner applies Role-Based Visibility (RBV) using the following precise rules. Let *roles* be the set of roles in the current session; visibility flags are tri-state {`true`, `false`, unset}, where unset is treated as `true`.

WIP

Page decision

1. If the requested page is the Home page, **ALLOW** by default.
2. Else, if no authorization for any of the session roles is found on the page or any ancestor (page → area → portal), **DENY** — *unless* the session has the `root` role, in which case continue to step 3.
3. Else, if `page.visible` is `false`, **DENY** and *navigate to the Home page.*
4. Otherwise, **ALLOW**.

Content decision (for each content on an allowed page)

1. If the content or its ancestors (page → area → portal) define authorizations for the session roles:
   (a) If none of those authorizations evaluate to `true`, **DENY**.
   (b) Else, if `content.visible` is `false`, **DENY**.
   (c) Otherwise, **ALLOW**.
2. If no role assignment for any session role is found all the way up to the portal level, treat as an *explicit deny* — *unless* the session has the `root` role, in which case evaluate `content.visible`: if `false` then **DENY**, otherwise **ALLOW**.

Defaults and inheritance

- Pages are *default-deny* (unless Home), requiring an explicit or inherited allow for at least one session role, and `visible` must not be `false`. If no role assignment is found all the way to the portal level, treat the outcome as an *explicit deny*; sessions with the `root` role bypass this specific condition and proceed to the `visible` check.
- Contents without any role assignment up to the portal level are *explicitly denied*. Sessions with the `root` role bypass only this condition and proceed to the `visible` check.
- RBV inherits up the hierarchy; evaluation short-circuits at the nearest level that defines role entries. If none are found by the time the portal is reached, the result is an explicit deny (subject to the `root` override above).

9.4 User Session Management

The Web Spinner maintains stateful user sessions to manage authentication, authorization, and personalization:

9.4.1 Session Establishment

When a user first accesses the portal, a new session is created with a unique identifier; a guest user is set as the session user (assigned the `guest` role). Sessions are maintained using cookies, JWT tokens, or other mechanisms.

9.4.2 Authentication Integration

The system integrates with various authentication providers (LDAP, OAuth, SAML, etc.) to verify user credentials and establish their identity.

9.4.3 Role Assignment

Once authenticated, the user's roles are determined through integration with identity providers or internal role mappings. These roles are cached in the session for performance.

9.4.4 Session State

The session maintains:

- User identity and roles
- Current language preference
- Navigation history
- Cached command results (when appropriate)
- Active connector connections

9.5 Request Routing and Processing

The Web Spinner handles incoming HTTP requests through a sophisticated routing mechanism:

WIP

9.5.1 URL Parsing

Incoming URLs are parsed to extract the area/page/content hierarchy. For example:

- `https://portal.acme.com/sales/dashboard` → Area: "sales", Page: "dashboard"
- `https://portal.acme.com/sales/dashboard/orders-table` → Area: "sales", Page: "dashboard", Content: "orders-table"

9.5.2 Element Resolution

Using the pre-built routing table, URLs are resolved to specific `WBOL` elements. Runtime outcomes:

- **Pages**: If the URL resolves to a page that is not visible to the current session (per Figure 9.1 and § 9.3.4), the user is taken to the **Home page**. If the path itself is invalid, the nearest portal or area main page is served.
- **Contents**: If a content is not visible, it is omitted entirely and the request returns `200 OK` with an empty body. If the path is invalid, no result is returned.

9.5.3 Protocol Handling

The Web Spinner supports both HTTP and WebSocket protocols:

HTTP : Used for standard page and content requests, following RESTful principles
WebSocket : Used for real-time content updates, live data feeds, and interactive features

9.6 Visibility and Authorization Engine

Before any content is delivered, the Web Spinner performs comprehensive authorization checks. See § 9.3 for the visibility model and predefined roles; this section focuses on runtime enforcement:

9.6.1 Role-Based Filtering

For each requested element (page or content), the visibility rules are evaluated against the user's session roles:

- Elements with no matching role rules inherit visibility from their parent elements
- The hierarchical check continues up to the root element
- Elements without explicit or inherited visibility permissions are denied by default

9.6.2 Dynamic Filtering

Visibility checks are performed in real-time for every request, ensuring that changes to user roles or permissions take immediate effect.

9.6.3 Secure Response Generation

Only authorized elements are included in the response. Unauthorized elements are completely omitted, preventing information leakage.

WIP

9.7 Content Request and Response Cycle

The Web Spinner handles content requests through a multi-stage process:

9.7.1 Page Structure Delivery

When a page is requested, the Web Spinner:

- Identifies all visible `STWContent` elements for the page
- Returns a lightweight response containing the list of content slugs and their metadata
- Includes section assignments and sequencing information for layout

9.7.2 Asynchronous Content Fetching

The client then requests individual content elements:

- Each content request triggers a separate web socket call to the Web Spinner
- Content elements are fetched in parallel, improving perceived performance
- Each content element is processed independently, allowing for granular caching and error handling

9.7.3 Content Processing Pipeline

For each content request, the Web Spinner:

1. Validates user authorization for the specific content element
2. Resolves the associated connector and command
3. Processes the command through the `WBPL` (Webbase Placeholders Language) engine
4. Executes the processed command against the connector
5. Applies the content layout transformation
6. Returns the rendered content or raw data (depending on the request type)

9.8 Connector Connection and Command Management

The Web Spinner maintains a sophisticated connector management system:

9.8.1 Connection Pooling

Database and API connections are pooled and reused across requests to optimize performance and resource utilization.

9.8.2 Command Processing

Raw queries defined in `STWContent` elements undergo several processing steps:

`WBPL` Processing : Placeholders are resolved using session data, URL parameters, and global variables

Security Validation : Processed queries are validated to prevent injection attacks

Optimization : Command plans may be cached for frequently-executed queries

WIP

9.8.3 Multi-Connector Support

The system supports heterogeneous connectors:

Relational Databases : SQL queries with full `WBPL` placeholder support
`REST` APIs : HTTP requests with parameter substitution and response transformation
NoSQL Databases : Native command languages (MongoDB, Elasticsearch, etc.)
File Systems : Direct file access and processing

9.8.4 Error Handling

Connector errors are gracefully handled:

- Connection failures trigger automatic retry logic
- Command errors are logged and appropriate error responses are returned
- Partial failures in multi-content pages don't affect other content elements

9.9 Performance Optimization and Timeout Management

The Web Spinner implements several performance and reliability features:

9.9.1 Content Timeouts

Each content element has configurable timeout settings:

Command Timeout : Maximum time allowed for connector queries
Layout Timeout : Maximum time for layout compilation and rendering
Total Request Timeout : Overall timeout for content delivery

9.9.2 Caching Mechanisms

Multiple levels of caching improve performance:

Command Result Caching : Connector results are cached based on command signatures
Layout Caching : Compiled layouts are cached until templates change
Response Caching : Complete HTTP responses may be cached for static content

9.9.3 Load Balancing

Multiple Web Spinner instances can operate in parallel:

- Session affinity ensures consistent user experience
- Shared cache layers enable scaling across multiple servers
- Health monitoring ensures failed instances are automatically excluded

9.9.4 Monitoring and Metrics

The Web Spinner provides comprehensive monitoring:

- Request/response times and throughput metrics
- Connector performance and error rates

WIP

- User session analytics and behavior patterns
- System resource utilization and capacity planning data

This architecture ensures that the Web Spinner can handle enterprise-scale workloads while maintaining high performance, security, and reliability standards.

9.10 Looking Forward

At this point, we have a powerful engine and a sophisticated set of languages. However, asking developers to write raw `WBOL` in a text editor, manage resources via the command line, and test queries in a separate database tool would be laborious and inefficient. How can we streamline this development process?

This is where the **Spin the Web Studio** comes in. The Studio, itself a *webbaselet*, provides a comprehensive, integrated development environment for building, testing, and deploying *webbase*s. It is the testing ground for the entire Web Spinner ecosystem and an essential tool for any serious developer. The next chapter will be dedicated to exploring the Studio's rich feature set.

WIP

WIP

Chapter 10

Spin the Web Studio: An Integrated Development Environment

"The best way to predict the future is to invent it."
— Alan Kay

10.1 The Need for an Integrated Environment

While the `WBOL` and `WBPL` languages provide a powerful declarative framework for defining enterprise portals, and the *Web Spinner* runtime offers a robust execution layer, the development experience can still be laborious. Without a dedicated toolset, a developer would be forced to:

- Write and edit complex `WBOL` files in a standard text editor, without syntax highlighting, validation, or autocompletion.
- Manage portal resources, such as connectors and user roles, through command-line interfaces or direct database manipulation.
- Create and test `WBPL` queries in a separate database management system, disconnected from the portal context.
- Manually compile and deploy the *webbase* to see the results of any changes.

This fragmented workflow is inefficient, error-prone, and a significant barrier to productivity. To address these challenges, the **Spin the Web Studio** was created.

10.2 Introducing the Spin the Web Studio

The Spin the Web Studio is a webbased development environment designed specifically for building, testing, and managing *webbase*s. It streamlines the entire development lifecycle, from initial design to final deployment, providing a single, coherent interface for all development tasks.

Crucially, the Studio is not an external, standalone application. It is itself a ***webbaselet***, built using the very same technologies it helps to create. This has two profound implications:

1. **The Ultimate Testing Ground**: The Studio serves as the primary testing ground for the *Web Spinner* runtime and the entire Spin the Web framework. Every feature of the framework must be robust and performant enough to run the Studio itself.

WIP

2. **Part of the Virtualized Portal**: As a *webbaselet*, the Studio can be seamlessly integrated into any *webbase*. This allows developers with the appropriate permissions to access the development environment directly from within the live portal, making it a true part of the virtualized portal.

10.3 Studio Architecture and Activation

The Studio operates as a specialized *webbaselet* that is added to the portal *webbase* and is accessible to users with developer permissions when they log in. The studio remains hidden until activated by the developer using the keyboard shortcut **Alt+F12**.

Upon activation, the Studio transforms the portal interface into a full-featured development environment with the following key components:

Action Bar Provides quick access to the Studio functions.

Side Bar Houses multiple views including interactive *webbase* hierarchy, portal folder contents, search capabilities, debugging tools, source control integration, and Studio settings.

Status Bar Displays development status information, compilation results, and system feedback.

Panel Contains additional development tools, terminal access, and debugging output.

Main Section Features a tabbed interface where the live portal is displayed in a persistent browser tab alongside other editors.

10.3.1 Unique Browser Tab Integration

One of the Studio's most innovative features is its tab management system. The main section displays the live portal in a special browser tab that cannot be closed, ensuring developers always maintain visual connection to their running application. Portal resources such as files, configurations, and logs can be opened in separate tabs for editing and review.

This design creates an in-place development experience where:

- Changes to `WBOL` files are immediately reflected in the persistent portal view
- Developers can interact with the live portal while simultaneously editing its underlying code
- The development environment becomes part of the portal ecosystem rather than an external tool

10.3.2 Side Bar Navigation

The Studio's side bar provides comprehensive navigation and development tools through multiple specialized views:

Interactive *webbase* Hierarchy A tree view displaying the complete structure of the *webbase*, allowing developers to navigate between *webbaselets*, connectors, and configurations with visual context.

Portal Primary Folder Contents Direct access to the portal's file system, enabling quick file management and resource organization.

Search Comprehensive search capabilities across both *webbase* definitions and folder contents, supporting pattern matching and content searches.

WIP

Debugging Integrated debugging tools for `WBPL` queries, *webbaselet* execution, and runtime diagnostics.

Source Control Built-in version control integration for tracking changes to *webbase* definitions and portal resources.

Studio Settings Customization options for the development environment, including themes, editor preferences, and workflow configurations.

10.4 Key Features of the Studio

The Studio is organized into several key modules, each addressing a specific aspect of *webbase* development.

10.4.1 The WBOL Editor

A rich text editor with full support for the `WBOL` syntax, featuring:

- Syntax highlighting for improved readability.
- Real-time validation to catch errors as you type.
- Autocompletion for element names and properties.
- A hierarchical tree view for easy navigation of the *webbase* structure.

10.4.2 The WBPL Command Builder

An interactive tool for creating, testing, and debugging `WBPL` queries:

- A graphical interface for building complex queries.
- The ability to execute queries against live connectors and view the results instantly.
- A "persona simulator" to test queries under different user roles and contexts.

10.4.3 Resource Management

A centralized dashboard for managing all portal resources:

- **Connector Configuration**: Connect to and manage various connectors (databases, APIs, etc.).
- **User and Role Management**: Define user roles and assign permissions.
- **Asset Library**: Upload and manage static assets like images, CSS, and JavaScript files.

10.4.4 Live Preview and Deployment

The Studio provides a real-time preview of the portal as you build it. Developers can instantly see how their changes will look and behave. When development is complete, the Studio offers one-click deployment to staging or production environments.

WIP

10.5 Looking Forward

The Spin the Web Studio completes the conceptual picture of the framework, providing the development environment necessary to move from Foundations to Framework to working Portal. It transforms *webbase* development from a manual, error-prone task into a streamlined, interactive experience.

Now that we have covered the complete set of tools in the framework—from the declarative languages to the runtime and the IDE—the next chapter will ground these concepts in reality. We will examine the specific technology stack and implementation details of the reference Web Spinner, revealing how these architectural principles are translated into running code.

WIP

Chapter 11

Technology Stack and Implementation

This chapter documents the concrete technologies used to implement the web spinner mechanics and how the theoretical constructs from Part II are realized in a working system.

11.1 Runtime and Languages

The reference implementation is written in JavaScript and runs on Node.js 22.18 or later:

- Node.js runtime and JavaScript for server-side logic
- Standard Web APIs (URL, URLSearchParams, Fetch, Crypto) alongside Node.js APIs and npm packages
- npm scripts and Node.js utilities for development, testing, asset builds, and releases
- Containerization via a Dockerfile based on the official Node.js image

11.1.1 Why Node.js for the *Web Spinner*?

Node.js provides a mature server runtime and package ecosystem while retaining the modern JavaScript and Web API features used by the *Web Spinner*:

- **JavaScript end-to-end:** one language for the spinner, utilities, and any shared logic with client code.
- **Web APIs in the server:** standard `URL`, `Request/Response`, `Fetch`, and `Crypto` reduce bespoke abstractions.
- **Package ecosystem:** npm dependencies provide database drivers, XML parsing, and WebSocket support.
- **Integrated tooling:** npm scripts and the built-in Node.js test runner support development and releases.
- **Simple deploys:** reproducible Docker images and the widely available Node.js runtime keep operations light.
- **Native ESM:** native modules and top-level `await` fit the compilation model used by `WBLL` and `WBPL` tooling.

Other implementations are welcomed, provided they adhere to the specifications and interoperability guidelines set forth by the Spin the Web Project.

WIP

11.2 High-Level Architecture

The spinner is a server that understands WBOL. On each request it:[1]

1. Establishes or resumes a session (user, roles, locale, placeholders)
2. Ensures the requested WBOL/Webbase is loaded into an in-memory tree
3. Decides whether to respond with a resource directly or with a list of REST calls the client should make (async via WebSockets)
4. Renders contents on demand using WBLL-driven layouts and returns HTML fragments/resources

11.3 Core Elements and Portal Tree

The in-memory model mirrors the WBOL structure:

- **STWPortal** (singleton root), **STWArea**, **STWPage**, **STWContent**
- All derive from an abstract **STWElement** providing identity, naming, localization, hierarchy, and export to WBOL
- A content type (e.g., Text, Table, Menus, Breadcrumbs, Calendar, Code Editor, ...), implemented under `stwContents/`, encapsulates data access and rendering concerns

11.4 Rendering Pipeline: WBLL and WBPL

Presentation is described with WBLL (Webbase Layout Language), interpreted by a layout interpreter:

- WBLL strings are tokenized and validated; tokens drive generation of a specialized render function
- Token handlers cover inputs, lists, links, media, buttons/actions, and structural fragments; they build HTML using placeholders and field values
- WBPL expressions provide string interpolation and conditional/functional logic within layouts and settings
- Placeholders (e.g., `@@name`) merge session, request, and record values

11.5 Request Flow in Practice

For a content render request:

1. The session determines visibility (role-based) and language
2. The content locates its WBLL layout for the current language
3. Records are fetched (via a connector or parameters); the first row and fields hydrate placeholders
4. The compiled WBLL render function executes, producing the HTML body; optional header/footer wrappers apply

[1] See also the “Paradigm” section in the implementation README

11.6 Security, Localization, and State

- **Visibility**: role-based flags inherited along the element tree control exposure of nodes
- **Localization**: localized properties (names, slugs, messages) are resolved through the session
- **State**: per-session placeholders and content-level settings influence rendering and actions

11.7 Build, Tooling, and Deployment

- npm scripts run Node.js tasks to merge and minify static assets (e.g., CSS and JavaScript) for the `public/` client
- Tests: parsing and evaluation tests for WBPL ensure correctness of expressions and escaping
- Docker: a Node.js image installs npm dependencies and ships a non-root runtime image

11.8 Where the Mechanics Live (Guide to Source)

The following folders in the reference implementation contain the mechanics described above:

- `stwElements/`: *STWElement*, *STWPortal*, *STWArea*, *STWPage*, *STWContent*
- `stwContents/`: concrete contents and *WBLL* interpreter (layout parsing/rendering)
- `tests/`: WBPL and layout-related unit tests
- `public/`: client-side scripts, styles, and SPA shell
- `tasks/`: Node.js development and build utilities (e.g., minification, CSS merge)

11.9 Example: From WBOL to HTML

At a glance:

1. WBOL defines the portal tree; the spinner builds an in-memory model at startup/load
2. A user navigates to a page; the spinner locates the route and the associated contents
3. Each content loads data (if needed), prepares placeholders, and renders its WBLL layout
4. The server responds with an HTML fragment or instructs the client to fetch multiple fragments via REST/WebSockets

This chapter has bridged theory and implementation, showing how the abstract mechanics of the Web Spinner are realized in a modern technology stack. With the platform's construction now fully detailed—from its languages to its runtime and development tools—our focus shifts from building the framework to using it.

The next part of this book begins the practical guide for developers, covering the development models and methodologies for designing and building effective portals with the platform we have just described.

WIP

WIP

Part III

The Portal

WIP

WIP

Introduction to Part III: The Portal

> *"Structure is not just a means to a solution. It is the solution."*
> — Alexandra V. Agranovsky

With the Spin the Web framework fully specified in Part II, this part transitions from engineering blueprints to practical application. It serves as the developer's guide to the models and methodologies for *using* the framework to design, build, and structure a real-world enterprise portal.

Before the implementation guidance, § 12 establishes the business context: the enterprise's purpose, processes, structure, and communication needs. The following chapters address implementation through two complementary dimensions:

- **Portal Contents (Structure, Semantics, Information)** — Modeling Areas, Pages, and Content blocks; embedding documentation; designing navigation, search, and task-oriented information architecture (§ 13).
- **Portal Visuals (Presentation, Layout, Interaction)** — Translating structure into accessible, brand-aligned, performant user interfaces while preserving semantic integrity (§ 14).

Throughout, we reference the public website spintheweb.org and the companion *Spin the Web Studio*—both built with the framework—as running examples of the patterns described here. For an overview of the community catalog used to discover and rate webbaselets, see the Ecosystem webbaselet in § D.3.

By the end of this part, you will have a clear methodology for designing and building sophisticated web portals using the Spin the Web framework—treating structure and presentation as orthogonal layers that evolve independently yet harmonize in the delivered experience.

WIP

WIP

Chapter 12

Enterprise

"Communication is the lifeblood of any enterprise. It is the thread that weaves together the fabric of a company, connecting employees, departments, and stakeholders. Effective communication fosters collaboration, drives innovation, and ensures that everyone is aligned with the enterprise's goals and values... it's brand"

12.1 Defining a goal

An enterprise is a system that exists for a purpose. It is not simply a group of people or a collection of departments; it is an organized human activity designed to achieve a goal. In most cases, that goal is to provide products and services that respond to a real need in the market, in society, or within a specific community. Every enterprise also has a vision that gives meaning to its work. This vision is more than a slogan: it expresses the future the enterprise wants to help create. It provides direction, inspires commitment, and helps define what the enterprise stands for.

12.2 Thinking of processes

To pursue that goal, an enterprise needs a strategy. Strategy is the deliberate way in which it chooses its priorities, allocates resources, and positions itself in relation to competitors, customers, and changing conditions. It translates purpose into action. In practice, this means defining the processes through which work is carried out, decisions are made, and results are produced. Good processes turn the enterprise's intentions into repeatable and manageable activities.

12.3 Implementing a structure

The strategy, in turn, shapes the enterprise's structure. Departments, teams, roles, and procedures are organized so that the organization can act coherently and efficiently. Structure is therefore not an end in itself; it is the way the enterprise coordinates people, knowledge, and responsibilities around its objectives. A clear structure helps the enterprise align its resources with its purpose and ensures that each part of the organization contributes to the whole.

WIP

12.4 Creating a communication channel

Finally, communication is what binds an enterprise together. It is essential both within the organization and in relation to the surrounding world. Inside the enterprise, communication allows people across departments to coordinate, share knowledge, and align around common goals. Outside the enterprise, it helps the organization present itself clearly to customers, partners, and society at large. For this reason, communication needs a channel: a shared medium through which messages can flow consistently and reliably.

In this perspective, a single, adaptive, and homogeneous communication channel is especially valuable. It provides one coherent environment in which information can move across the enterprise without fragmentation, while remaining flexible enough to evolve with changing needs. A portal is therefore a 360° communication channel: not only a B2C interface, as with most websites, but also a medium for B2B and B2E interactions, connecting the enterprise with customers, partners, and employees. Spin the Web is particularly well suited to this role because it uses web technologies designed for multifaceted communication. It enables the enterprise to connect people, processes, and information through a unified digital channel, transforming raw data into meaningful information that supports action, understanding, and trust. Without such a channel, even a strong strategy and a well-designed structure remain incomplete.

Spin the Web is therefore not just a tool for building websites; it is a platform for creating an enterprise communication channel that integrates the organization's goals, processes, structure, and interactions. By leveraging Spin the Web, enterprises can enhance their ability to communicate effectively, adapt to change, and achieve their objectives in a dynamic environment.

12.5 Conclusion

In summary, an enterprise thrives on the alignment of its purpose, strategy, structure, and communication. Spin the Web provides the technological foundation to support this alignment, offering a unified platform that facilitates coherent and adaptive communication across all levels of the organization. By adopting such a platform, enterprises can ensure that their internal and external interactions are not only efficient but also strategically aligned with their overarching goals.

Ultimately, the success of an enterprise depends on its ability to integrate these elements seamlessly. A well-defined purpose guides strategic choices, a robust structure enables effective execution, and a comprehensive communication channel ensures that information flows where it is needed most. Spin the Web acts as the connective tissue that binds these components together, empowering enterprises to navigate complexity, respond to emerging challenges, and capitalize on opportunities in a rapidly evolving digital landscape.

Key Takeaways:

- Purpose drives strategy, which in turn shapes structure and processes.
- Communication is the glue that holds the enterprise together, both internally and externally.

- A unified digital channel, such as a Spin the Web portal, enhances coherence, adaptability, and effectiveness.
- Integrating purpose, strategy, structure, and communication is essential for enterprise success in a dynamic environment.

WIP

WIP

Chapter 13

Implementing Portal Contents: Structure, Semantics, and Information Flow

"Structure is the substrate of meaning; when well designed it becomes self-documenting and accelerates delivery."

This chapter covers how to model and implement the *informational side* of an enterprise portal using `WBOL`: Areas, Pages, and Content blocks as semantic anchors; embedded documentation as a living knowledge system; and patterns for navigation, search, and task execution. The emphasis is on how structure transforms raw enterprise data into durable, navigable knowledge assets.

13.1 From Organization to Information Architecture

The starting point for portal content modeling is the enterprise itself. Business functions, departments, service domains, and stakeholder-facing capabilities provide the *semantic inventory* that becomes your top-level `STWArea` set. Mapping is a translation exercise:

1. Collect the official organizational chart(s) and cross-functional process maps.
2. Identify external-facing vs. internal-only domains; decide which are public, private, or hybrid.
3. Normalize naming (short, role-recognizable labels) and prune redundancies.
4. Annotate each candidate Area with primary audiences, core data domains, and governing policies.
5. Prioritize rollout sequence (critical operations first, supporting domains next, exploratory later).

Example Top-Level Areas A manufacturing enterprise might define: Sales, Administration, Backoffice, Technical Office, Products & Services. Each becomes an `STWArea` root for subordinate Pages and Content.

Area definitions embed *living documentation* through localized `name`, `description`, and `keywords`. This collapses the distance between operational knowledge and runtime structure: the portal itself becomes the manual.

13.2 Hierarchical Semantics and Namespaces

Hierarchy provides cognitive compression. The *Hierarchical Namespace Pattern* organizes content so users predict where information lives. Recommended principles:

- Depth over width only when each level adds semantic clarity.
- Keep sibling counts manageable (7 ± 2 heuristic for primary navigation tiers).
- Use stable identifiers (slugs) for Areas/Pages to preserve deep links and audit trails.
- Reflect role segmentation (what differs by role) at the `STWContent` or conditional rendering layer rather than duplicating structural nodes.

Roles shape *visibility* and *interaction surfaces* but should not fork the structural namespace unnecessarily. This separation sustains maintainability and consistent analytics.

13.3 Documentation Through Structure

Every `WBOL` element (Portal, Area, Page, Content) hosts localized `description` and `keywords`. These fields form a vertically integrated documentation system that can encode: quality policies, compliance references, process identifiers, KPIs, audit obligations, data classification tags, and internal taxonomy terms. Table 13.1 summarizes scope alignment.

Portal Mission, global quality policy, enterprise standards.
Area Departmental procedures, regulatory scope, operating KPIs.
Page Process walkthroughs, workflow prerequisites, exception handling.
Content Field-level rules, validation, data retention, privacy notes.

Embedding this metadata enables: contextual help, machine-assisted authoring, internal semantic search, automated compliance extraction, and AI augmentation (linking processes to data touchpoints).

Table 13.1: Documentation scope by structural level

Level	Primary Focus	Typical Metadata	Example Questions Enabled
Portal	Enterprise Mission	Mission, quality policy, audit standards, global KPIs	What is the overarching mission? Which global standards govern all Areas?
Area	Department / Domain	Procedures, regulatory scope, data domains, risk class	Which regulations apply to this domain? Who owns the process?
Page	Process / Journey	Workflow steps, prerequisites, exception handling, SLA	What happens before/after this step? What are escalation paths?
Content	Field / Action Unit	Validation rules, retention, privacy flags, policy codes	Can this value be exported? How long is data retained?

The metadata lattice supports contextual help, semantic search ranking, compliance extraction, and AI-assisted authoring.

13.4 Core Page Archetypes

Across domains three archetypes dominate main content regions:

- **Dashboards**: Multi-source summaries for situational awareness and prioritization. Favor glanceable KPIs, deltas, and exception surfacing.
- **Tabular / List Views**: Filterable, paginated, sometimes hierarchical or pivot-capable collections enabling search+select workflows.
- **Detail Views**: Focused inspection/editing surfaces for a single entity with contextual navigation (previous/next, related entities, timeline overlays).

Composite pages combine archetypes (e.g., miniature dashboard widgets above a list). Resist uncontrolled aggregation—each archetype should answer a distinct question.

13.5 User Journeys and Page Design

Pages (`STWPage`) embody discrete user tasks or journeys. Design methodology:

1. **Task Enumeration**: Elicit core user goals per Area (create quote, approve order, analyze defect rate).
2. **Journey Mapping**: Sequence states and data intersections; identify required contextual jumps (entity cross-links) to minimize session fragmentation.
3. **Structural Allocation**: Assign each journey to a Page; merge only if cognitive load stays low and authorization scopes match.
4. **Section Layout**: Header (global actions), sidebars (navigation, filters, summaries), main body (primary archetype), footer (feedback, contacts).
5. **Instrumentation**: Embed identifiers and metadata for analytics, ticketing, and performance tracing.

Integrated Ticketing A mature portal treats structure itself as a support surface. Ticket submissions should auto-capture structural scope (portal/area/page/content IDs), user locale, and active filters. This converts qualitative feedback into structured, triage-ready data.

13.6 Building with Content Blocks

`STWContent` instances are atomic functional or informational units: forms, tables, charts, grids, banners, maps, metrics, documents. Composition principles:

- **Single Responsibility**: Each block answers one primary question or supports one action cluster.
- **Declarative Data Binding**: Use `WBPL` for parameterized queries; keep transformation logic close to data retrieval for transparency.
- **Progressive Disclosure**: Lazy-load heavy or low-priority content blocks to reduce initial cognitive and performance load.
- **Embedded Governance**: Include validation rules, policy codes, and retention hints inside `description` metadata.

WIP

- **Reusability**: Parameterize commonly repeated patterns (e.g., entity summary panels) rather than cloning definitions.

Example Composition A public "Products" page may combine: hero banner (static), category menu (dynamic list), product grid (dynamic, filtered), featured carousel (dynamic curated), and call-to-action block—each a discrete `STWContent`.

13.7 Search, Discovery, and Internal SEO

Localized `keywords` and `description` fields drive internal search relevance. Two complementary modes:

Global Search Traverses full structural graph; returns heterogenous results ranked by metadata quality, usage signals, and recency.

In-Context Search Operates within the active Page scope: filters list/table rows, quick-finds form fields, queries localized help.

Design guidance: persistent global search affordance (often header); proximal in-context search control near target content. Provide keyboard shortcuts, accessible labeling, and query history. Treat internal search analytics as a requirements radar (unmet search intent indicates structural or content gaps).

WIP

13.8 Patterns and Evolution

Long-term iteration reveals recurring cycles: pattern recognition → insight → abstraction → simplification. Content modeling matures by:

- Consolidating duplicated structures into parameterized definitions.
- Elevating cross-cutting concerns (authorization tags, retention policies) into shared vocabularies.
- Refactoring deep hierarchies when navigation analytics show friction.
- Capturing emergent naming conventions to stabilize taxonomy.
- Instrumenting evolution (version history of structural nodes) to support audits and AI summarization.

The endpoint is elegant simplicity: a minimal, expressive structure that scales without combinatorial explosion.

13.9 Conclusion

The content layer transforms disparate enterprise data into structured, navigable, contextual information assets. By treating every node (Area/Page/Content) as both functional unit and documentation carrier, the portal becomes a continuously evolving, queryable knowledge base that supports operations, compliance, and learning.

Chapter 14

Implementing Portal Visuals: Presentation, Layout, and Interaction

"Visual design should disappear into function, letting users feel the system rather than notice it."

This chapter focuses on the *visual and interaction layer* of a Spin the Web portal: translating semantic structure into perceivable, accessible, performant, and brand-aligned experiences—without compromising the stability of information architecture defined in § 13. The goal is to make presentation an *orthogonal dimension*: evolvable, themable, and testable in isolation.

14.1 Separation of Structure and Presentation

Structure lives in `WBOL`: Areas, Pages, and Content blocks define semantics, navigation graph, and documentation. Presentation lives in a theming and layout layer (CSS variables, design tokens, component library primitives) that consumes structural metadata. This separation yields:

- **Predictable Evolution**: New visual themes deploy without structural migrations.
- **Stable Deep Links**: URLs and identifiers remain constant across redesigns.
- **Semantic Integrity**: Search, analytics, and AI augmentations operate on durable structure, not brittle selectors.
- **Test Focus**: Functional tests target structure and logic; visual regression suites target presentation surfaces.

Anti-patterns: encoding layout meaning into identifiers; duplicating Pages solely for cosmetic variants; baking brand colors into content definitions.

Design Tokens Use an invariant token vocabulary (e.g., `color.surface.raised`, `space.xs`, `font.heading.scale`) mapped to concrete theme values. Tokens enable multi-brand deployments and dark/light adaptation with minimal churn.

WIP

14.2 Layout Regions and Responsiveness

Canonical regions: Header (global nav, identity, search), Primary Navigation (lateral or horizontal), Context Pane (filters, related entities), Main Content, Ancillary Panels (notifications, collaboration), Footer (legal, contact). Responsive strategy principles:

1. **Mobile First Density**: Collapse non-critical side regions into overlay drawers; preserve primary task path above decorative brand elements.
2. **Breakpoint Semantics**: Define breakpoints where interaction model changes (hover removed $<$ tablet, multi-column grids collapse).
3. **Progressive Disclosure**: Defer rendering of off-screen heavy panels until first invocation.
4. **Adaptive, Not Just Responsive**: Personalize ordering of blocks based on role usage analytics while retaining structural IDs.

Use CSS grid/flex abstractions aligned to tokenized spacing; avoid ad hoc pixel constants.

14.3 Navigation Systems and Flow

Navigation manifests user mental models of the structure. Layers:

Global Navigation Exposes top-level Areas; must be stable, sparse, and keyboard navigable.

Local Navigation Contextual to an Area or Page section (tab sets, side menus) for lateral moves.

Breadcrumbs Encode path memory; avoid redundancy when global navigation already fully mirrors hierarchy depth 1.

Inline Relational Links Provide graph exploration (related entities, recent activity) without forcing full context switch.

Design heuristics: prefer *predictable repetition* (consistent placement) over novelty; minimize hover-only affordances; provide explicit focus order. Instrument navigation events to surface friction (abandoned path segments, loop behaviors).

Image and Iconographic Navigation Navigation can also be accomplished through **clickable images**, floor-plan style "planimetries", diagrams, or semantically meaningful icons. These affordances are powerful for spatial, facilities, product catalog, or process topology exploration. To integrate them without sacrificing accessibility or scalability:

- **Semantic Redundancy**: Every image-driven affordance must have a parallel text link or ARIA-labelled control to support screen readers and search indexing.
- **Vector Over Raster**: Prefer SVG with distinct, focusable regions (using `<a>` or `role="link"`) instead of image maps on raster graphics; enables theming and high-DPI crispness.
- **Descriptive Tooltips**: Provide concise tooltips / `title` attributes; avoid encoding primary meaning solely in color or pictogram shape.
- **Responsive Hit Targets**: Ensure minimum target size (44 px CSS) across breakpoints; adapt layout so targets do not cluster too densely on touch devices.
- **Keyboard Pathways**: Maintain logical tab order across hotspot regions; allow arrow-key or WASD navigation for spatial grids where appropriate.

- **Progressive Enhancement**: Initial load should render a textual list fallback while SVG/hotspot script enhancements hydrate.
- **Performance Budget**: Large planimetric diagrams should be chunked or lazily loaded; defer non-visible layers (e.g., annotations) until interaction.
- **Analytics Instrumentation**: Tag each hotspot with structural IDs (Area/Page/Content) and business semantics to measure navigation efficacy and dead zones.
- **Scalability**: For dynamic catalogs, auto-generate hotspot layers from the `WBOL` structure rather than manually editing coordinates.
- **Theming**: Bind fills, strokes, and hover states to design tokens (not hard-coded colors) for dark mode and brand adaptations.

Use image-based navigation to *accelerate discovery*, not to replace canonical hierarchical paths. Spatial or iconographic maps become a complementary entry surface feeding into the same stable URL and breadcrumb system.

14.4 Dashboards, Tables, and Details

Visual treatments align to archetype intent:

- **Dashboards**: Prioritize contrast, succinct labeling, and anomaly highlighting. Limit cardinality of primary KPI tiles (7 ± 2). Provide consistent tile grammar: label, value, delta, trend.
- **Tables / Lists**: Support density toggles (comfortable/compact), sticky headers, column personalization. Emphasize scannability: left-align textual identifiers, right-align numeric aggregates, reserve iconography for actionable states.
- **Detail Views**: Anchor with an identity bar (title, status, primary actions). Segment content with visual rhythm (spacing tiers) not heavy borders. Provide contextual next/previous navigation when part of a result set.

Cross-cutting: embed loading placeholders shaped like final content (skeletons) to reduce perceived latency; ensure empty states teach next action.

14.5 Role-Based Visual Adaptation

Authorization governs data visibility; visual adaptation communicates scope without fragmenting structure. Techniques:

- Conditional display of Content blocks (retain layout placeholders to avoid jumpy reflow when possible).
- Progressive disclosure of advanced filters and bulk actions only for privileged roles.
- Declarative role tags bound to CSS utility classes for subtle emphasis (e.g., manager-only highlights).
- Unified audit overlay mode (toggle) to display why elements are hidden (for debugging and governance).

Avoid: duplicating Pages per role; mixing security logic into visual components instead of central policy engines.

14.6 Feedback, Ticketing, and Observability

Integrate a frictionless feedback loop aligned with structure (see § 13 on instrumentation). Key UI constructs:

- Inline issue trigger (icon/button) scoped to Page or Content block; auto-captures structural IDs, user locale, and viewport size.
- Session timeline panel exposing recent navigation, feature flags, and performance spans for support replication.
- Visual state indicators: latency spinners, deferred load badges, stale data warnings with last refresh timestamp.
- Observability overlay (admin only) highlighting render cost hotspots / API latency zones.

Close the loop: a ticket success toast with deep link to status; encourage user re-engagement instead of dead-end submission pages.

14.7 Search Experience Design

Two surfaces (global, in-context) must *feel* unified. Global search: omnipresent field or icon opening a command palette style modal; supports keyboard invocation, fuzzy matching, and result type grouping. In-context search: embedded within tables, forms, or navigation panels, scoping results to current structural node.

WIP

Design Principles

- Immediate focus when opening global search; preserve prior query history with non-intrusive ghost text.
- Provide semantic filters (Area/Page) as chips; avoid forcing users to learn query DSL initially.
- Highlight matched substrings for learnable relevance model feedback.
- Offer keyboard preview navigation with real-time detail pane (no full navigation until commit).

Accessibility: ARIA roles (combobox, listbox), announce result counts, maintain logical tab order returning user to invoking control when dismissed.

14.8 Accessibility and Inclusive Design

Inclusive design is multiplicative: it improves efficiency for all users while enabling access for those with specific needs. Core practices:

- Semantic HTML foundation; avoid `div`-only components.
- Color contrast meeting WCAG 2.1 AA (4.5:1 text, 3:1 large); test dark/light parity.
- Full keyboard operability: visible focus, logical order, skip links for main content.
- Motion reduction honoring prefers-reduced-motion; substitute subtle fades for large parallax.
- Localization readiness: mirrored layouts for RTL, flexible space for longer strings, numeric/date formatting.

- Assistive hints in metadata (descriptions) powering contextual help and screen reader summaries.

Adopt automated accessibility testing plus manual audits (screen reader smoke tests) in CI.

14.9 Branding and Themability

Brand expression emerges from typography scale, color system, shape language (radius, stroke), and motion curve palette. Implementation strategy:

1. Define neutral base theme (grayscale, spacing, layout primitives).
2. Layer brand-specific tokens (color, typography, motion) referencing base tokens—no hard-coded hex in components.
3. Provide runtime theme switch (light/dark/high-contrast) with persisted user preference.
4. Guard legibility: run contrast validation when updating token sets; reject failing combinations.
5. Expose a Theme Inspector webbaselet for administrators to preview token diffs live.

Multi-brand portals map different token sets to identical `WBOL` structures, enabling re-use of governance and search analytics.

14.10 Performance and Perceived Speed

User perception hinges on *time to meaningful interaction*. Strategies:

Skeleton Screens Mirror final layout; avoid generic spinners that reset user mental model.

Incremental Data Hydration Stream primary entities first; defer secondary panels (analytics, recommendations).

Optimistic UI Reflect user intent immediately (button state, provisional row) with reconcile fallback if server rejects.

Edge Caching Cache static assets and token manifests at CDN; version tokens for instant theme rollbacks.

Resource Budgeting Define performance budgets (kb per route, API latency SLOs) and surface violations in build pipeline.

Instrument Web Vitals (LCP, INP, CLS) and map to structural IDs for precise remediation. Performance data should be browsable through an internal observability webbaselet.

14.11 Conclusion

A disciplined visual layer preserves semantic clarity while amplifying usability, trust, and brand presence. By keeping presentation orthogonal to structure, portals remain evolvable: new themes, devices, and interaction models can emerge without refactoring the underlying `WBOL` definitions. Visual excellence compounds: accessible, performant, token-driven interfaces reduce cognitive load and accelerate enterprise adoption.

WIP

Part IV

A Network of Portals

WIP

WIP

Introduction to Part IV: A Network of Portals

This part looks beyond individual portal development toward a network of interoperable portals. It explores how emerging capabilities—agentic AI, machine-readable access, shared standards, and API-first integration—could connect portals across organizational boundaries.

Topics include agentic user experiences and access, knowledge and reasoning, learning and operational models, standards for interoperability, and machine-to-machine business communication.

An evolving vision. This book is a continuous work in progress. Part IV gathers forward-looking ideas and experiments rather than defining a fixed delivery schedule. As proposals mature and are implemented, they are promoted to:

- Part II (The Framework) — when they affect the framework's languages, runtime, or tooling.
- Part III (The Portal) — when they shape methods, patterns, or models for portal design and delivery.

The chapter that follows, *Interconnected Portals* (§ 15), collects the most promising threads and defines criteria for promotion into the main body of the book.

WIP

WIP

Chapter 15

Interconnected Portals

This chapter explores the transformative potential of Spin the Web as it evolves beyond individual portal development toward intelligent, interconnected business ecosystems. We examine how AI agents can enhance portal functionality while envisioning a future where structured corporate portals enable seamless machine-to-machine communication across global business networks.

15.1 Agentic UX

- Contextual copilots embedded within areas/pages
- Task-oriented flows that orchestrate multiple contents and APIs
- Natural-language prompts mapped to parameterized actions

15.2 Agentic Access and Training-Oriented Rendering

A distinct **agentic** or **AI** role is useful not as a special case of the user interface, but as a first-class access mode for the portal itself. The regular human user sees the rendered page in the conventional sense: HTML, CSS, navigation, and the final interaction surface. An agent, by contrast, should receive the same page in a richer, machine-readable envelope that includes both the human-visible result and the declarative structure that produced it. In other words, an agentic user is not only shown *what* a regular user sees, but also *why* that result was assembled and *which* underlying WBOL fragment and metadata were used to produce it.

This is not a leak of implementation detail; it is a semantic contract. A portal that can expose its rendered HTML together with the relevant `WBOL` fragment, localized metadata, role constraints, connector bindings, and request context becomes self-describing to both humans and AI systems. The same portal can then serve multiple audiences simultaneously: a human reader receives a polished experience, while an AI agent receives the canonical structure of the content, its provenance, and the intent of the request that shaped the response. This distinction is essential in enterprise settings, where the business meaning of a page often matters more than the final presentation markup alone.

For Spin the Web, the natural pattern is therefore to define an explicit AI role whose view is a structured render contract. The contract should include:

- the rendered HTML or normalized view for human inspection;

WIP

- the relevant `WBOL` subtree that generated that view;
- contextual metadata describing the active page, area, content, and user role;
- the resolved connector and parameter set that informed the response;
- optional provenance information such as visibility rules, language selection, and request history.

Such a role is immediately valuable for retrieval, reasoning, and evaluation. An agent can ground its response in the declarative content model rather than guessing from a flattened HTML snippet. It can explain why a page was shown, what alternatives were available, and which business object or policy regime governed the response. The benefit is especially strong in training and benchmarking scenarios: the portal can expose paired examples of *intent* $\rightarrow$ *WBOL fragment* $\rightarrow$ *rendered HTML* $\rightarrow$ *metadata*, creating a transparent dataset for supervised learning, simulation, and policy testing.

This idea also aligns with the broader philosophy of Spin the Web. A portal is not only a set of screens; it is a machine-readable model of an organization, a process, and a governance environment. By exposing the WBOL fragment used to generate a page, the system turns the portal into an interpretable digital substrate for AI. The result is a portal that is simultaneously human-facing and machine-traceable—an essential foundation for trustworthy agentic systems, auditable automation, and future AI-assisted enterprise operations.

15.3 Knowledge and Reasoning

- Retrieval pipelines grounded in the webbase, logs, and domain docs
- Guardrails and policy evaluation layered over actions
- Transparent, auditable traces for enterprise adoption

15.4 Learning Loops

- Implicit feedback from usage, explicit ratings for outcomes
- Continuous improvement of layouts, queries, and flows
- Safe experimentation with feature flags and A/B variants

15.5 Operational Model

- Private inference endpoints and on-prem models for compliance
- Event streams for real-time adaptations and monitoring
- Cost controls, quotas, and quality-of-service tiers

15.6 Standards and Interop

- Schema-first contracts for tools and agent actions
- Portable traces and evaluation datasets
- Alignment with emerging agent frameworks and security best practices

WIP

15.7 The Digital Ecosystem Vision: Machine-to-Machine Business Communication

Envision a digital world where every enterprise maintains a structured portal built on declarative principles—a world where business communication transcends human interfaces to enable seamless machine-to-machine interaction. In this ecosystem, corporate portals would serve as standardized digital representations of organizations, with each portal exposing structured data through consistent `WBOL` definitions that machines can interpret and interact with automatically.

Consider the transformative potential: when suppliers, customers, partners, and service providers all maintain portals with standardized structures, business processes could become truly automated. A manufacturing enterprise's portal could automatically command supplier portals for inventory levels, pricing updates, and delivery schedules. Customer portals could seamlessly integrate with vendor systems for real-time order tracking, automated reordering, and predictive maintenance scheduling. Regulatory compliance could be achieved through automated data exchange between corporate portals and government systems.

This vision extends the concept of eBranding into eMachineReading—where organizations design their digital presence not only for human stakeholders but also for automated business processes. The hierarchical documentation principles embedded within `WBOL` structures would provide the semantic foundation necessary for machines to understand business context, process flows, and data relationships. Quality management metadata embedded in portal structures would enable automated verification, compliance checking, and performance monitoring across entire business networks.

The Spin the Web framework's emphasis on declarative languages and embedded documentation makes this vision achievable. When every business decision, process, and data element is described through structured `keywords` and `description` attributes, the resulting portals become self-documenting APIs that both humans and machines can navigate with equal effectiveness. This represents a paradigm shift from today's fragmented digital business landscape toward an interconnected ecosystem where organizational boundaries become permeable to automated business intelligence while maintaining security and appropriate access controls.

Such a digital ecosystem would fundamentally reshape how businesses discover, evaluate, and engage with one another, creating unprecedented opportunities for efficiency, innovation, and global economic integration through structured digital representation.

15.8 Closing Thoughts

The unification brought about by `WBOL` and modern AI has profound consequences for the future of digital ecosystems:

- **Semantic Interoperability:** `WBOL` provides standardized, machine-readable descriptions of web resources. AI systems can leverage this structure to understand, reason about, and manipulate web content, enabling automation and intelligent integration across platforms.

- **Automated Reasoning and Decision Making:** AI agents can use WBOL's structured data to perform complex reasoning, automate workflows, and make context-aware decisions, resulting in smarter web applications that adapt to user needs and business environments.
- **Accelerated Innovation:** Developers and organizations can build new tools and services more rapidly, as AI can interpret and act on WBOL-described resources without manual intervention, reducing development time and errors.
- **Enhanced Discoverability and Personalization:** AI systems can use WBOL metadata to better understand user intent and preferences, enabling more accurate search, recommendation, and personalization features.
- **Cross-Domain Integration:** The modularity of WBOL and the generalization capabilities of AI make it easier to connect disparate systems, connector, and services, fostering a unified and intelligent web ecosystem.

In summary, the synergy between WBOL and AI transforms the web from a collection of static resources into a dynamic, intelligent, and interoperable environment, driving new possibilities for automation, personalization, and innovation.

15.9 API-First Enterprise Software: WBOL as Universal UI

Looking forward, the Project actively advocates for enterprise software vendors to provide robust, well-documented APIs capable of managing all aspects of their software. This is essential for global adoption of the API-first paradigm: organizations expose business processes, data, and operations through APIs—REST, GraphQL, or other standards—while WBOL acts as the universal UI layer, consuming these APIs to build flexible, unified portals.

The Project's Position: For Spin the Web to reach its full potential, enterprise software houses must offer comprehensive APIs for their products. These APIs should cover all major business functions, data access, and operational controls, enabling WBOL to consume and orchestrate them in portal UIs. This advocacy is essential for:

- Modernizing legacy and monolithic systems without rewriting core logic
- Integrating diverse platforms into unified, role-based user experiences
- Accelerating portal development and deployment
- Future-proofing organizations against backend migrations or upgrades
- Enabling machine-to-machine business communication and automation

In this paradigm, WBOL orchestrates UI, navigation, and user journeys, while all backend interactions—authentication, business rules, data queries—are handled via API calls. This separation of concerns supports agile development, scalability, and global adoption. As more enterprise systems adopt API-first strategies, WBOL can unify them, delivering consistent, brand-aligned experiences for both human and machine users.

WIP

Crucially, WBOL can interact with any enterprise software—provided the data is made accessible—using a uniform paradigm: data is searched, the search result is a list, and the items in the list can be explored. This means that on a single webpage, different connectors (from multiple systems) can be accessed and presented as if they were managed by a single unified software. This capability opens the full universe of eBranding: organizations can design digital experiences that seamlessly blend data and functionality from diverse platforms, delivering a coherent brand identity and user journey across all business domains.

Intelligent agents enhance the portal experience rather than replace it. WBLL and WBOL remain the foundation, while agents act as advanced collaborators—able to read, write, and reason across the webbase to accelerate meaningful work and unlock new possibilities for automation and insight.

WIP

WIP

Appendices

WIP

WIP

Appendix A

WBOL XML Schema Reference

This appendix collects the formal XML Schema (XSD) definitions for the main WBOL element types used in Spin the Web. These definitions provide the canonical, validated structure for webbases, areas, pages, and content elements. The full schema is published at `https://spintheweb.org/schemas/wbol.xsd`.

A.1 Design Rationale

WBOL is deliberately expressed as an XML Schema rather than a data-interchange-only format. Three requirements drove this choice:

Referential integrity A webbase is a graph of cross-referencing GUIDs: a webbase's `homepage` must resolve to an actual `page`; an `area`'s or `webbaselet`'s `mainpage` must resolve to a `page` within scope; a `shortcut`'s `target` and every `option`'s `target` must resolve to a navigable element; every role referenced in a `visibility` block must be declared in the webbase's `roles`. XSD's `xs:key` and `xs:keyref` express and validate all of these constraints declaratively, something a plain data format cannot do on its own.

Mixed, localized content Names, keywords, descriptions, and documentation are collections of `text` elements distinguished by `xml:lang`, and some (like `documentation`) carry inline, mixed markup. XML's mixed-content model handles this naturally.

Composable namespaces *webbaselet*s are designed to be authored independently and imported into a larger *webbase*. XML namespaces and qualified element names keep that composition unambiguous.

At runtime, the *Web Spinner* parses this XML into an optimized in-memory object graph (see § 9). The XML document is the durable source of truth; the in-memory representation is a runtime implementation detail, not a second schema.

A.2 Webbase (`webbase`)

The root element of a complete portal. Requires exactly one `webbase` per document.

Attributes

`guid` (required) Unique identifier for the webbase, matching pattern `w[0-9A-Za-z]+`.

WIP

homepage (required) GUID of the page that serves as the portal's landing page.
protocol (optional, default https://) One of http:// or https://.
defaultLanguage (required) An xs:language tag (e.g., en, it).

Child Elements

connectors (optional) One or more connector definitions (id, queryLanguage, connection-string).
roles (required) At least the seven mandatory preset roles: root, administrator, guest, user, developer, leaddeveloper, seo, plus any custom roles.
name (required) Localized display name (see §A.7).
documentation (optional) Free-form, localized, mixed-content documentation.
visibility (optional) Role-based visibility rules (see §A.8).
children (required) Any mix of area, webbaselet, page, content, and shortcut elements.

```
<?xml version="1.0" encoding="UTF-8"?>
<webbase xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="w2FYn1HghFMNRz8sX5s32YP" homepage="p41eZz1dU5ZxBafbmZeyQEB"
    protocol="https://" defaultLanguage="en">
  <roles>
    <role id="root" /><role id="administrator" /><role id="guest" />
    <role id="user" /><role id="developer" /><role id="leaddeveloper" /><role id="seo" />
  </roles>
  <name>
    <text xml:lang="en" slug="portal">Corporate Portal</text>
  </name>
  <children>
    <page guid="p41eZz1dU5ZxBafbmZeyQEB" origin="w2FYn1HghFMNRz8sX5s32YP">
      <name><text xml:lang="en" slug="home">Home</text></name>
      <keywords><text xml:lang="en">home, welcome</text></keywords>
      <description><text xml:lang="en">Portal landing page</text></description>
    </page>
  </children>
</webbase>
```

Listing A.1: Minimal Webbase

A.3 Area (area) and Webbaselet (webbaselet)

area is a logical grouping of pages, analogous to a chapter in a book. webbaselet is structurally identical but marks the root of an independently authored, importable fragment (see § 8); a root webbaselet additionally requires a version attribute and omits origin.

Attributes

guid (required) Matches pattern a[0-9A-Za-z]+.

origin (required for nested area/webbaselet) GUID of the containing webbase or area.
mainpage (optional) GUID of the page that serves as this area's entry point.
src (optional) URI of an externally hosted webbaselet to import in place.
sequence (optional) Decimal ordering hint among siblings.
version (required on root webbaselet only) Independent version token for the fragment.

Child Elements name (required), visibility (optional), documentation (optional), children (optional; any mix of area, webbaselet, page, content, shortcut).

```
<webbaselet xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="aHRWebbaseletRoot1" version="1.0.0">
  <name><text xml:lang="en" slug="human-resources">Human Resources</text></name>
  <children>
    <page guid="pHRDirectory0001" origin="aHRWebbaseletRoot1">
      <name><text xml:lang="en" slug="directory">Employee Directory</text></name>
      <keywords><text xml:lang="en">staff, directory</text></keywords>
      <description><text xml:lang="en">Company employee directory</text></description>
    </page>
  </children>
</webbaselet>
```

Listing A.2: Webbaselet Root (importable fragment)

A.4 Page (page)

A concrete, navigable page. Restricts its children to content and shortcut elements.

Attributes guid (required, pattern p[0-9A-Za-z]+), origin (required), template (optional, default index.html), sequence (optional).

Child Elements name (required), keywords (required), description (required), visibility (optional), documentation (optional), children (optional, ordered content/shortcut).

A.5 Content (content) and Shortcut (shortcut)

content is an atomic, interactive data unit rendered within a page region; shortcut is a lightweight pointer that reuses an existing content elsewhere on the page.

Content Attributes guid (required, pattern c[0-9A-Za-z]+), origin (required), type (required; one of text, table, form, list, graph, plots, calendar, tree, tabs, accordion, menu, breadcrumbs, keypad, imagemap, map, serverside, clientside), section (optional layout region, e.g. main, aside-left, popup), sequence (optional), class (optional CSS hook).

Content Elements `name` (required), `query` (required; the `WBPL`-processed command, with an optional `connector` attribute), `parameters` (optional querystring payload), `layouts` (optional, localized `WBLL` templates), `documentation` (optional), `options` (optional; see below), `visibility` (optional).

Shortcut Attributes `guid`, `origin`, `target` (required, GUID of the `content` being reused), `section`, `sequence`, `class` (required).

```
<content xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="cEmployeeList00001" origin="pHRDirectory0001" type="table" section="main">
  <name><text xml:lang="en" slug="employees">Employees</text></name>
  <query connector="MSSQL">SELECT name, department FROM employees WHERE active = 1</query>
  <layouts><text xml:lang="en">name | department</text></layouts>
</content>
```

Listing A.3: Content with a data-bound query

A.6 Options (menus, tabs, accordions)

Any `content` may carry an `options` element containing zero or more `option` entries; this is how menu, tabs, and accordion content reference the elements they present.

```
<content xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="cMainMenu000001" origin="w2FYn1HghFMNRz8sX5s32YP" type="menu" section="header">
  <name><text xml:lang="en" slug="main-menu">Main Menu</text></name>
  <query>menu</query>
  <options>
    <option target="aHRWebbaseletRoot1">
      <label><text xml:lang="en">Human Resources</text></label>
      <parameters></parameters>
    </option>
  </options>
</content>
```

Listing A.4: Content with options (e.g., a menu)

Every `option`'s `target` must resolve, in scope, to a webbase, area, webbaselet, page, or content GUID; this is enforced by the schema's `optionTargetRef` keyref.

A.7 Localized Text (`name`, `keywords`, `description`, `documentation`)

Localizable fields are containers of one or more `text` elements, each qualified with `xml:lang` (IETF BCP 47, e.g. `en`, `en-US`, `it`). The `name/text` element additionally requires a `slug` attribute (pattern `[a-z0-9]+([.-][a-z0-9]+)*`) used to compose URL-friendly paths; `documentation/text` instead requires a `format` attribute (e.g., `text/plain`, `application/javascript`).

```
<name>
  <text xml:lang="en" slug="portal.example.local">Portal Example</text>
  <text xml:lang="it" slug="portale.esempio">Portale Esempio</text>
</name>
```

Listing A.5: Localized name with per-language slugs

A.8 Visibility (visibility)

Attaches role-based visibility rules to any element. Each role entry pairs a declared id with a visibility value: the literal true or false, or a call to a visibility function (pattern name()) resolved at request time to true, false, or null (meaning: inherit from the parent element). Every role id referenced here must already be declared in the webbase's roles element; the schema enforces this via the visibilityRoleRefs keyref.

```
<visibility>
  <role id="user" visibility="true" />
  <role id="guest" visibility="isPublished()" />
</visibility>
```

Listing A.6: Role-based visibility

WIP

WIP

Appendix B

WBLL Token Reference

This appendix provides a complete reference for WBLL tokens.

General syntax: `<token>('arg1[;arg2][;arg3]...')`

Brackets denote optional arguments, for example:

- No arguments: `e`
- One argument: `e('format')`
- Two arguments: `e('format;name')`
- Three arguments: `e('format;name;value')`

If you need to skip an argument, use an empty segment: e.g., `e(';username')` omits *format*.

Formatting note: the *format* argument applies only to numeric output in `e` and `f` (e.g., `€ #,##0.00`, `#,##0`, `0`). For non-numeric values it is ignored; inputs default to `text`.

Cursor movement policy: **editing tokens** (form controls such as `h`, `e`, `w`, `m`) advance the field cursor when the *name* is not specified; **non-editing tokens** advance only when they implicitly consume the active field *value*.

WIP

B.0.1 Choice Sources and Option Shape

Choice symbols share an option-data convention but may support different arities. After WBPL expands placeholders using the current record's context, the choice arguments describe either inline options or a connector name and query (`connector;query`). WBPL performs the substitution; the connector layer executes the query.

Inline option arity is 1, 2, or 3: one column supplies a value used as both value and label; two columns supply value and label; three columns supply value, label, and group. For a connector query, up to three result columns map to value, label, and group, and the number of returned columns determines the arity. The token descriptions below specify which arities each symbol supports.

Symbols	Presentation	Arities	Grouping
`c`, `r`	Checkbox or radio controls	1, 2, 3	Fieldsets
`d`, `D`	Single-select controls	1, 2, 3	Optgroups
`s`, `S`	Multiple-select controls	1, 2, 3	Optgroups
`i`, `n`	Non-interactive output	1, 2	Symbol-specific
`e`	Text input with datalist options	1	Not applicable

Grouped options are presented according to the symbol: select controls use `<optgroup>`, while `c` and `r` use `<fieldset>` groups. Other symbols render the same option data using their own presentation.

Example recordset (fields in order): `rent`, `username`, `city`.

rent	username	city
450.00	alice	Milan
525.00	bob	Paris
400.00	carol	Berlin

Assumptions for examples: unless stated otherwise, (1) examples evaluate the first row; (2) the field cursor starts at the first field (`rent`); (3) when currency output like "€ 1,234.50" appears, it is the formatted `rent` of row 1 using the pattern `€ #,##0.00`.

Token	`/* comment text */`
Description	Multiline comment. The interpreter ignores everything between `/*` and `*/`. Can span multiple lines. Produces no output and does **not** move the field cursor.
Example	

```
lf /* comment
   spanning
   lines */
\rl('UserName')f
```

```
<label>rent</label>450.00<br><label>UserName</label>alice
```

Token	`// comment text`
Description	Line comment. The interpreter ignores everything from `//` to the end of the line. Produces no output and does **not** move the field cursor.
Example	

```
t('Hello') // inline comment after code
\r
// full-line comment
t('World')
```

```
Hello<br>World
```

Token	`<`
Description	Moves the field cursor back by one position. Produces no output. If the cursor is already at the first field, this operation is a no-op.
Example	

```
>>><f
```

```
Milan
```

Token	`>`
Description	Advances the field cursor by one position. Produces no output. If the cursor is already at the last field, this operation is a no-op.
Example	

```
>f
```

```
alice
```

Token	`\A('attr="value" ...')`
Description	Like **\a**, but applies attributes to the *parent* structural element: the nearest enclosing `<tr>` (in table context) or `<li>` (in list context). Non-editing; produces no output and does **not** move the field cursor. Has effect only when inside a table row or list item context. The attributes are processed by the WBPL interpreter.

Example

```
// In a table row context (created by the table subtype)
\A('class="highlight"')e

// In a list item context (created by the list/menu subtype)
\A('data-role="user"')>e(';username')
```

```
<tr class="highlight">... <input type="text" name="rent" value="450.00"> ...</tr>
<li data-role="user">... <input type="text" name="username" value="alice"> ...</li>
```

Token	`\a('attr="value" ...')`
Description	Assigns HTML attributes to the most recently emitted element. Use immediately after a token that creates an element (e.g., `e`, `w`, `m`, `h`). Attributes are appended/merged; later attributes override earlier ones when duplicated. Non-editing; produces no output and does **not** move the field cursor. The attributes are processed by the WBPL interpreter.

Example

```
e\a('required style="color:red"')
>e(';username')\a('maxlength="20"')
```

```
<input type="text" name="rent" value="450.00" required style="color:red"><input
    ↪ type="text" name="username" value="alice" maxlength="20">
```

Token	`\r`
Description	Inserts a line break: ` `. Non-editing; produces no value output and does **not** advance the field cursor.
Example	

```
f\rf
```

```
450.00<br>alice
```

Token	`e('format;name;value;1;options...')` or `e('format;name;value;connector;query')`
Description	Renders an input element. Arguments are *positional but optional*. Defaults: *format* = `text`, *name* = active field name, *value* = active field value. For a text input, inline arity-1 options or a connector query returning one column may provide datalist suggestions; each suggestion is both its value and label. **Format options:** any HTML5 input type (`text`, `email`, `url`, `tel`, `number`, `date`, `datetime-local`, `time`, `month`, `week`, `color`, `range`, etc.); or a numeric/date-time formatting string (e.g., `#,##0.00` for decimals, `yyyy-MM-dd` for dates). Numeric patterns set `type="number"` with appropriate `step` attribute. **Cursor rule (editing):** advances when *name* is not specified; if *name* is provided, does not advance (even if *value* is omitted). **Non-interactive mode:** renders as **f** (formatted field value).
Example	

```
e('email;userEmail') // HTML5 email input type
e('date;startDate') // HTML5 date input
e('#,##0.00;rent;450.00') // Numeric format pattern -> type="number" step="0.01"
e // Defaults to type="text", uses active field
```

```
<input type="email" name="userEmail" value="450.00">
<input type="date" name="startDate" value="alice">
<input type="number" name="rent" value="450.00" step="0.01" inputmode="decimal">
<input type="text" name="rent" value="450.00">
```

Token	`f('format')`
Description	Renders the active field value at the cursor, optionally applying a *format*. The *format* argument is positional but optional (default: identity). **Cursor rule (non-editing):** advances because it consumes the active field value. **Formatting:** applies to numeric and date-time values (e.g., `#,##0.00` for decimals, `yyyy-MM-dd` for dates).
Example	

```
f('#,##0.00')\r // Numeric formatting of active field
f('yyyy-MM-dd')\r // Date formatting
f // No format (identity)
```

```
1,234.50<br>2025-11-30<br>alice
```

Token	`h('name[;value]')`
Description	Inserts an HTML input element of type hidden. Arguments are *positional but optional*. Defaults when omitted: *name* = active field name, *value* = active field value. **Cursor rule (editing):** the cursor advances when *name* is not specified (e.g., just **h**); if *name* is provided, the cursor does not advance.
Example	

```
h
h('kind;area')
h('id')
```

```
<input type="hidden" name="rent" value="450.00"><input type="hidden" name="kind"
    ↪ value="area"><input type="hidden" name="id" value="alice">
```

Token	`j('code')`
Description	Inserts a JavaScript code block as `<script>code</script>`. If *code* is omitted, uses the active field value. Placeholders (e.g., `@@placeholder`) within *code* are automatically replaced with their values. Use `\@` to escape the `@` symbol if literal text is needed. **Cursor rule (non-editing):** advances only when *code* is empty (consuming active field value).

Example

```
// assuming @@rows = 3, active field value = "alert('Hello');"
j('function foo() { alert("what?"); }')
j('console.log("Rows:", @@rows)')
j('// Email: user\@example.com')
j>
```

```
<script>function foo() { alert("what?"); }</script>
<script>console.log("Rows:", 3)</script>
<script>// Email: user@example.com</script>
<script>alert('Hello');</script>
```

Token	`k('name[;value]')`
Description	Sets a session variable. Arguments are *positional but optional*. Defaults: *name* = active field name, *value* = active field value. Produces no output. **Cursor rule (non-editing):** advances only when it implicitly uses the active field *value* (i.e., when *value* is omitted). If *value* is provided, the cursor does not advance.

Example

```
k('role;admin')
k
```

Token	`l('id[;text]')`
Description	Renders a label element *as a sibling* (not wrapping) to the next input element: `<label for="<id>"><text></label>`. The `for` attribute references the next input's `id`. Arguments: *id* (optional, defaults to auto-generated ID), *text* (optional, defaults to active field name or value). **Cursor rule (non-editing):** does not advance. **Note:** Use uppercase **L** to wrap the next input inside the label.
Example	

```
l('uname;Username:')e('username')
```

```
<label for="uname">Username:</label><input type="text" name="username" id="uname"
    ↪ value="450.00">
```

Token	`L('text')`
Description	Renders a label element that *wraps* the next input element: `<label><text> <input...></label>`. The *text* argument is optional (default = active field value or empty). Unlike lowercase **l**, this creates a label without `for` attribute and contains the input. **Cursor rule (non-editing):** does not advance.
Example	

```
L('Username:')e('username')
```

```
<label>Username: <input type="text" name="username" value="450.00"></label>
```

Token	`m('format[;name][;value]')`
Description	Renders a multiline input. Arguments are *positional but optional*. **Format modes:** empty or `textarea` = plain `<textarea>`; `wysiwyg` = Summernote WYSIWYG editor; language code (`javascript`, `html`, `css`, `bash`, etc.) = Ace code editor with syntax highlighting. Defaults: *format* = textarea, *name* = active field name, *value* = active field value. **Cursor rule (editing):** advances when *name* is not specified; if *name* is provided, does not advance. **Non-interactive mode:** renders as **f** (formatted field value).
Example	

```
m(';comments;Hello') // Plain textarea
m('wysiwyg;description') // Summernote editor
m('javascript;code;console.log("test")') // Ace editor with JavaScript syntax
```

```
<textarea name="comments">Hello</textarea>
<textarea id="..." name="description">alice</textarea><script>...</script>
<div id="..." class="stwCodeeditor">...</div><textarea id="..." name="code"
    ↪ style="display:none">console.log("test")</textarea><script>...</script>
```

Token	`\s('attr="value" ...')`
Description	Sets content-level attributes: `caption`, `header`, `footer`, `key`, `visible`, `enabled`, `disabled`, `nodata`. Non-editing; does not move the field cursor. Multiple calls accumulate; later values override earlier ones for the same key.
Example	

```
// table subtype
\s('caption="Users" header="Found: @@rows" key="fId"') l f l f l f
```

```
<table data-key="fId">
  <caption>Users</caption>
  <thead>Found: 3</thead>
  <tbody>
    <tr>
      <th>rent</th><td>450.00</td>
      <th>username</th><td>alice</td>
      <th>city</th><td>Milan</td>
    </tr>
    ...
  </tbody>
</table>
```

Token	`t('text')`
Description	Inserts the given text string into the response flow at the current position. Non-editing; does not move the field cursor.

Example

```
t('Hello World!')
```

```
Hello World!
```

Token	`w('name[;value]')`
Description	Renders a password input element: `<input type="password" name="<name>" value="<value>">`. Arguments are *positional but optional*. Defaults: *name* = active field name, *value* = active field value. **Cursor rule (editing):** advances when *name* is not specified; if *name* is provided, does not advance. *Note:* some browsers ignore preset password values.

Example

```
w('pwd;secret')\rw\rw(';password')
```

```
<input type="password" name="pwd" value="secret"><br><input type="password"
    ↪ name="rent" value="450.00"><br><input type="password" name="username"
    ↪ value="password">
```

Token	`a('url')p('name[;value]')t('text')`
Description	Renders an anchor element: `<a href="url?params">text</a>`. The *url* argument is optional (default = active field value). Use **p()** tokens to append query parameters; use **t()** or another display token for link text. **Cursor rule (non-editing):** advances only if *url* is empty (consuming active field value). **Note:** Use uppercase **A** to open link in new tab.

Example

```
a('/users')p('id;@@userId')t('View User')
a>t('Link from field')
```

```
<a href="/users?id=123">View User</a>
<a href="450.00">Link from field</a>
```

Token	`A('url')p('name[;value]')t('text')`
Description	Renders an anchor element with `target="_blank"`: `<a href="url?params" target="_blank">text</a>`. Same as lowercase **a** but opens in a new tab/window. **Cursor rule (non-editing):** advances only if *url* is empty.
Example	

```
A('https://example.com')t('External Link')
```

```
<a href="https://example.com" target="_blank">External Link</a>
```

Token	`p('name[;value]')`
Description	Appends a query parameter to the preceding **a**, **A**, **b**, or **o** token. Arguments: *name* (required), *value* (optional, defaults to active field value or placeholder if `@@name`). Does not produce output directly; modifies the URL/href of the parent element. **Cursor rule (non-editing):** advances only when *value* is empty (consuming active field value).
Example	See examples for **a**, **b**, **o** tokens.

Token	`b('url;action[;environment;args...]')p('name[;value]')t('text')`
Description	Defines a server-side form action and its post-action destination. The first argument is the destination URL (`.` means the current URL); the second is the action (for example, `stwfilter`, `stwsearch`, `stwinsert`, `stwupdate`, `stwdelete`, `stwsubmit`, `stwlogon`, `stwlogoff`, or `stwpwdreset`). Remaining arguments are positional and action-specific. An *environment* identifies the dataspace in which the operation runs, such as a configured database, shell, or API connector. **p()** adds parameters to the destination URL; **t()** sets the button text. **Cursor rule (non-editing):** does not advance.
Request flow	Search and filter submit form values as GET requests. Insert, update, delete, submit, and authentication actions execute server-side using PUT, PATCH, DELETE, or POST as appropriate, then return a redirect so the destination is loaded with GET (Post/Redirect/Get).
Example	

```
b('.;stwfilter')t('Filter')
b('.;stwsearch')t('Search')
b('/customer;stwupdate;erp;select * from tCustomers where
    ↪ fId='@@fId'')p('fId;@@fId')t('Save')
b('/customers;stwsubmit;erp;exec spDoStuff '@@fid', '@@fname' ')t('Run')
b('/dashboard;stwlogon;@@user;@@password')t('Log on')
b('/;stwlogoff')t('Log off')
b('.;stwpwdreset;@@old;@@new1;@@new2')t('Change password')
```

Token	`c('name;value;arity;options...')` or `c('name;value;connector;query')`
Description	Renders checkbox input(s) from the shared choice data. Inline options use arity 1 (value also supplies the label), 2 (value and label), or 3 (value, label, and group). Alternatively, the choice source may specify a connector and query (`connector;query`); after WBPL expansion, the result's one to three columns determine the arity. Arity 3 groups options into fieldsets. Arguments: *name* (optional, defaults to the active field), *value* (optional, defaults to the active field value), then the choice source. **Cursor rule (editing):** advances when *name* is not specified.

Example

```
c('tags;;mysqldb;SELECT id,name FROM tags') // Connector (2 columns -> value and
    ↪ label)
c('agree;;1;yes;no;maybe') // Arity 1: each option is its own value and label
c('choice;;2;1;Option A;2;Option B') // Arity 2: value and label
```

```
<fieldset class="stwGroup"><label><input type="checkbox" name="tags" value="1">Tag
    ↪ One</label>...</fieldset>
<fieldset class="stwGroup"><label><input type="checkbox" name="agree"
    ↪ value="yes">yes</label>...</fieldset>
<fieldset class="stwGroup"><label><input type="checkbox" name="choice"
    ↪ value="1">Option A</label>...</fieldset>
```

Token	`r('name;value;arity;options...')` or `r('name;value;connector;query')`
Description	Renders radio button input(s) from the shared choice data. Inline options use arity 1 (value also supplies the label), 2 (value and label), or 3 (value, label, and group). Alternatively, the choice source may specify a connector and query (`connector;query`); after WBPL expansion, the result's one to three columns determine the arity. Arity 3 groups options into fieldsets. Arguments: *name* (optional, defaults to the active field), *value* (optional, defaults to the active field value), then the choice source. **Cursor rule (editing):** advances when *name* is not specified.

Example

```
r('gender;;1;male;female;other')
```

```
<fieldset class="stwGroup"><label><input type="radio" name="gender"
    ↪ value="male">male</label>...</fieldset>
```

Token	`d('name[;value];arity;options...')` or `d('name[;value];connector;query')` (same forms for `D`)
Description	Renders a single-select control from the shared choice data. **Lowercase d** allows an empty selection; **uppercase D** does not add an empty option. Inline choices use arity 1 (value also supplies the label), 2 (value and label), or 3 (value, label, and group); arity 3 renders groups as `<optgroup>` elements. Alternatively, the choice source may specify a connector and query (`connector;query`); after WBPL expansion, the result's one to three columns determine the arity. Arguments: *name* (optional, defaults to the active field), *value* (optional, defaults to the active field value), then the choice source. **Cursor rule (editing):** advances when *name* is not specified.

Example

```
d('country;;mysqldb;SELECT id,name FROM countries') // Connector (2 columns: value
    ↪ and label)
d('city;;1;Milan;Paris;Berlin') // Simple list
D('status;;2;1;Active;2;Inactive') // Key-value pairs
```

```
<select name="country"><option></option><option value="1">Italy</option>...</select>
<select name="city"><option></option><option value="Milan">Milan</option>...</select>
<select name="status"><option value="1">Active</option><option
    ↪ value="2">Inactive</option></select>
```

Token	`s('name[;value];arity;options...')` or `s('name[;value];connector;query')` (same forms for `S`)
Description	Renders a multiple-select control from the shared choice data. **Lowercase s** includes an empty option; **uppercase S** does not. Inline choices use arity 1 (value also supplies the label), 2 (value and label), or 3 (value, label, and group); arity 3 renders groups as `<optgroup>` elements. Alternatively, the choice source may specify a connector and query (`connector;query`); after WBPL expansion, the result's one to three columns determine the arity. Arguments: *name* (optional, defaults to the active field), *value* (optional, defaults to the active field value), then the choice source. **Cursor rule (editing):** advances when *name* is not specified.

Example

```
s('tags;;1;tag1;tag2;tag3')
```

```
<select name="tags" multiple><option></option><option
    ↪ value="tag1">tag1</option>...</select>
```

Token	`u`
Description	Renders a file upload input: `<input type="file">`. Uses active field name. **Cursor rule (non-editing):** does not advance.
Example	

```
u\a('accept="image/*"')
```

```
<input type="file" accept="image/*">
```

Token	`i('URL')` or `i('arity;options...')` or `i('connector;query')`
Description	Renders an image. A direct URL may be supplied, or choice data may map the current field value to an image URL. Inline choices support arity 1 (indexed image URLs) or 2 (value and image URL). Alternatively, a connector name and query (`connector;query`) may provide one or two result columns after WBPL expansion. **Cursor rule (non-editing):** advances when the current field value is used implicitly.
Example	

```
// assuming field value = 2
i('/img/logo.png')
i('1;img1.png;img2.png;img3.png')
i('2;1;img-one.png;2;img-two.png')
```

```
<img src="/img/logo.png">
<img src="img2.png">
<img src="img-two.png">
```

Token	`n('arity;options...')` or `n('connector;query')`
Description	Displays the label corresponding to the current value as plain text. Inline choices use arity 1 (value also supplies the label) or 2 (value and label). Alternatively, the choice source may specify a connector and query (`connector;query`); after WBPL expansion, one or two result columns determine the arity. **Cursor rule (non-editing):** advances when the current field value is used implicitly.

Example

```
// field value = 2
n('1;Low;Medium;High')
n('2;1;Active;2;Inactive;3;Pending')
```

```
Medium
Inactive
```

Token	`o('url')p('name[;value]')`
Description	Renders an article container element with auto-generated ID and optional href built from *url* and parameters. **Cursor rule (non-editing):** does not advance.

Example

```
o('/item')p('id')
```

```
<article id="..." href="/item?id=450.00"></article>
```

Token	`v('expression')`
Description	Evaluates a JavaScript expression at compile time and inlines the result. **Warning:** executes at layout compilation time, not render time. Use with caution. **Cursor rule (non-editing):** does not advance.

Example

```
v('new Date().getFullYear()')
```

```
2025
```

Token	`\n`
Description	Inserts a line break: ` `. Same as **\r**. Non-editing; does not advance the field cursor.
Example	

```
t('Line 1')\nt('Line 2')
```

```
Line 1<br>Line 2
```

Token	**\t**
Description	Inserts an empty label element: `<label></label>`. Useful for layout spacing in flex forms. Non-editing; does not advance the field cursor.
Example	

```
\tL('Name:')e
```

```
<label></label><label>Name: <input type="text" name="rent" value="450.00"></label>
```

Token	`x('width')`
Description	Renders a horizontal bar element for plots and visualizations: `<span style="display:inline-block; width:<width>px; height:1rem;"></span>`. The *width* argument (in pixels) is optional; default = active field value. **Cursor rule (non-editing):** advances when *width* is not specified (consuming active field value).
Example	

```
// assuming active field value = 250
x('100')
x
```

```
<span style="display:inline-block; width:100px; height:1rem;"></span>
<span style="display:inline-block; width:250px; height:1rem;"></span>
```

Token	`y('height')`
Description	Renders a vertical bar element for plots and visualizations: `<span style="display:inline-block; width:1rem; height:<height>px;"></span>`. The *height* argument (in pixels) is optional; default = active field value. **Cursor rule (non-editing):** advances when *height* is not specified (consuming active field value).
Example	

```
// assuming active field value = 200
y('150')
y
```

```
<span style="display:inline-block; width:1rem; height:150px;"></span>
<span style="display:inline-block; width:1rem; height:200px;"></span>
```

Token	`z`
Description	Reserved token; currently no-op (produces no output). May be used for future extensions. Non-editing; does not advance the field cursor.
Example	No output.

WIP

Appendix C

Webbase Placeholders Language (WBPL)

This appendix explains the key concepts and usage patterns for the Webbase Placeholders Language (WBPL), the lightweight templating layer used by Spin the Web to build data-driven commands and queries.

C.1 What WBPL Is

WBPL is a placeholder-driven template language for generating dynamic text safely and predictably. It is designed to:

- substitute values into templates,
- include or omit optional fragments based on supplied parameters,
- preserve syntax correctness for target languages like SQL, JSON, and HTML,
- avoid injection risks by escaping quoted values automatically.

C.2 Core Syntax

A WBPL template contains placeholders marked by the `@` symbol. The most common forms are:

- `@name` — simple substitution of the value for `name`. A single `@` placeholder resolves first from cookies, then from URL querystring parameters.
- `@@fieldname` — double-`@` substitution. This can resolve from a query field, a session variable, an application variable shared across sessions, or an HTTP header such as `@@REQUEST_METHOD`.
- `'@name'` or `"@name"` — quoted substitution; the engine quotes and escapes the inserted value.
- `'@list'...` — list expansion; converts a comma-separated string into a quoted list for use in SQL `IN` clauses. If the @list is wrapped in quotes, the quotes are preserved around each item in the list. For example, `IN ('@list'...)` with `list=one,two,three` becomes `IN ('one','two','three')`.

C.3 Conditional Fragments

WBPL supports optional text blocks that are included only when their placeholders resolve to non-empty values.

WIP

C.3.1 Curly braces

Text inside curly braces is kept only if at least one placeholder in the block is replaced successfully. If all placeholders are empty or missing, the entire block is removed.

C.3.2 Square brackets

Square brackets work like curly braces, but they also clean up one adjacent keyword when the block is removed. WBPL first checks for a removable word immediately after the closing bracket; if none is found, it then checks for a word immediately before the opening bracket. This is especially useful for SQL clauses such as `AND` or `OR`.

Example

```
SELECT * FROM users WHERE 1=1 AND [status = '@status']
```

Listing C.1: WBPL conditional fragment with SQL cleanup

If `status` is not provided, the whole square-bracketed expression is removed along with the preceding `AND`. The final query becomes:

```
SELECT * FROM users WHERE 1=1
```

C.4 Escaping and Safety

WBPL treats an escaped at-sign () as a literal character rather than a placeholder marker. Quoted placeholders automatically escape internal quotes and special characters appropriate for the target text context.

C.5 Integration Patterns

WBPL is frequently used inside `WBOL` content elements where a command or query needs runtime data. Typical placeholder value sources include:

1. URL querystring values,
2. cookies
3. session and user context,
4. global system variables,
5. HTTP headers and device metadata.

C.6 Example Usage

C.6.1 Basic substitution

```
SELECT * FROM products WHERE sku = '@sku'
```

Listing C.2: Simple WBPL substitution

With `sku=ABC123`, the output becomes:

```
SELECT * FROM products WHERE sku = 'ABC123'
```

C.6.2 Optional conditions

```
SELECT * FROM orders WHERE 1=1 AND [customer_id = @customer_id] AND [status = '@status']
```

Listing C.3: Optional WHERE clauses with WBPL

If only `status=shipped` is provided, the rendered query becomes:

```
SELECT * FROM orders WHERE 1=1 AND status = 'shipped'
```

C.6.3 List expansion

```
SELECT * FROM shipments WHERE region IN ('@regions'...)
```

Listing C.4: WBPL list expansion for IN clauses

With `regions=us-east,eu-west`, this becomes:

```
SELECT * FROM shipments WHERE region IN ('us-east','eu-west')
```

C.7 Why WBPL Matters

WBPL makes dynamic portal behavior easier to author while keeping the underlying syntax safe. It separates data binding from query structure, enabling reusable templates that adapt to available inputs without producing broken or unsafe output.

C.8 Further Reading

For a fuller treatment of WBPL syntax, operators, and runtime semantics, see Chapter 6 in the main text.

WIP

Appendix D

Webbaselets: BPMS, PLM, and Ticketing

This appendix summarizes three foundational webbaselets that commonly ship with a Spin the Web deployment. Each is delivered as a standalone webbaselet (root `webbaselet` element) that can be imported into any Webbase, sharing common conventions for navigation, security, and data.

- Business Process Management System (BPMS)
- Presence and Leave Management (PLM)
- Ticketing (Service Desk)

All three follow the same patterns:

1. Pages expose task-oriented UI
2. A clear data model with well-known keys and relations
3. Role-based visibility and action authorization
4. Events and workflows that integrate across webbaselets

WIP

D.1 Common Design

Navigation. Each webbaselet registers under its own Area (e.g., slugs `bpms`, `plm`, `tickets`); pages include Dashboard, Browse/Detail, and Administration.

Security. Every action checks roles and ownership. Typical roles include: reader, contributor, approver, manager, and admin. Actions are logged.

Search and SEO. Content uses `keywords` and `description` attributes for in-context search. Lists expose filters and faceted navigation.

Auditability. All state transitions are captured with who/when/what; attachments preserved with versions.

Interoperability. Events are published as notifications that other webbaselets can subscribe to (e.g., Ticket created -> BPMS starts a triage workflow; Leave approved -> Ticket auto-closes).

D.1.1 Minimal Area Stub

A minimal root for each webbaselet as a `webbaselet` element:

```
<webbaselet xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="aBPMSRoot000000001" version="1.0.0">
  <name><text xml:lang="en" slug="bpms">BPMS</text></name>
</webbaselet>
```

Listing D.1: Minimal Webbaselet Root

D.2 Structured Classification for Webbaselets

To make webbaselets discoverable and governable across the ecosystem, the root `webbaselet` of each SHOULD declare a compact, structured *classification*. This is a proposed extension to the base `WBOL` XSD (Appendix A): a dedicated `classification` element, distinct from `name`/`visibility`/`documentation`, to avoid collisions with core elements. Engines MAY also surface these as indexed metadata for search.

D.2.1 Classification keys

Recommended fields and value ranges:

WIP

Field	Type	Purpose / Examples
purpose	enum	Primary intent: bpms, plm, ticketing, cms, directory, reporting, integration, admin.
domain	enum	Business area: hr, it, finance, sales, marketing, ops, legal, support, general.
capability	string[]	Features: workflow, approvals, forms, queueing, sla, search, analytics, files, notifications, calendar.
layer	enum	Architectural layer: ui, service, integration, data.
audience	string[]	Users: employees, managers, admins, agents, external.
criticality	enum	low, medium, high, critical.
maturity	enum	experimental, beta, stable, deprecated.
visibility	enum	public, authenticated, role-restricted.
compliance	string[]	gdpr, hipaa, sox, pci, iso27001, etc.
dataSensitivity	enum	public, internal, confidential, pii, phi.
i18n	string[]	Supported locales (BCP 47): e.g., ["en","it"].
engine	object	Runtime bounds: "min": "1.3.0", "max": "<2.0.0".
dependsOn	string[]	Other webbaselets by namespace and range, e.g., ["directory>=1.2", "notifications"].
imports	string[]	Subscribed events/exports (namespaced), e.g., ["bpms.task.completed"].
exports	string[]	Emitted events/components, e.g., ["tickets.created", "ui.widget:calendar"].
tags	string[]	Free-form keywords for discovery.

D.2.2 Example

BPMS classification on its root webbaselet:

```
<webbaselet xmlns="https://spintheweb.org/schemas/wbol.xsd"
    guid="aBPMSRoot000000001" version="1.0.0">
  <name><text xml:lang="en" slug="bpms">BPMS</text></name>
  <classification purpose="bpms" domain="hr" layer="ui"
      criticality="high" maturity="stable" visibility="authenticated"
      dataSensitivity="pii">
    <capability>workflow</capability>
    <capability>approvals</capability>
    <capability>forms</capability>
    <capability>sla</capability>
    <audience>employees</audience>
    <audience>managers</audience>
    <audience>admins</audience>
    <compliance>gdpr</compliance>
    <i18n>en</i18n>
    <i18n>it</i18n>
    <engine min="1.3.0" />
    <dependsOn>directory&gt;=1.1</dependsOn>
```

WIP

```
    <dependsOn>notifications</dependsOn>
    <imports>tickets.created</imports>
    <exports>bpms.task.created</exports>
    <exports>bpms.task.completed</exports>
    <tags>process</tags>
    <tags>tasks</tags>
    <tags>orchestration</tags>
  </classification>
</webbaselet>
```

Listing D.2: Webbaselet with classification

Notes

- Engines should index `classification` attributes/children for search and dependency checks.
- Recommending enumerated attribute values keeps catalogs consistent; use `tags` for additional nuance.
- Version ranges follow semantic versioning; omit `max` for open-ended support.

D.3 Ecosystem Webbaselet (Community Catalog)

The Spin the Web portal (see part III) includes an *Ecosystem* webbaselet that catalogs community-created webbaselets. Its purpose is to classify, make discoverable, and enable quality signals (rating/reviews) for webbaselets across the ecosystem. It builds directly on the structured classification in § D.2 and extends it with an opinionated, organization-based taxonomy.

D.3.1 Organization-based taxonomy

Classification aligns to common enterprise departments to aid discovery by function:

Domain	Examples
hr	onboarding, leave, compensation, training
it	service desk, change, assets, access management
finance	expenses, invoicing, budgeting, approvals
sales	leads, opportunities, quotes, forecasts
marketing	campaigns, content hub, events, assets
ops	facilities, fleet, logistics, maintenance
legal	contracts, policies, compliance
procurement	vendors, sourcing, purchase requests
support	knowledge base, ticket deflection, CSAT
rnd	requirements, roadmaps, experiments
product	releases, feature flags, feedback
security	incidents, awareness, audits
admin	directory, identity, governance
general	dashboards, search, navigation, utilities

These values map to `classification` attributes and inform facets in catalog pages.

D.3.2 Data model

Key entities managed by the Ecosystem webbaselet:

```
{
  "catalogItem": {
    "uuid": "eco-wbl-hr-directory",
    "namespace": "hr-directory",
    "name": {"en":"HR People Directory"},
    "summary": {"en": "Org-wide searchable people directory"},
    "class": {
      "purpose": "directory",
      "domain": "hr",
      "capability": ["search","profiles"],
      "tags": ["people","org","contact"]
    },
    "version": "1.2.0",
    "author": {"name":"Community Team","url":"https://spintheweb.org"},
    "links": {"repo":"https://...","docs":"https://...","demo":"https://..."},
    "status": "published"
  },
  "review": {
    "uuid": "rev-123",
    "item": "eco-wbl-hr-directory",
    "user": "u:alice",
    "stars": 5,
    "comment": "Great starter for HR portals",
    "createdAt": "2025-09-12T10:00:00Z"
  },
  "rating": { "item": "eco-wbl-hr-directory", "average": 4.6, "count": 28 }
}
```

Listing D.3: Ecosystem entities

D.3.3 Workflows

- Submission: contributor provides metadata, classification, and links; item enters *submitted* state.
- Review/Moderation: approvers validate classification, security notes, and licensing; states: *approved*, *rejected*, *changes-requested*.
- Publish/Deprecate: approved items are listed; subsequent versions can supersede; deprecated items remain searchable with badges.
- Rating/Reporting: authenticated users rate (1–5) and review; abuse reports trigger moderation.

D.3.4 Representative pages

- Catalog: faceted browse by `domain`, `purpose`, `capability`, and tags; sort by rating and freshness.
- Item Detail: metadata, installation notes, screenshots, version history, ratings, related items.
- Submit/Manage: guided submission, preview, and moderation queue (admin).

D.3.5 Ratings and quality signals

- 1–5 star ratings with weighted average; first-party installs may carry a *verified* badge.
- Anti-spam: one rating per account per version; optional cool-down windows; abuse reporting.
- Signals: popularity (installs), freshness (recent updates), completeness (docs, tests), compliance tags.

D.3.6 Integration

- Events: `ecosystem.item.published`, `ecosystem.item.updated`, `ecosystem.review.created`.
- Dependencies: Directory (profiles), Notifications, Search/Index.
- Portal linkage: featured items and curated collections surfaced on spintheweb.org (see part III).

D.4 BPMS Webbaselet

Purpose: model, execute, and monitor business processes with tasks, SLAs, and approvals.

D.4.1 Core Concepts

Process Named workflow definition with versioning
Instance Runtime execution of a Process
Task Unit of work assigned to a role/user
Event Signal that triggers transitions or external actions

D.4.2 Data Model

```
{
  "process": { "uuid": "proc-id", "name": {"en": "Onboarding"}, "version": 3, "stages":
    ↪ ["init","docs","it","done"] },
  "instance": { "uuid": "pi-123", "process": "proc-id", "stage": "docs", "state":
    ↪ "active", "assignees": ["hr:manager"], "due": "2025-09-30" },
  "task": { "uuid": "task-789", "instance": "pi-123", "type": "approve", "owner":
    ↪ "hr:manager", "status": "open", "slaHours": 48 },
  "event": { "kind": "task.completed", "ref": "task-789", "by": "hr:manager", "at":
    ↪ "2025-09-12T08:30:00Z" }
}
```

Listing D.4: BPMS entities

D.4.3 Representative Pages

- Dashboard: My Tasks, Overdue, SLA breaches
- Process Designer: stage/transition editor (admin)
- Instance Detail: timeline, attachments, comments

D.4.4 WBLL Snippet

```
\s('caption="My Tasks" key="taskId"')
lf l f l f // id, type, status
```

Listing D.5: My Tasks list (sketch)

D.5 PLM Webbaselet

Purpose: track presence, leave requests, balances, holidays, and approvals.

D.5.1 Data Model

```
{
  "calendar": { "year": 2025, "holidays": ["2025-01-01","2025-12-25"] },
  "balance": { "user": "u:alice", "year": 2025, "vacation": 15, "sick": 5 },
  "leave": { "uuid": "lv-42", "user": "u:alice", "from": "2025-09-15", "to": "2025-09-20",
    ↪ "type": "vacation", "status": "pending", "approver": "mgr:bob" }
}
```

Listing D.6: PLM entities

D.5.2 Representative Pages

- My Calendar: presence, requests, approvals
- Team Calendar: manager view, conflicts
- Balances: accrual, consumption, carryover

D.5.3 Events

Examples: `leave.requested`, `leave.approved`, `leave.rejected`. Ticketing can subscribe to create handover tickets; BPMS can trigger onboarding/offboarding.

D.6 Ticketing Webbaselet

Purpose: log, track, and resolve issues/requests with queues, priorities, and SLAs.

D.6.1 Data Model

```
{
```

```
  "ticket": { "uuid": "t-1001", "queue": "it", "kind": "incident", "priority": "high",
    ↪ "status": "open", "subject": "Laptop fan noisy", "requester": "u:carol",
    ↪ "assignee": "it:agent01" },
  "comment": { "uuid": "c-1", "ticket": "t-1001", "by": "u:carol", "when":
    ↪ "2025-09-12T09:00:00Z", "text": "Happens after 10min" },
  "sla": { "queue": "it", "kind": "incident", "responseHours": 4, "resolutionHours": 48 }
}
```

Listing D.7: Ticket entities

D.6.2 Representative Pages

- Submit Ticket: form with WBLL inputs, attachments
- My Tickets: list, filters, bulk actions
- Agent Console: triage, assign, merge, close, macros

D.6.3 Cross-Webbaselet Integrations

- BPMS: auto-create approval tasks for change requests
- PLM: auto-snooze tickets when requester is on leave
- Directory: enrich requester profile and permissions

D.7 Roles and Permissions

Role	Capabilities
reader	browse lists and details
contributor	create/update own domain entities
approver	review/approve pending items
manager	oversee queues/teams, reports
admin	configure processes, queues, calendars

D.8 Notes on Deployment

Each webbaselet can be versioned and deployed independently. Use namespace scoping, feature flags, and migration scripts for data evolution. Provide sample datasets for demos and QA.

WIP

Appendix E

Webbaselet Use Cases

This appendix illustrates typical use cases for webbaselets: small, self-contained web applications that used to live in spreadsheets, ad-hoc scripts, or custom line-of-business tools. The goal is not to replace existing systems, but to harmonize them: software vendors expose stable APIs, and UI integrators compose webbaselets that sit on top of those APIs.

Despite the name, webbaselets are not necessarily simple or small. At one end of the spectrum they can model a single form or report; at the other end they can embody a complete ERP, CRM, or vertical line-of-business solution. The key distinction is not size, but the fact that they are modular, API-driven, and composable.

WIP

E.1 Team Task Board

Before: Spreadsheet To-Do List

Many teams maintain a shared spreadsheet to track tasks: columns for assignee, status, due date, and comments. Over time, these files proliferate ("Q1_tasks_final_v7.xlsx"), access control becomes informal, and simple workflows (e.g. notifications, filtering by user) require manual effort.

After: Task Board Webbaselet

A task board webbaselet connects to a tasks API (or a simple JSON connector) and offers:

- Column-based views (e.g. *Backlog*, *In Progress*, *Done*).
- Per-user filters and saved views.
- Inline editing, without opening or emailing files.
- Optional integration with issue trackers or chat tools.

The underlying logic (task model, permissions, notifications) remains in the core product; the webbaselet focuses on UI and composition.

E.2 Inventory and Stock Tracking

Before: Warehouse Spreadsheet

Small warehouses or teams often track inventory in a spreadsheet: SKU, description, location, stock level, reorder threshold. There is no single source of truth, concurrent edits conflict, and basic queries ("show low stock by location") require manual filtering.

After: Inventory Webbaselet

An inventory webbaselet consumes an inventory API (or database view) and provides:

- Search and filtering by SKU, category, or location.
- Highlighting of low-stock and out-of-stock items.
- Simple forms for stock adjustments and movements.
- Read-only views for stakeholders who should not edit data.

The stock logic and validation stay in the backend; the webbaselet offers a focused UI that can be embedded in portals or dashboards.

E.3 Event Registration and Attendance

Before: Sign-up Forms + CSV Exports

Event organizers often rely on generic form builders that export CSV files. They manually merge lists, send reminders, and track attendance in a spreadsheet with ad-hoc columns.

After: Registration Webbaselet

A registration webbaselet connects to an events/participants API and enables:

- Branded sign-up forms backed by a structured data model.
- Live views of registration counts per session or ticket type.
- Check-in views optimized for tablets or mobile devices.
- Export to downstream systems (CRM, email marketing) via APIs.

Again, business rules (capacity limits, ticket types, pricing) live in the backend. The webbaselet tailors the UI for a specific event or organizer.

E.4 Lightweight CRM and Contact Lists

Before: Contact Spreadsheet

Sales or support teams maintain contact lists in spreadsheets: name, company, email, notes, last-contact date. Different teams fork their own copies, and no one has a consistent, up-to-date view of customer interactions.

After: Contact Webbaselet

A contact webbaselet integrates with a CRM or customer API and offers:

- Unified views of contacts with filters for segment, owner, or lifecycle stage.

- Inline note taking and tagging.
- Contextual links to external systems (support tickets, billing, product usage dashboards).

The CRM remains the system of record; the webbaselet is a customized lens focused on one team's workflow.

E.5 Timesheets and Time Tracking

Before: Weekly Timesheet Templates

Consulting and development teams often email around weekly timesheet templates as spreadsheets. Employees fill them in, send them back, and someone consolidates the data manually for payroll or billing.

After: Timesheet Webbaselet

A timesheet webbaselet talks to a time-tracking or billing API and provides:

- Simple weekly views per person, project, or client.
- Validation rules delegated to the backend (e.g. max hours, required fields).
- Role-specific views (employee, manager, finance).
- Export or synchronization to accounting systems.

The core product owns timesheet logic and compliance; the webbaselet delivers a focused UI that can evolve independently.

E.6 Guest Registration via QR Code

Before: Paper Forms and Ad-hoc Apps

Guest registration is often handled with paper sign-in sheets, generic form builders, or improvised tablet apps. Data ends up scattered across mailboxes and CSV exports; hosts lack a live view of who has arrived, and compliance requirements (e.g. GDPR consent, visitor badges, emergency lists) are handled informally.

After: Guest Registration Webbaselet

A guest registration webbaselet focuses entirely on the arrival experience and visitor lifecycle:

- Pre-registration links sent by email, each with a unique QR code.
- A check-in view that scans the QR code and confirms arrival.
- Dynamic questions per visit type (e.g. NDA, health & safety).
- Instant notifications to hosts and reception staff.
- Secure integration with identity systems and visitor logs via APIs.

The underlying policies (who may enter, retention times, badge rules) remain in the core system; the webbaselet specializes the UI around QR-code–based registration and check-in.

E.7 Employee Timesheets

Before: Spreadsheet-based Timesheets

In many organizations, employees track working hours in shared spreadsheets or emailed templates. Each week, files are copied, renamed, and manually consolidated for payroll and billing. There is no single source of truth, approval workflows are ad hoc, and basic checks (e.g. missing entries, overtime rules) are performed by hand.

After: Timesheet Webbaselet

A timesheet webbaselet is dedicated to capturing, reviewing, and exporting working hours:

- Weekly and monthly views per employee, project, or client.
- Validation of entries (required fields, maximum hours, holidays) delegated to backend policies.
- Manager approval flows (pending, approved, rejected) surfaced as simple UI states.
- Role-specific perspectives for employees, managers, and finance.
- API-based integration with HR, payroll, and invoicing systems.

The core HR or ERP system remains the system of record; the webbaselet provides a focused, evolvable UI for time capture and approval, instead of relying on fragile spreadsheet processes.

E.8 Human Resources and Welfare Management

Before: Fragmented HR and Welfare Processes

HR and welfare programs are often split across multiple tools: spreadsheets for benefits eligibility, email threads for requests, PDF forms for reimbursements, and separate portals for leave, training, and well-being initiatives. Employees struggle to find the right entry point, HR staff re-key data across systems, and visibility on participation and costs is limited.

After: HR and Welfare Webbaselet

An HR and welfare management webbaselet unifies access to policies, requests, and status tracking:

- A single entry point where employees can view benefits, submit requests (e.g. childcare, wellness, commuting), and track approvals.
- Dynamic workflows based on role, location, and employment type, driven by backend rules.
- Integration with HRIS, payroll, and benefits providers via APIs, avoiding manual data transfer.
- Aggregated dashboards for HR to monitor utilization, budget impact, and compliance indicators.

The core HR and payroll systems keep ownership of contracts, eligibility, and calculations; the webbaselet orchestrates a coherent, employee-centric UI for welfare management at scale.

WIP

These examples illustrate a recurring pattern: existing spreadsheets and ad-hoc tools reveal stable data structures and workflows. Webbaselets capture those patterns as reusable, composable UI pieces that sit on top of well-defined APIs, harmonizing rather than replacing the underlying systems.

WIP

WIP

Bibliography

[1] Thomas Allweyer. *BPMN 2.0: Introduction to the Standard for Business Process Modeling*. BoD–Books on Demand, 2 edition, 2016.

[2] Tim Berners-Lee, Larry Masinter, and Mark McCahill. Universal resource identifiers in www. *Request for Comments*, 1630, 1994.

[3] Marlon Dumas, Marcello La Rosa, Jan Mendling, and Hajo A. Reijers. *Fundamentals of Business Process Management*. Springer, 2 edition, 2018.

[4] Roy Thomas Fielding. *Architectural styles and the design of network-based software architectures*. University of California, Irvine, 2000.

[5] Jakob Freund and Bernd R"ucker. *Real-Life BPMN: Using BPMN 2.0 to Analyze, Improve, and Automate Processes in Your Company*. Camunda Services GmbH, 2 edition, 2014.

[6] Erich Gamma, Richard Helm, Ralph Johnson, and John Vlissides. *Design patterns: elements of reusable object-oriented software*. Addison-Wesley, 1994.

[7] Sam Newman. *Building microservices: designing fine-grained systems*. O'Reilly Media, 2015.

[8] Natalya F. Noy and Deborah L. McGuinness. Ontology development 101: A guide to creating your first ontology. Technical Report KSL-01-05, Stanford University, Knowledge Systems Laboratory, 2001.

[9] Object Management Group. Business process model and notation (bpmn), version 2.0.2. Technical Report formal/13-12-09, Object Management Group, January 2014. Standard specification.

[10] Cesare Pautasso, Olaf Zimmermann, and Frank Leymann. Restful web services vs. big web services: making the right architectural decision. In *Proceedings of the 17th international conference on World Wide Web*, pages 805–814, 2008.

[11] Bruce Silver. *BPMN Method and Style*. Cody-Cassidy Press, 2 edition, 2011.

[12] Wil M. P. van der Aalst, Arthur H. M. ter Hofstede, B. Kiepuszewski, and Alistair P. Barros. Workflow patterns. *Distributed and Parallel Databases*, 14(1):5–51, 2003.

[13] W3C. Xml schema part 1: Structures second edition. *W3C Recommendation*, 2004.

WIP

WIP

Glossary

API

Application Programming Interface. A set of definitions and protocols for building and integrating application software. 145

eBranding

The practice of virtualizing all virtualizable aspects of an entity (organization, enterprise, trade, or group) into a single, coherent digital channel. eBranding unifies documentation and action: it presents public and private information, interactive workflows, and system integrations through a role-aware portal that acts as the brand's primary digital harbor. It emphasizes consistency, accessibility, and governance across audiences (public, customers, suppliers, partners, regulators, employees), and favors integration over replacement by orchestrating APIs and existing systems behind a unified experience. eBranding is the philosophy that the Spin the Web Project stewards; the Spin the Web framework is built to realize it. v, vii, 3, 9, 17, 145

portal

An **Enterprise Web Portal**: a single access point that unifies the capabilities of a website (public information and brand presence), a traditional web portal and a web application (aggregation, personalization, discovery, interactive and transactional workflows). In this book, unless otherwise specified, the term *portal* refers to the **Enterprise Web Portal** and is capable of handling all virtualizable activities associated with an enterprise across roles and channels. v, 145

REST

Representational State Transfer. A software architectural style that defines a set of constraints to be used for creating Web services. 145

Spin the Web Project

The organization stewarding the eBranding philosophy and, in service of it, the Spin the Web framework (`WBOL`, the *Web Spinner*, and the *Spin the Web Studio*). The Project is first a philosophy; the framework is the means by which that philosophy is realized. 145

URI

Uniform Resource Identifier. A unique sequence of characters that identifies a logical or physical resource. 145

WIP

webbase

A complete WBOL-described portal: the full, declarative structure of a portal including areas, pages, contents, connector, and configuration. 145

webbaselet

A modular fragment of a webbase. A WBOL document rooted at an STWArea that can be imported or integrated into a full webbase. 145

WIP