

InfoSec App Hands-On Workshop

Lab Guide

Overview

This lab guide contains the hands-on exercises for the InfoSec App Hands-On workshop. Before proceeding with these exercises, please ensure that you have a copy of the workshop slide deck, which will help to put into context the tasks you are carrying out.

Download the workshop slide deck: <https://splk.it/Infosec-Attendee>

Prerequisites

In order to complete these exercises, you will need your own Splunk instance. Splunk's hands-on workshops are delivered via the [Splunk Show portal](#) and you will need a splunk.com account in order to access this.

If you don't already have a Splunk.com account, please create one [here](#) before proceeding with the rest of the workshop.

⚠ Troubleshooting Connectivity

If you experience connectivity issues with accessing either your workshop environment or the event page, please try the following troubleshooting steps. If you still experience issues please reach out to the team running your workshop.

- **Use Google Chrome** (if you're not already)
- If the event page (i.e. <https://show.splunk.com/event/<eventID>>) didn't load when you clicked on the link, try **refreshing the page**
- **Disconnect from VPN** (if you're using one)
- **Clear your browser cache and restart your browser** (if using Google Chrome, go to: Settings > Privacy and security > Clear browsing data)
- **Try using private browsing mode** (e.g. Incognito in Google Chrome) to rule out any cache issues
- **Try using another computer** such as your personal computer - all you need is a web browser! Cloud platforms like AWS can often be blocked on corporate laptops.

Table of Contents

Overview	1
Exercise 1 – Set Up the InfoSec App	3
Description	3
Steps	3
Alternative Installation Method	4
Exercise 2 – Investigating with InfoSec App Dashboards	9
Description	9
Steps	9
Exercise 3 – Malware Investigation and Alerts	11
Description	11
Steps	11
Exercise 4 – User Behavior Investigation	15
Description	15
Steps	15
Exercise 5 – Customize the InfoSec App	18
Description	18
Steps	18
Exercise 6 – Adding Security Content: New Use Case	23
Description	23
Steps	23
Exercise 7 – Adding Security Content: New Dashboard	28
Description	28
Steps	28
Summary	34

Exercise 1 – Set Up the InfoSec App


Description

Our first task is to install the Splunk Add-on for AWS and finish setting up the InfoSec App for Splunk, ensuring that the dashboards are populating correctly.


Steps

Install the Splunk Add-on for AWS


1. Log into your Splunk environment using the credentials from Splunk Show (<https://show.splunk.com>)
2. In the top menu bar click on **Apps > Find More Apps**.

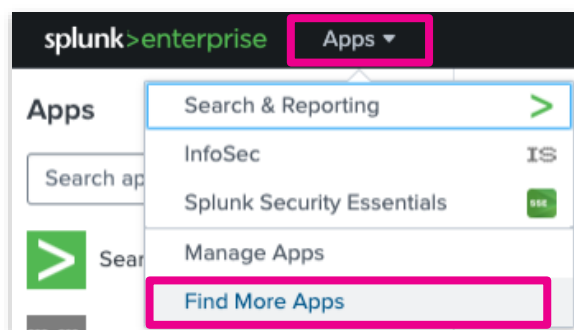

3. Search for "Splunk Add-on for AWS". Find the **Splunk Add-on for Amazon Web Services (AWS)** search results and click on **Install**.

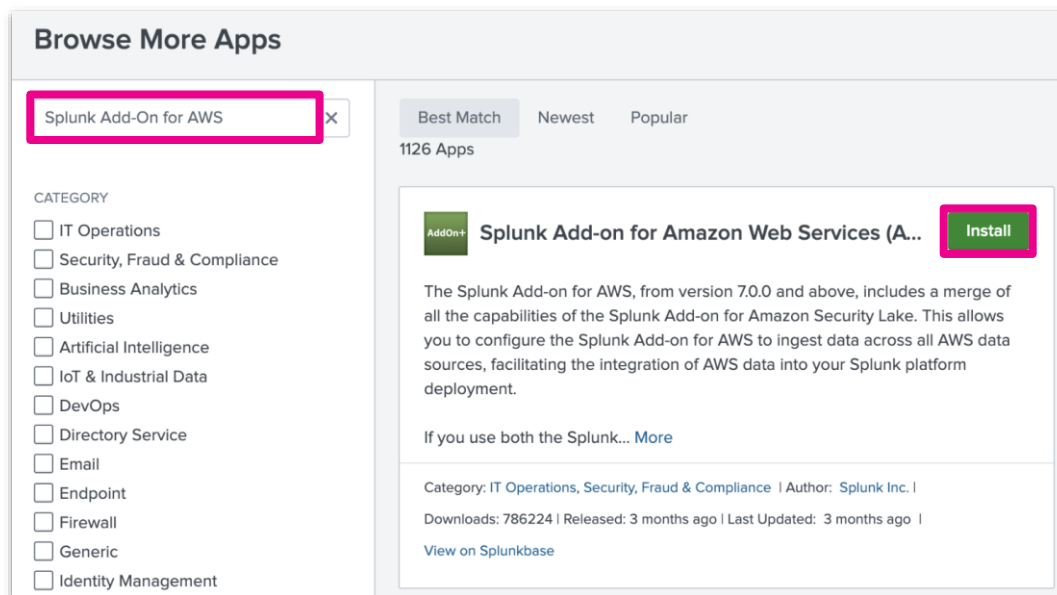

Enter your splunk.com credentials when prompted and click on **Agree and Install**.

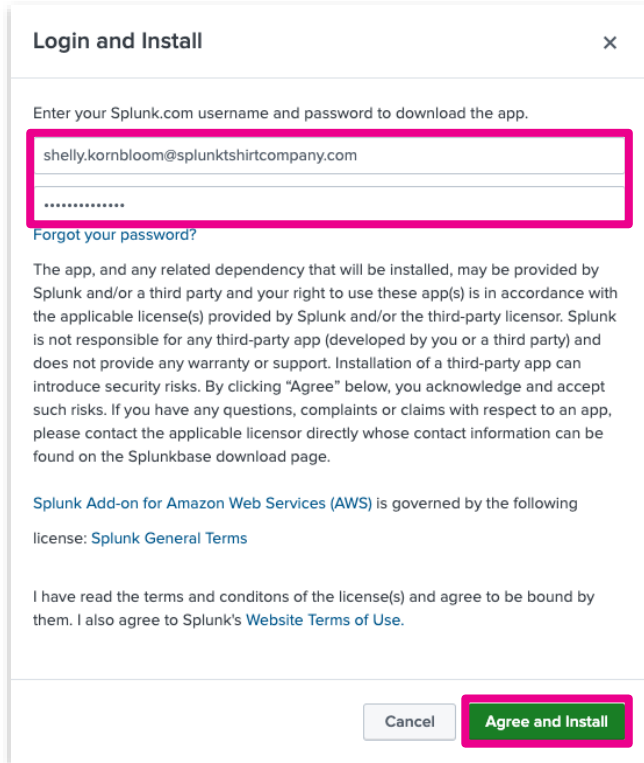

4. In the top menu bar navigate to **Apps > Manage Apps** and check that the Splunk Add-on for AWS is listed.


Alternative Installation Method

****You only need to follow these steps if you were unable to install the add-on from Splunkbase****


If you have any issues installing the add-on from Splunkbase using the above steps, we've provided an alternative installation method just for this workshop.

Steps

1. Open the InfoSec app and on the menu bar click on **Help > Install AWS Add-on**

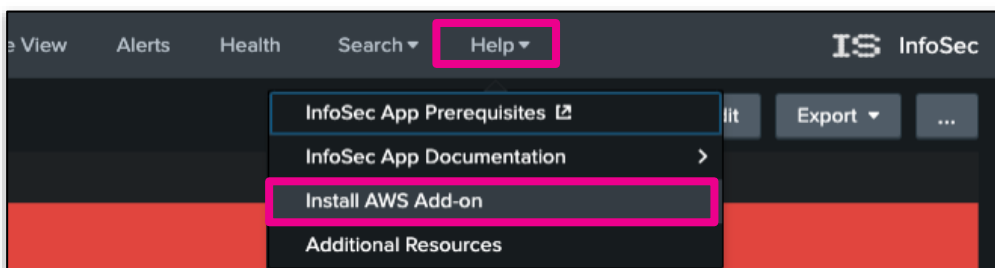


2. Check the 'Install Splunk Add-on for AWS' checkbox.

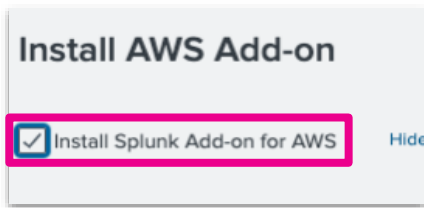


This will run a script in the background to install the add-on for you - again, this is a custom workaround to help in this workshop and is not natively part of the InfoSec App for Splunk.

3. In the top right corner of the screen click on **Settings > Server controls**.

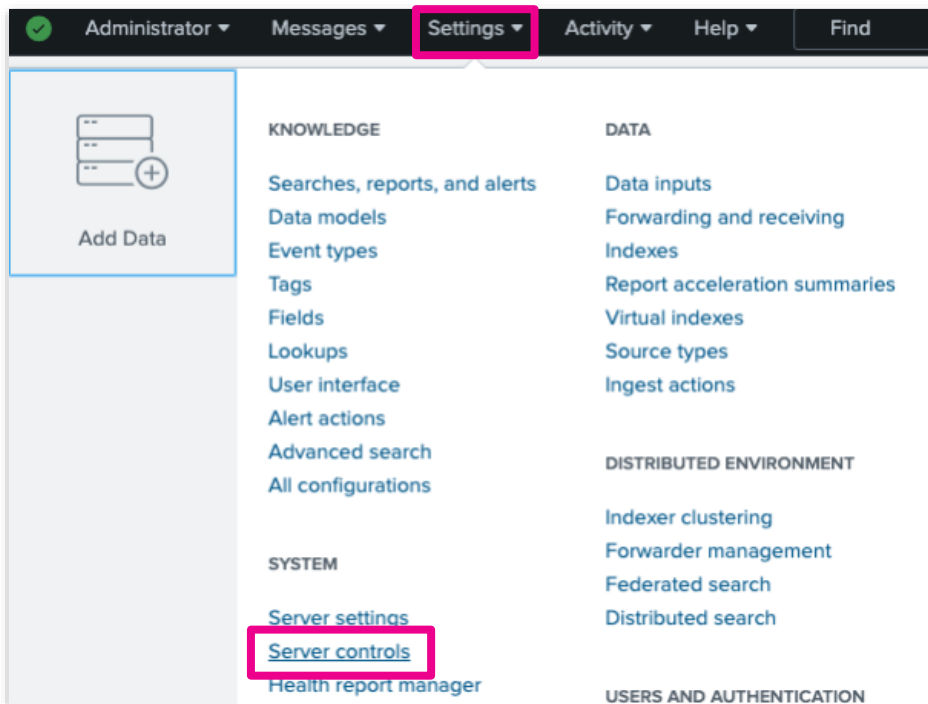

Click on **Restart Splunk**. If prompted for confirmation by your web browser, click on **OK** to continue.

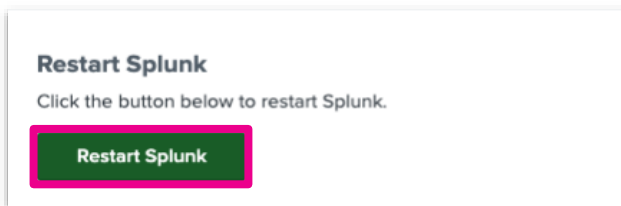


The reboot process should take no longer than a few minutes. When it has finished you will see the Splunk login screen again. When you do, **log back in to Splunk**.

4. In the top menu bar navigate to **Apps > Manage Apps** and check that the Splunk Add-on for AWS is listed.


Check the Health of the InfoSec App for Splunk

Now that we've installed the AWS add-on, let's check the overall health of the InfoSec app.

5. Open the **InfoSec App for Splunk** by clicking on **Apps > InfoSec**.

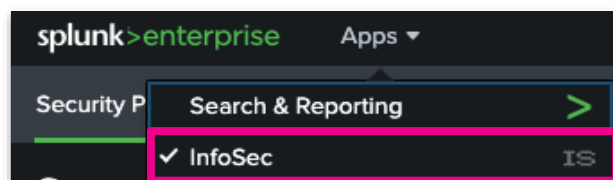

6. Click on the **Health** dashboard from the menu.



7. The first two rows of panels on the Health dashboard provide an overview of the data in your Splunk environment.

Using the Health dashboard, identify the following information:

Q. How many events are feeding each of the data models?

Q. Which data models are accelerated and which (if any) are not accelerated?


Q. What installed add-ons are being used by the InfoSec app?

You should notice that the Authentication (also referred to as “CIM_Authentication”) data model does not contain any events (see the “Data Models Used by InfoSec App: Events in 24 Hours” and “Data Models Used by InfoSec App: Details in 24 Hours” panels) and also is not currently accelerated (it's not listed under the “Data Model Acceleration Status” panel.)

Let's fix that...

Accelerate the Authentication Data Model

8. In the top right corner of the screen click on **Settings > Data models**.

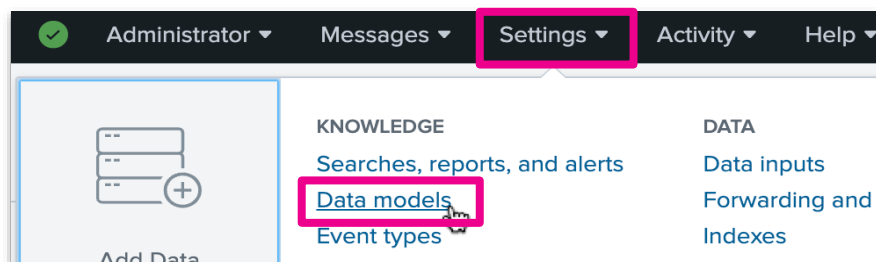

9. Identify the **Authentication** data model. Click on the arrow to expand this section to view more information about this data model.

Data Models

Data models enable users to easily create reports in the Pivot tool. [Learn More](#)

27 Data Models App: InfoSec (InfoSec_App_for_Splunk) Visible in the App Owner: Any filter

i	Title	Type	⚡	Actions	App	Owner
>	Alerts	data model	⚡	Edit Pivot	Splunk_SA_CIM	nobody
>	Application State (Deprecated)	data model	⚡	Edit Pivot	Splunk_SA_CIM	nobody
✓	Authentication Authentication Data Model	data model	⚡	Edit Pivot	Splunk_SA_CIM	nobody

MODEL
 Datasets 10 Events [Edit](#)
 Permissions Shared Globally. Owned by nobody. [Edit](#)

ACCELERATION
 Model is not accelerated. [Add](#)

10. Notice that under the **ACCELERATION** section it says “Model is not accelerated”. Click on **Add**.

ACCELERATION
 Model is not accelerated. [Add](#)

11. On the **Edit Acceleration** dialog box, check the **Accelerate** checkbox and click on **Save**. (Leave all other settings unchanged.)

Edit Acceleration ✕

Data Model **Authentication**

Accelerate ☒ Acceleration may increase storage and processing costs.

Summary Range ? 1 Year ▼

> Advanced Settings

[Cancel](#) [Save](#)

12. Splunk will now start to build the data model accelerations for this data model. Return to the InfoSec app **Health** dashboard and track the progress of the accelerations under the **Data Model Acceleration Status** panel.

When the acceleration status reaches 100% any warnings at the top of the dashboard should disappear.

Alerts	Health	Search ▾	Help ▾	IS InfoSec
Edit Export ▾ ...				
Data Model Acceleration Status				
All accelerated data models and their status				
data_model ▴ ▾		complete ▴ ▾		
CIM_Authentication		100 %		
CIM_Change		100 %		
CIM_Email		100 %		
CIM_Endpoint		100 %		
CIM_Endpoint.Filesystem		100 %		
CIM_Endpoint.Processes		100 %		
CIM_Endpoint.Registry		100 %		
CIM_Endpoint.Services		100 %		
CIM_Intrusion_Detection		100 %		

Note: The acceleration process may take up to 10 min to reach 100% and increases in steps, so don't be worried if it stays at "0%" for some time.

Exercise 2 – Investigating with InfoSec App Dashboards


Description

Now the InfoSec app setup is complete, we're ready to start investigating.


This exercise demonstrates how to use the InfoSec app dashboards to investigate critical security events and gain insights.

Steps

1. Open the **InfoSec** app's **Security Posture** dashboard. This dashboard provides a high level view to monitor the security in your Splunk environment.

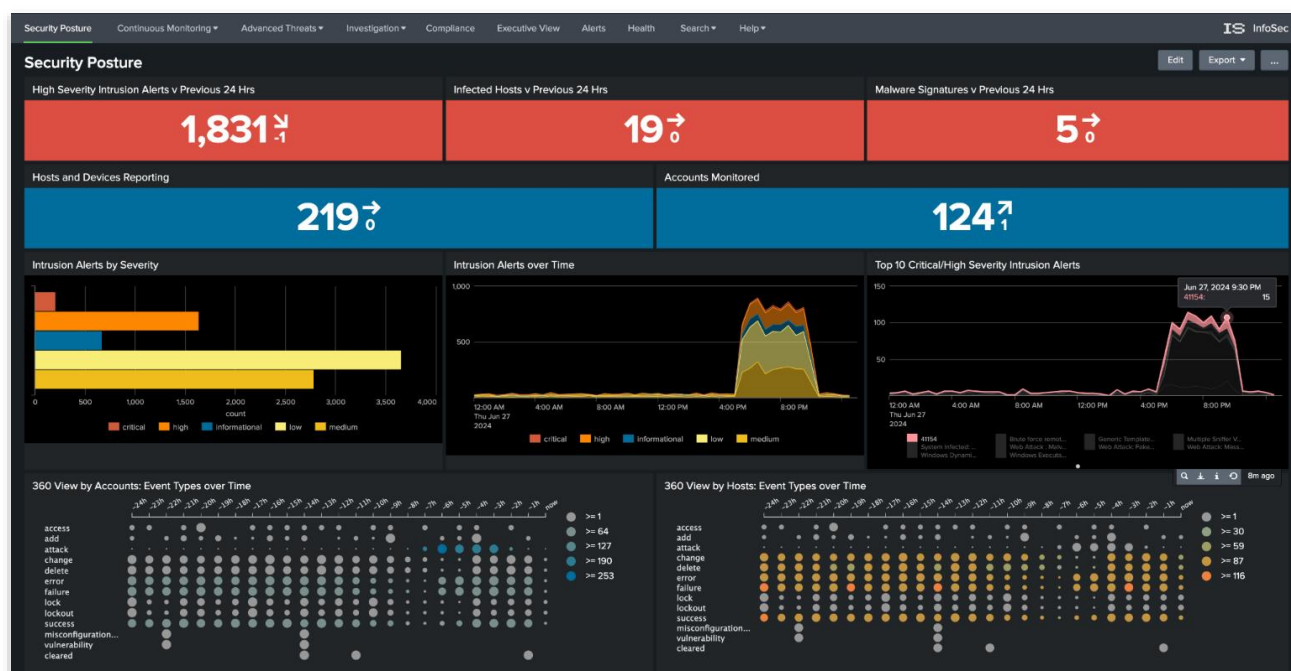


2. Investigate intrusion alerts by clicking on any of the bars on the **Intrusion Alerts by Severity** chart.

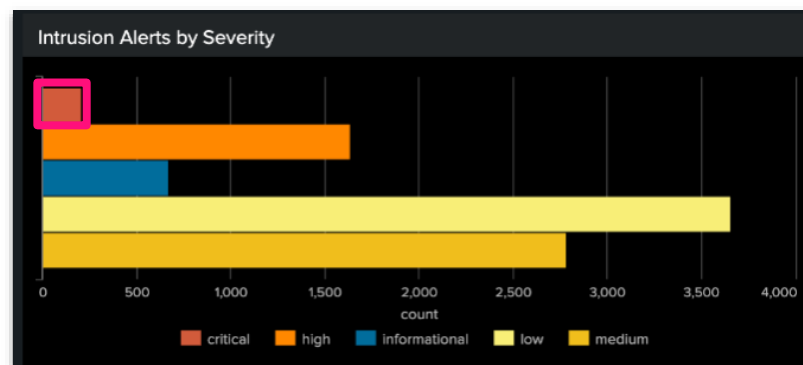

This will take you to the **Intrusion Detection (IDS/IPS)** dashboard where you will see more detailed information about intrusion events.

- Filter the dashboard by critical alerts by clicking on the **Critical Severity Alerts** panel.

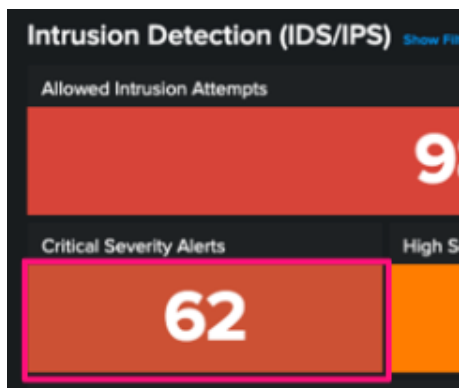

- Identify the top 3 intrusion signatures by sorting the **count** column from highest to lowest (click on the **count** column header on the **Intrusion Signatures** panel).


Optionally click on any of the signature names to view the raw event.

signature	severity	count
'Application and Device Control is ready'	critical	3
'C:\Program Files (x86)\splunkshirtcompany.com\Product\2.3.4-5\bin64\yyyyy.exe'	critical	3
AC9-1.1 Block access to autorun.inf	critical	4
AC9-1.1 Block access to autorun.inf - Caller MD5=xxxxxx86c5d511fdcaa2d7445d21aeb1	critical	10
AC9-1.1 Block access to autorun.inf - Caller MD5=xxxxxx8920ba0d0eba75ea68ff97a93c	critical	3
AC9-1.1 Block access to autorun.inf - Caller MD5=xxxxxxb14356827cd672e25beb37be3	critical	3
Adobe Flash Player Remote Code Execution Vulnerability	critical	2

- Now let's see what malware is being detected. In the menu bar navigate to **Continuous Monitoring > Malware**.

Using this dashboard, identify the following information:

- What malware has been detected in the last 24 hours?
- What are the top 3 malware types?

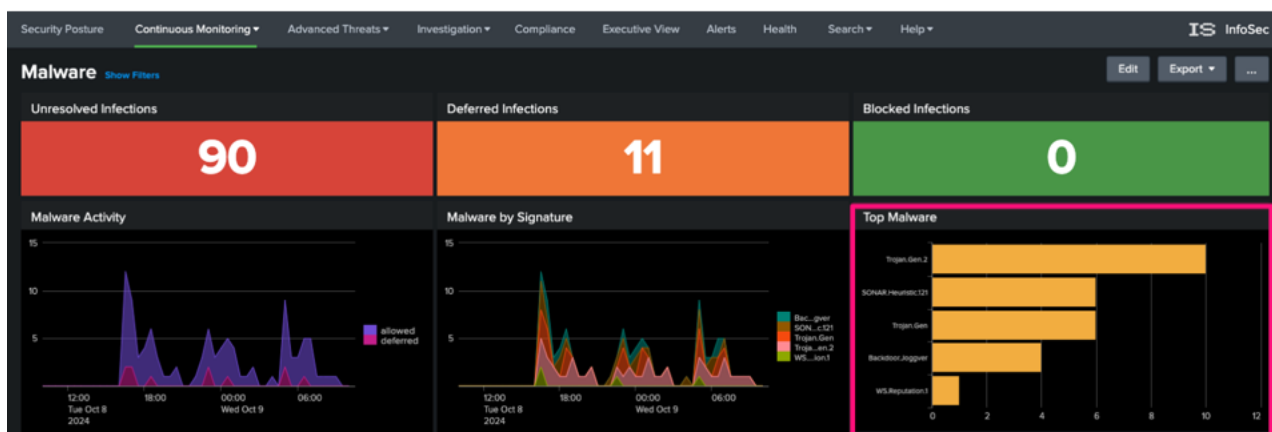

Exercise 3 – Malware Investigation and Alerts

Description


Now that we've taken a quick look at a few of the dashboards included in the InfoSec App for Splunk, we're ready to dive further into our investigations.

The IT team has asked us to find malware-infected files and set up an alert for future detections.

Steps

Find Malware-Infected Files


1. Using the InfoSec app's **Malware** dashboard (**Continuous Monitoring > Malware**), identify the **top malware-infected files**.

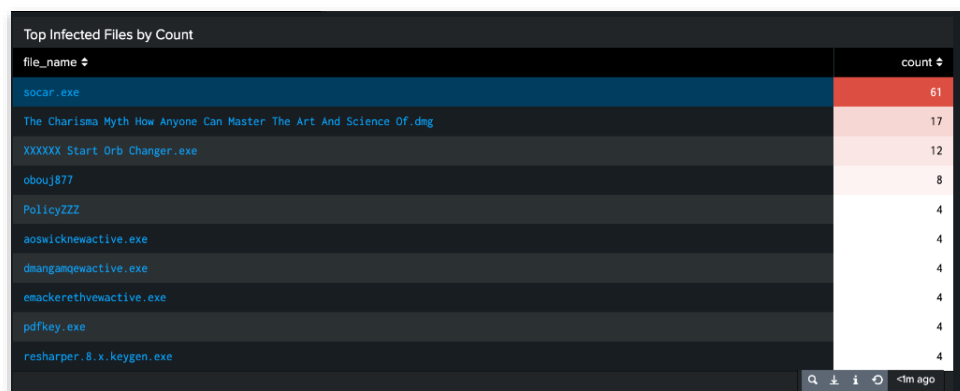

file_name	count
socar.exe	61
The Charisma Myth How Anyone Can Master The Art And Science Of.dmg	17
XXXXXX Start Orb Changer.exe	12
obouj877	8
PolicyZZZ	4
aoswicknewactive.exe	4
dmangamgewactive.exe	4
emackerethvewactive.exe	4
pdfkey.exe	4
resharper.8.x.keygen.exe	4

We can see that **socar.exe** is the top infected file.

2. Click on the file name ("**socar.exe**") to drill down into the search results where we can view more detail about these events.



From the search results and the fields displayed on the left of the search page, answer the following questions:

- Which host(s) are infected with this malware?
- What are the file paths of socar.exe on the infected host(s)?

Now that you know where the infected files are, you can inform the IT team so they remediate this issue.

Create an Alert


Now let's create an alert to inform the team if this infection is seen again in future.

- Return to the **Malware** dashboard (**Continuous Monitoring > Malware**) and click on the search (🔍) button beneath the **Top Infected Files by Count** table.



file_name	count
socar.exe	61
The Charisma Myth How Anyone Can Master The Art And Science Of.dmg	17
XXXXXX Start Orb Changer.exe	12
obouj877	8
PolicyZZZ	4
aoswicknewactive.exe	4
dmangamewactive.exe	4
emackerethwactive.exe	4
pdfkey.exe	4
resharper.8.x.keygen.exe	4

- We can now see the full search that creates this table.

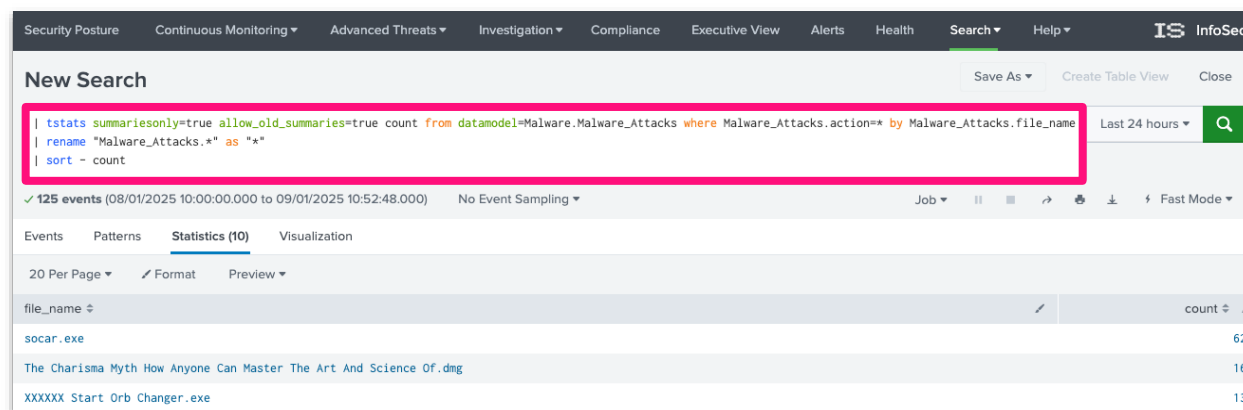


```
| tstats summariesonly=true allow_old_summaries=true count from datamodel=Malware.Malware_Attacks where Malware_Attacks.action=* by Malware_Attacks.file_name
| rename "Malware_Attacks.*" as "*"
| sort - count
```

file_name	count
socar.exe	62
The Charisma Myth How Anyone Can Master The Art And Science Of.dmg	16
XXXXXX Start Orb Changer.exe	13

In this scenario we want to create an alert specifically for when the **socar.exe** file is detected. To do that, add the following filter to the end of the search:

```
| search file_name=socar.exe
```


- Now re-run your search and check that you only see that file in the table.

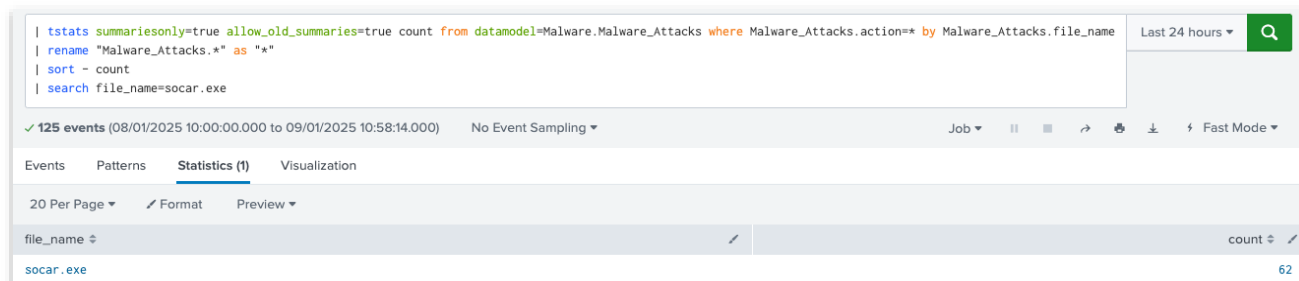

```
| tstats summariesonly=true allow_old_summaries=true count from datamodel=Malware.Malware_Attacks where Malware_Attacks.action=* by Malware_Attacks.file_name
| rename "Malware_Attacks.*" as "*"
| sort - count
| search file_name=socar.exe
```

file_name	count
socar.exe	62

6. To create an alert, above the search box click on **Save As > Alert**.

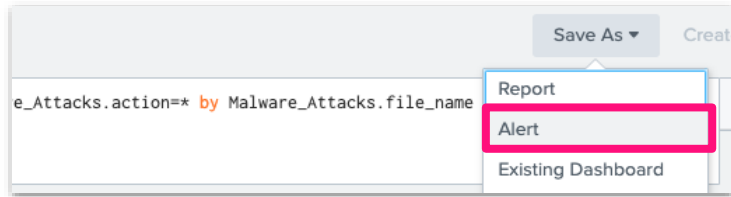

7. Create an alert that runs every hour, to be triggered when **socar.exe** is detected (i.e. if the number of results returned by this search is greater than “0”).

A screenshot of the 'Save As Alert' configuration dialog in Splunk. The dialog has a title bar with a close button (X). It is divided into two main sections: 'Settings' and 'Trigger Conditions'.
Settings:
- Title: 'Infected "socar.exe" detected'
- Description: 'Optional'
- Permissions: 'Private' (selected) and 'Shared in App'
- Alert type: 'Scheduled' (selected) and 'Real-time'
- Run every: 'Run every hour' (selected)
- At: '0' minutes past the hour
- Expires: '24' hour(s)
Trigger Conditions:
- Trigger alert when: 'Number of Results' (selected)
- is greater than: '0'
- Trigger: 'Once' (selected) and 'For each result'
- Throttle: unchecked checkbox

8. Under the **Trigger Actions** section click on **+ Add Actions** and select **Add to Triggered Alerts**. This means any alerts created will be added to the Triggered Alerts list within Splunk.

Leave the Severity as **Medium** and click on **Save**.

A screenshot of the 'Trigger Actions' section in Splunk. It shows a '+ Add Actions' button. Below it, there is a list of actions. The first action is 'Add to Triggered Alerts', which is highlighted with a red rectangular box. To the right of this action is a 'Remove' button. Below the action name, there is a 'Severity' dropdown menu set to 'Medium'.

When your alert triggers it will be displayed on the InfoSec app’s Alerts dashboard.

Security PostureContinuous MonitoringAdvanced ThreatsInvestigationComplianceExecutive ViewAlertsHealthSearchHelp

IS InfoSec

Alerts

Last 24 hoursHide Filters

List of Triggered Alerts

_time	alert	severity	alert_actions
2024-12-11 14:15:00.299	High Severity Intrusion	High	
2024-12-11 14:15:00.282	Critical Severity Intrusion	Critical	
2024-12-11 14:30:00.544	Suspected Network Scanning	Low	
2024-12-11 15:30:00.920	High Severity Intrusion	High	
2024-12-11 15:30:00.899	Suspected Network Scanning	Low	
2024-12-11 15:30:00.744	Critical Severity Intrusion	Critical	
2024-12-11 15:15:00.636	High Severity Intrusion	High	
2024-12-11 15:00:01.600	Locked Out Accounts	Low	
2024-12-11 15:00:00.780	Suspected Network Scanning	Low	
2024-12-11 15:00:00.741	High Severity Intrusion	High	

< Prev12Next >

Triggered Alerts over Time

Time	Brute Force Attack	Critical Severity Intrusion	High Severity Intrusion	Locked Out Accounts
4:00 PM Tue Dec 10 2024	0	0	0	0
8:00 PM	0	0	0	0
12:00 AM Wed Dec 11	0	0	0	0
4:00 AM	0	0	0	0
8:00 AM	0	0	0	0
12:00 PM	0	0	0	0
1:00 PM	0	0	0	0
2:00 PM	0	0	0	0
3:00 PM	0	0	0	0
4:00 PM	0	0	0	0
5:00 PM	0	0	0	0
6:00 PM	0	0	0	0
7:00 PM	0	0	0	0
8:00 PM	0	0	0	0
9:00 PM	0	0	0	0
10:00 PM	0	0	0	0
11:00 PM	0	0	0	0
12:00 PM	0	0	0	0

Configure Alerts

Edit Existing Alerts

Add Alerts

To set up a new alert either:

- hover over a report you want to be alerted on and click on the magnifying glass icon to open a search; save the search: Save As > Alert or
- follow instructions in [this video](#)

Exercise 4 – User Behavior Investigation


Description

Analyzing user behaviors helps detect unauthorized access and account modifications, addressing potential insider threats.

In this exercise we will look for any sudden access changes, unauthorized role modifications, or unusual activity.

Steps


1. In the InfoSec app, browse to **Continuous Monitoring > All Authentications**. This dashboard shows us all authentication actions taken in our environment.

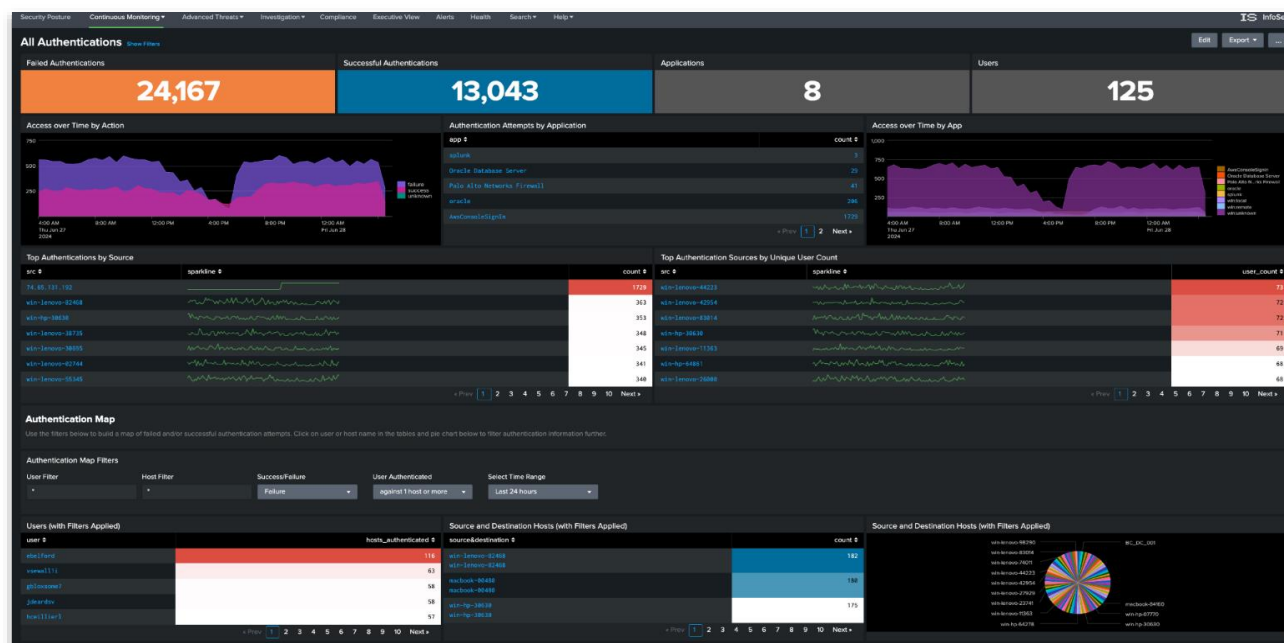

2. Scroll down to the **Users (with Filters Applied)** table. This shows us the number of times each user authenticated against any of the hosts/systems in our environment. Notice that **ebelford** has authenticated against an unusually high number of hosts compared to the other users.

Users (with Filters Applied)	
user	hosts_authenticated
ebelford	116
vsewall11	63
gbloxsome7	58
jdeardsv	58
hceillier1	57


- Optionally click on the **ebelford** user to filter the panels in that section by just that user. You will be able to see the sources and destinations that they authenticated against.

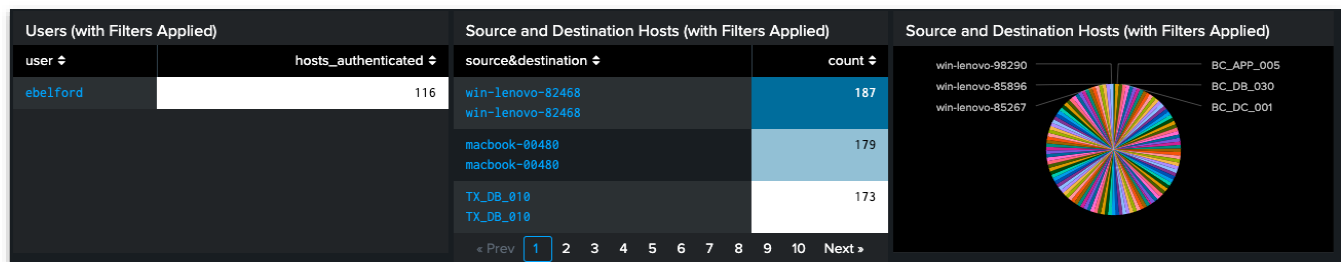


Let's now look in a bit more detail at access anomalies to see what else we can find.

- Browse to **Advanced Threats > Access Anomalies** and identify the following information:


- Which users had the most login failures?
- Which users are performing the most privileged actions?

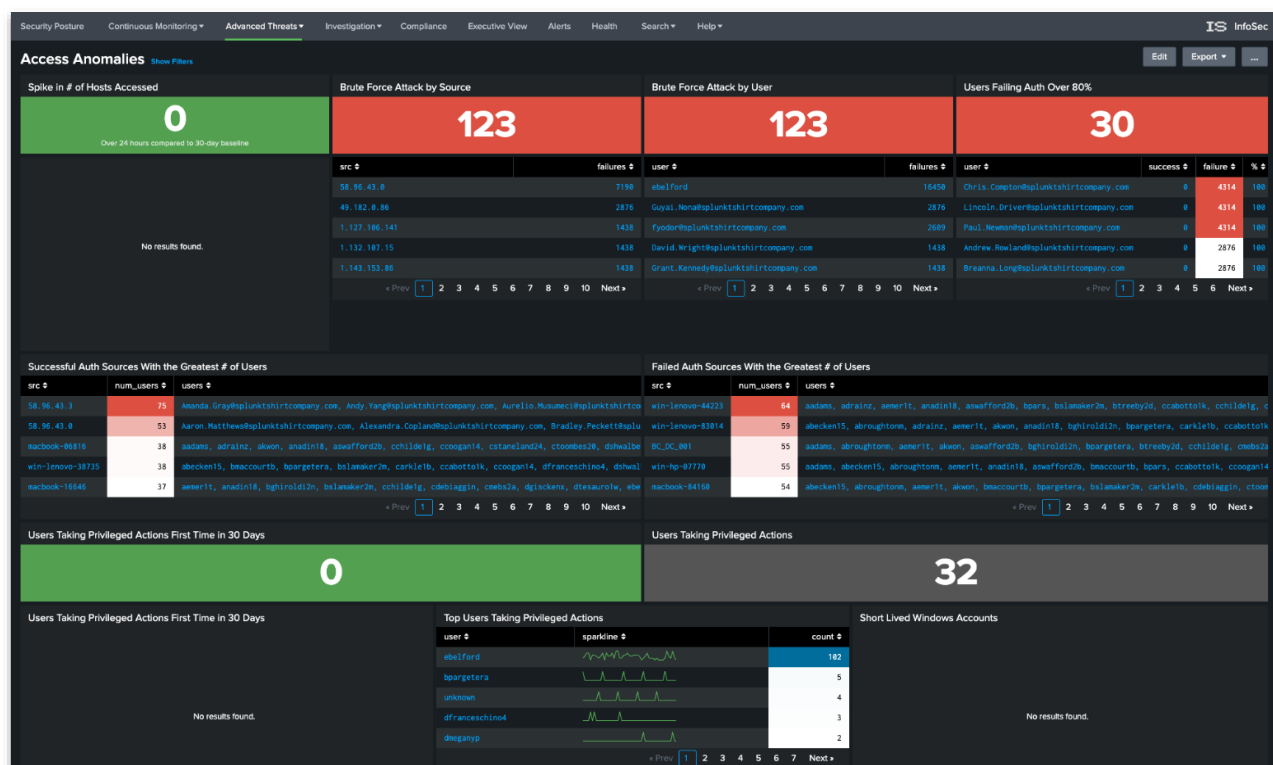

Notice that **ebelford** has both a high number of failed logins (see **Brute Force Attack by User**) and also is taking a large number of privileged actions (see **Top Users Taking Privileged Actions**). Click on the name "**ebelford**" in either of those tables to navigate to the **User Investigation** dashboard.

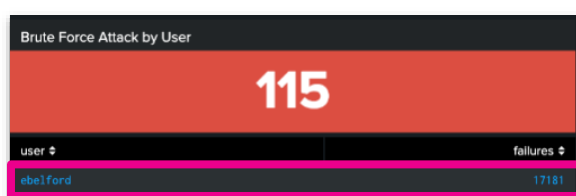

5. Review the account changes made by **ebelford** shown on this dashboard - is there anything suspicious or anomalous? (Hint: Pay attention to the **Account Changes** chart.)

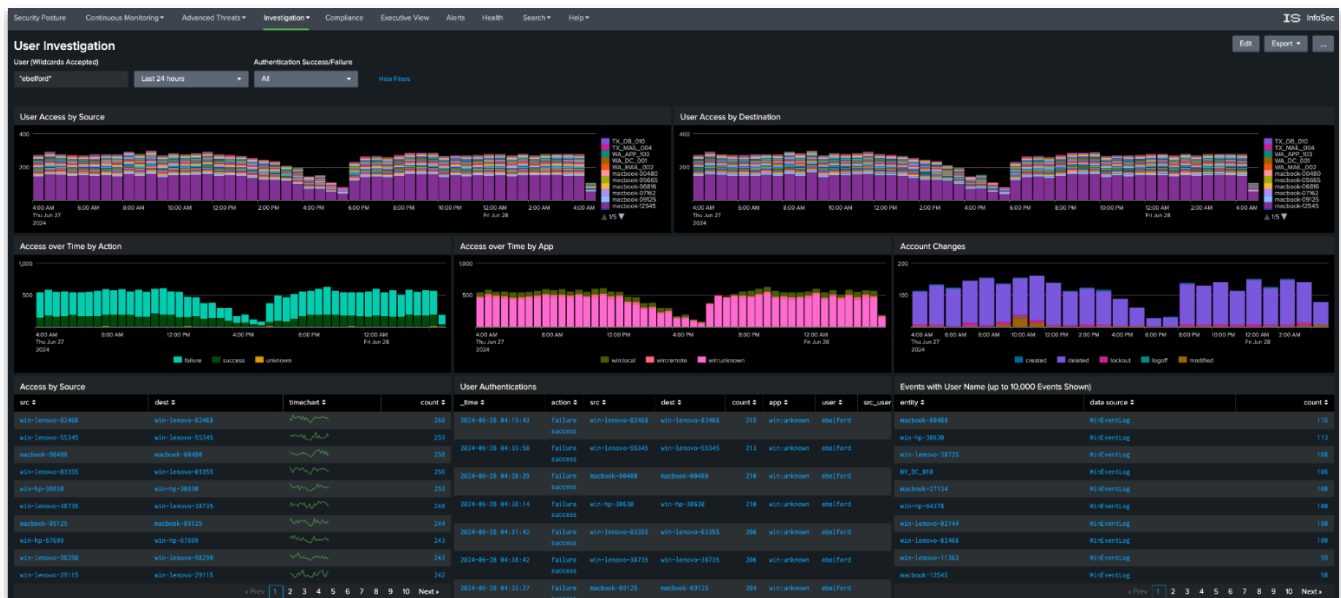

From the insights we've gathered it's clear that the **ebelford** account has been behaving strangely and is carrying out actions out of line with other accounts. At this point we now have enough information to work with the IT team to lock the user account and force a password reset and work to reverse any malicious changes that were made.

Exercise 5 – Customize the InfoSec App

Description


The InfoSec app contains some great out of the box views for common use security cases, but we can tailor the content to ensure it's as relevant as possible to the university's needs.

The university's IT team wants to exclude known VPN IP addresses from the **Geographically Improbable Access** search to remove false positives that can result when users connect to the university's systems using a VPN. They have uploaded a lookup file (**vpn_ip.csv**) containing those IPs, which we can use to tailor our content.


Steps

1. In the InfoSec app go to **Search > Search** and check the contents **vpn_ip.csv** lookup file by running the following search:

```
| inputlookup vpn_ip.csv
```

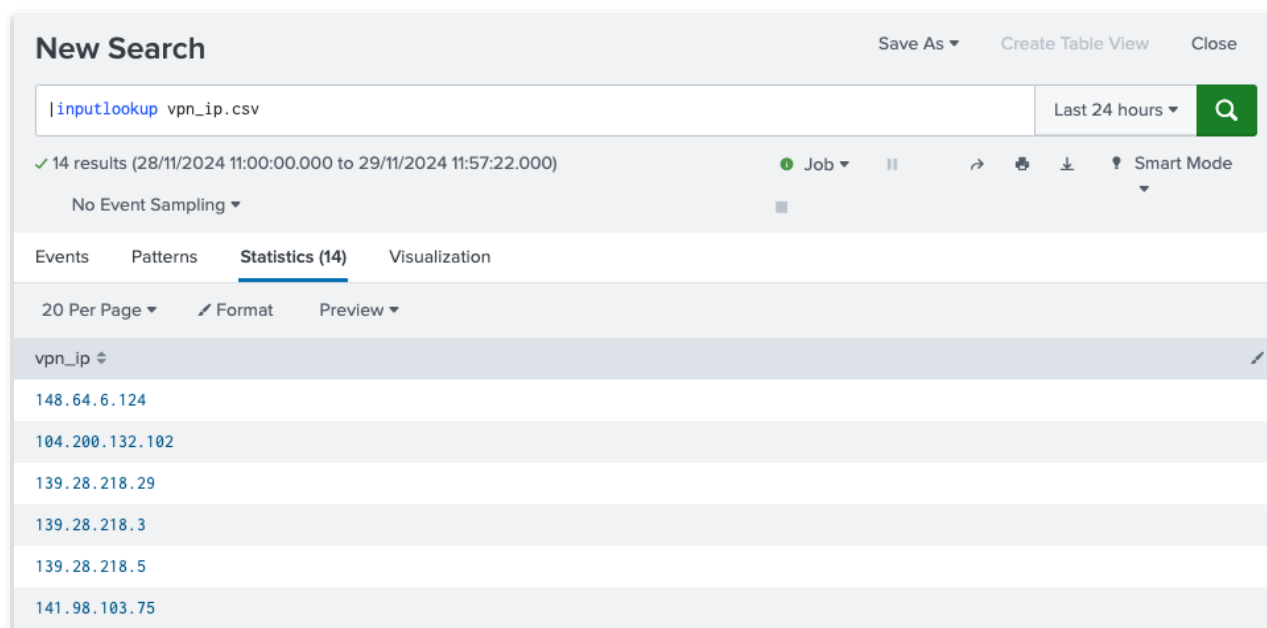


2. Navigate to **Advanced Threats > Access Anomalies** and switch to **Edit** mode.

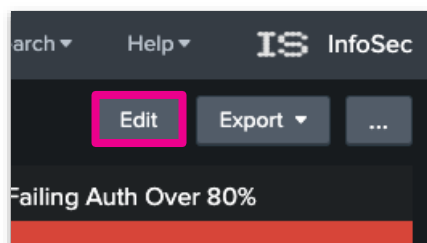

3. Scroll down to the **Geographically Improbable Access** table. Notice that we see src IP addresses from India as well as Australia. The India IPs are from our VPN provider and need to be filtered out.

user	src	_time	City	Country	app	prev_src
Varsha.Mahadevan@splunktshirtcompany.com	58.96.43.0	2024-09-19 12:00:01	North Sydney	Australia	AzureActiveDirectory	148.64.6.124
mickey.perre@splunktshirtcompany.com	58.96.43.3	2024-09-19 12:00:01	North Sydney	Australia	AzureActiveDirectory	220.253.98.44
shaun.stuart@splunktshirtcompany.com	58.96.43.0	2024-09-19 12:00:01	North Sydney	Australia	AzureActiveDirectory	1.132.107.15
Varsha.Mahadevan@splunktshirtcompany.com	148.64.6.124	2024-09-19 12:01:01	Mumbai	India	AzureActiveDirectory	58.96.43.0
Varsha.Mahadevan@splunktshirtcompany.com	58.96.43.0	2024-09-19 12:01:01	North Sydney	Australia	AzureActiveDirectory	148.64.6.124

4. Click the magnifying glass icon above this table to edit the search.



5. In the **Search String** box, add the following SPL at the end of the search:

```
| lookup vpn_ip.csv vpn_ip AS src OUTPUT vpn_ip AS matched_src
| lookup vpn_ip.csv vpn_ip AS prev_src OUTPUT vpn_ip AS matched_prev_src
| where isnull(matched_src) AND isnull(matched_prev_src)
| fields - matched_src matched_prev_src
```

Edit Search

Title

Search String

```

))))), distance=round(distance,2)
| fields - lat1_r, lat2_r, long1_r, long2_r, delta
| eval time_diff=if(((('_time' - prev_time) == 0),1,(' _time' - prev_time))), speed
=round(((distance * 3600) / time_diff),2)
| where (speed > 500)
| eval prev_time=strftime(prev_time,"%Y-%m-%d %H:%M:%S")
| table user, src, _time, City, Country, app, prev_src, prev_time, prev_city,
prev_country, prev_app, distance, speed
| lookup vpn_ip.csv vpn_ip AS src OUTPUT vpn_ip AS matched_src
| lookup vpn_ip.csv vpn_ip AS prev_src OUTPUT vpn_ip AS matched_prev_src
| where isnull(matched_src) AND isnull(matched_prev_src)
| fields - matched_src matched_prev_src

```

Run Search

Time Range

Shared Time Picker (field1)

Auto Refresh Delay

No auto refresh

Refresh Indicator

Progress bar

Cancel

Convert to Report

Apply

This search will lookup the IP addresses in our search results against our lookup file of the university's known IP addresses, and only return results that are NOT in those IP ranges.

SPL Line-by-Line Explanation:

```
| lookup vpn_ip.csv vpn_ip AS src OUTPUT vpn_ip AS matched_src
```

- ↳ Match the field “**vpn_ip**” in the lookup file with the field “**src**” from our data. Where there is a matched value it outputs a new field called “**matched_src**”, with the value of the IP address that was matched.

```
| lookup vpn_ip.csv vpn_ip AS prev_src OUTPUT vpn_ip AS matched_prev_src
```

- ↳ Repeat the exact same step but with the **prev_src** field, outputting a new field called “**matched_prev_src**”.

```
| where isnull(matched_src) AND isnull(matched_prev_src)
```

- ↳ Applies a filter to only show events **where** the “**matched_src**” and “**matched_prev_src**” fields are both empty, meaning if the IP address was in the lookup file and in the logs, they were “marked” as “matched” and they won’t be shown in the final table (thus, not reported as geographically improbable access).

```
| fields - matched_src matched_prev_src
```

- ↳ Removes the fields that we don’t want to show because they were just temporary fields to help us with filtering the IP addresses.

6. Click on **Apply** to save the search.


Notice now that the table updates and we only see events from **Australia** as we have filtered out our **India** IP addresses using our modified search.

user	src	_time	City	Country	app	prev_src	prev_time	prev_city	prev_country	prev_
mickey.perre@splunkshirtcompany.com	58.96.43.3	2024-10-24 09:23:31	North Sydney	Australia	AzureActiveDirectory	220.253.98.44	2024-10-24 09:23:31	Kelvin Grove	Australia	Azure
shaun.stuart@splunkshirtcompany.com	58.96.43.0	2024-10-24 09:23:31	North Sydney	Australia	AzureActiveDirectory	1.132.107.15	2024-10-24 09:23:31	Woolloongabba	Australia	Azure
mickey.perre@splunkshirtcompany.com	220.253.98.44	2024-10-24 09:24:31	Kelvin Grove	Australia	AzureActiveDirectory	58.96.43.3	2024-10-24 09:23:31	North Sydney	Australia	Azure
mickey.perre@splunkshirtcompany.com	58.96.43.3	2024-10-24 09:24:31	North Sydney	Australia	AzureActiveDirectory	220.253.98.44	2024-10-24 09:24:31	Kelvin Grove	Australia	Azure
shaun.stuart@splunkshirtcompany.com	1.132.107.15	2024-10-24 09:24:31	Woolloongabba	Australia	AzureActiveDirectory	58.96.43.0	2024-10-24 09:23:31	North Sydney	Australia	Azure


7. We now need to customize the **Improbable Access by User** map visualization beneath this table to also filter out our known IP addresses.

Click the magnifying glass icon above the map to edit the search and add these two lines under the iplocation line:


```
| lookup vpn_ip.csv vpn_ip AS src OUTPUT vpn_ip AS matched_src  
| where isnull(matched_src)
```

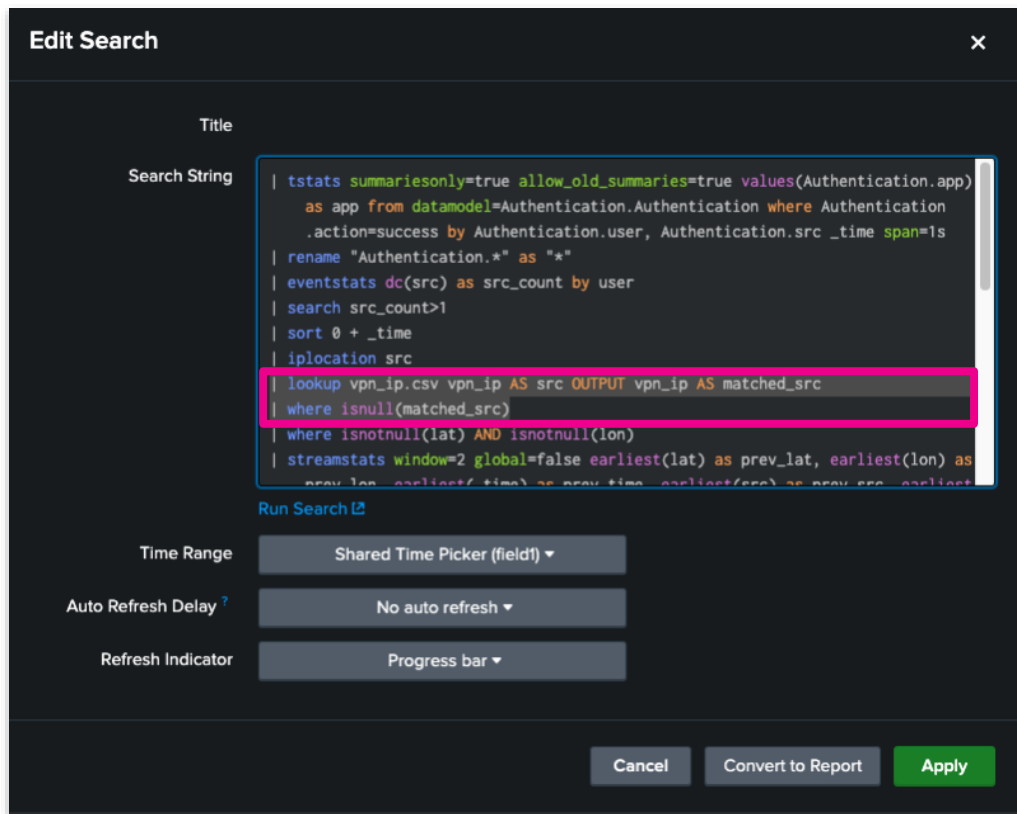

8. Click on **Apply** to save the search. Verify that you no longer see India IP addresses highlighted on the map.

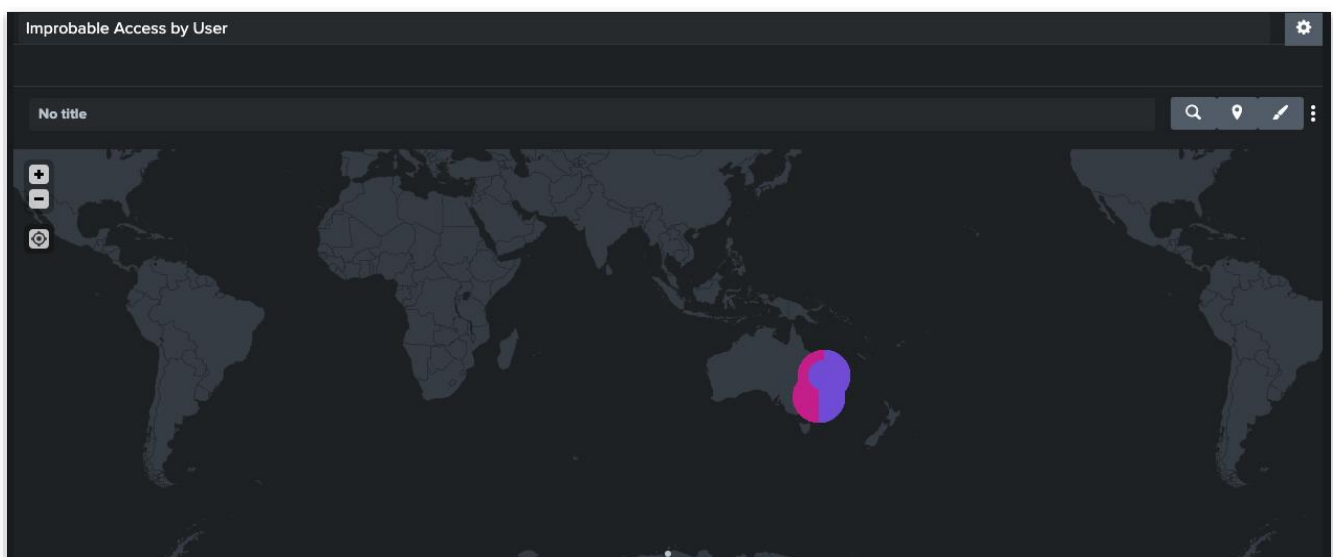

9. **Save** your dashboard.

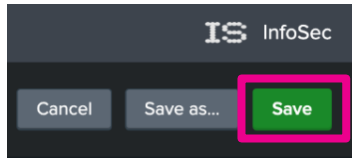

Exercise 6 – Adding Security Content: New Use Case


Description

The free Splunk Security Essentials app provides a great way to find and add new security use cases. Doing so helps you to enhance the InfoSec app's capabilities and address emerging security needs.


The Security team wants a new dashboard panel to show recurring infections on any of the hosts in the Buttercup State University environment.

Steps


1. Navigate to **Apps > Splunk Security Essentials**.

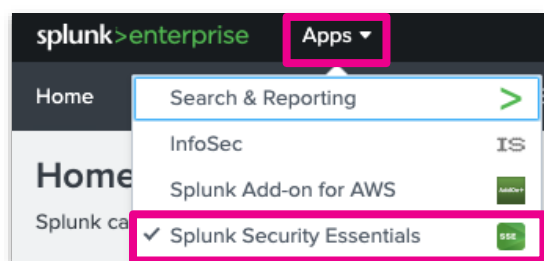

2. On the menu click on **Content > Security Content**.

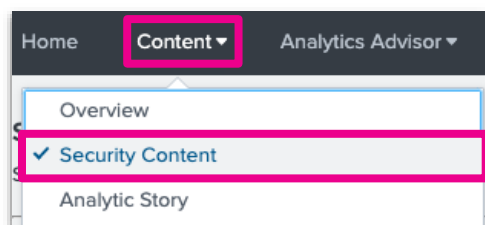

3. In the search field type "Recurring Infection on Host" and click on the **Recurring Infection on Host** use case in the results.



- On the **Recurring Infection on Host** use case page, scroll down and click on **Live Data**. Review the search **query** and click the search button to run the search.

The screenshot shows the Splunk search interface with the 'Live Data' tab selected. A search query is entered in the search bar:

```
index=* sourcetype=symantec:* earliest=-30d
| stats count range(_time) as TimeRange by Risk_Name, Computer_Name
| where TimeRange>1800
| eval TimeRange_In_Hours = round(TimeRange/3600,2), TimeRange_In_Days = round(TimeRange/3600/24,2)
```

The search results show 273 events for the time range 22/09/2024 12:17:44.000 to 22/10/2024 12:17:45.387.

- Scroll down to the **Raw Data Preview** section and verify that you see results.

Raw Data Preview
(Click Detect New Values above to find outliers.)

Risk_Name	Computer_Name	count	TimeRange	TimeRange_In_Days	TimeRange_In_Hours
Backdoor.Joggver	boxster	9	173357	2.01	48.15
Backdoor.Joggver	continental	10	195083	2.26	54.19
Backdoor.Joggver	frontier	9	173357	2.01	48.15
Backdoor.Joggver	rabbit	9	173357	2.01	48.15
Backdoor.Joggver	skyhawk	9	173357	2.01	48.15
Backdoor.Joggver	talon	9	173357	2.01	48.15
Backdoor.Joggver	thunderbird	9	173357	2.01	48.15
SONAR.Heuristic.121	acclaim	9	173357	2.01	48.15
SONAR.Heuristic.121	boxster	18	173455	2.01	48.18
SONAR.Heuristic.121	continental	9	173357	2.01	48.15

- Copy the search query to your clipboard (**CTRL+C** on Windows, **CMD+C** on Mac) and navigate to the InfoSec app.
- Open the InfoSec app's **Search** view (**Search > Search**) and paste in the SPL you copied to your clipboard. Optionally run the search to verify that it copied/pasted correctly.

The screenshot shows the 'New Search' interface in the InfoSec app. The search query is pasted into the search bar:

```
index=* sourcetype=symantec:* earliest=-30d
| stats count range(_time) as TimeRange by Risk_Name, Computer_Name
| where TimeRange>1800
| eval TimeRange_In_Hours = round(TimeRange/3600,2), TimeRange_In_Days = round(TimeRange/3600/24,2)
```

The search results show 4,539 events for the time range 10/12/2024 16:55:15.000 to 09/01/2025 16:55:16.309. The results are displayed in a table with columns: Risk_Name, Computer_Name, count, TimeRange, TimeRange_In_Days, and TimeRange_In_Hours.

Risk_Name	Computer_Name	count	TimeRange	TimeRange_In_Days	TimeRange_In_Hours
Backdoor.Joggver	boxster	9	173357	2.01	48.15
Backdoor.Joggver	continental	10	195083	2.26	54.19
Backdoor.Joggver	frontier	9	173357	2.01	48.15
Backdoor.Joggver	rabbit	9	173357	2.01	48.15

8. Edit the search to create a table that only includes the “**Risk_Name**”, “**Computer_Name**” and “**count**” fields. To do this, add the following line to the end of the search:

```
| table Risk_Name, Computer_Name, count
```

9. Re-run the search to verify that you only see the specified fields/columns in the table.

The screenshot shows the 'New Search' interface in Splunk. The search query is as follows:

```
index=* sourcetype=symantec:* earliest=-30d
| stats count range(_time) as TimeRange by Risk_Name, Computer_Name
| where TimeRange>1800
| eval TimeRange_In_Hours = round(TimeRange/3600,2), TimeRange_In_Days = round(TimeRange/3600/24,2)
| fields Risk_Name, Computer_Name, count
```

The search results show 323 events from 22/09/2024 12:56:43.000 to 22/10/2024 12:56:44.333. The results are displayed in a table with the following columns: Risk_Name, Computer_Name, and count.

Risk_Name	Computer_Name	count
Trojan.Gen.2	bravada	2
Trojan.Gen.2	optima	2


10. We now need to add this to a dashboard within the InfoSec app. For this exercise we will use the **Custom Use Cases** dashboard, which is provided out of the box as a place for custom searches such as this.

Click on **Save As > Existing Dashboard**.

The screenshot shows the 'Save As' dropdown menu in the Splunk interface. The menu options are: Report, Alert, Existing Dashboard, and New Dashboard. The 'Existing Dashboard' option is highlighted.


11. Search for and select the **Custom Use Cases** dashboard.

Give your panel a title, such as “**Hosts with Recurring Infections**” and click on **Save to Dashboard**.

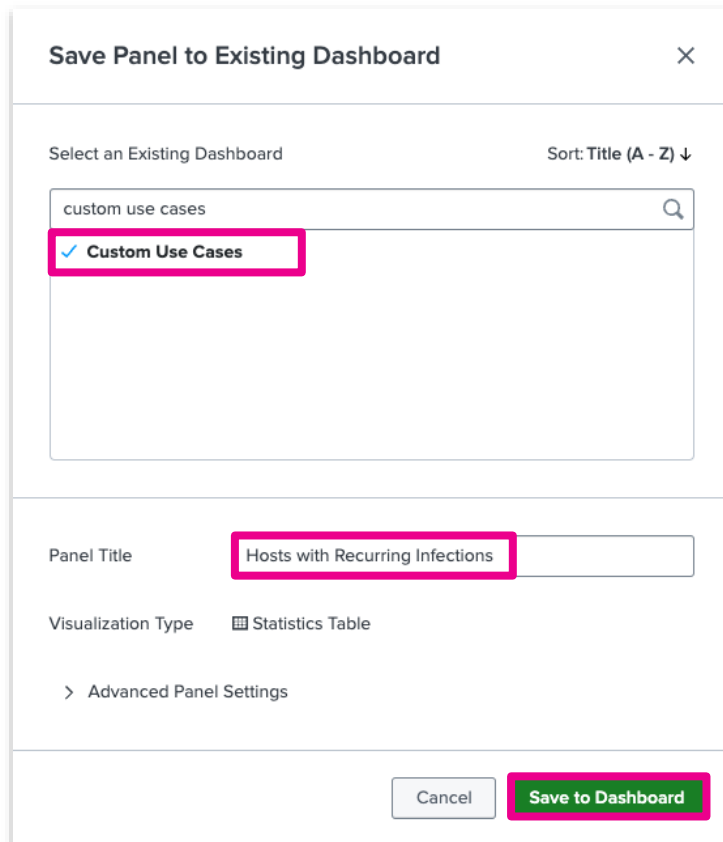


12. On the popup click **View Dashboard**. (If you already closed that prompt, navigate to the dashboard at **Advanced Threats > Custom Use Cases**).

13. To help make the table easier to reach, add some colour by putting the dashboard into **Edit** mode and clicking on the edit (✎) icon for the **count** column.



14. Edit the color ranges as shown so a count of **10 or greater** will be red ☐

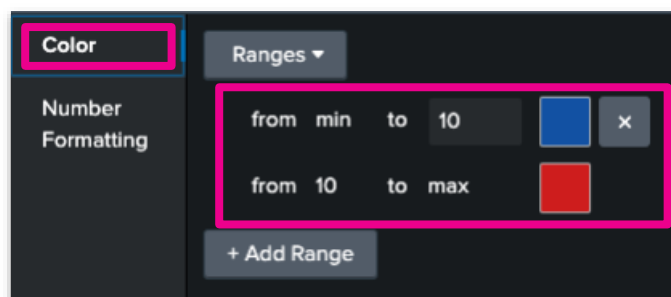

Make sure you **save** your dashboard when you're finished!

Custom Use Cases

EditExport...

Last 24 hoursHide Filters

This is a dashboard you can add your custom reports to.

You can explore hundreds of additional security use cases available in the free [Splunk Security Essentials app](#).

Some of the common use cases from Security Essentials app are already implemented in this InfoSec app under Access Anomalies and Network Anomalies.

Hosts with Recurring Infections

Risk_Name ↕	Computer_Name ↕	count ↕
Backdoor.Joggver	boxster	9
Backdoor.Joggver	continental	10
Backdoor.Joggver	frontier	9
Backdoor.Joggver	rabbit	9
Backdoor.Joggver	skyhawk	9
Backdoor.Joggver	talon	9

Exercise 7 – Adding Security Content: New Dashboard


Description

The Security team has asked us to create a new custom dashboard showing network security insights, to help strengthen their continuous monitoring and network security.


For this exercise we will use Splunk Security Essentials, which has a useful feature to help with creating new custom dashboards.

Steps

1. Open the Splunk Security Essentials app and in the menu bar navigate to **Setup > 4 - Create Posture Dashboards**.

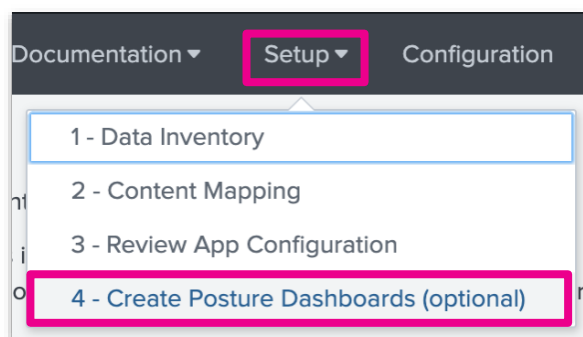


2. Since we've already run this report for you, click on **Retrieve Last Result** to populate the report.





Note: If the 'Retrieve Last Results' button is not present or is greyed out, please refresh the page.


3. Click on **Create Posture Dashboards**.




4. On the **Available Visualizations** popup, select **Essential Network Security** and ensure only the following detections are selected:
 - **Rare Internal Destination IPs**
 - **Rare Internal Source IPs**
 - **Hosts communicating with the most destinations on SMB ports**

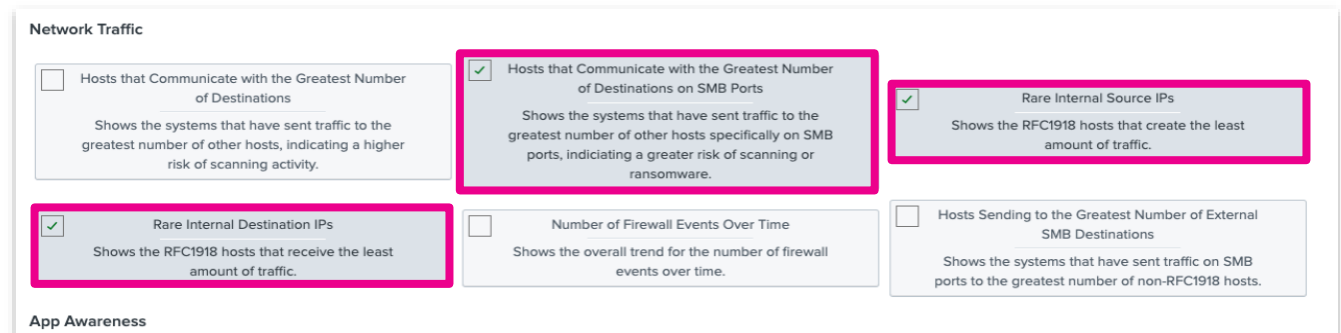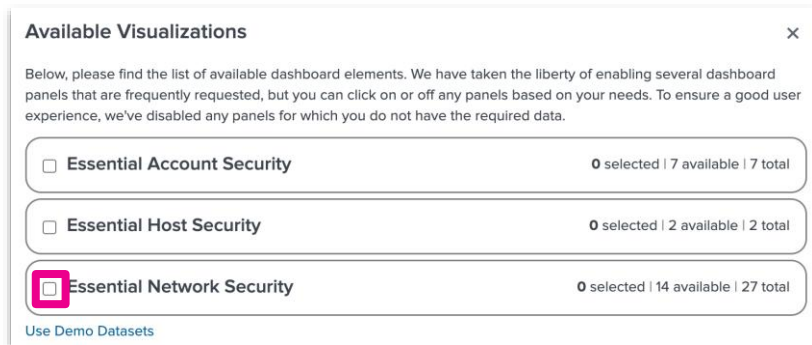

5. Your dashboard has now been created! Locate the new dashboard by navigating (still within Splunk Security Essentials) to **Advanced > Dashboards**.

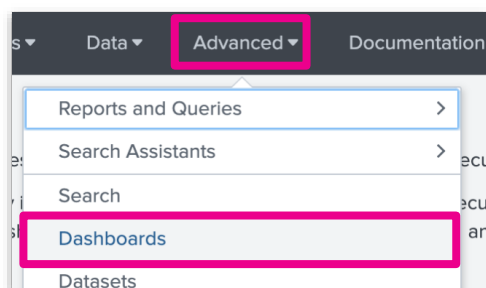

You should see the new **Essential Network Security** dashboard listed.

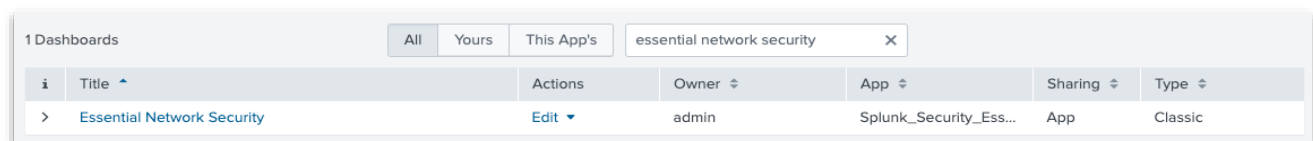

6. Optionally open the dashboard and verify that it contains the use cases you selected.

Essential Network Security Edit Export ...

Last 7 days Hide Filters

Network Traffic

Hosts that Communicate with the Greatest Number of Destinations on SMB Ports		Rare Internal Source IPs		Rare Internal Destination IPs	
All_Traffic.src_ip	count	All_Traffic.src_ip	count	All_Traffic.dest_ip	count
66.1.1.7	3	10.154.1.71	6	10.154.1.88	6
66.1.1.10	2	10.154.10.169	6	10.154.10.203	6
66.1.1.2	2	10.154.127.222	6	10.154.10.247	6
10.154.10.24	1	10.154.13.30	6	10.154.10.77	6
10.154.10.26	1	10.154.13.93	6	10.154.114.26	6
10.154.10.29	1	10.154.14.21	6	10.154.122.120	6
10.154.10.31	1	10.154.15.16	6	10.154.135.14	6
66.1.1.4	1	10.154.15.8	6	10.154.252.92	6
66.1.1.5	1	10.154.216.135	6	10.154.8.203	6
66.1.1.6	1	10.154.217.70	6	10.68.28.45	6


Shows the systems that have sent traffic to the greatest number of other hosts specifically on SMB ports, indicating a greater risk of scanning or ransomware.

Shows the RFC1918 hosts that create the least amount of traffic.


Shows the RFC1918 hosts that receive the least amount of traffic.

Now let's move the dashboard to the InfoSec app so it's alongside the rest of our security dashboards.


7. In the top right corner of the screen go to **Settings** > **User interface**. On the **User interface** page click on **Views**.

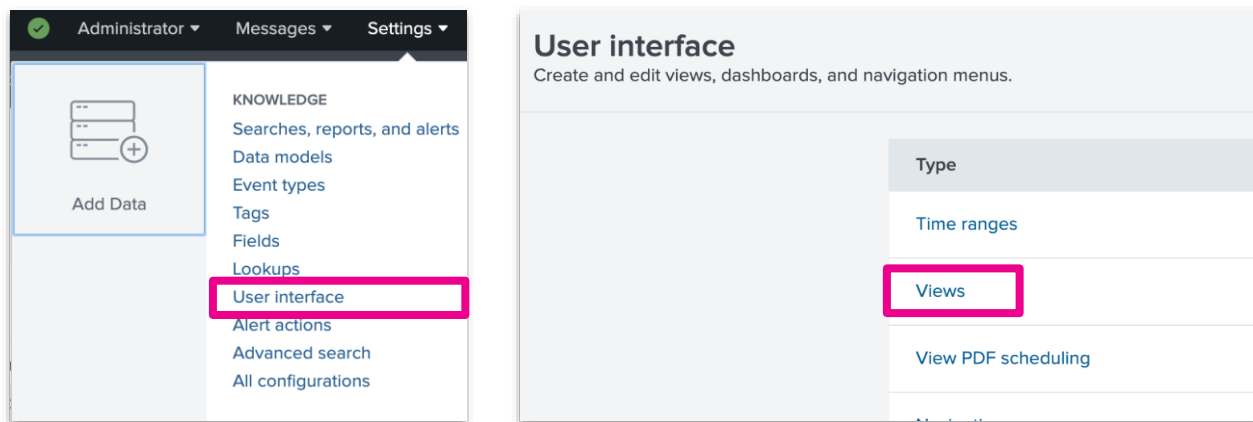

- Locate the **Essential_Network_Security** view (i.e. our dashboard) in the list and under the **Actions** column click on **Move**.

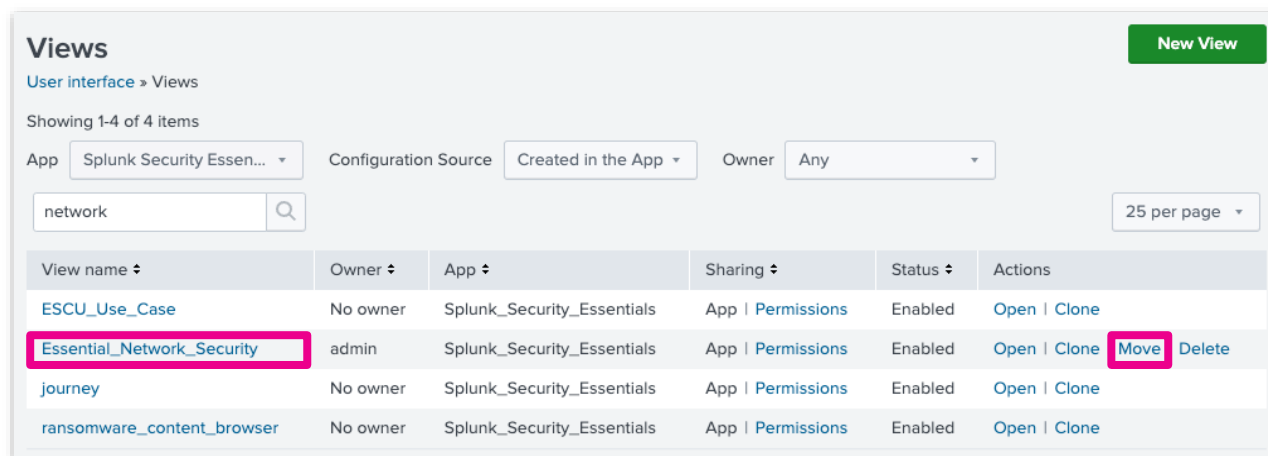

- On the **Move Object** popup, select the InfoSec app and click **Move**.

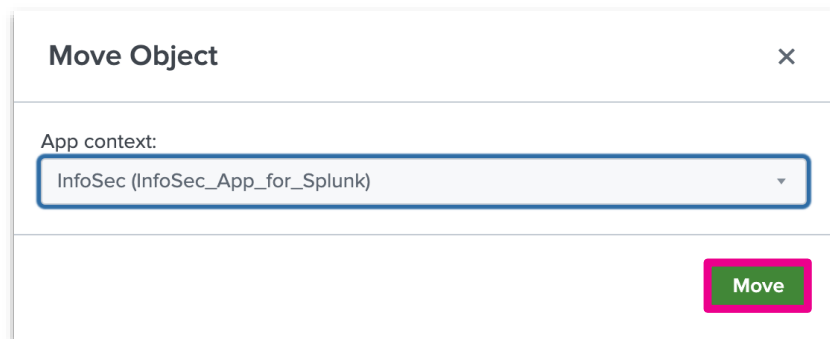


- Your dashboard has now been moved to the InfoSec app! Verify this by opening the **InfoSec** app and navigating to **Search > Dashboards** and locating the dashboard in the list.

>	Endpoints	Edit	nobody	InfoSec_App_for_Spl...
>	Error Details	Edit	nobody	Splunk_TA_aws
>	Essential Network Security	Edit	admin	InfoSec_App_for_Spl...
>	Executive View	Edit	nobody	InfoSec_App_for_Spl...
>	Firewalls	Edit	nobody	InfoSec_App_for_Spl...


Our final step will be to add this dashboard to the dropdown menus within the InfoSec app. Add the dashboard to the navigation menu. This will help users to find this new dashboard and the insights it contains.

11. In the top right corner of the screen go to **Settings > User interface** and click on **Navigation menus**.

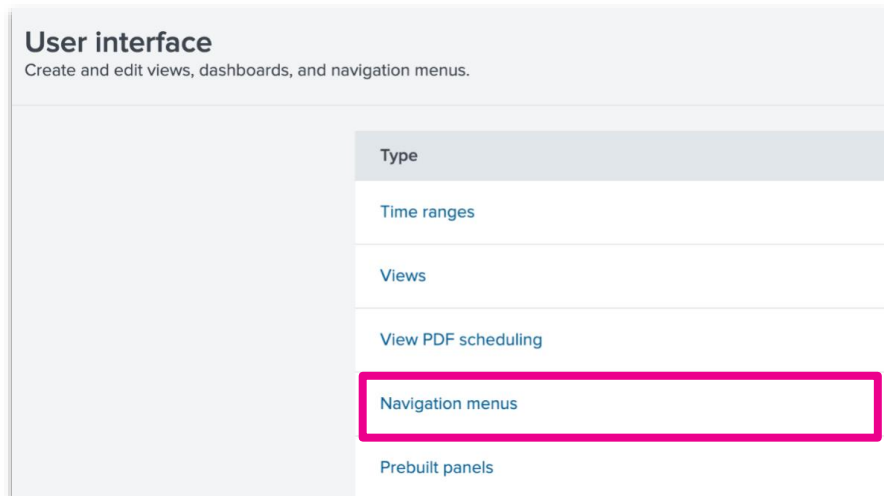

12. Ensure the **App** context is set to “**InfoSec (InfoSec_App_for_Splunk)**” and **Configuration Source** is set to “**Created in the App**”.

Click on the **default** navigation menu for the **InfoSec_App_for_Splunk**.

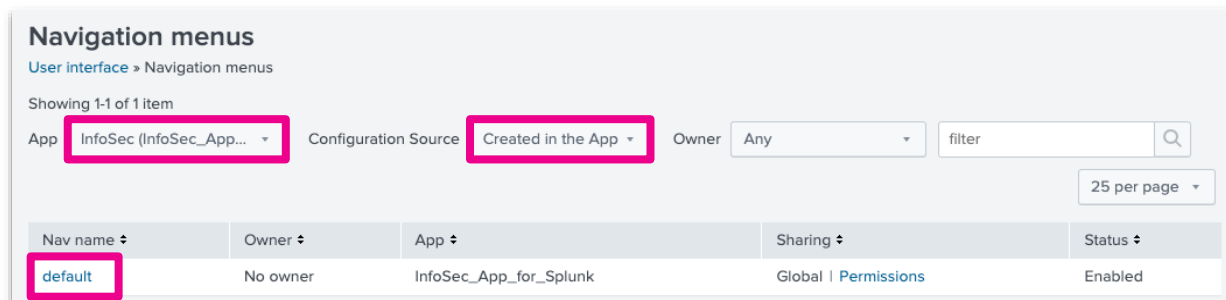

Here we can edit the XML of the navigation menus for this app.

13. Let's add our new dashboard under the **Continuous Monitoring** dropdown. To do this, locate the `<view name="malware">` line and add the following new line beneath it (note that the view name is case sensitive):

```
<view name="Essential_Network_Security" />
```



Click on **Save**.

14. Now return to the **InfoSec** app and click on the **Continuous Monitoring** dropdown in the menu. You should now see your new dashboard listed!

store

Continuous Monitoring ▾

Advanced

Windows Access and Changes

All Authentications

Malware

Essential Network Security

Intrusion Detection (IDS/IPS)

Firewalls

Network Traffic

Security Posture

Continuous Monitoring ▾

Advanced Threats ▾

Investigation ▾

Compliance

Executive View

Alerts

Health

Search ▾

Help ▾

IS InfoSec

Essential Network Security

Edit

Export ▾

...

Last 7 days ▾

Hide Filters

Network Traffic

Hosts that Communicate with the Greatest Number of Destinations on SMB Ports

All_Traffic.src_ip ▾	count ▾
66.1.1.7	3
66.1.1.10	2
66.1.1.2	2
10.154.10.24	1
10.154.10.26	1
10.154.10.29	1
10.154.10.31	1
66.1.1.4	1
66.1.1.5	1
66.1.1.6	1

Shows the systems that have sent traffic to the greatest number of other hosts specifically on SMB ports, indicating a greater risk of scanning or ransomware.

Rare Internal Source IPs

All_Traffic.src_ip ▾	count ▾
10.154.13.93	17
10.154.15.8	17
10.154.216.135	17
10.154.228.191	17
10.154.1.71	18
10.154.10.169	18
10.154.127.222	18
10.154.13.30	18
10.154.14.21	18
10.154.15.16	18

Shows the RFC1918 hosts that create the least amount of traffic.

Rare Internal Destination IPs

All_Traffic.dest_ip ▾	count ▾
10.154.10.247	17
10.154.114.26	17
10.154.135.14	17
10.154.8.203	17
10.154.1.88	18
10.154.10.203	18
10.154.10.26	18
10.154.10.77	18
10.154.122.120	18
10.154.252.92	18

Shows the RFC1918 hosts that receive the least amount of traffic.

Summary

Congratulations on completing the hands-on exercises in today's workshop! By completing these exercises, you have helped Buttercup State University to customize the InfoSec App for Splunk to meet its specific needs, allowing them to enhance their security posture, and detect and respond to security threats more effectively.