

Splunk4Rookies - Splunk Connect for Syslog (SC4S)

Lab Guide

Overview



Containerized Syslog Appliance

This lab guide contains the hands-on exercises for the Splunk4Rookies - Splunk Connect for Syslog (SC4S) workshop and is a companion to the full workshop slides to assist you with configuration file contents and flow.

Before proceeding with these exercises, please ensure that you have a copy of the workshop slide deck, which will help to put into context the tasks you are carrying out.

Download the workshop slide deck: <https://splk.it/S4R-SC4S-Attendee>

Prerequisites

In order to complete these exercises, you will need your own Splunk instance. The presenter delivering your workshop will give you a unique URL for your event, which will allow you to register and create your own Splunk instance.

Please follow the steps provided by the presenter to get access to Splunk!

⚠ Troubleshooting Connectivity

If you experience connectivity issues with accessing either your workshop environment or the event page, please try the following troubleshooting steps. If you still experience issues please reach out to the team running your workshop.


- **Use Google Chrome** (if you're not already)
- If the event page (i.e. <https://show.splunk.com/event/<eventID>>) didn't load when you clicked on the link, try **refreshing the page**
- **Disconnect from VPN** (if you're using one)
- **Clear your browser cache and restart your browser** (if using Google Chrome, go to: Settings > Privacy and security > Clear browsing data)
- **Try using private browsing mode** (e.g. Incognito in Google Chrome) to rule out any cache issues
- **Try using another computer** such as your personal computer - all you need is a web browser! Cloud platforms like AWS can often be blocked on corporate laptops.

Table of Contents

Overview	1
Prerequisites	1
⚠ Troubleshooting Connectivity	1
Table of Contents	2
Labs: SC4S 101	3
Lab 1: Setup Your Environment	3
Lab 2: Introduction to Search	8
Lab 4: Config Explorer	11
Splunk_metadata.csv contents:	13
Example search to check the changes have been applied:	13
Labs: SC4S 201	16
Lab 6: Set a Custom Filter	16
Lab 7: null_queue	20
Check Labs Dashboard	24


Login to Splunk

Locate your instance URL and credentials in the Splunk Show event
<https://show.splunk.com>



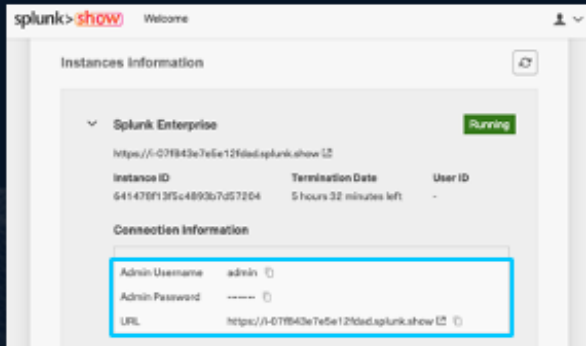


Scroll down the event page and expand the **Splunk Enterprise** section to view your login details


Log in to your Splunk instance

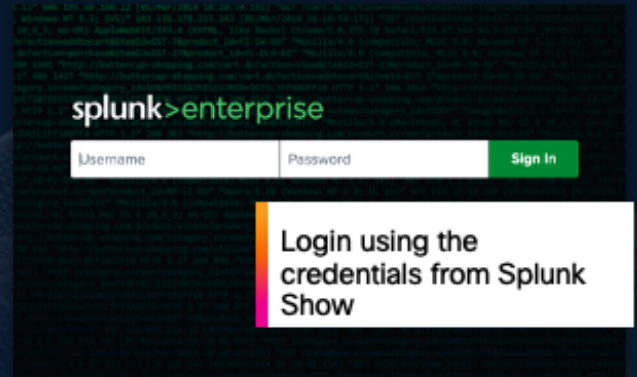

Login and Set Your Timezone

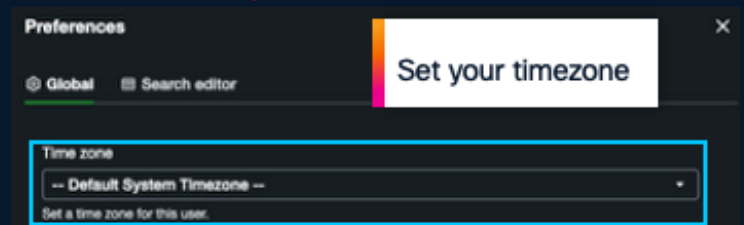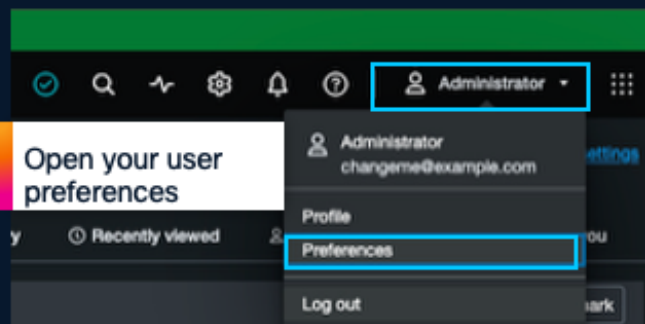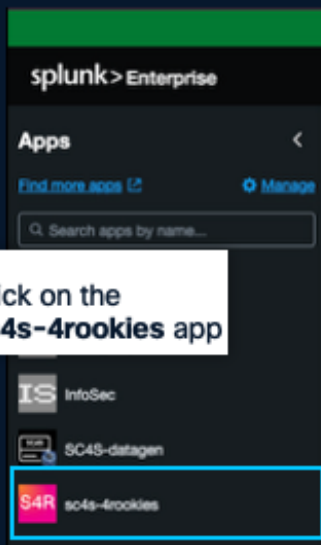

Check the Data Flow

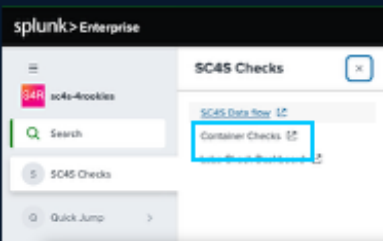

Click on **SC4S Checks** and then on **02 - SC4S Container Message Checks**

All inputs are turned off and the sc4s service is stopped after the initial image creation

You may see some historical data or blank tables - this is normal


02 - SC4S Container Message Checks

Messages from "sc4scontainer" or "sc4sprobe"

Select Time Range: Last 15 minutes

#	_time	sourceType	_raw
1	2021-09-09T14:17:41+02:00	sc4sevents	2021-09-09T02:17:41:728-00:00 sc4s4rookies syslog-ng 164 - [meta.sequenceid="2"] syslog-ng starting up, version="3.32.7"
2	2021-09-09T14:17:36+02:00	sc4sprobe	HEC TEST EVENT
3	2021-09-09T14:17:36+02:00	sc4sprobe	HEC TEST EVENT
4	2021-09-09T14:17:30+02:00	sc4sevents	2021-09-09T02:17:30:695-00:00 sc4s4rookies syslog-ng 164 - [meta.sequenceid="276043"] syslog-ng shutting down, version="3.32.7"


Check the Data Flow

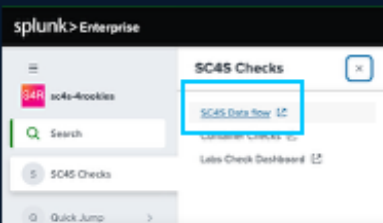

Click on **SC4S Checks** and then on **01 - SC4S Data flow**

All inputs are turned off and the sc4s service is stopped after the initial image creation

You may see some historical data or blank graphs - this is normal

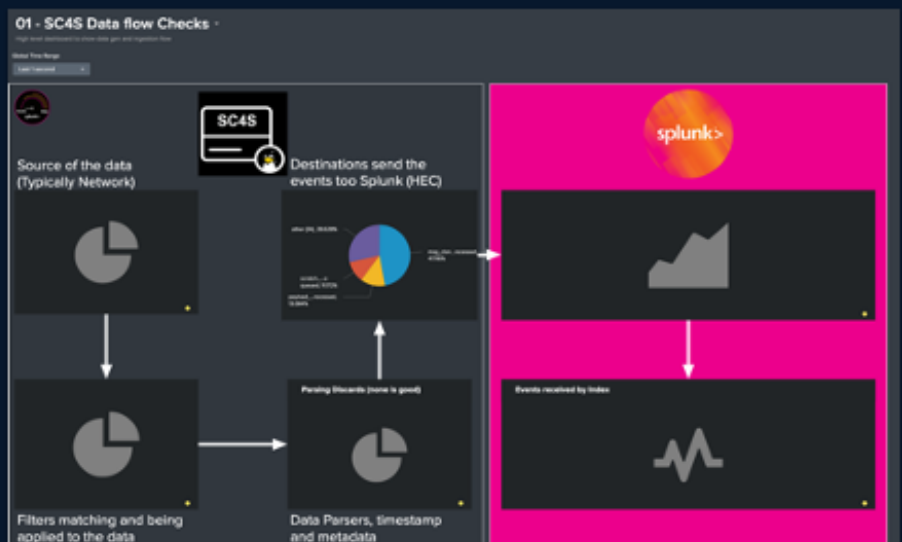



Restart the SC4S systemd Service

Restart the systemd service for podman and SC4S by enabling the input, waiting a few seconds, then disabling it again:



Inputs

Manage your data inputs

2 Inputs 10 Per Page All filter

Name	Interval	Index	Status	Actions
cisco_sc4s_events	30	default	Disabled	
sc4s_systemd_restarter	86400	default	Disabled	

1. Set the toggle to Enabled

2. Wait for 10 seconds...

1. Set the toggle to Disabled

Note: In environments with CLI access you can also restart the service using the following command:

```
sudo systemctl restart sc4s
```

Enable the Cisco Datagen

Inputs

Manage your data inputs

2 Inputs 10 Per Page All filter

Name	Interval	Index	Status	Actions
cisco_sc4s_events	30	default	Disabled	
sc4s_systemd_restarter	86400	default	Disabled	

1. Set the toggle to Enabled

Inputs

Manage your data inputs


2 Inputs 10 Per Page All filter

Name	Interval	Index	Status	Actions
cisco_sc4s_events	30	default	Enabled	
sc4s_systemd_restarter	86400	default	Disabled	

This input will start the cisco datagen - leave this one enabled

Now let's check the data flow dashboard again

Go Back to the sc4s-4rookies App

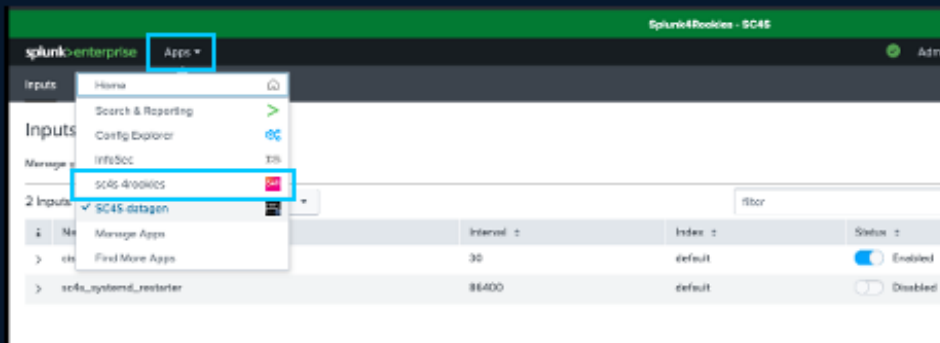

Open the
sc4s-4rookies app

© 2020 Cisco and/or its affiliates. All rights reserved.

CISCO

Check the Data Flow

SC4S Checks

[SC4S Data flow](#)

[Container Checks](#)

[Labs Check Dashboard](#)

Click on **SC4S Checks** and then on **01 - SC4S Data flow Checks**

Now we have started the Cisco datagen you should see a steady flow of data start to populate your dashboard

The arrows indicate the flow of the events through your log paths and out to Splunk over HEC to the indexes

01 - SC4S Data flow Checks

High level dashboard to show data gen and ingestion flow

Source of the data (Typically Networking)

Processing and indexing of the data

Data Flow, Knowledge and Indexing


Events Indexed by Index

Spring events

© 2020 Cisco and/or its affiliates.

CISCO

Check the Data Flow

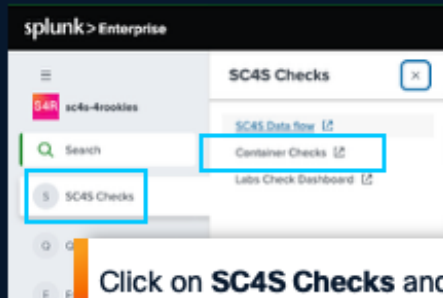

Click on **SC4S Checks** and then on **SC4S Container Checks**

Now we have restarted the sc4s service you should see some startup messages from syslog-ng from inside the container

(If not you may have disabled the sc4s restart input too quickly a few slides back - try that again!)

02 - SC4S Container Message Checks

Messages from 'syslog-ng' in 'Syslog-ng'

Select Time Range:

SC4S events

#	_time_	_source_	_raw_
1	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020427P"]out error sending HTTP request, url=https://172.17.0.1:8080/services/collector/event, error=Could't connect to server' worker_index="0", driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
2	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]Server disconnected while preparing messages for sending, trying again, driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
3	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]Server disconnected while preparing messages for sending, trying again, driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
4	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]out error sending HTTP request, url=https://172.17.0.1:8080/services/collector/event, error=Could't connect to server' worker_index="0", driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
5	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]out error sending HTTP request, url=https://172.17.0.1:8080/services/collector/event, error=Could't connect to server' worker_index="0", driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
6	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]Server disconnected while preparing messages for sending, trying again, driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
7	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]Server disconnected while preparing messages for sending, trying again, driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
8	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]out error sending HTTP request, url=https://172.17.0.1:8080/services/collector/event, error=Could't connect to server' worker_index="0", driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
9	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]Server disconnected while preparing messages for sending, trying again, driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
10	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]out error sending HTTP request, url=https://172.17.0.1:8080/services/collector/event, error=Could't connect to server' worker_index="0", driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
11	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]Server disconnected while preparing messages for sending, trying again, driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
12	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]out error sending HTTP request, url=https://172.17.0.1:8080/services/collector/event, error=Could't connect to server' worker_index="0", driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
13	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]Server disconnected while preparing messages for sending, trying again, driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
14	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]out error sending HTTP request, url=https://172.17.0.1:8080/services/collector/event, error=Could't connect to server' worker_index="0", driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"
15	2023-08-30T19:00:00.000	syslog-ng	[meta requestor="020440P"]Server disconnected while preparing messages for sending, trying again, driver="d_hes_h4PQ", location=host-generator-dest_hes:5:0, worker_index="0", time_request="0", batch_size="500"

Lab 2: Introduction to Search

Q. How would you find DNS events that are NOT .google.com?

Possible answers:

dns NOT *.google.com

dns query!=*.google.com

NOT vs !=

For more information on the difference between NOT and != please see

<https://docs.splunk.com/Documentation/Splunk/latest/Search/NOTexpressions>.



Introducing the InfoSec App for Splunk

Download: <https://splunkbase.splunk.com/app/4240>

InfoSec App for Splunk is your starter security pack.

The InfoSec app is free (as in beer) to install and use and is designed to address the most common security use cases, including continuous monitoring and security investigations, as well as a number of advanced threat detection use cases.

All of the components of the InfoSec app can be easily expanded using free security resources available for Splunk like [Splunk Security Essentials](#)

IS InfoSec App for Splunk


★★★★★ 10 ratings

Splunk Cloud Splunk Built






InfoSec App for Splunk: Examples

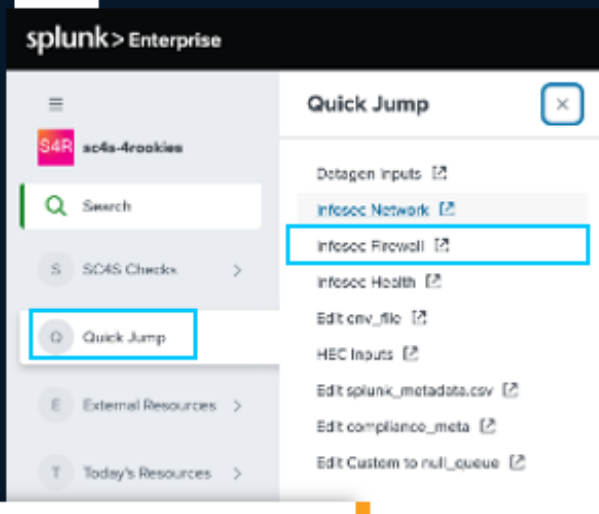

Firewalls


Provides visibility into your firewalls, regardless of vendor or the presence of data from multiple vendors in the same environment.

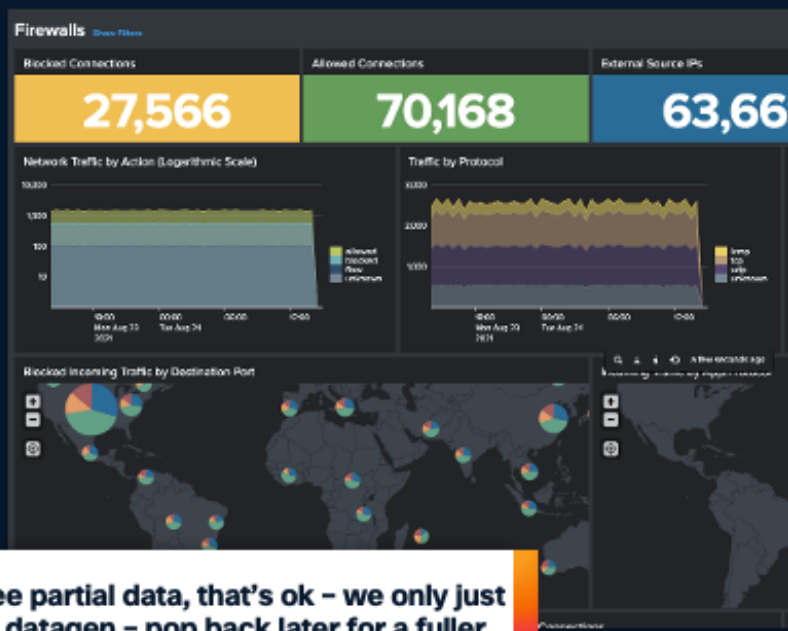

You may see partial data, that's ok - we only just started the datagen - pop back later for a fuller view



InfoSec App for Splunk: Examples

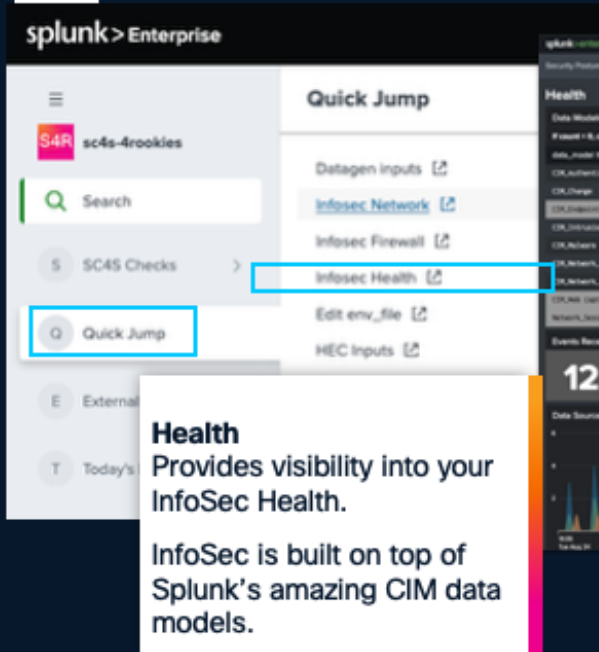

Health

Provides visibility into your InfoSec Health.

InfoSec is built on top of Splunk's amazing CIM data models.



Lab 4: Config Explorer

Config Explorer 101

The screenshot shows the Splunk Config Explorer interface. On the left, the 'splunk> Enterprise' sidebar is visible, with the 'Quick Jump' section highlighted. The 'Quick Jump' section lists various configuration areas, including 'Edit env_file'. A blue box highlights the 'Quick Jump' button. On the right, the main pane shows the file explorer view for the path '/sc4s/local/config/app_parsers/'. The 'Filter' button is highlighted, and a blue box labeled 'Filter files' points to it. The 'Recent Files' button is also highlighted. The 'Refresh' button is highlighted. The 'Folder path' is highlighted, and a blue box labeled 'Folder path' points to the path '/sc4s/local/config/app_parsers/'. The 'Splunk conf files' button is highlighted. A blue box labeled 'Splunk conf files' points to the 'Filter' button. A blue box labeled 'Filter files' points to the 'Filter' button. A blue box labeled 'Recent Files' points to the 'Recent Files' button. A blue box labeled 'Refresh' points to the 'Refresh' button. A blue box labeled 'Folder path' points to the path '/sc4s/local/config/app_parsers/'. A blue box labeled 'Splunk conf files' points to the 'Filter' button. A blue box labeled 'Filter files' points to the 'Filter' button.

Config Explorer
The basic functions are highlighted here, but it can also do much more than this!

© 2020 Cisco and/or its affiliates. All rights reserved.

Config Explorer 102

It's like Visual Studio Code, but in Splunk!

Click on the `env_file` to see the contents:



The screenshot shows the Splunk Config Explorer interface with the file explorer view. The file explorer shows the path '/sc4s/' and the file 'env_file' is selected. The contents of the 'env_file' are displayed in the main pane. The contents are as follows:

```
1
2 ## Created with JB Splunk Install script by magic
3 # Output config
4 SC4S_DEST_SPLUNK_HEC_DEFAULT_URL=https://127.0.0.1:8088
5
6 SC4S_DEST_SPLUNK_HEC_DEFAULT_TOKEN=e342a3c6-5d59-48ed-9ffe-9f2b75786802
7
8 #Uncomment the following line if using untrusted SSL certificates
9 SC4S_DEST_SPLUNK_HEC_TLS_VERIFY=no
10
```

Learn more: <https://splunk.github.io/splunk-connect-for-syslog/latest/configuration/#global-configuration-variables>

© 2020 Cisco and/or its affiliates. All rights reserved.

Edit splunk_metadata.csv

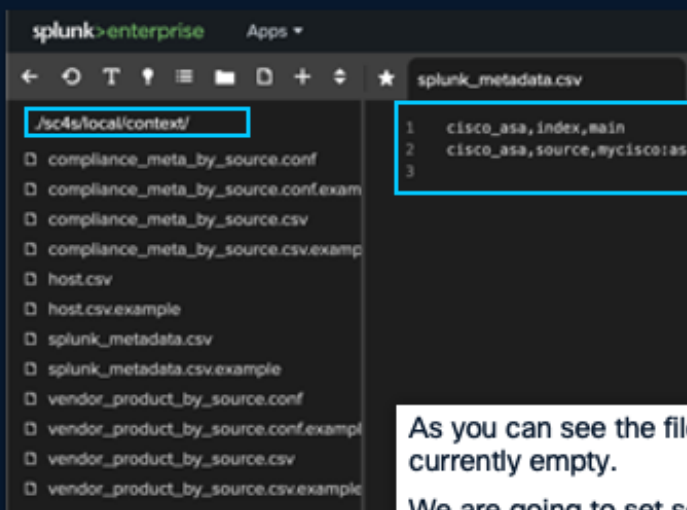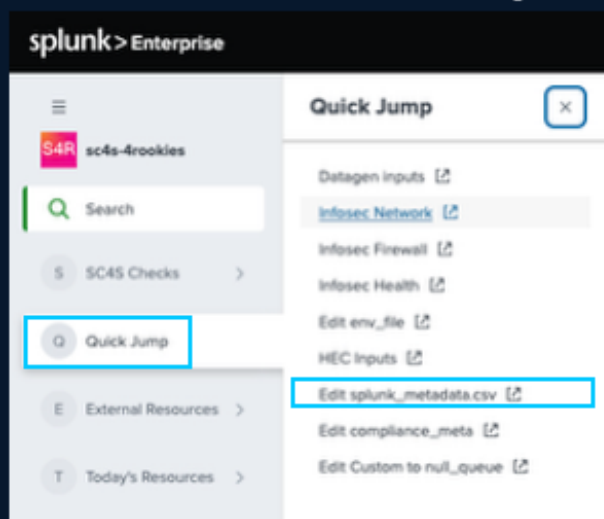


As you can see the file is currently empty.

We are going to set some custom items, restart SC4S and enjoy the show!


© 2016 Cisco and/or its affiliates. All rights reserved.

Learn more: <https://splunk.github.io/splunk-connect-for-syslog/latest/configuration/#override-the-log-path-of-indexes-or-metadata>

Edit splunk_metadata.csv

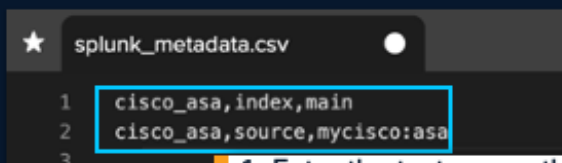

1. Enter the text as per the screenshot to the left
change:
index to main
source to mycisco:asa

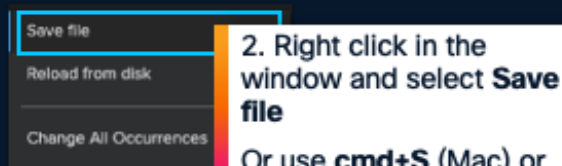

2. Right click in the window and select **Save file**
Or use **cmd+S** (Mac) or **ctrl+S** (Windows)

This configuration will take precedence over the default for the **cisco_asa** filter.

The default values of:

key = cisco_asa
metadata = index
value = **netfw**

key = cisco_asa
metadata = source
value = **cisco:asa**

will become:

key = cisco_asa
metadata = index
value = **main**

key = cisco_asa
metadata = source
value = **mycisco:asa**

© 2016 Cisco and/or its affiliates. All rights reserved.

Learn more: <https://splunk.github.io/splunk-connect-for-syslog/main/sources/Cisco/#product-asa-and-ftd-firepower>

Splunk_metadata.csv contents:

```
cisco_asa,index,main
cisco_asa,source,mycisco:asa
```

SC4S-datagen

Restart the SC4S systemd Service

Restart the systemd service for podman and SC4S by enabling the input, waiting a few seconds, then disabling it again:

splunk> Enterprise

Apps

Find more apps

Search apps by name...

SC4S-datagen

SC4S-rookies

Open the SC4S-datagen app

Inputs

Manage your data inputs

2 Inputs

10 Per Page

All

filter

Name	Interval	Index	Status	Actions
cisco_sc4s_events	30	default	Disabled	
sc4s_systemd_restarter	86400	default	Disabled	

1. Set the toggle to Enabled

Inputs

Manage your data inputs

2 Inputs

10 Per Page

All

filter

Name	Interval	Index	Status	Actions
cisco_sc4s_events	30	default	Disabled	
sc4s_systemd_restarter	86400	default	Enabled	

2. Wait for 10 seconds...

1. Set the toggle to Disabled

Note: In environments with CLI access you can also restart the service using the following command:

```
sudo systemctl restart sc4s
```

© 2020 Cisco and/or its affiliates. All rights reserved.

CISCO

Example search to check the changes have been applied:

```
index=main sourcetype=cisco:asa
```

Check the Changes Have Been Applied

Run the following Splunk search:

```
index=main sourcetype=cisco:asa
```

i	Time	Event
>	28/08/2021 10:02:19.468	%ASA-2-106016: Deny IP spoof from (0.0.0.0) to 10.115.120.161 on interface Mobile_Traffic action = blocked dest = 10.115.120.161 host = 192.168.12.1 index = main sc4s_container = sc4s4rookies sc4s_loghost = sc4s4rookies source = mycisco:asa sourcetype = cisco:asa

Our custom index


Our custom source

© 2020 Cisco and/or its affiliates. All rights reserved.


Learn more: <https://splunk.github.io/splunk-connect-for-syslog/latest/configuration/#configure-sc4s-metadata>

CISCO

Check the Index Change

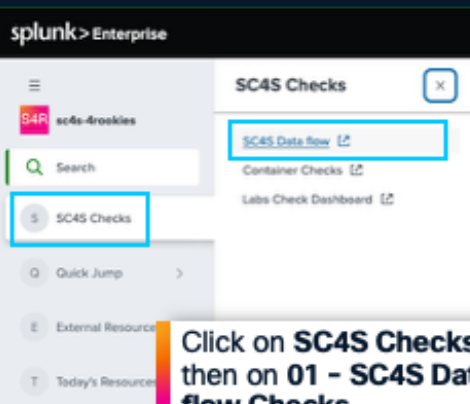

Click on **SC4S Checks** and then on **01 - SC4S Data flow Checks**

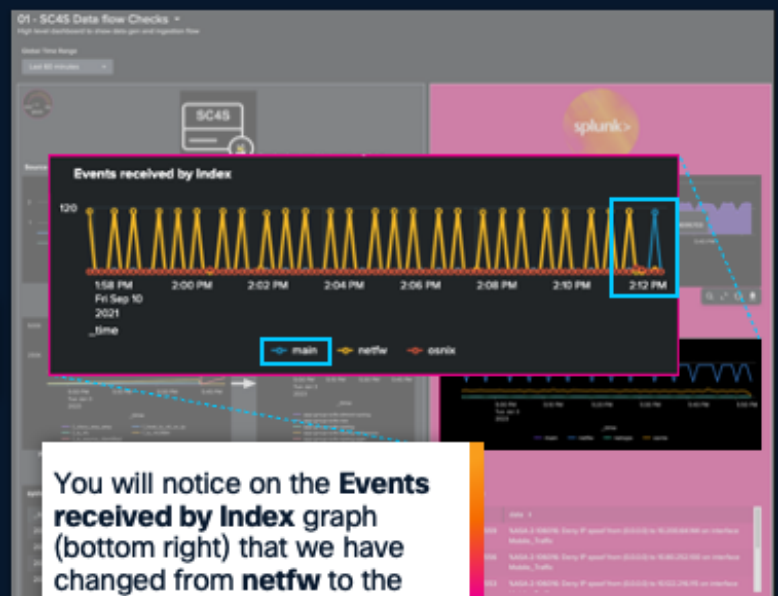

You will notice on the **Events received by Index** graph (bottom right) that we have changed from **netfw** to the **main** index

© 2020 Cisco and/or its affiliates. All rights reserved.

CISCO

Example search to see index changeover:

index=* | timechart count by index

Check the Index Change

Run the following Splunk search:

```
index=* | timechart count by index
```



Note the index change here
when we restarted SC4S

© 2026 Cisco and/or its affiliates. All rights reserved.

Learn more: <https://splunk.github.io/splunk-connect-for-syslog/latest/configuration/#configure-sc4s-metadata>

Cisco

Lab 6: Set a Custom Filter

Filter and Enrich

compliance_meta_by_source.conf

```
1 filter f_sc4s {
2   host("192.168.12.*" type(glob)) or
3   netmask(192.168.12.0/24)
4 };
```

Create **filters** in json format to match the events you want to manipulate

In this case we are choosing our Cisco device

compliance_meta_by_source.csv

```
1 f_sc4s,fields.compliance,"pci"
2 f_sc4s,fields.datacenter,"DC1"
3 f_sc4s,fields.city,"Auckland"
4 f_sc4s,fields.country,"New Zealand"
5 f_sc4s,fields.lat,"-36.8509"
6 f_sc4s,fields.lon,"174.7645"
7
```

Create **csv** data - this will be added to each event as it flows.

This is a fun example but there are production consequences such as **more disk space used** as fields are **indexed**. Use a **lookup** where possible as it's more efficient!

© 2020 Cisco and/or its affiliates. All rights reserved.

CISCO

Learn more: <https://splunk.github.io/splunk-connect-for-syslog/main/configuration/#override-index-or-metadata-based-on-host-ip-or-subnet-compliance-overrides>

Compliance_meta_by_source.conf contents:

```
filter f_sc4s {
  host("192.168.12.*" type(glob)) or
  netmask(192.168.12.0/24)
};
```


Compliance_meta_by_source.csv contents:

```
f_sc4s,fields.compliance,"pci"
f_sc4s,fields.datacenter,"DC1"
f_sc4s,fields.city,"Auckland"
f_sc4s,fields.country,"New Zealand"
f_sc4s,fields.lat,"-36.8509"
f_sc4s,fields.lon,"174.7645"
```




Restart the SC4S systemd Service

Restart the systemd service for podman and SC4S by enabling the input, waiting a few seconds, then disabling it again:

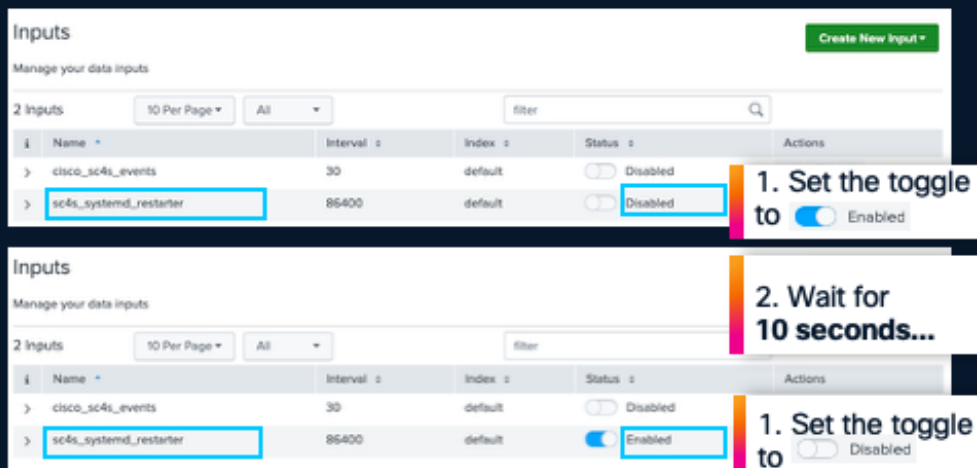

Note: In environments with CLI access you can also restart the service using the following command:

```
sudo systemctl restart sc4s
```

Example search to check events:

index=main

Check the Changes Have Been Applied

Run the following Splunk search:

```
index=*
```

The raw event is unchanged as we have added fields in flight

Event

%ASA-2-106016: Deny IP spoof from (0.0.0.0) to 10.3.83.54 on interface Mobile_Traffic

action = blocked

city = Auckland

compliance = pci

country = New Zealand

datacenter = DC1

Our custom fields

© 2016 Cisco and/or its affiliates. All rights reserved.

Learn more: <https://splunk.github.io/splunk-connect-for-aviron/main/configuration/#override-index-or-metadata-based-on-host-in-or-subnet-compliance-overrides>

CISCO

Cisco Confidential

Check the Changes Have Been Applied

```
index=main
```

Our custom fields

SELECTED FIELDS

a action 8

a city 1

a compliance 1

a country 1

a datacenter 1

a dest 100+

a host 1

a index 1

lat 2

lon 1

These ones look fun... what can we do with these?

city

1 Value, 100% of events

Selected

Yes

No

Reports

Top values

Top values by time

Rare values

Events with this field

Values	Count	%
Auckland	2,664	100%

© 2016 Cisco and/or its affiliates. All rights reserved.

CISCO

Cisco Confidential


Example search to check events:

```
index=main sourcetype=*cisco*  
| geostats count by sourcetype latfield=lat longfield=lon
```

Map It!

```
index=main sourcetype=*cisco*  
| geostats count by sourcetype latfield=lat longfield=lon
```

Select the **Cluster Map** visualisation

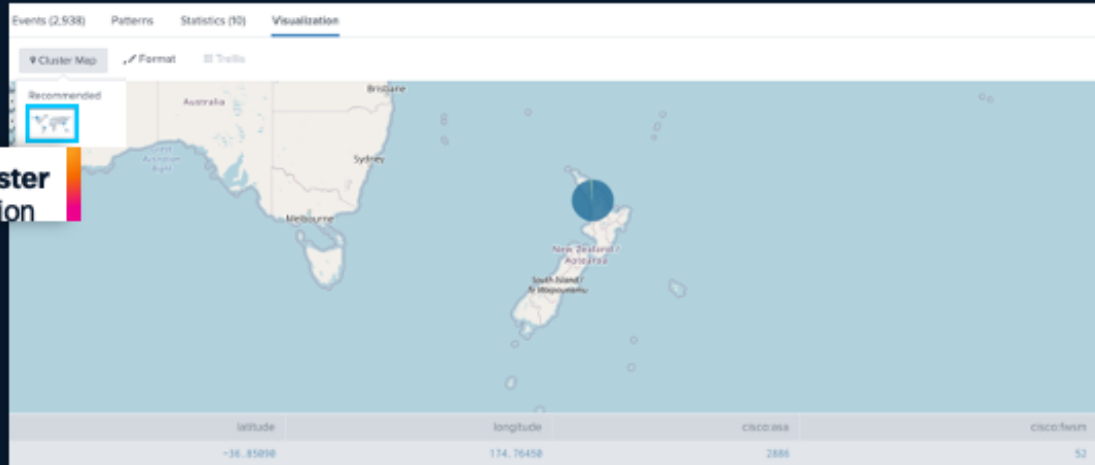

© 2016 Cisco and/or its affiliates. All rights reserved.

Learn more: <https://splunk.github.io/splunk-connect-for-syslog/main/configuration/#override-index-or-metadata-based-on-host-ip-or-subnet-compliance-overrides>

Cisco


Lab 7: null_queue

index=* host=192* sourcetype=*cisco*

| timechart count by sourcetype

null_queue

```
index=* host=192* sourcetype=*cisco*  
| timechart count by sourcetype
```

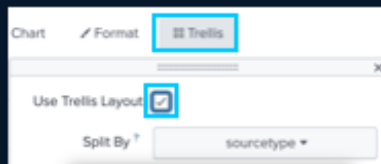



Enable the trellis layout and split by sourcetype



We are currently getting data from:

- asa
- fwsm

null_queue

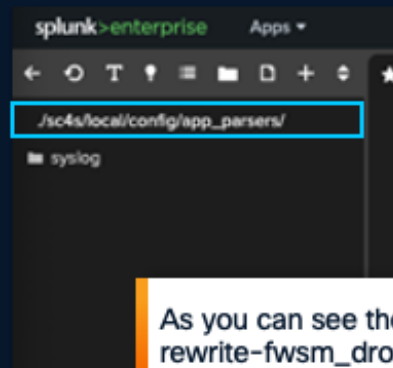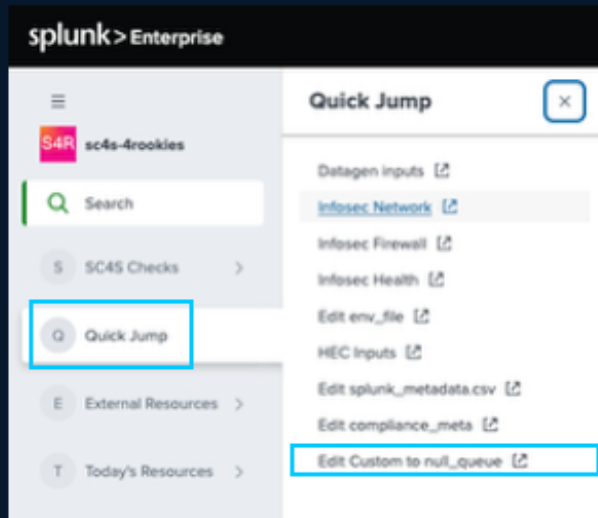

As you can see the dest-rewrite-fwsm_drop.conf file does not currently exist



We are going to create the file and its contents

© 2026 Cisco and/or its affiliates. All rights reserved.

Learn more: <https://splunk.github.io/splunk-connect-for-syslog/main/configuration/#/configure-all-data-by-in-or-subnet>




null_queue

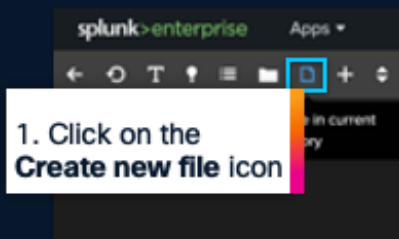

2. Enter the file name:

dest-rewrite-fwsm_drop.conf
then click on **Create**.

This file name is arbitrary but make sure it makes sense to you!

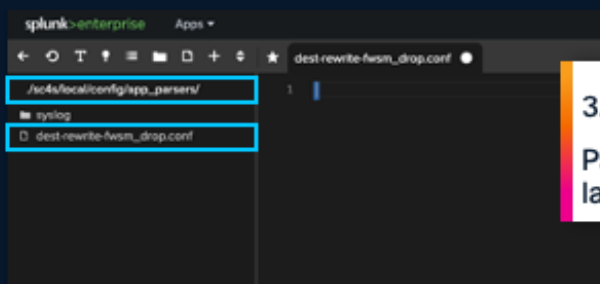

3. Double check the file path

Paste the file contents from the lab guide

© 2026 Cisco and/or its affiliates. All rights reserved.

Learn more: <https://splunk.github.io/splunk-connect-for-syslog/latest/sources/#filtering-events-from-output>



dest-rewrite-fwsm_drop.conf:

```
# /opt/splunk/sc4s/local/config/app_parsers/dest-rewrite-fwsm_drop.conf


block parser fwsm_drop-postfilter() {
  channel {
    # In this case the outcome is drop the event
    rewrite(r_set_dest_splunk_null_queue);
  };
};

application fwsm_drop-postfilter[sc4s-postfilter] {
  filter {
    "${fields.sc4s_vendor}" eq "cisco" and
    "${fields.sc4s_product}" eq "fwsm"
    # Note regex reads as start from first position
    # Any atleast 1 char that is not a '-'
    # constant '-7-'
    # and message('^%[\^\\-]+-7-');
  };
  parser { fwsm_drop-postfilter(); };
};
```

 SC4S-datagen

Restart the SC4S systemd Service

Restart the systemd service for podman and SC4S by enabling the input, waiting a few seconds, then disabling it again:

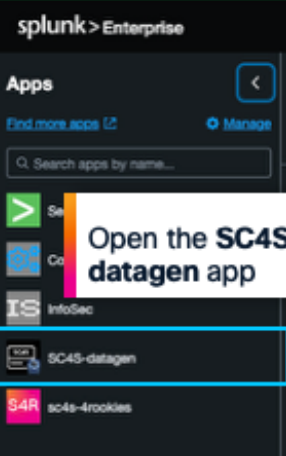


Open the **SC4S-datagen** app



Name	Interval	Index	Status	Actions
cisco_sc4s_events	30	default	Disabled	
sc4s_systemd_restarter	86400	default	Disabled	

1. Set the toggle to **Enabled**

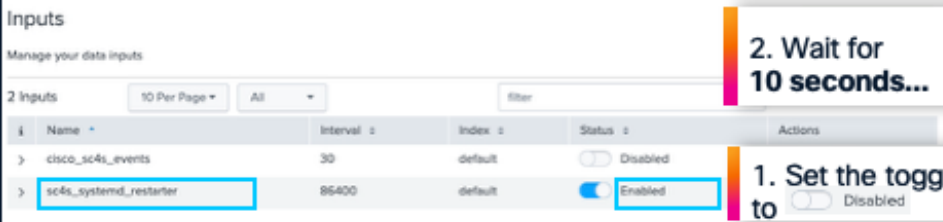

Name	Interval	Index	Status	Actions
cisco_sc4s_events	30	default	Disabled	
sc4s_systemd_restarter	86400	default	Enabled	

2. Wait for **10 seconds...**

1. Set the toggle to **Disabled**

Note: In environments with CLI access you can also restart the service using the following command:

```
sudo systemctl restart sc4s
```

© 2016 Cisco and/or its affiliates. All rights reserved.




Example search to check events:

```
index=* host=192* sourcetype=*cisco*  
| timechart count by sourcetype
```

null_queue

```
index=main host=192* sourcetype=*cisco*  
| timechart count by sourcetype
```

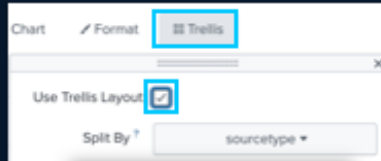

Enable the trellis layout and split by **sourcetype**




We are currently getting data from:

- ~~fwsm~~
- asa

fwsm has dropped away thanks to our filter

Check Labs Dashboard

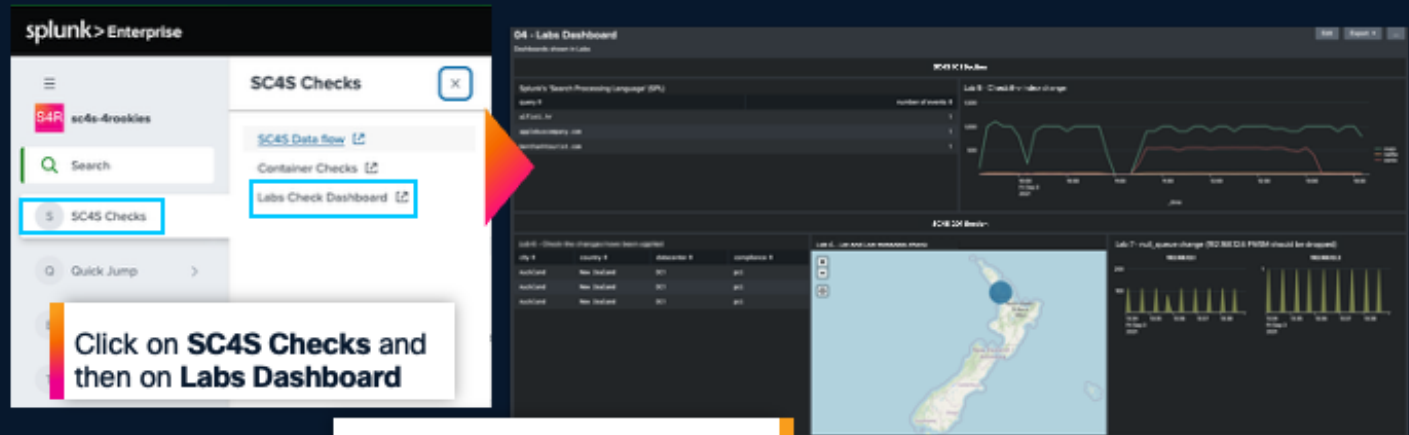

This Dashboard contains some of the panels from the labs.

Yours may not match exactly, but this is a good checkpoint.