

Validação - Somente COVID-19

José Elvano Moraes

4/15/2021

Variáveis selecionadas

```
## Rows: 76,666
## Columns: 11
## $ IDADE      <fct> "(37,73]", "(37,73]", "(73,109]", "(37,73]", "(73,109]", "(~
## $ EVOLUCAO   <fct> 2, 1, 1, 1, 2, 1, 2, 2, 1, 2, 1, 2, 2, 2, 1, 1, 1, 1, 1, 1,~
## $ RENAL      <fct> 2, 2, 2, 1, 2, 1, 2, 2, 2, 1, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,~
## $ DIABETES   <fct> 2, 1, 2, 1, 2, 2, 2, 2, 2, 1, 1, 1, 1, 1, 1, 1, 2, 2, 2, 2,~
## $ OBESIDADE  <fct> 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 1, 2, 2, 2, 1, 2, 2, 9, 2,~
## $ NEUROLOGIC <fct> 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 9, 2, 2, 2,~
## $ PNEUMOPATI <fct> 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,~
## $ UTI        <fct> 1, 1, 2, 1, 2, 2, 1, 2, 2, 2, 2, 2, 1, 1, 2, 2, 1, 2, 2, 2,~
## $ CARDIOPATI <fct> 2, 2, 2, 1, 1, 2, 2, 1, 1, 1, 1, 1, 1, 1, 2, 2, 1, 1, 1, 1,~
## $ SUPORT_VEN <fct> 2, 2, 2, 9, 3, 3, 2, 2, 3, 2, 2, 3, 1, 1, 3, 3, 2, 3, 9, 3,~
## $ ANTIVIRAL  <fct> 2, 2, 2, 9, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,~
```

Imposição de estrutura com arcos que fazem sentido clínico (*White list*)

```
s1 <- sample_frac(ddf, .8, FALSE)
cat(nrow(ddf) - nrow(s1))


## 15333

wl = matrix(c("OBESIDADE", "DIABETES",
              "IDADE", "DIABETES",
              "IDADE", "SUPORT_VEN",
              "IDADE", "NEUROLOGIC",
              "DIABETES", "RENAL",
              "DIABETES", "CARDIOPATI",
              "UTI", "EVOLUCAO"),
            ncol = 2, byrow = TRUE, dimnames = list(NULL, c("from", "to")))

bn1 <- mmhc(s1, whitelist = wl)
```

Rede Causal (DAG, *Directed Acyclic Graphic*)

```
#par(mfrow=c(2,2))
graphviz.plot(bn1, shape='rectangle', highlight = list(arcs = wl), main = '...')
```

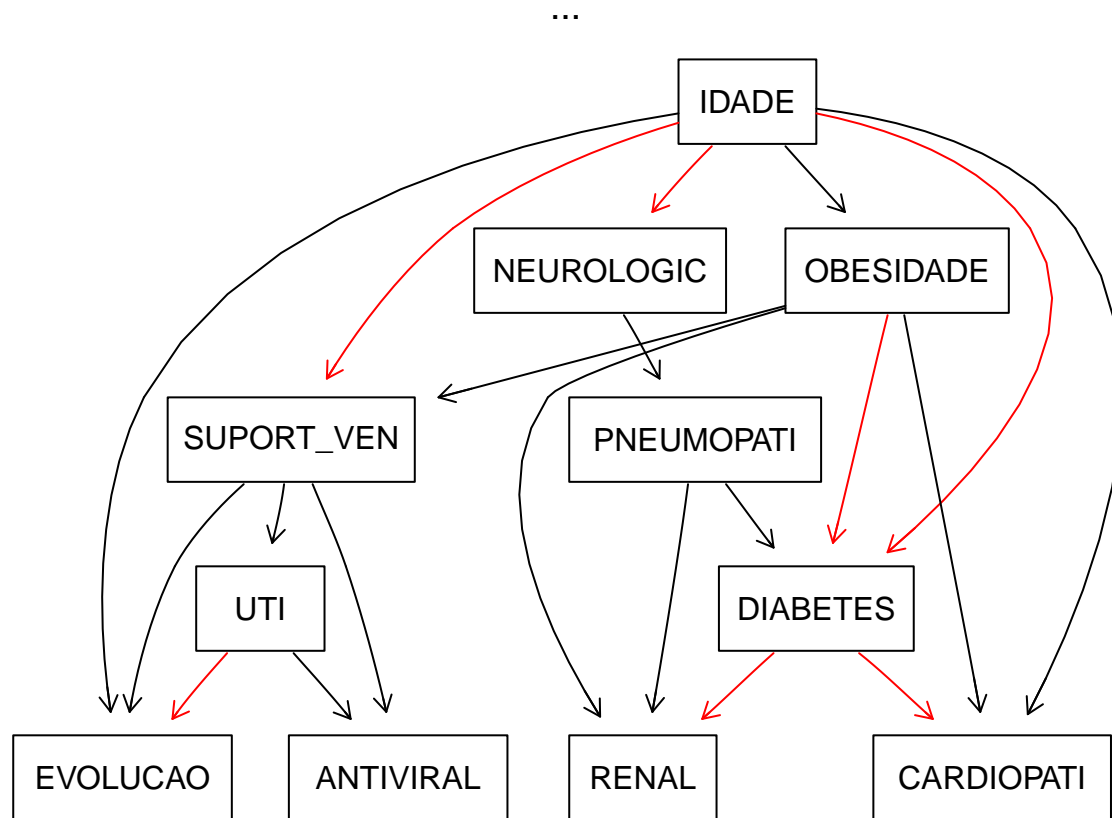


```
fitted.1 <- bn.fit(bn1, s1)
```

```
#par(mfrow=c(2,2))
```

```
graphviz.chart(fitted.1, scale = c(2, 3), type = "barprob", col = "darkblue", bg = "azure", bar.col = "darkblue", bar.bg = "azure")
```

Rede de probabilidades

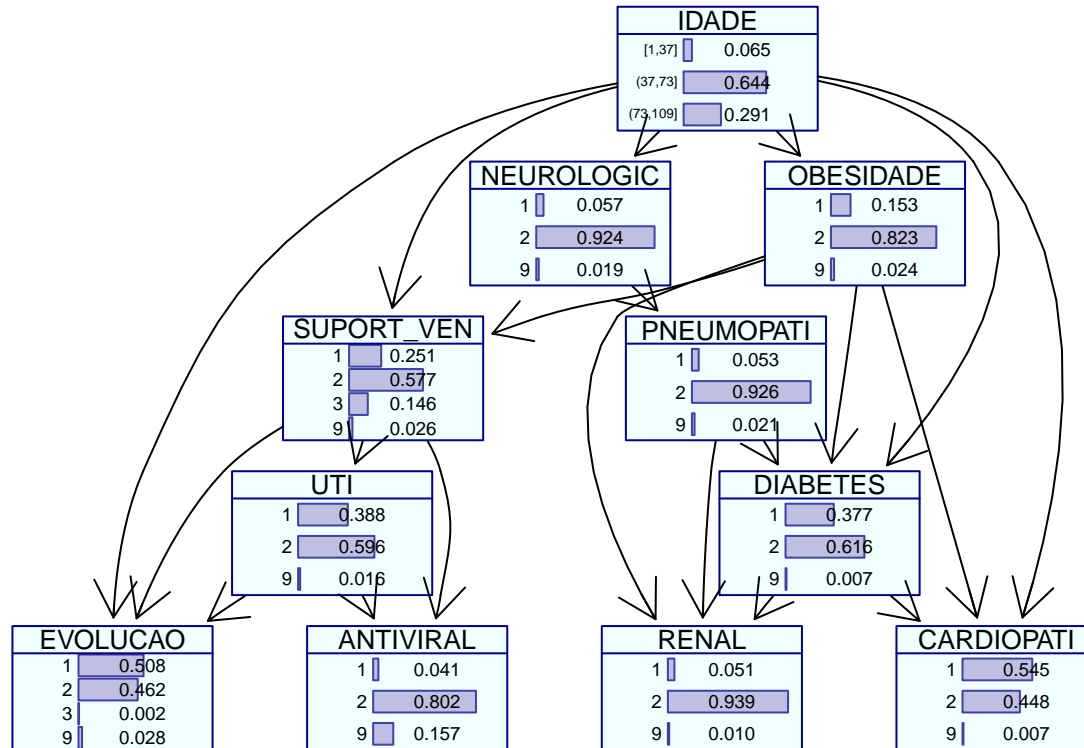


Bootstrapping

```
boots.trap <- 400
str.diff = suppressMessages(boot.strength(s1, R = boots.trap, algorithm = "mmhc"))
cat(paste('Threshold: ', attr(str.diff, "threshold")))
```

Threshold: 0.3725

```
avg.diff = averaged.network(str.diff)
strength.plot(avg.diff, str.diff, shape = "rectangle", main = paste("Iterações = ", boots.trap))
```


Iterações = 400

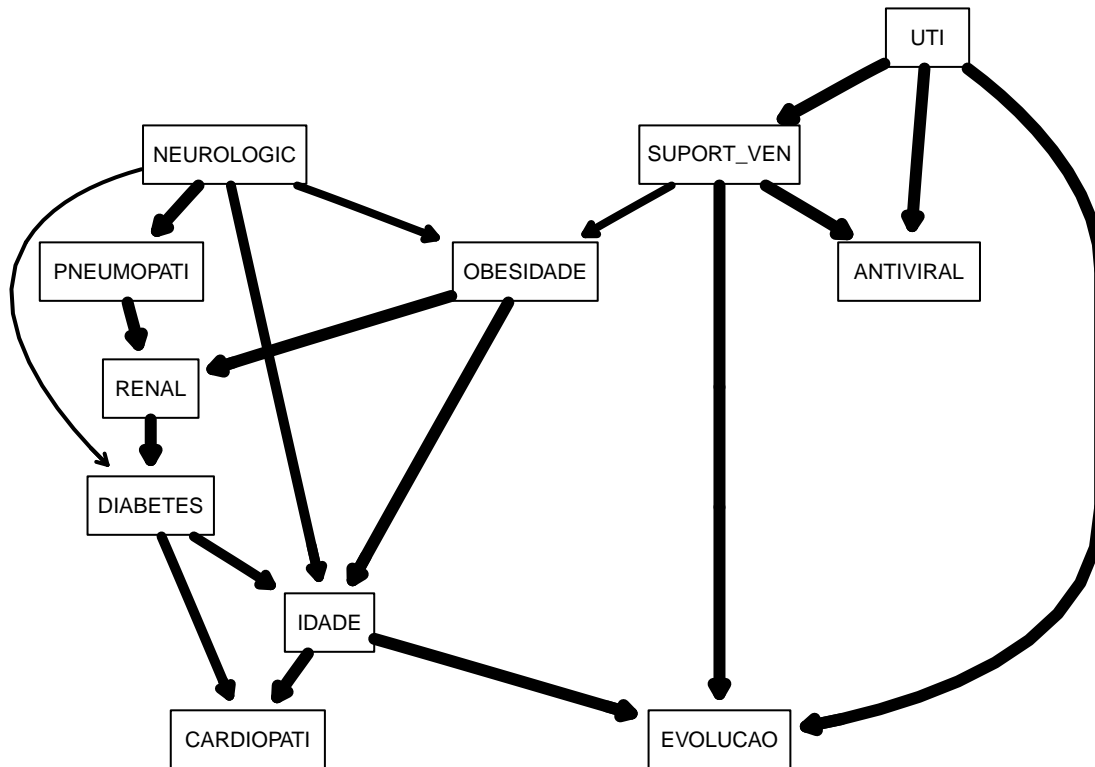


How can we compare the averaged network (avg.diff) with the network we originally learned in from all the data? The most qualitative way is to plot the two networks side by side, with the nodes in the same positions, and highlight the arcs that appear in one network and not in the other, or that appear with different directions.

```
par(mfrow = c(1, 2))
graphviz.compare(avg.diff, bn1, shape = "rectangle", main = c("DAG médio", "DAG único"))
```

DAG médio

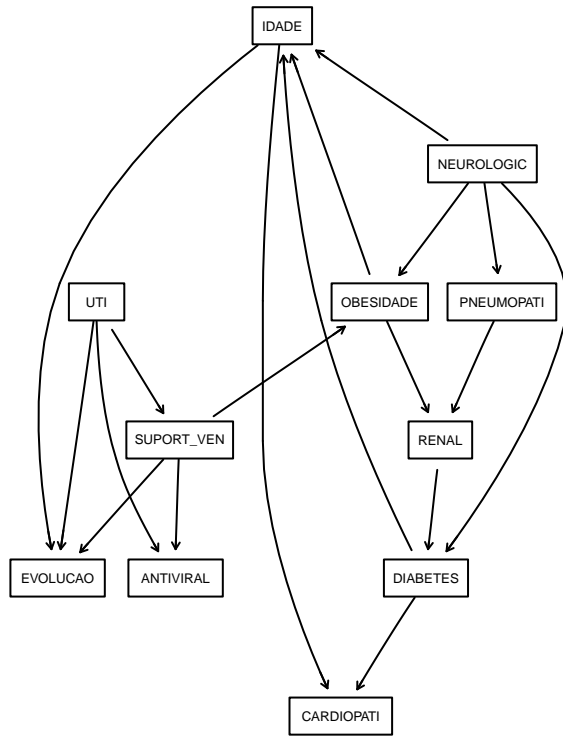

DAG único

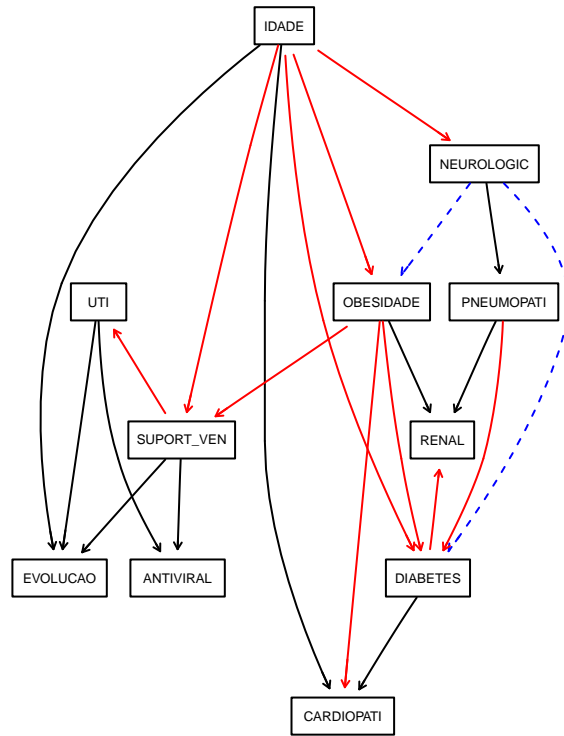


It is also a good idea to look at the threshold with respect to the distribution of the arc strengths

```

plot(str.diff)
abline(v = 0.75, col = "tomato", lty = 2, lwd = 2)
abline(v = 0.85, col = "steelblue", lty = 2, lwd = 2)

```


threshold = 0.372

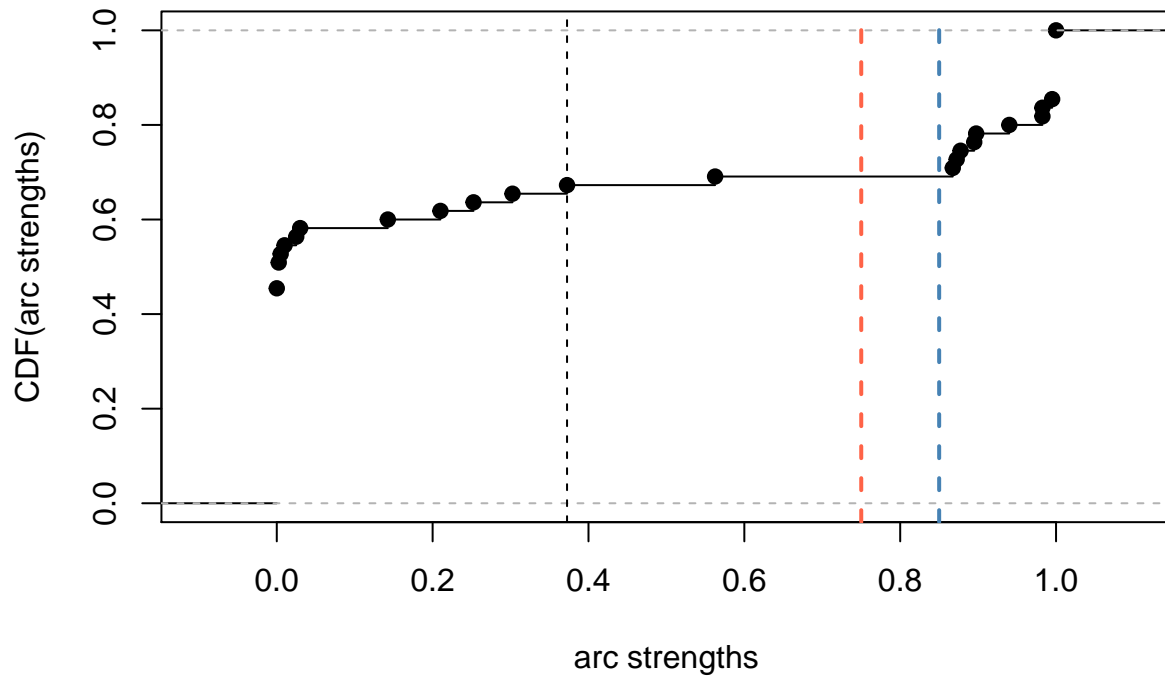


The simpler network we obtain by setting `threshold = 0.8` in `averaged.network()` is shown below; it is certainly easier to reason with from a qualitative point of view.

```
par(mfrow = c(1, 2))
avg.simpler = averaged.network(str.diff, threshold = 0.85)
strength.plot(avg.diff, str.diff, shape = "rectangle",
              main = paste("Iterações = ", boots.trap, " Thr = ", attr(str.diff, "threshold")))
strength.plot(avg.simpler, str.diff, shape = "rectangle", main = 'Iterações = 100 Thr = 0.85')
```

Iterações = 400 Thr = 0.3725

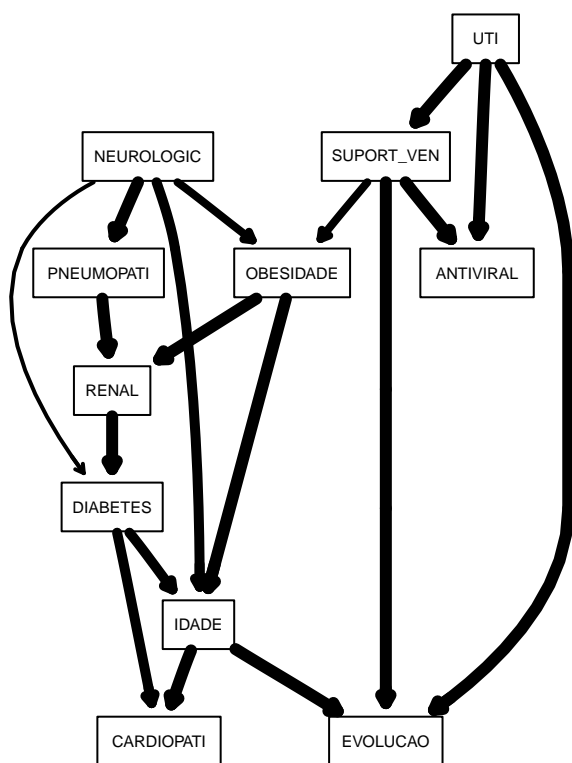

Iterações = 100 Thr = 0.85

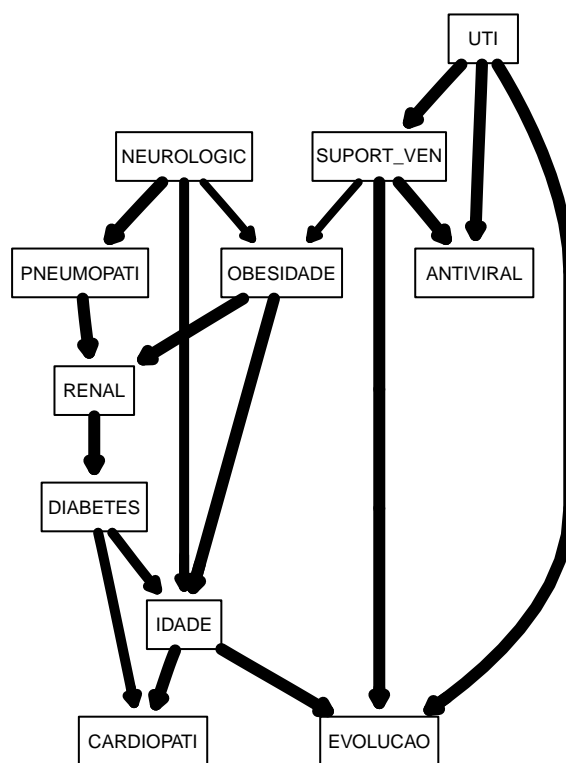

Markov Blanket da variável evolução

```
cat (mb(x = avg.diff, node = 'EVOLUCAO'))

## IDADE UTI SUPORT_VEN
##
cat (mb(x = avg.simpler, node = 'EVOLUCAO'))

## IDADE UTI SUPORT_VEN
```