

Query 1: Retrieve all students


```
CREATE DATABASE IF NOT EXISTS college_dbms;
```

```
USE college_dbms;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'Spoorthi', 10, 85),  
(102, 'NEha', 20, 92),  
(103, 'Navya', 10, 76),  
(104, 'Manya', 30, 88),  
(105, 'Tanisha', 20, 95);
```

```
SELECT * FROM Student;
```

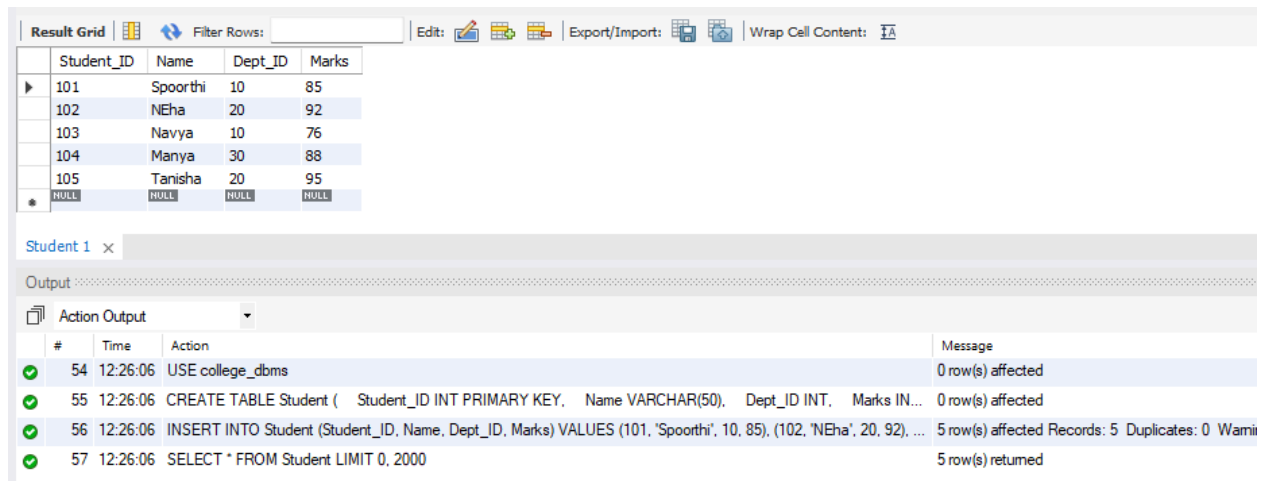

Student_ID	Name	Dept_ID	Marks
101	Spoorthi	10	85
102	NEha	20	92
103	Navya	10	76
104	Manya	30	88
105	Tanisha	20	95
* NULL	NULL	NULL	NULL

#	Time	Action	Message
54	12:26:06	USE college_dbms	0 row(s) affected
55	12:26:06	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected
56	12:26:06	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES (101, 'Spoorthi', 10, 85), (102, 'NEha', 20, 92), ...	5 row(s) affected Records: 5 Duplicates: 0 Warni
57	12:26:06	SELECT * FROM Student LIMIT 0, 2000	5 row(s) returned

Query 2: Retrieve selected columns

```
CREATE DATABASE IF NOT EXISTS college_dbms;
```

```
USE college_dbms;
```

```
CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES
(101, 'Spoorthi', 10, 85),
(102, 'NEha', 20, 92),
(103, 'Navya', 10, 76),
(104, 'Manya', 30, 88),
(105, 'Tanisha', 20, 95);
```

```
SELECT Name, Marks
FROM Student;
```

19 • **SELECT Name, Marks**
20 **FROM Student;**

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

	Name	Marks
▶	Spoorthi	85
	NEha	92
	Navya	76
	Manya	88
	Tanisha	95

Student 3 x

Output

Action Output

#	Time	Action	Message
61	12:29:07	CREATE DATABASE IF NOT EXISTS college_dbms	1 row(s) affected, 1
62	12:29:07	USE college_dbms	0 row(s) affected
63	12:29:07	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	Error Code: 1050. T
64	12:29:14	SELECT Name, Marks FROM Student LIMIT 0, 2000	5 row(s) returned

Query 3: Find students scoring more than 80

```
CREATE DATABASE IF NOT EXISTS college_dbms;
```

```
USE college_dbms;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'Spoorthi', 10, 85),  
(102, 'NEha', 20, 92),  
(103, 'Navya', 10, 76),  
(104, 'Manya', 30, 88),  
(105, 'Tanisha', 20, 95);
```

```
SELECT Student_ID, Name, Dept_ID, Marks  
FROM Student  
WHERE Marks > 80;
```

The screenshot displays a database management interface. At the top, there is a toolbar with various icons for editing, exporting, and filtering. Below the toolbar is a 'Result Grid' showing the data from the 'Student' table. The grid has columns for Student_ID, Name, Dept_ID, and Marks. The data rows are: (101, 'Spoorthi', 10, 85), (102, 'NEha', 20, 92), (104, 'Manya', 30, 88), and (105, 'Tanisha', 20, 95). Below the result grid is a tab labeled 'Student 4'. Underneath the tab is an 'Output' section with a dropdown menu set to 'Action Output'. This section shows a log of database actions with columns for #, Time, Action, and Message. The log entries are: 62 (12:29:07) 'USE college_dbms' with '0 row(s) affected'; 63 (12:29:07) 'CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...' with 'Error Code: 1050. Table'; 64 (12:29:14) 'SELECT Name, Marks FROM Student LIMIT 0, 2000' with '5 row(s) returned'; and 65 (12:30:25) 'SELECT Student_ID, Name, Dept_ID, Marks FROM Student WHERE Marks > 80 LIMIT 0, 2000' with '4 row(s) returned'.

Student_ID	Name	Dept_ID	Marks
101	Spoorthi	10	85
102	NEha	20	92
104	Manya	30	88
105	Tanisha	20	95
NULL	NULL	NULL	NULL

#	Time	Action	Message
62	12:29:07	USE college_dbms	0 row(s) affected
63	12:29:07	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	Error Code: 1050. Table
64	12:29:14	SELECT Name, Marks FROM Student LIMIT 0, 2000	5 row(s) returned
65	12:30:25	SELECT Student_ID, Name, Dept_ID, Marks FROM Student WHERE Marks > 80 LIMIT 0, 2000	4 row(s) returned

Query 4: Find CSE students


```
CREATE DATABASE IF NOT EXISTS college_dbms;
```

```
USE college_dbms;
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'Spoorthi', 10, 85),  
(102, 'NEha', 20, 92),  
(103, 'Navya', 10, 76),  
(104, 'Manya', 30, 88),  
(105, 'Tanisha', 20, 95);
```

```
SELECT Student_ID, Name, Dept_ID, Marks  
FROM Student  
WHERE Dept_ID = 10;
```

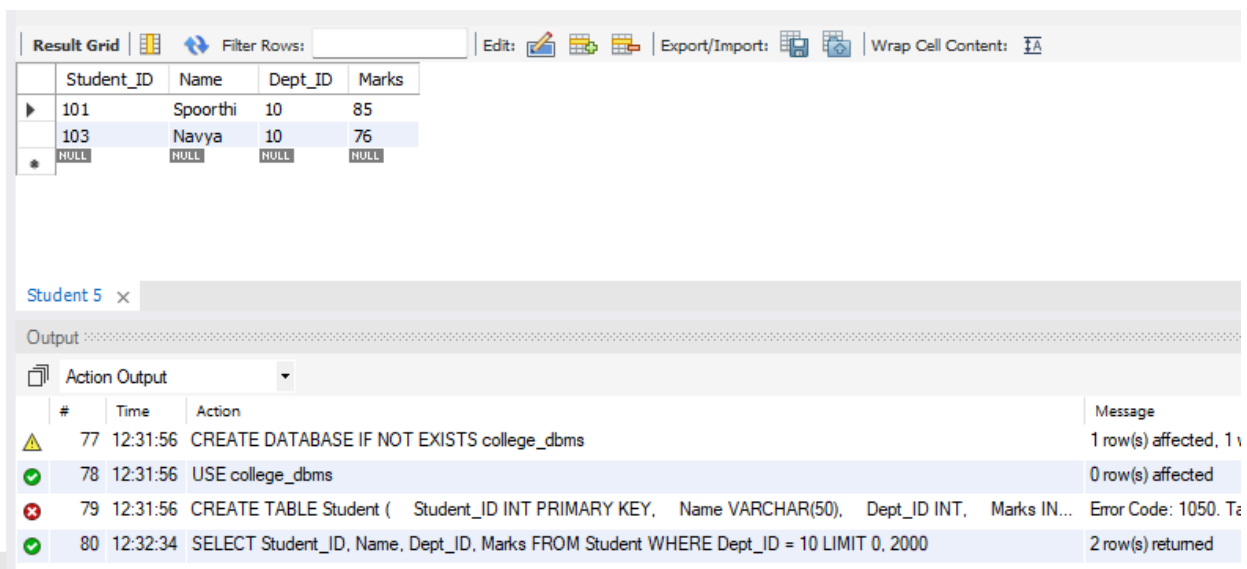

Result Grid

Student_ID	Name	Dept_ID	Marks
101	Spoorthi	10	85
103	Navya	10	76
NULL	NULL	NULL	NULL

Student 5 x

Output

Action Output

#	Time	Action	Message
77	12:31:56	CREATE DATABASE IF NOT EXISTS college_dbms	1 row(s) affected, 1 row(s) returned
78	12:31:56	USE college_dbms	0 row(s) affected
79	12:31:56	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks INT	Error Code: 1050. Table 'Student' already exists.
80	12:32:34	SELECT Student_ID, Name, Dept_ID, Marks FROM Student WHERE Dept_ID = 10 LIMIT 0, 2000	2 row(s) returned

Query 5: Find students from Delhi who scored above 80

```
CREATE DATABASE IF NOT EXISTS college_dbms;
```


```
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;
```


```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT,  
    City VARCHAR(50)  
);
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES  
(101, 'Spoorthi', 10, 85, 'Delhi'),  
(102, 'Neha', 20, 92, 'Mumbai'),  
(103, 'Navya', 10, 76, 'Delhi'),  
(104, 'Manya', 30, 88, 'Bangalore'),  
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT * FROM Student  
WHERE City = 'Delhi' AND Marks > 80;
```

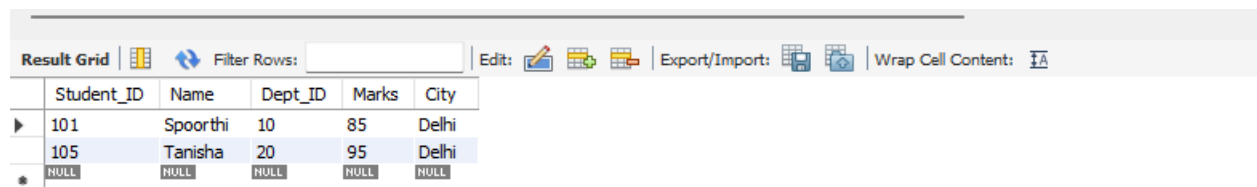

Student_ID	Name	Dept_ID	Marks	City
101	Spoorthi	10	85	Delhi
105	Tanisha	20	95	Delhi
NULL	NULL	NULL	NULL	NULL

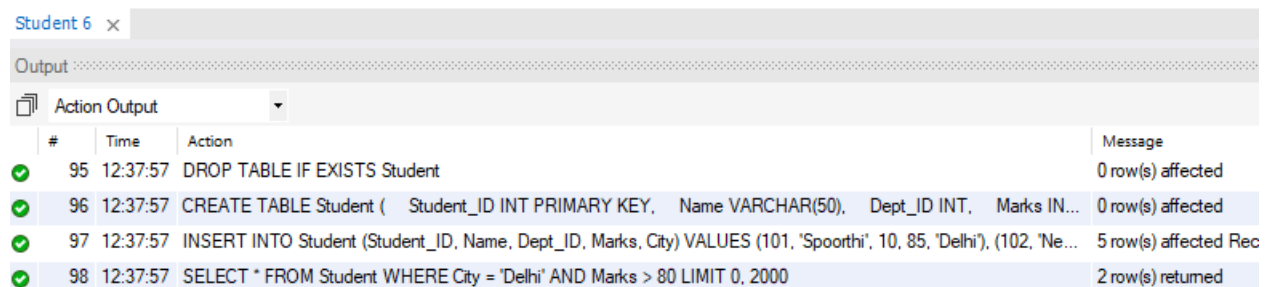

#	Time	Action	Message
95	12:37:57	DROP TABLE IF EXISTS Student	0 row(s) affected
96	12:37:57	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected
97	12:37:57	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Rec
98	12:37:57	SELECT * FROM Student WHERE City = 'Delhi' AND Marks > 80 LIMIT 0, 2000	2 row(s) returned

Query 6: Find the highest marks

```
CREATE DATABASE IF NOT EXISTS college_dbms;  
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;
```

```
CREATE TABLE Student (
```

```

Student_ID INT PRIMARY KEY,
Name VARCHAR(50),
Dept_ID INT,
Marks INT,
City VARCHAR(50)
);

```

```

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Spoorthi', 10, 85, 'Delhi'),
(102, 'Neha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'Manya', 30, 88, 'Bangalore'),
(105, 'Tanisha', 20, 95, 'Delhi');

```

```

SELECT MAX(Marks) AS Highest_Marks
FROM Student;

```

Result Grid				Filter Rows:	Export:	Wrap Cell Content:
	Highest_Marks					
	95					

Result 7			
Output			
Action Output			
#	Time	Action	Message
101	12:39:08	DROP TABLE IF EXISTS Student	0 row(s) affected
102	12:39:08	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected
103	12:39:08	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Rec
104	12:39:08	SELECT MAX(Marks) AS Highest_Marks FROM Student LIMIT 0, 2000	1 row(s) returned

Query 7: Find the average marks

```

CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;

```

```

DROP TABLE IF EXISTS Student;

```

```

CREATE TABLE Student (
Student_ID INT PRIMARY KEY,
Name VARCHAR(50),
Dept_ID INT,
Marks INT,

```

City VARCHAR(50)
);

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES  
(101, 'Spoorthi', 10, 85, 'Delhi'),  
(102, 'Neha', 20, 92, 'Mumbai'),  
(103, 'Navya', 10, 76, 'Delhi'),  
(104, 'Manya', 30, 88, 'Bangalore'),  
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT AVG(Marks) AS Average_Marks  
FROM Student;
```

Result Grid					Filter Rows:	Export:	Wrap Cell Content:
Average_Marks							
▶ 87.2000							

Result 8				
Output				
Action Output				
#	Time	Action		Message
✓ 107	12:40:59	DROP TABLE IF EXISTS Student		0 row(s) affected
✓ 108	12:40:59	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...		0 row(s) affected
✓ 109	12:40:59	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...		5 row(s) affected Records: 5 Duplic
✓ 110	12:40:59	SELECT AVG(Marks) AS Average_Marks FROM Student LIMIT 0, 2000		1 row(s) returned