

Subquery 1 — Students scoring above the average

```
CREATE DATABASE IF NOT EXISTS college_dbms;  
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;  
DROP TABLE IF EXISTS Department;
```

```
CREATE TABLE Department (  
    Dept_ID INT PRIMARY KEY,  
    Dept_Name VARCHAR(50)  
);
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT,  
    City VARCHAR(50)  
);
```

```
INSERT INTO Department (Dept_ID, Dept_Name) VALUES  
(10, 'CSE'),  
(20, 'ECE'),  
(30, 'MECH');
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES  
(101, 'Spoorthi', 10, 85, 'Delhi'),  
(102, 'Neha', 20, 92, 'Mumbai'),  
(103, 'Navya', 10, 76, 'Delhi'),  
(104, 'Manya', 30, 88, 'Bangalore'),  
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT Student_ID, Name, Dept_ID, Marks, City
```

FROM Student
WHERE Marks > (SELECT AVG(Marks) FROM Student);

Result Grid					
Filter Rows:					
Edit:					
Export/Import:					
Wrap Cell Content:					
Student_ID	Name	Dept_ID	Marks	City	
102	Neha	20	92	Mumbai	
104	Manya	30	88	Bangalore	
105	Tanisha	20	95	Delhi	
* NULL	NULL	NULL	NULL	NULL	

Student 13 x					
Output					
Action Output					
#	Time	Action			Message
✓ 157	12:57:27	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...			0 row(s) affected
✓ 158	12:57:27	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')			3 row(s) affected Records: 3
✓ 159	12:57:27	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...			5 row(s) affected Records: 5
✓ 160	12:57:27	SELECT Student_ID, Name, Dept_ID, Marks, City FROM Student WHERE Marks > (SELECT AVG(Marks) FROM St...			3 row(s) returned

Outer:

CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;

DROP TABLE IF EXISTS Student;
DROP TABLE IF EXISTS Department;

```
CREATE TABLE Department (
    Dept_ID INT PRIMARY KEY,
    Dept_Name VARCHAR(50)
);
```

```
CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);
```

INSERT INTO Department (Dept_ID, Dept_Name) VALUES

```
(10, 'CSE'),
(20, 'ECE'),
(30, 'MECH');
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Spoorthi', 10, 85, 'Delhi'),
(102, 'Neha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'Manya', 30, 88, 'Bangalore'),
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT Name, Marks FROM Student
WHERE Marks >
(SELECT AVG(Marks) FROM Student);
```

Result Grid			Filter Rows:	Export:	Wrap Cell Content:
	Name	Marks			
▶	Neha	92			
	Manya	88			
	Tanisha	95			

Student 15					Output
Action Output					
#	Time	Action	Message		
✓ 175	12:58:51	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected		
✓ 176	12:58:51	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Records: 3		
✓ 177	12:58:51	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Records: 5		
✓ 178	12:58:51	SELECT Name, Marks FROM Student WHERE Marks > (SELECT AVG(Marks) FROM Student) LIMIT 0, 2000	3 row(s) returned		

Inner:

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;
DROP TABLE IF EXISTS Department;
```

```
CREATE TABLE Department (
```

```
Dept_ID INT PRIMARY KEY,  
Dept_Name VARCHAR(50)  
);
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT,  
    City VARCHAR(50)  
);
```

```
INSERT INTO Department (Dept_ID, Dept_Name) VALUES  
(10, 'CSE'),  
(20, 'ECE'),  
(30, 'MECH');
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City)  
VALUES  
(101, 'Spoorthi', 10, 85, 'Delhi'),  
(102, 'Neha', 20, 92, 'Mumbai'),  
(103, 'Navya', 10, 76, 'Delhi'),  
(104, 'Manya', 30, 88, 'Bangalore'),  
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT Name, Marks FROM Student  
WHERE Marks >  
    (SELECT AVG(Marks) FROM Student);
```

Result Grid

Filter Rows:

Export:

Wrap Cell Content:

	Name	Marks
▶	Neha	92
	Manya	88
	Tanisha	95

Student 16

×

Output

Action Output

	#	Time	Action	Message
✓	184	13:00:18	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected
✓	185	13:00:18	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Record
✓	186	13:00:18	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Record
✓	187	13:00:18	SELECT Name, Marks FROM Student WHERE Marks > (SELECT AVG(Marks) FROM Student) LIMIT 0, 2000	3 row(s) returned

Subquery 2 — Student(s) who scored the highest marks

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;
DROP TABLE IF EXISTS Department;
```

```
CREATE TABLE Department (
    Dept_ID INT PRIMARY KEY,
    Dept_Name VARCHAR(50)
);
```

```
CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);
```

```
INSERT INTO Department (Dept_ID, Dept_Name) VALUES
(10, 'CSE'),
(20, 'ECE'),
(30, 'MECH');
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Spoorthi', 10, 85, 'Delhi'),
(102, 'Neha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'Manya', 30, 88, 'Bangalore'),
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT Student_ID, Name, Dept_ID, Marks, City
FROM Student
WHERE Marks = (SELECT MAX(Marks) FROM Student);
```

Result Grid					
	Student_ID	Name	Dept_ID	Marks	City
▶	105	Tanisha	20	95	Delhi
✱	NULL	NULL	NULL	NULL	NULL

Student 17				
Output				
Action Output				
#	Time	Action	Message	
✓ 193	13:01:27	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected	
✓ 194	13:01:27	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Recor	
✓ 195	13:01:27	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Recor	
✓ 196	13:01:27	SELECT Student_ID, Name, Dept_ID, Marks, City FROM Student WHERE Marks = (SELECT MAX(Marks) FROM St...	1 row(s) returned	

Inner:

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;
DROP TABLE IF EXISTS Department;
```

```
CREATE TABLE Department (
    Dept_ID INT PRIMARY KEY,
    Dept_Name VARCHAR(50)
);
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT,  
    City VARCHAR(50)  
);
```

```
INSERT INTO Department (Dept_ID, Dept_Name) VALUES  
(10, 'CSE'),  
(20, 'ECE'),  
(30, 'MECH');
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City)  
VALUES  
(101, 'Spoorthi', 10, 85, 'Delhi'),  
(102, 'Neha', 20, 92, 'Mumbai'),  
(103, 'Navya', 10, 76, 'Delhi'),  
(104, 'Manya', 30, 88, 'Bangalore'),  
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT MAX(Marks) FROM Student
```

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
MAX(Marks)			
▶ 95			

Result 18 x

Output

Action Output

#	Time	Action	Message
✓ 202	13:02:57	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected
✓ 203	13:02:57	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Records: 3 Duplica
✓ 204	13:02:57	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Records: 5 Duplica
✓ 205	13:02:57	SELECT MAX(Marks) FROM Student LIMIT 0, 2000	1 row(s) returned

Subquery 3 — Students scoring above Rahul

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;
DROP TABLE IF EXISTS Department;
```

```
CREATE TABLE Department (
    Dept_ID INT PRIMARY KEY,
    Dept_Name VARCHAR(50)
);
```

```
CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);
```

```
INSERT INTO Department (Dept_ID, Dept_Name) VALUES
(10, 'CSE'),
(20, 'ECE'),
(30, 'MECH');
```

```


INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Spoorthi', 10, 85, 'Delhi'),
(102, 'Neha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'Manya', 30, 88, 'Bangalore'),
(105, 'Tanisha', 20, 95, 'Delhi');

```

```

SELECT Student_ID, Name, Dept_ID, Marks, City
FROM Student
WHERE Marks >
(SELECT Marks FROM Student WHERE Name = 'Rahul' OR Name = 'Spoorthi');

```

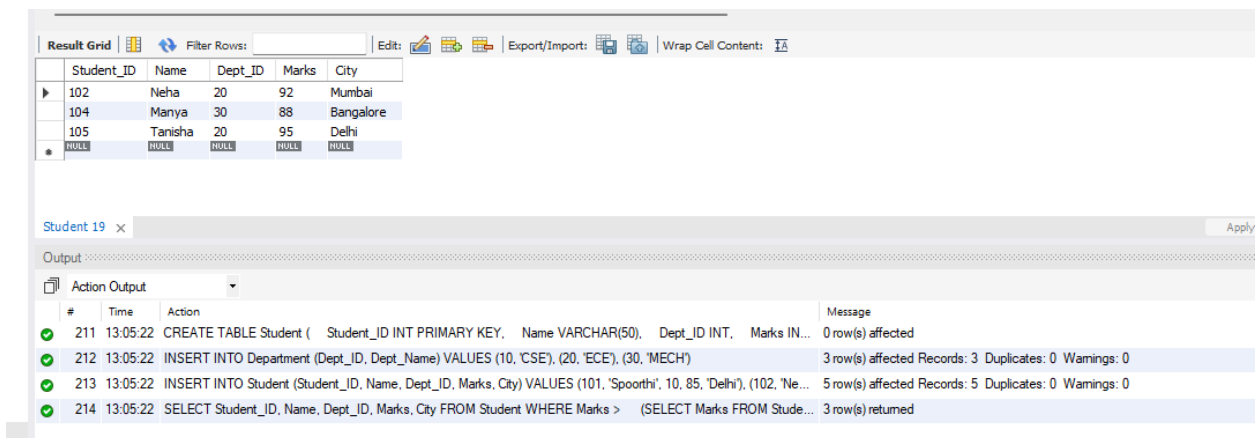

The screenshot shows a database management interface. At the top, there's a 'Result Grid' with a table containing 5 rows and 6 columns: Student_ID, Name, Dept_ID, Marks, and City. The rows are: (102, Neha, 20, 92, Mumbai), (104, Manya, 30, 88, Bangalore), (105, Tanisha, 20, 95, Delhi), and two rows of NULL values. Below the grid, there's an 'Output' section with a tab labeled 'Student 19'. The 'Action Output' section shows a log of database actions with columns for #, Time, Action, and Message. The log entries are: 211: CREATE TABLE Student (0 row(s) affected), 212: INSERT INTO Department (3 row(s) affected), 213: INSERT INTO Student (5 row(s) affected), and 214: SELECT Student_ID, Name, Dept_ID, Marks, City FROM Student WHERE Marks > (SELECT Marks FROM Student WHERE Name = 'Rahul' OR Name = 'Spoorthi') (3 row(s) returned).

Student_ID	Name	Dept_ID	Marks	City
102	Neha	20	92	Mumbai
104	Manya	30	88	Bangalore
105	Tanisha	20	95	Delhi
NULL	NULL	NULL	NULL	NULL
NULL	NULL	NULL	NULL	NULL

#	Time	Action	Message
211	13:05:22	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected
212	13:05:22	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0
213	13:05:22	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0
214	13:05:22	SELECT Student_ID, Name, Dept_ID, Marks, City FROM Student WHERE Marks > (SELECT Marks FROM Stude...	3 row(s) returned

Subquery 4 — Students belonging to the same department as Rahul

```

CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;

```

```

DROP TABLE IF EXISTS Student;
DROP TABLE IF EXISTS Department;

```

```

CREATE TABLE Department (
    Dept_ID INT PRIMARY KEY,
    Dept_Name VARCHAR(50)
);

```

```
CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);
```

```
INSERT INTO Department (Dept_ID, Dept_Name) VALUES
(10, 'CSE'),
(20, 'ECE'),
(30, 'MECH');
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Spoorthi', 10, 85, 'Delhi'),
(102, 'Neha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'Manya', 30, 88, 'Bangalore'),
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT Student_ID, Name, Dept_ID, Marks, City
FROM Student
WHERE Dept_ID =
    (SELECT Dept_ID FROM Student WHERE Name = 'Spoorthi');
```

Result Grid					
Filter Rows:					
Edit:					
Export/Import:					
Wrap Cell Content:					
Student_ID	Name	Dept_ID	Marks	City	
101	Spoorthi	10	85	Delhi	
103	Navya	10	76	Delhi	
* NULL	NULL	NULL	NULL	NULL	

Student 20 x					
Output					
Action Output					
#	Time	Action	Message		
220	13:06:07	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected		
221	13:06:07	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Records: 3 Duplicates: 0 Warni		
222	13:06:07	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Records: 5 Duplicates: 0 Warni		
223	13:06:07	SELECT Student_ID, Name, Dept_ID, Marks, City FROM Student WHERE Dept_ID = (SELECT Dept_ID FROM ...	2 row(s) returned		

Subquery 5 — Students who scored above the average CSE marks

```
CREATE DATABASE IF NOT EXISTS college_dbms;
```

```
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;  
DROP TABLE IF EXISTS Department;
```

```
CREATE TABLE Department (  
    Dept_ID INT PRIMARY KEY,  
    Dept_Name VARCHAR(50)  
);
```

```
CREATE TABLE Student (  
    Student_ID INT PRIMARY KEY,  
    Name VARCHAR(50),  
    Dept_ID INT,  
    Marks INT,  
    City VARCHAR(50)  
);
```

```
INSERT INTO Department (Dept_ID, Dept_Name) VALUES  
(10, 'CSE'),  
(20, 'ECE'),  
(30, 'MECH');
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES  
(101, 'Spoorthi', 10, 85, 'Delhi'),  
(102, 'Neha', 20, 92, 'Mumbai'),  
(103, 'Navya', 10, 76, 'Delhi'),  
(104, 'Manya', 30, 88, 'Bangalore'),  
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT Student_ID, Name, Dept_ID, Marks, City  
FROM Student  
WHERE Marks >  
    (SELECT AVG(Marks) FROM Student WHERE Dept_ID = 10);
```

Result Grid

Filter Rows:

Edit:

Export/Import:

Wrap Cell Content:

	Student_ID	Name	Dept_ID	Marks	City
▶	101	Spoorthi	10	85	Delhi
	102	Neha	20	92	Mumbai
	104	Manya	30	88	Bangalore
	105	Tanisha	20	95	Delhi
•	NULL	NULL	NULL	NULL	NULL

Student 21

Output

Action Output

#	Time	Action	Message
✓ 229	13:07:15	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected
✓ 230	13:07:15	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0
✓ 231	13:07:15	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0
✓ 232	13:07:15	SELECT Student_ID, Name, Dept_ID, Marks, City FROM Student WHERE Marks > (SELECT AVG(Marks) FROM ...	4 row(s) returned

Subquery 6 — Students who belong to a department having a student from Mumbai

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;
DROP TABLE IF EXISTS Department;
```

```
CREATE TABLE Department (
    Dept_ID INT PRIMARY KEY,
    Dept_Name VARCHAR(50)
);
```

```
CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);
```

```
INSERT INTO Department (Dept_ID, Dept_Name) VALUES
(10, 'CSE'),
(20, 'ECE'),
(30, 'MECH');
```

```
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Spoorthi', 10, 85, 'Delhi'),
```

```
(102, 'Neha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'Manya', 30, 88, 'Bangalore'),
(105, 'Tanisha', 20, 95, 'Delhi');
```

```
SELECT Student_ID, Name, Dept_ID, Marks, City
FROM Student
WHERE Dept_ID IN
    (SELECT Dept_ID FROM Student WHERE City = 'Mumbai');
```

Result Grid					
Filter Rows:					
	Student_ID	Name	Dept_ID	Marks	City
▶	102	Neha	20	92	Mumbai
	105	Tanisha	20	95	Delhi
*	NULL	NULL	NULL	NULL	NULL

Student 22 x					
Output					
Action Output					
#	Time	Action	Message		
✓ 238	13:08:15	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected		
✓ 239	13:08:15	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Records: 3 Duplicates: 0		
✓ 240	13:08:15	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Records: 5 Duplicates: 0		
✓ 241	13:08:15	SELECT Student_ID, Name, Dept_ID, Marks, City FROM Student WHERE Dept_ID IN (SELECT Dept_ID FROM ...	2 row(s) returned		

Subquery 7 — Students who scored higher than every ECE student

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
```

```
DROP TABLE IF EXISTS Student;
DROP TABLE IF EXISTS Department;
```

```
CREATE TABLE Department (
    Dept_ID INT PRIMARY KEY,
    Dept_Name VARCHAR(50)
);
```

```
CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
```

```

Dept_ID INT,
Marks INT,
City VARCHAR(50)
);

```

```

INSERT INTO Department (Dept_ID, Dept_Name) VALUES
(10, 'CSE'),
(20, 'ECE'),
(30, 'MECH');

```

```

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Spoorthi', 10, 85, 'Delhi'),
(102, 'Neha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'Manya', 30, 88, 'Bangalore'),
(105, 'Tanisha', 20, 95, 'Delhi');

```

```

SELECT Student_ID, Name, Dept_ID, Marks, City
FROM Student
WHERE Marks > (
    SELECT MAX(Marks)
    FROM Student
    WHERE Dept_ID = 20
);

```

The screenshot shows a database management interface. At the top, there's a 'Result Grid' with a table containing five columns: Student_ID, Name, Dept_ID, Marks, and City. All cells in this table are empty, indicating null values. Below this, there's a tab labeled 'Student 23'. The main part of the interface is the 'Output' pane, which shows an 'Action Output' log. The log contains four entries, all marked with green checkmarks, indicating successful execution:

#	Time	Action	Message
247	13:09:31	CREATE TABLE Student (Student_ID INT PRIMARY KEY, Name VARCHAR(50), Dept_ID INT, Marks IN...	0 row(s) affected
248	13:09:31	INSERT INTO Department (Dept_ID, Dept_Name) VALUES (10, 'CSE'), (20, 'ECE'), (30, 'MECH')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0
249	13:09:31	INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES (101, 'Spoorthi', 10, 85, 'Delhi'), (102, 'Ne...	5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0
250	13:09:31	SELECT Student_ID, Name, Dept_ID, Marks, City FROM Student WHERE Marks > (SELECT MAX(Marks) FR...	0 row(s) returned