

SPQ-03 Doxygen

Generated by Doxygen 1.8.13

Contents

| | | |
|----------|--|----------|
| 1 | Namespace Index | 1 |
| 1.1 | Packages | 1 |
| 2 | Hierarchical Index | 3 |
| 2.1 | Class Hierarchy | 3 |
| 3 | Class Index | 5 |
| 3.1 | Class List | 5 |
| 4 | File Index | 7 |
| 4.1 | File List | 7 |
| 5 | Namespace Documentation | 9 |
| 5.1 | Package es | 9 |
| 5.2 | Package es.deusto | 9 |
| 5.3 | Package es.deusto.client | 9 |
| 5.4 | Package es.deusto.server | 9 |
| 5.5 | Package es.deusto.server.db | 10 |
| 5.6 | Package es.deusto.server.db.dao | 10 |
| 5.7 | Package es.deusto.server.db.data | 10 |
| 5.8 | Package es.deusto.server.remote | 10 |

| | | |
|----------|---|-----------|
| 6 | Class Documentation | 11 |
| 6.1 | es.deusto.client.Client Class Reference | 11 |
| 6.1.1 | Detailed Description | 11 |
| 6.1.2 | Constructor & Destructor Documentation | 11 |
| 6.1.2.1 | Client() | 12 |
| 6.1.3 | Member Function Documentation | 12 |
| 6.1.3.1 | actionPerformed() | 12 |
| 6.1.3.2 | main() | 12 |
| 6.1.3.3 | rellenarTablaProd() | 12 |
| 6.1.3.4 | rellenarTablaUser() | 13 |
| 6.2 | es.deusto.server.db.dao.DAO Class Reference | 13 |
| 6.2.1 | Detailed Description | 13 |
| 6.2.2 | Constructor & Destructor Documentation | 14 |
| 6.2.2.1 | DAO() | 14 |
| 6.2.3 | Member Function Documentation | 14 |
| 6.2.3.1 | getAllProd() | 14 |
| 6.2.3.2 | getAllUser() | 14 |
| 6.2.3.3 | retrieveMoney() | 14 |
| 6.2.3.4 | retrieveProdSearch() | 15 |
| 6.2.3.5 | retrieveUser() | 15 |
| 6.2.3.6 | storeMoney() | 15 |
| 6.2.3.7 | storeProd() | 15 |
| 6.2.3.8 | storeUser() | 15 |
| 6.2.3.9 | updateMoney() | 16 |
| 6.2.3.10 | updateProd() | 16 |
| 6.2.3.11 | updateUser() | 16 |
| 6.3 | es.deusto.server.db.DB Class Reference | 16 |
| 6.3.1 | Detailed Description | 17 |
| 6.3.2 | Constructor & Destructor Documentation | 17 |
| 6.3.2.1 | DB() [1/2] | 17 |

| | | |
|----------|--|----|
| 6.3.2.2 | DB() [2/2] | 17 |
| 6.3.3 | Member Function Documentation | 17 |
| 6.3.3.1 | buyProd() | 17 |
| 6.3.3.2 | getAllProd() | 18 |
| 6.3.3.3 | insertMoney() | 18 |
| 6.3.3.4 | insertProd() | 18 |
| 6.3.3.5 | insertUser() | 18 |
| 6.3.3.6 | showProd() | 18 |
| 6.3.3.7 | showUser() | 19 |
| 6.4 | es.deusto.server.db.dao.IDAO Interface Reference | 19 |
| 6.4.1 | Detailed Description | 19 |
| 6.4.2 | Member Function Documentation | 19 |
| 6.4.2.1 | getAllProd() | 20 |
| 6.4.2.2 | getAllUser() | 20 |
| 6.4.2.3 | retrieveMoney() | 20 |
| 6.4.2.4 | retrieveProdSearch() | 20 |
| 6.4.2.5 | retrieveUser() | 20 |
| 6.4.2.6 | storeMoney() | 20 |
| 6.4.2.7 | storeProd() | 21 |
| 6.4.2.8 | storeUser() | 21 |
| 6.4.2.9 | updateMoney() | 21 |
| 6.4.2.10 | updateProd() | 21 |
| 6.4.2.11 | updateUser() | 21 |
| 6.5 | es.deusto.server.db.IDB Interface Reference | 22 |
| 6.5.1 | Detailed Description | 22 |
| 6.5.2 | Member Function Documentation | 22 |
| 6.5.2.1 | buyProd() | 22 |
| 6.5.2.2 | getAllProd() | 22 |
| 6.5.2.3 | insertMoney() | 23 |
| 6.5.2.4 | insertProd() | 23 |

| | | |
|----------|---|----|
| 6.5.2.5 | insertUser() | 23 |
| 6.5.2.6 | showProd() | 23 |
| 6.5.2.7 | showUser() | 23 |
| 6.6 | es.deusto.server.remote.ITransferer Interface Reference | 24 |
| 6.6.1 | Detailed Description | 24 |
| 6.6.2 | Member Function Documentation | 24 |
| 6.6.2.1 | buyProd() | 24 |
| 6.6.2.2 | getAllProd() | 25 |
| 6.6.2.3 | getAllUser() | 25 |
| 6.6.2.4 | getUser() | 26 |
| 6.6.2.5 | registerProd() | 26 |
| 6.6.2.6 | registerUser() | 27 |
| 6.6.2.7 | searchProd() | 27 |
| 6.6.2.8 | sendMoney() | 28 |
| 6.7 | es.deusto.server.JUnitTest Class Reference | 28 |
| 6.7.1 | Detailed Description | 29 |
| 6.7.2 | Member Function Documentation | 29 |
| 6.7.2.1 | getAmountPerfTest() | 29 |
| 6.7.2.2 | getCharacteristicsPerfTest() | 29 |
| 6.7.2.3 | getLoginPerfTest() | 30 |
| 6.7.2.4 | getMoneyPerfTest() | 30 |
| 6.7.2.5 | getNamePerfTest() | 30 |
| 6.7.2.6 | getPasswordPerfTest() | 30 |
| 6.7.2.7 | getProdPerfTest() | 30 |
| 6.7.2.8 | getSenderPerfTest() | 30 |
| 6.7.2.9 | RegisterProductTest() | 31 |
| 6.7.2.10 | setUp() | 31 |
| 6.7.2.11 | setUpUser() | 31 |
| 6.7.2.12 | stablishConnection() | 31 |
| 6.7.2.13 | suite() | 31 |

| | | |
|----------|--|----|
| 6.7.2.14 | tearDown() | 31 |
| 6.7.2.15 | testBuyProduct() | 32 |
| 6.7.2.16 | testGetAllProd() | 32 |
| 6.7.2.17 | testGetAmount() | 32 |
| 6.7.2.18 | testGetCharacteristics() | 32 |
| 6.7.2.19 | testGetLogin() | 32 |
| 6.7.2.20 | testGetMoney() | 32 |
| 6.7.2.21 | testGetName() | 33 |
| 6.7.2.22 | testGetPassword() | 33 |
| 6.7.2.23 | testGetProd() | 33 |
| 6.7.2.24 | testGetSender() | 33 |
| 6.7.2.25 | testGetUser() | 33 |
| 6.7.2.26 | testRegisterUser() | 33 |
| 6.7.2.27 | testRetrieveMoney() | 34 |
| 6.7.2.28 | testRetrieveUser() | 34 |
| 6.7.2.29 | testSearchProduct() | 34 |
| 6.7.2.30 | testSendMoney() | 34 |
| 6.7.2.31 | testStoreMoney() | 34 |
| 6.7.2.32 | testStoreProduct() | 34 |
| 6.7.2.33 | testStoreUser() | 35 |
| 6.7.2.34 | testUpdateMoney() | 35 |
| 6.7.2.35 | testUpdateProduct() | 35 |
| 6.8 | es.deusto.server.db.data.Money Class Reference | 35 |
| 6.8.1 | Detailed Description | 36 |
| 6.8.2 | Constructor & Destructor Documentation | 36 |
| 6.8.2.1 | Money() | 36 |
| 6.8.3 | Member Function Documentation | 36 |
| 6.8.3.1 | getAmount() | 36 |
| 6.8.3.2 | getProd() | 36 |
| 6.8.3.3 | getSender() | 37 |

| | | |
|----------|--|----|
| 6.8.3.4 | setProduct() | 37 |
| 6.8.3.5 | setUserSending() | 37 |
| 6.8.3.6 | toString() | 37 |
| 6.9 | es.deusto.client.NewProdWindow Class Reference | 38 |
| 6.9.1 | Detailed Description | 38 |
| 6.9.2 | Constructor & Destructor Documentation | 38 |
| 6.9.2.1 | NewProdWindow() | 38 |
| 6.9.3 | Member Function Documentation | 38 |
| 6.9.3.1 | actionPerformed() | 38 |
| 6.9.3.2 | setTransferer() | 39 |
| 6.10 | es.deusto.server.db.data.Product Class Reference | 39 |
| 6.10.1 | Detailed Description | 39 |
| 6.10.2 | Constructor & Destructor Documentation | 39 |
| 6.10.2.1 | Product() | 39 |
| 6.10.3 | Member Function Documentation | 40 |
| 6.10.3.1 | dnGetuser() | 40 |
| 6.10.3.2 | getBuyersPayment() | 40 |
| 6.10.3.3 | getCharacteristics() | 40 |
| 6.10.3.4 | getName() | 41 |
| 6.10.3.5 | setName() | 41 |
| 6.10.3.6 | setOwner() | 41 |
| 6.10.3.7 | toString() | 41 |
| 6.10.3.8 | toStringShort() | 42 |
| 6.11 | es.deusto.server.Server Class Reference | 42 |
| 6.11.1 | Detailed Description | 42 |
| 6.11.2 | Member Function Documentation | 42 |
| 6.11.2.1 | main() | 42 |
| 6.12 | es.deusto.server.remote.Transferer Class Reference | 42 |
| 6.12.1 | Detailed Description | 43 |
| 6.12.2 | Constructor & Destructor Documentation | 43 |

| | | |
|-----------|---|----|
| 6.12.2.1 | Transferer() [1/2] | 43 |
| 6.12.2.2 | Transferer() [2/2] | 43 |
| 6.12.3 | Member Function Documentation | 43 |
| 6.12.3.1 | buyProd() | 43 |
| 6.12.3.2 | getAllProd() | 44 |
| 6.12.3.3 | getAllUser() | 44 |
| 6.12.3.4 | getUser() | 45 |
| 6.12.3.5 | registerProd() | 45 |
| 6.12.3.6 | registerUser() | 46 |
| 6.12.3.7 | searchProd() | 46 |
| 6.12.3.8 | sendMoney() | 47 |
| 6.13 | es.deusto.server.db.data.User Class Reference | 47 |
| 6.13.1 | Detailed Description | 48 |
| 6.13.2 | Constructor & Destructor Documentation | 48 |
| 6.13.2.1 | User() | 48 |
| 6.13.3 | Member Function Documentation | 48 |
| 6.13.3.1 | addMoney() | 49 |
| 6.13.3.2 | getLogin() | 49 |
| 6.13.3.3 | getMoney() | 49 |
| 6.13.3.4 | getPassword() | 49 |
| 6.13.3.5 | getSuper() | 50 |
| 6.13.3.6 | removeMoney() | 50 |
| 6.13.3.7 | setAmount() | 50 |
| 6.13.3.8 | setPassword() | 50 |
| 6.13.3.9 | setSuper() | 51 |
| 6.13.3.10 | toString() | 51 |

| | |
|--|-----------|
| 7 File Documentation | 53 |
| 7.1 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/Client.java File Reference | 53 |
| 7.2 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/NewProdWindow.java File Reference | 53 |
| 7.3 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/DAO.java File Reference | 53 |
| 7.4 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/IDAO.java File Reference | 54 |
| 7.5 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/Money.java File Reference | 54 |
| 7.6 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/Product.java File Reference | 54 |
| 7.7 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/User.java File Reference | 54 |
| 7.8 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/DB.java File Reference . . . | 55 |
| 7.9 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/IDB.java File Reference . . . | 55 |
| 7.10 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/ITransferer.java File Reference | 55 |
| 7.11 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/Transferer.java File Reference | 55 |
| 7.12 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/Server.java File Reference . . . | 56 |
| 7.13 C:/Users/Oihane/git/SPQ03/spq03/src/test/java/es/deusto/server/JUnitTest.java File Reference . . | 56 |
| Index | 57 |

Chapter 1

Namespace Index

1.1 Packages

Here are the packages with brief descriptions (if available):

| | |
|--|----|
| es | 9 |
| es.deusto | 9 |
| es.deusto.client | 9 |
| es.deusto.server | 9 |
| es.deusto.server.db | 10 |
| es.deusto.server.db.dao | 10 |
| es.deusto.server.db.data | 10 |
| es.deusto.server.remote | 10 |

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

| | |
|---|----|
| es.deusto.server.db.dao.IDAO | 19 |
| es.deusto.server.db.dao.DAO | 13 |
| es.deusto.server.db.IDB | 22 |
| es.deusto.server.db.DB | 16 |
| es.deusto.server.JUnitTest | 28 |
| es.deusto.server.Server | 42 |
| ActionListener | |
| es.deusto.client.Client | 11 |
| es.deusto.client.NewProdWindow | 38 |
| JFrame | |
| es.deusto.client.Client | 11 |
| es.deusto.client.NewProdWindow | 38 |
| Remote | |
| es.deusto.server.remote.ITransferer | 24 |
| es.deusto.server.remote.Transferer | 42 |
| Serializable | |
| es.deusto.server.db.data.Money | 35 |
| es.deusto.server.db.data.Product | 39 |
| es.deusto.server.db.data.User | 47 |
| UnicastRemoteObject | |
| es.deusto.server.remote.Transferer | 42 |

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

| | |
|---|----|
| es.deusto.client.Client | 11 |
| es.deusto.server.db.dao.DAO | 13 |
| es.deusto.server.db.DB | 16 |
| es.deusto.server.db.dao.IDAO | 19 |
| es.deusto.server.db.IDB | 22 |
| es.deusto.server.remote.ITransferer | 24 |
| es.deusto.server.JUnitTest | 28 |
| es.deusto.server.db.data.Money | 35 |
| es.deusto.client.NewProdWindow | 38 |
| es.deusto.server.db.data.Product | 39 |
| es.deusto.server.Server | 42 |
| es.deusto.server.remote.Transferer | 42 |
| es.deusto.server.db.data.User | 47 |

Chapter 4

File Index

4.1 File List

Here is a list of all files with brief descriptions:

| | |
|---|----|
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/ Client.java | 53 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/ NewProdWindow.java | 53 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/ Server.java | 56 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/ DB.java | 55 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/ IDB.java | 55 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/ DAO.java | 53 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/ IDAO.java | 54 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/ Money.java | 54 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/ Product.java | 54 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/ User.java | 54 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/ ITransferer.java | 55 |
| C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/ Transferer.java | 55 |
| C:/Users/Oihane/git/SPQ03/spq03/src/test/java/es/deusto/server/ JUnitTest.java | 56 |

Chapter 5

Namespace Documentation

5.1 Package es

Packages

- package [deusto](#)

5.2 Package es.deusto

Packages

- package [client](#)
- package [server](#)

5.3 Package es.deusto.client

Classes

- class [Client](#)
- class [NewProdWindow](#)

5.4 Package es.deusto.server

Packages

- package [db](#)
- package [remote](#)

Classes

- class [JUnitTest](#)
- class [Server](#)

5.5 Package es.deusto.server.db

Packages

- package [dao](#)
- package [data](#)

Classes

- class [DB](#)
- interface [IDB](#)

5.6 Package es.deusto.server.db.dao

Classes

- class [DAO](#)
- interface [IDAO](#)

5.7 Package es.deusto.server.db.data

Classes

- class [Money](#)
- class [Product](#)
- class [User](#)

5.8 Package es.deusto.server.remote

Classes


- interface [ITransferer](#)
- class [Transferer](#)

Chapter 6

Class Documentation

6.1 es.deusto.client.Client Class Reference

Inheritance diagram for es.deusto.client.Client:



Public Member Functions

- `Client ()`
- `void actionPerformed (ActionEvent e)`
- `void rellenarTablaProd (ArrayList< Product > pList)`
- `void rellenarTablaUser (ArrayList< User > uList)`

Static Public Member Functions

- `static void main (String[] args)`

6.1.1 Detailed Description

Definition at line 29 of file `Client.java`.

6.1.2 Constructor & Destructor Documentation

6.1.2.1 Client()

```
es.deusto.client.Client.Client ( )
```

Generates a [Client](#) Window with all the different attributes it has, begins with a log in and then allows the user to send money, search a product, insert new products, search for all the users (if it has permission), etc.

Definition at line 64 of file Client.java.

6.1.3 Member Function Documentation

6.1.3.1 actionPerformed()

```
void es.deusto.client.Client.actionPerformed (
    ActionEvent e )
```

Definition at line 225 of file Client.java.

6.1.3.2 main()

```
static void es.deusto.client.Client.main (
    String [] args ) [static]
```

Definition at line 201 of file Client.java.

6.1.3.3 rellenarTablaProd()

```
void es.deusto.client.Client.rellenarTablaProd (
    ArrayList< Product > pList )
```

Fill the table (this.table) with the ArrayList set by parameter after switching the title of the second column to "↔ Description"

Parameters

| | |
|--------------|--|
| <i>pList</i> | The list of all the products inside the DB |
|--------------|--|

Definition at line 334 of file Client.java.

6.1.3.4 rellenarTablaUser()

```
void es.deusto.client.Client.rellenarTablaUser (
    ArrayList< User > uList )
```

Fill the table (this.table) with the ArrayList set by parameter after switching the title of the second column to "← Password"

Parameters

| | |
|--------------|---|
| <i>uList</i> | The list of all the users inside the DB |
|--------------|---|


Definition at line 356 of file Client.java.

The documentation for this class was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/[Client.java](#)

6.2 es.deusto.server.db.dao.DAO Class Reference

Inheritance diagram for es.deusto.server.db.dao.DAO:



Public Member Functions

- [DAO](#) ()
- boolean [storeUser](#) ([User](#) u)
- List< [User](#) > [getAllUser](#) ()
- [User](#) [retrieveUser](#) (String login)
- boolean [updateUser](#) ([User](#) u)
- boolean [storeProd](#) ([Product](#) p)
- List< [Product](#) > [getAllProd](#) ()
- [Product](#) [retrieveProdSearch](#) (String name)
- boolean [updateProd](#) ([Product](#) p)
- boolean [storeMoney](#) ([Money](#) m)
- [Money](#) [retrieveMoney](#) (int amount)
- boolean [updateMoney](#) ([Money](#) m)

6.2.1 Detailed Description

Definition at line 12 of file DAO.java.

6.2.2 Constructor & Destructor Documentation

6.2.2.1 DAO()

```
es.deusto.server.db.dao.DAO.DAO ( )
```

Definition at line 16 of file DAO.java.

6.2.3 Member Function Documentation

6.2.3.1 getAllProd()

```
List<Product> es.deusto.server.db.dao.DAO.getAllProd ( )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 151 of file DAO.java.

6.2.3.2 getAllUser()

```
List<User> es.deusto.server.db.dao.DAO.getAllUser ( )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 46 of file DAO.java.

6.2.3.3 retrieveMoney()

```
Money es.deusto.server.db.dao.DAO.retrieveMoney (
    int amount )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 254 of file DAO.java.

6.2.3.4 retrieveProdSearch()

```
Product es.deusto.server.db.dao.DAO.retrieveProdSearch (
    String name )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 181 of file DAO.java.

6.2.3.5 retrieveUser()

```
User es.deusto.server.db.dao.DAO.retrieveUser (
    String login )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 79 of file DAO.java.

6.2.3.6 storeMoney()

```
boolean es.deusto.server.db.dao.DAO.storeMoney (
    Money m )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 230 of file DAO.java.

6.2.3.7 storeProd()

```
boolean es.deusto.server.db.dao.DAO.storeProd (
    Product p )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 128 of file DAO.java.

6.2.3.8 storeUser()

```
boolean es.deusto.server.db.dao.DAO.storeUser (
    User u )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 21 of file DAO.java.

6.2.3.9 updateMoney()

```
boolean es.deusto.server.db.dao.DAO.updateMoney (
    Money m )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 279 of file DAO.java.

6.2.3.10 updateProd()

```
boolean es.deusto.server.db.dao.DAO.updateProd (
    Product p )
```

Implements [es.deusto.server.db.dao.IDAO](#).

Definition at line 208 of file DAO.java.

6.2.3.11 updateUser()

```
boolean es.deusto.server.db.dao.DAO.updateUser (
    User u )
```

Implements [es.deusto.server.db.dao.IDAO](#).


Definition at line 105 of file DAO.java.

The documentation for this class was generated from the following file:

- [C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/DAO.java](#)

6.3 es.deusto.server.db.DB Class Reference

Inheritance diagram for es.deusto.server.db.DB:



Public Member Functions

- [DB](#) ()
- [DB](#) ([IDAO](#) idao)
- List< [Product](#) > [getAllProd](#) ()
- [Product](#) [showProd](#) (String name)
- [User](#) [showUser](#) (String login)
- boolean [insertProd](#) ([Product](#) p)
- boolean [insertUser](#) ([User](#) u)
- boolean [insertMoney](#) ([Money](#) m)
- boolean [buyProd](#) (String loginB, String loginS, String name, int amount)

6.3.1 Detailed Description

Definition at line 16 of file DB.java.

6.3.2 Constructor & Destructor Documentation

6.3.2.1 [DB\(\)](#) [1/2]

```
es.deusto.server.db.DB.DB ( )
```

Definition at line 23 of file DB.java.

6.3.2.2 [DB\(\)](#) [2/2]

```
es.deusto.server.db.DB.DB (  
    IDAO idao )
```

Definition at line 28 of file DB.java.

6.3.3 Member Function Documentation

6.3.3.1 [buyProd\(\)](#)

```
boolean es.deusto.server.db.DB.buyProd (  
    String loginB,  
    String loginS,  
    String name,  
    int amount )
```

Implements [es.deusto.server.db.IDB](#).

Definition at line 134 of file DB.java.

6.3.3.2 getAllProd()

```
List<Product> es.deusto.server.db.DB.getAllProd ( )
```

Implements [es.deusto.server.db.IDB](#).

Definition at line 34 of file DB.java.

6.3.3.3 insertMoney()

```
boolean es.deusto.server.db.DB.insertMoney (
    Money m )
```

Implements [es.deusto.server.db.IDB](#).

Definition at line 113 of file DB.java.

6.3.3.4 insertProd()

```
boolean es.deusto.server.db.DB.insertProd (
    Product p )
```

Implements [es.deusto.server.db.IDB](#).

Definition at line 67 of file DB.java.

6.3.3.5 insertUser()

```
boolean es.deusto.server.db.DB.insertUser (
    User u )
```

Implements [es.deusto.server.db.IDB](#).

Definition at line 90 of file DB.java.

6.3.3.6 showProd()

```
Product es.deusto.server.db.DB.showProd (
    String name )
```

Implements [es.deusto.server.db.IDB](#).

Definition at line 45 of file DB.java.

6.3.3.7 showUser()

```
User es.deusto.server.db.DB.showUser (
    String login )
```

Implements [es.deusto.server.db.IDB](#).


Definition at line 56 of file DB.java.

The documentation for this class was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/[DB.java](#)

6.4 es.deusto.server.db.dao.IDAO Interface Reference

Inheritance diagram for es.deusto.server.db.dao.IDAO:



Public Member Functions

- boolean [storeUser](#) ([User](#) u)
- List< [User](#) > [getAllUser](#) ()
- [User](#) [retrieveUser](#) (String login)
- boolean [updateUser](#) ([User](#) u)
- boolean [storeProd](#) ([Product](#) p)
- List< [Product](#) > [getAllProd](#) ()
- [Product](#) [retrieveProdSearch](#) (String name)
- boolean [updateProd](#) ([Product](#) p)
- boolean [storeMoney](#) ([Money](#) m)
- [Money](#) [retrieveMoney](#) (int amount)
- boolean [updateMoney](#) ([Money](#) m)

6.4.1 Detailed Description

Definition at line 7 of file IDAO.java.

6.4.2 Member Function Documentation

6.4.2.1 getAllProd()

```
List<Product> es.deusto.server.db.dao.IDAO.getAllProd ( )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.2 getAllUser()

```
List<User> es.deusto.server.db.dao.IDAO.getAllUser ( )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.3 retrieveMoney()

```
Money es.deusto.server.db.dao.IDAO.retrieveMoney (
    int amount )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.4 retrieveProdSearch()

```
Product es.deusto.server.db.dao.IDAO.retrieveProdSearch (
    String name )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.5 retrieveUser()

```
User es.deusto.server.db.dao.IDAO.retrieveUser (
    String login )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.6 storeMoney()

```
boolean es.deusto.server.db.dao.IDAO.storeMoney (
    Money m )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.7 storeProd()

```
boolean es.deusto.server.db.dao.IDAO.storeProd (
    Product p )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.8 storeUser()

```
boolean es.deusto.server.db.dao.IDAO.storeUser (
    User u )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.9 updateMoney()

```
boolean es.deusto.server.db.dao.IDAO.updateMoney (
    Money m )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.10 updateProd()

```
boolean es.deusto.server.db.dao.IDAO.updateProd (
    Product p )
```

Implemented in [es.deusto.server.db.dao.DAO](#).

6.4.2.11 updateUser()

```
boolean es.deusto.server.db.dao.IDAO.updateUser (
    User u )
```


Implemented in [es.deusto.server.db.dao.DAO](#).

The documentation for this interface was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/[IDAO.java](#)

6.5 es.deusto.server.db.IDB Interface Reference

Inheritance diagram for es.deusto.server.db.IDB:



Public Member Functions

- List< [Product](#) > [getAllProd](#) ()
- boolean [buyProd](#) (String loginB, String loginS, String name, int amount)
- boolean [insertUser](#) ([User](#) u)
- boolean [insertProd](#) ([Product](#) p)
- boolean [insertMoney](#) ([Money](#) m)
- [Product](#) [showProd](#) (String name)
- [User](#) [showUser](#) (String login)

6.5.1 Detailed Description

Definition at line 8 of file IDB.java.

6.5.2 Member Function Documentation

6.5.2.1 buyProd()

```
boolean es.deusto.server.db.IDB.buyProd (
    String loginB,
    String loginS,
    String name,
    int amount )
```

Implemented in [es.deusto.server.db.DB](#).

6.5.2.2 getAllProd()

```
List<Product> es.deusto.server.db.IDB.getAllProd ( )
```

Implemented in [es.deusto.server.db.DB](#).

6.5.2.3 insertMoney()

```
boolean es.deusto.server.db.IDB.insertMoney (
    Money m )
```

Implemented in [es.deusto.server.db.DB](#).

6.5.2.4 insertProd()

```
boolean es.deusto.server.db.IDB.insertProd (
    Product p )
```

Implemented in [es.deusto.server.db.DB](#).

6.5.2.5 insertUser()

```
boolean es.deusto.server.db.IDB.insertUser (
    User u )
```

Implemented in [es.deusto.server.db.DB](#).

6.5.2.6 showProd()

```
Product es.deusto.server.db.IDB.showProd (
    String name )
```

Implemented in [es.deusto.server.db.DB](#).

6.5.2.7 showUser()

```
User es.deusto.server.db.IDB.showUser (
    String login )
```


Implemented in [es.deusto.server.db.DB](#).

The documentation for this interface was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/[IDB.java](#)

6.6 es.deusto.server.remote.ITransferer Interface Reference

Inheritance diagram for es.deusto.server.remote.ITransferer:

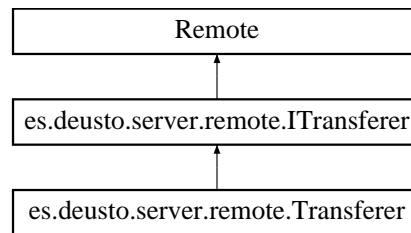

Public Member Functions

- boolean [sendMoney](#) (String loginR, int amount, String loginS) throws RemoteException
- ArrayList< [User](#) > [getAllUser](#) () throws RemoteException
- boolean [registerUser](#) ([User](#) u) throws RemoteException
- [User](#) [getUser](#) (String login) throws RemoteException
- ArrayList< [Product](#) > [getAllProd](#) () throws RemoteException
- [Product](#) [searchProd](#) (String name) throws RemoteException
- boolean [buyProd](#) (String loginB, [Product](#) p, int amount, String loginS) throws RemoteException
- boolean [registerProd](#) ([Product](#) p) throws RemoteException

6.6.1 Detailed Description

Definition at line 10 of file ITransferer.java.

6.6.2 Member Function Documentation

6.6.2.1 buyProd()

```

boolean es.deusto.server.remote.ITransferer.buyProd (
    String loginB,
    Product p,
    int amount,
    String loginS ) throws RemoteException
  
```

This method allows the user with loginB to buy a product p to the user with loginS for the amount of money specified

Parameters

| | |
|---------------|---|
| <i>loginB</i> | The PK that identifies the buyer |
| <i>p</i> | The Product to be bought |
| <i>amount</i> | The quantity to be spent on the transaction |
| <i>loginS</i> | The PK that identifies the seller |

Returns

Whether the product has been bought or not

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implemented in [es.deusto.server.remote.Transferer](#).

6.6.2.2 getAllProd()

```
ArrayList<Product> es.deusto.server.remote.ITransferer.getAllProd ( ) throws RemoteException
```

This method retrieves all the products inside the DB

Returns

A list of all the products inside the DB

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implemented in [es.deusto.server.remote.Transferer](#).

6.6.2.3 getAllUser()

```
ArrayList<User> es.deusto.server.remote.ITransferer.getAllUser ( ) throws RemoteException
```

This method returns the list of all users in the DB

Returns

the list of users in the DB

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implemented in [es.deusto.server.remote.Transferer](#).

6.6.2.4 `getUser()`

```
User es.deusto.server.remote.ITransferer.getUser (
    String login ) throws RemoteException
```

This method returns a user based on their username (login)

Parameters

| | |
|--------------|---|
| <i>login</i> | The name of the user that wants to be retrieved |
|--------------|---|

Returns

The user with the login name "login"

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implemented in [es.deusto.server.remote.Transferer](#).

6.6.2.5 `registerProd()`

```
boolean es.deusto.server.remote.ITransferer.registerProd (
    Product p ) throws RemoteException
```

This method registers a product and returns if the transaction was done rightfully

Parameters

| | |
|----------|-----------------------------------|
| <i>p</i> | The product to register in the DB |
|----------|-----------------------------------|

Returns

whether the product has been registered or not

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implemented in [es.deusto.server.remote.Transferer](#).

6.6.2.6 registerUser()

```
boolean es.deusto.server.remote.ITransferer.registerUser (  
    User u ) throws RemoteException
```

This method registers a user and returns if the transaction was done rightfully

Parameters

| | |
|----------|--------------------------------|
| <i>u</i> | The user to register in the DB |
|----------|--------------------------------|

Returns

whether the user has been registered or not

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implemented in [es.deusto.server.remote.Transferer](#).

6.6.2.7 searchProd()

```
Product es.deusto.server.remote.ITransferer.searchProd (  
    String name ) throws RemoteException
```

This method returns a Product based on its name

Parameters

| | |
|-------------|--|
| <i>name</i> | The PK of the Product and the way to search it inside the DB |
|-------------|--|

Returns

An object Product that meets with the requirements

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implemented in [es.deusto.server.remote.Transferer](#).

6.6.2.8 sendMoney()

```
boolean es.deusto.server.remote.ITransferer.sendMoney (
    String loginR,
    int amount,
    String loginS ) throws RemoteException
```

This method allows the user with loginS to send an amount to the user with loginR

Parameters

| | |
|---------------|--|
| <i>loginR</i> | the name of the user that receives the money |
| <i>amount</i> | the number of money sent |
| <i>loginS</i> | the name of the user that sends the money |

Returns

whether the money has been sent or not

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implemented in [es.deusto.server.remote.Transferer](#).

The documentation for this interface was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/[ITransferer.java](#)

6.7 es.deusto.server.JUnitTest Class Reference

Public Member Functions

- void [setUpUser](#) ()
- void [stablishConnection](#) ()
- void [RegisterProductTest](#) ()
- void [testRegisterUser](#) ()
- void [testGetUser](#) ()
- void [testSearchProduct](#) ()
- void [testStoreUser](#) ()
- void [testRetrieveUser](#) ()
- void [testStoreProduct](#) ()
- void [testGetAllProd](#) ()
- void [testUpdateProduct](#) ()
- void [testBuyProduct](#) ()
- void [testUpdateMoney](#) ()
- void [testStoreMoney](#) ()
- void [testRetrieveMoney](#) ()
- void [testSendMoney](#) ()

- void [getSenderPerfTest](#) ()
- void [getProdPerfTest](#) ()
- void [getAmountPerfTest](#) ()
- void [getNamePerfTest](#) ()
- void [getCharacteristicsPerfTest](#) ()
- void [getLoginPerfTest](#) ()
- void [getPasswordPerfTest](#) ()
- void [getMoneyPerfTest](#) ()
- void [testGetSender](#) ()
- void [testGetProd](#) ()
- void [testGetAmount](#) ()
- void [testGetName](#) ()
- void [testGetCharacteristics](#) ()
- void [testGetLogin](#) ()
- void [testGetPassword](#) ()
- void [testGetMoney](#) ()

Static Public Member Functions

- static junit.framework.Test [suite](#) ()
- static void [setUp](#) ()
- static void [tearDown](#) ()

6.7.1 Detailed Description

Definition at line 47 of file JUnitTest.java.

6.7.2 Member Function Documentation

6.7.2.1 [getAmountPerfTest\(\)](#)

```
void es.deusto.server.JUnitTest.getAmountPerfTest ( )
```

Definition at line 414 of file JUnitTest.java.

6.7.2.2 [getCharacteristicsPerfTest\(\)](#)

```
void es.deusto.server.JUnitTest.getCharacteristicsPerfTest ( )
```

Definition at line 430 of file JUnitTest.java.

6.7.2.3 getLoginPerfTest()

```
void es.deusto.server.JUnitTest.getLoginPerfTest ( )
```

Definition at line 438 of file JUnitTest.java.

6.7.2.4 getMoneyPerfTest()

```
void es.deusto.server.JUnitTest.getMoneyPerfTest ( )
```

Definition at line 455 of file JUnitTest.java.

6.7.2.5 getNamePerfTest()

```
void es.deusto.server.JUnitTest.getNamePerfTest ( )
```

Definition at line 422 of file JUnitTest.java.

6.7.2.6 getPasswordPerfTest()

```
void es.deusto.server.JUnitTest.getPasswordPerfTest ( )
```

Definition at line 447 of file JUnitTest.java.

6.7.2.7 getProdPerfTest()

```
void es.deusto.server.JUnitTest.getProdPerfTest ( )
```

Definition at line 405 of file JUnitTest.java.

6.7.2.8 getSenderPerfTest()

```
void es.deusto.server.JUnitTest.getSenderPerfTest ( )
```

Definition at line 395 of file JUnitTest.java.

6.7.2.9 RegisterProductTest()

```
void es.deusto.server.JUnitTest.RegisterProductTest ( )
```

Definition at line 226 of file JUnitTest.java.

6.7.2.10 setUp()

```
static void es.deusto.server.JUnitTest.setUp ( ) [static]
```

Definition at line 70 of file JUnitTest.java.

6.7.2.11 setUpUser()

```
void es.deusto.server.JUnitTest.setUpUser ( )
```

Definition at line 160 of file JUnitTest.java.

6.7.2.12 stablshConnection()

```
void es.deusto.server.JUnitTest.stablshConnection ( )
```

Definition at line 213 of file JUnitTest.java.

6.7.2.13 suite()

```
static junit.framework.Test es.deusto.server.JUnitTest.suite ( ) [static]
```

Definition at line 65 of file JUnitTest.java.

6.7.2.14 tearDown()

```
static void es.deusto.server.JUnitTest.tearDown ( ) [static]
```

Definition at line 513 of file JUnitTest.java.

6.7.2.15 testBuyProduct()

```
void es.deusto.server.JUnitTest.testBuyProduct ( )
```

Definition at line 360 of file JUnitTest.java.

6.7.2.16 testGetAllProd()

```
void es.deusto.server.JUnitTest.testGetAllProd ( )
```

Definition at line 334 of file JUnitTest.java.

6.7.2.17 testGetAmount()

```
void es.deusto.server.JUnitTest.testGetAmount ( )
```

Definition at line 476 of file JUnitTest.java.

6.7.2.18 testGetCharacteristics()

```
void es.deusto.server.JUnitTest.testGetCharacteristics ( )
```

Definition at line 488 of file JUnitTest.java.

6.7.2.19 testGetLogin()

```
void es.deusto.server.JUnitTest.testGetLogin ( )
```

Definition at line 494 of file JUnitTest.java.

6.7.2.20 testGetMoney()

```
void es.deusto.server.JUnitTest.testGetMoney ( )
```

Definition at line 507 of file JUnitTest.java.

6.7.2.21 testGetName()

```
void es.deusto.server.JUnitTest.testGetName ( )
```

Definition at line 482 of file JUnitTest.java.

6.7.2.22 testGetPassword()

```
void es.deusto.server.JUnitTest.testGetPassword ( )
```

Definition at line 501 of file JUnitTest.java.

6.7.2.23 testGetProd()

```
void es.deusto.server.JUnitTest.testGetProd ( )
```

Definition at line 469 of file JUnitTest.java.

6.7.2.24 testGetSender()

```
void es.deusto.server.JUnitTest.testGetSender ( )
```

Definition at line 461 of file JUnitTest.java.

6.7.2.25 testGetUser()

```
void es.deusto.server.JUnitTest.testGetUser ( )
```

Definition at line 246 of file JUnitTest.java.

6.7.2.26 testRegisterUser()

```
void es.deusto.server.JUnitTest.testRegisterUser ( )
```

Definition at line 237 of file JUnitTest.java.

6.7.2.27 testRetrieveMoney()

```
void es.deusto.server.JUnitTest.testRetrieveMoney ( )
```

Definition at line 383 of file JUnitTest.java.

6.7.2.28 testRetrieveUser()

```
void es.deusto.server.JUnitTest.testRetrieveUser ( )
```

Definition at line 290 of file JUnitTest.java.

6.7.2.29 testSearchProduct()

```
void es.deusto.server.JUnitTest.testSearchProduct ( )
```

Definition at line 258 of file JUnitTest.java.

6.7.2.30 testSendMoney()

```
void es.deusto.server.JUnitTest.testSendMoney ( )
```

Definition at line 388 of file JUnitTest.java.

6.7.2.31 testStoreMoney()

```
void es.deusto.server.JUnitTest.testStoreMoney ( )
```

Definition at line 374 of file JUnitTest.java.

6.7.2.32 testStoreProduct()

```
void es.deusto.server.JUnitTest.testStoreProduct ( )
```

Definition at line 326 of file JUnitTest.java.

6.7.2.33 testStoreUser()

```
void es.deusto.server.JUnitTest.testStoreUser ( )
```

Definition at line 270 of file JUnitTest.java.

6.7.2.34 testUpdateMoney()

```
void es.deusto.server.JUnitTest.testUpdateMoney ( )
```

Definition at line 365 of file JUnitTest.java.

6.7.2.35 testUpdateProduct()

```
void es.deusto.server.JUnitTest.testUpdateProduct ( )
```


Definition at line 339 of file JUnitTest.java.

The documentation for this class was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/test/java/es/deusto/server/[JUnitTest.java](#)

6.8 es.deusto.server.db.data.Money Class Reference

Inheritance diagram for es.deusto.server.db.data.Money:

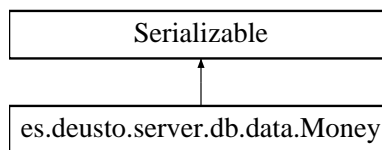

Public Member Functions

- [Money](#) (int amount)
- [User](#) `getSender` ()
- [Product](#) `getProd` ()
- void [setUserSending](#) ([User](#) sender)
- void [setProduct](#) ([Product](#) p)
- int `getAmount` ()
- String `toString` ()

6.8.1 Detailed Description

Definition at line 13 of file Money.java.

6.8.2 Constructor & Destructor Documentation

6.8.2.1 Money()

```
es.deusto.server.db.data.Money.Money (
    int amount )
```

Method to create a new instance of an object [Product](#)

Parameters

| | |
|---------------|--|
| <i>amount</i> | establishes the value for the parameter amount |
|---------------|--|

Definition at line 28 of file Money.java.

6.8.3 Member Function Documentation

6.8.3.1 getAmount()

```
int es.deusto.server.db.data.Money.getAmount ( )
```

This method returns the amount of the money

Returns

The amount of money in the interaction

Definition at line 69 of file Money.java.

6.8.3.2 getProd()

```
Product es.deusto.server.db.data.Money.getProd ( )
```

This method returns the product inside the money interaction

Returns

The product of the money interaction

Definition at line 45 of file Money.java.

6.8.3.3 getSender()

```
User es.deusto.server.db.data.Money.getSender ( )
```

This method returns the user that sends the money

Returns

The sender of the money

Definition at line 37 of file Money.java.

6.8.3.4 setProduct()

```
void es.deusto.server.db.data.Money.setProduct (
    Product p )
```

Establishes the value for the parameter sender of the [Money](#)

Parameters

| | |
|----------|--|
| <i>p</i> | the product inside the money interaction |
|----------|--|

Definition at line 61 of file Money.java.

6.8.3.5 setUserSending()

```
void es.deusto.server.db.data.Money.setUserSending (
    User sender )
```

Establishes the value for the parameter sender of the [Money](#)

Parameters

| | |
|---------------|-----------------------------------|
| <i>sender</i> | the user that will send the money |
|---------------|-----------------------------------|

Definition at line 53 of file Money.java.

6.8.3.6 toString()

```
String es.deusto.server.db.data.Money.toString ( )
```


Definition at line 71 of file Money.java.

The documentation for this class was generated from the following file:

- [C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/Money.java](#)

6.9 es.deusto.client.NewProdWindow Class Reference

Inheritance diagram for es.deusto.client.NewProdWindow:



Public Member Functions

- [NewProdWindow](#) ()
- void [actionPerformed](#) (ActionEvent e)
- void [setTransferer](#) (ITransferer iTrans)

6.9.1 Detailed Description

Definition at line 21 of file `NewProdWindow.java`.

6.9.2 Constructor & Destructor Documentation

6.9.2.1 NewProdWindow()

```
es.deusto.client.NewProdWindow.NewProdWindow ( )
```

Definition at line 31 of file `NewProdWindow.java`.

6.9.3 Member Function Documentation

6.9.3.1 actionPerformed()

```
void es.deusto.client.NewProdWindow.actionPerformed (
   (ActionEvent e )
```

Definition at line 70 of file `NewProdWindow.java`.

6.9.3.2 setTransferer()

```
void es.deusto.client.NewProdWindow.setTransferer (
    ITransferer iTrans )
```


Definition at line 87 of file NewProdWindow.java.

The documentation for this class was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/NewProdWindow.java

6.10 es.deusto.server.db.data.Product Class Reference

Inheritance diagram for es.deusto.server.db.data.Product:



Public Member Functions

- [Product](#) (String name, String characteristics)
- [User dnGetuser](#) ()
- String [getName](#) ()
- void [setName](#) (String name)
- void [setOwner](#) ([User](#) owner)
- String [getCharacteristics](#) ()
- String [getBuyersPayment](#) ()
- String [toString](#) ()
- String [toStringShort](#) ()

6.10.1 Detailed Description

Definition at line 18 of file Product.java.

6.10.2 Constructor & Destructor Documentation

6.10.2.1 Product()

```
es.deusto.server.db.data.Product.Product (
    String name,
    String characteristics )
```

Method to create a new instance of an object [Product](#)

Parameters

| | |
|------------------------|--|
| <i>name</i> | The value for the PK that will identify a product between all the ones in the DB |
| <i>characteristics</i> | The value for the characteristics of the product |

Definition at line 40 of file Product.java.

6.10.3 Member Function Documentation

6.10.3.1 dnGetuser()

```
User es.deusto.server.db.data.Product.dnGetuser ( )
```

This method returns the user that owns the product

Returns

The owner of the [Product](#)

Definition at line 50 of file Product.java.

6.10.3.2 getBuyersPayment()

```
String es.deusto.server.db.data.Product.getBuyersPayment ( )
```

This method returns the buyers payment of the product

Returns

The buyers payment of the [Product](#)

Definition at line 86 of file Product.java.

6.10.3.3 getCharacteristics()

```
String es.deusto.server.db.data.Product.getCharacteristics ( )
```

This method returns the characteristics of the product

Returns

The characteristics of the [Product](#)

Definition at line 80 of file Product.java.

6.10.3.4 getName()

```
String es.deusto.server.db.data.Product.getName ( )
```

This method returns the name (PK) of the product

Returns

The name of the [Product](#)

Definition at line 58 of file Product.java.

6.10.3.5 setName()

```
void es.deusto.server.db.data.Product.setName (
    String name )
```

Establishes the value for the parameter name of the [Product](#)

Parameters

| | |
|-------------|------------------------|
| <i>name</i> | The value for the name |
|-------------|------------------------|

Definition at line 66 of file Product.java.

6.10.3.6 setOwner()

```
void es.deusto.server.db.data.Product.setOwner (
    User owner )
```

Establishes the value for the parameter owner of the [Product](#)

Parameters

| | |
|--------------|-----------------------------|
| <i>owner</i> | The value for the new owner |
|--------------|-----------------------------|

Definition at line 72 of file Product.java.

6.10.3.7 toString()

```
String es.deusto.server.db.data.Product.toString ( )
```

Definition at line 94 of file Product.java.

6.10.3.8 toStringShort()

```
String es.deusto.server.db.data.Product.toStringShort ( )
```

Definition at line 98 of file Product.java.

The documentation for this class was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/[Product.java](#)

6.11 es.deusto.server.Server Class Reference

Static Public Member Functions

- static void [main](#) (String[] args)

6.11.1 Detailed Description

Definition at line 16 of file Server.java.

6.11.2 Member Function Documentation

6.11.2.1 main()

```
static void es.deusto.server.Server.main (
    String [] args ) [static]
```


Definition at line 19 of file Server.java.

The documentation for this class was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/[Server.java](#)

6.12 es.deusto.server.remote.Transferer Class Reference

Inheritance diagram for es.deusto.server.remote.Transferer:

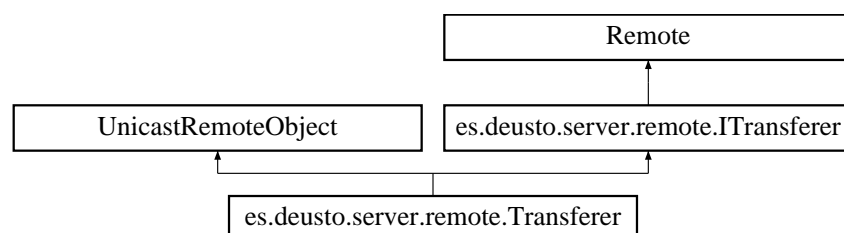

Public Member Functions

- [Transferer](#) () throws RemoteException
- [Transferer](#) (IDAO udao) throws RemoteException
- ArrayList< [User](#) > [getAllUser](#) () throws RemoteException
- boolean [registerUser](#) ([User](#) u)
- [User](#) [getUser](#) (String login) throws RemoteException
- ArrayList< [Product](#) > [getAllProd](#) () throws RemoteException
- [Product](#) [searchProd](#) (String name) throws RemoteException
- boolean [registerProd](#) ([Product](#) p) throws RemoteException
- boolean [buyProd](#) (String loginB, [Product](#) p, int amount, String loginS) throws RemoteException
- boolean [sendMoney](#) (String loginR, int amount, String loginS) throws RemoteException

6.12.1 Detailed Description

Definition at line 15 of file Transferer.java.

6.12.2 Constructor & Destructor Documentation

6.12.2.1 Transferer() [1/2]

```
es.deusto.server.remote.Transferer.Transferer ( ) throws RemoteException
```

Definition at line 22 of file Transferer.java.

6.12.2.2 Transferer() [2/2]

```
es.deusto.server.remote.Transferer.Transferer (
    IDAO udao ) throws RemoteException
```

Definition at line 27 of file Transferer.java.

6.12.3 Member Function Documentation

6.12.3.1 buyProd()

```
boolean es.deusto.server.remote.Transferer.buyProd (
    String loginB,
    Product p,
    int amount,
    String loginS ) throws RemoteException
```

This method allows the user with loginB to buy a product p to the user with loginS for the amount of money specified

Parameters

| | |
|---------------|---|
| <i>loginB</i> | The PK that identifies the buyer |
| <i>p</i> | The Product to be bought |
| <i>amount</i> | The quantity to be spent on the transaction |
| <i>loginS</i> | The PK that identifies the seller |

Returns

Whether the product has been bought or not

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implements [es.deusto.server.remote.ITransferer](#).

Definition at line 136 of file Transferer.java.

6.12.3.2 getAllProd()

```
ArrayList<Product> es.deusto.server.remote.Transferer.getAllProd ( ) throws RemoteException
```

This method retrieves all the products inside the DB

Returns

A list of all the products inside the DB

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implements [es.deusto.server.remote.ITransferer](#).

Definition at line 83 of file Transferer.java.

6.12.3.3 getAllUser()

```
ArrayList<User> es.deusto.server.remote.Transferer.getAllUser ( ) throws RemoteException
```

This method returns the list of all users in the DB

Returns

the list of users in the DB

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implements [es.deusto.server.remote.ITransferer](#).

Definition at line 33 of file Transferer.java.

6.12.3.4 getUser()

```
User es.deusto.server.remote.Transferer.getUser (
    String login ) throws RemoteException
```

This method returns a user based on their username (login)

Parameters

| | |
|--------------|---|
| <i>login</i> | The name of the user that wants to be retrieved |
|--------------|---|

Returns

The user with the login name "login"

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implements [es.deusto.server.remote.ITransferer](#).

Definition at line 66 of file Transferer.java.

6.12.3.5 registerProd()

```
boolean es.deusto.server.remote.Transferer.registerProd (
    Product p ) throws RemoteException
```

This method registers a product and returns if the transaction was done rightfully

Parameters

| | |
|----------|-----------------------------------|
| <i>p</i> | The product to register in the DB |
|----------|-----------------------------------|

Returns

whether the product has been registered or not

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implements [es.deusto.server.remote.ITransferer](#).

Definition at line 114 of file Transferer.java.

6.12.3.6 registerUser()

```
boolean es.deusto.server.remote.Transferer.registerUser (  
    User u )
```

This method registers a user and returns if the transaction was done rightfully

Parameters

| | |
|----------|--------------------------------|
| <i>u</i> | The user to register in the DB |
|----------|--------------------------------|

Returns

whether the user has been registered or not

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implements [es.deusto.server.remote.ITransferer](#).

Definition at line 46 of file Transferer.java.

6.12.3.7 searchProd()

```
Product es.deusto.server.remote.Transferer.searchProd (  
    String name ) throws RemoteException
```

This method returns a Product based on its name

Parameters

| | |
|-------------|--|
| <i>name</i> | The PK of the Product and the way to search it inside the DB |
|-------------|--|

Returns

An object Product that meets with the requirements

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implements [es.deusto.server.remote.ITransferer](#).

Definition at line 95 of file Transferer.java.

6.12.3.8 sendMoney()

```
boolean es.deusto.server.remote.Transferer.sendMoney (
    String loginR,
    int amount,
    String loginS ) throws RemoteException
```

This method allows the user with loginS to send an amount to the user with loginR

Parameters

| | |
|---------------|--|
| <i>loginR</i> | the name of the user that receives the money |
| <i>amount</i> | the number of money sent |
| <i>loginS</i> | the name of the user that sends the money |

Returns

whether the money has been sent or not

Exceptions

| | |
|------------------------|--------------------------------------|
| <i>RemoteException</i> | fails if there is a connection error |
|------------------------|--------------------------------------|

Implements [es.deusto.server.remote.ITransferer](#).


Definition at line 161 of file Transferer.java.

The documentation for this class was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/[Transferer.java](#)

6.13 es.deusto.server.db.data.User Class Reference

Inheritance diagram for es.deusto.server.db.data.User:

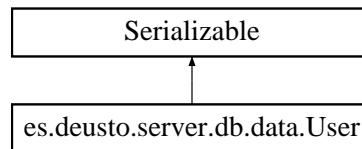

Public Member Functions

- [User](#) (String login, String password)
- void [addMoney](#) (int money)
- void [removeMoney](#) (int money)
- String [getLogin](#) ()
- String [getPassword](#) ()
- void [setPassword](#) (String password)
- void [setSuper](#) (boolean superU)
- boolean [getSuper](#) ()
- int [getMoney](#) ()
- void [setAmount](#) (int number)
- String [toString](#) ()

6.13.1 Detailed Description

Definition at line 17 of file User.java.

6.13.2 Constructor & Destructor Documentation

6.13.2.1 User()

```

es.deusto.server.db.data.User.User (
    String login,
    String password )
  
```

Method to create a new instance of an object [User](#)

Parameters

| | |
|-----------------|---|
| <i>login</i> | The value for the PK that will identify a user between all the ones in the DB |
| <i>password</i> | The value for the password of the user |

Definition at line 37 of file User.java.

6.13.3 Member Function Documentation

6.13.3.1 addMoney()

```
void es.deusto.server.db.data.User.addMoney (
    int money )
```

This method augments the value of the users amount of money for the parameter that is sent

Parameters

| | |
|--------------|---------------------------------|
| <i>money</i> | the amount of money to be added |
|--------------|---------------------------------|

Definition at line 46 of file User.java.

6.13.3.2 getLogin()

```
String es.deusto.server.db.data.User.getLogin ( )
```

This method returns the PK of the user

Returns

The username (login) of the user

Definition at line 58 of file User.java.

6.13.3.3 getMoney()

```
int es.deusto.server.db.data.User.getMoney ( )
```

This method returns the amount of money of the user

Returns

The amount value of the user

Definition at line 96 of file User.java.

6.13.3.4 getPassword()

```
String es.deusto.server.db.data.User.getPassword ( )
```

This method returns the pass of the user

Returns

The password of the user

Definition at line 66 of file User.java.

6.13.3.5 getSuper()

```
boolean es.deusto.server.db.data.User.getSuper ( )
```

This method returns the superU value of the user

Returns

The superU value of the user

Definition at line 90 of file User.java.

6.13.3.6 removeMoney()

```
void es.deusto.server.db.data.User.removeMoney (
    int money )
```

This method reduces the value of the users amount of money for the parameter that is sent

Parameters

| | |
|--------------|-----------------------------------|
| <i>money</i> | the amount of money to be removed |
|--------------|-----------------------------------|

Definition at line 52 of file User.java.

6.13.3.7 setAmount()

```
void es.deusto.server.db.data.User.setAmount (
    int number )
```

Establishes the value for the parameter amount of the user

Parameters

| | |
|---------------|---|
| <i>amount</i> | The value of the users amount parameter |
|---------------|---|

Definition at line 102 of file User.java.

6.13.3.8 setPassword()

```
void es.deusto.server.db.data.User.setPassword (
    String password )
```

Establishes the value for the parameter password of the user

Parameters

| | |
|-----------------|--------------------------------|
| <i>password</i> | The value for the new password |
|-----------------|--------------------------------|

Definition at line 74 of file User.java.

6.13.3.9 setSuper()

```
void es.deusto.server.db.data.User.setSuper (
    boolean superU )
```

Establishes the value for the parameter superU of the user

Parameters

| | |
|---------------|---|
| <i>superU</i> | The value of the users superU parameter |
|---------------|---|

Definition at line 82 of file User.java.

6.13.3.10 toString()

```
String es.deusto.server.db.data.User.toString ( )
```

Definition at line 104 of file User.java.

The documentation for this class was generated from the following file:

- C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/[User.java](#)

Chapter 7

File Documentation

7.1 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/Client.java File Reference

Classes

- class [es.deusto.client.Client](#)

Packages

- package [es.deusto.client](#)

7.2 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/NewProdWindow.java File Reference

Classes

- class [es.deusto.client.NewProdWindow](#)

Packages

- package [es.deusto.client](#)

7.3 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/DAO.java File Reference

Classes

- class [es.deusto.server.db.dao.DAO](#)

Packages

- package [es.deusto.server.db.dao](#)

7.4 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/IDAO.java File Reference

Classes

- interface [es.deusto.server.db.dao.IDAO](#)

Packages

- package [es.deusto.server.db.dao](#)

7.5 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/Money.java File Reference

Classes

- class [es.deusto.server.db.data.Money](#)

Packages

- package [es.deusto.server.db.data](#)

7.6 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/Product.java File Reference

Classes

- class [es.deusto.server.db.data.Product](#)

Packages

- package [es.deusto.server.db.data](#)

7.7 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/User.java File Reference

Classes

- class [es.deusto.server.db.data.User](#)

Packages

- package [es.deusto.server.db.data](#)

7.8 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/DB.java File Reference

Classes

- class [es.deusto.server.db.DB](#)

Packages

- package [es.deusto.server.db](#)

7.9 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/IDB.java File Reference

Classes

- interface [es.deusto.server.db.IDB](#)

Packages

- package [es.deusto.server.db](#)

7.10 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/ITransferer.java File Reference

Classes

- interface [es.deusto.server.remote.ITransferer](#)

Packages

- package [es.deusto.server.remote](#)

7.11 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/Transferer.java File Reference

Classes

- class [es.deusto.server.remote.Transferer](#)

Packages

- package [es.deusto.server.remote](#)

7.12 C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/Server.java File Reference

Classes

- class [es.deusto.server.Server](#)

Packages

- package [es.deusto.server](#)

7.13 C:/Users/Oihane/git/SPQ03/spq03/src/test/java/es/deusto/server/JUnitTest.java File Reference

Classes

- class [es.deusto.server.JUnitTest](#)

Packages

- package [es.deusto.server](#)

Index

actionPerformed
 es::deusto::client::Client, 12
 es::deusto::client::NewProdWindow, 38
addMoney
 es::deusto::server::db::data::User, 48
buyProd
 es::deusto::server::db::DB, 17
 es::deusto::server::db::IDB, 22
 es::deusto::server::remote::ITransferer, 24
 es::deusto::server::remote::Transferer, 43
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/
 Client.java, 53
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/client/
 NewProdWindow.java, 53
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/
 Server.java, 56
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/
 DB.java, 55
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/
 IDB.java, 55
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/
 DAO.java, 53
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/dao/
 IDAO.java, 54
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/
 Money.java, 54
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/
 Product.java, 54
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/db/data/
 User.java, 54
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/
 ITransferer.java, 55
C:/Users/Oihane/git/SPQ03/spq03/src/main/java/es/deusto/server/remote/
 Transferer.java, 55
C:/Users/Oihane/git/SPQ03/spq03/src/test/java/es/deusto/server/
 JUnitTest.java, 56
Client
 es::deusto::client::Client, 11
DAO
 es::deusto::server::db::dao::DAO, 14
DB
 es::deusto::server::db::DB, 17
dnGetuser
 es::deusto::server::db::data::Product, 40
es, 9
es.deusto, 9
es.deusto.client, 9
es.deusto.client.Client, 11
es.deusto.client.NewProdWindow, 38
es.deusto.server, 9
es.deusto.server.db, 10
es.deusto.server.db.dao, 10
es.deusto.server.db.dao.DAO, 13
es.deusto.server.db.dao.IDAO, 19
es.deusto.server.db.data, 10
es.deusto.server.db.data.Money, 35
es.deusto.server.db.data.Product, 39
es.deusto.server.db.data.User, 47
es.deusto.server.db.DB, 16
es.deusto.server.db.IDB, 22
es.deusto.server.JUnitTest, 28
es.deusto.server.remote, 10
es.deusto.server.remote.ITransferer, 24
es.deusto.server.remote.Transferer, 42
es.deusto.server.Server, 42
es::deusto::client::Client
 actionPerformed, 12
 Client, 11
 main, 12
 rellenarTablaProd, 12
 rellenarTablaUser, 12
es::deusto::client::NewProdWindow
 actionPerformed, 38
 NewProdWindow, 38
 setTransferer, 38
es::deusto::server::JUnitTest
 getAmountPerfTest, 29
 getCharacteristicsPerfTest, 29
 getLoginPerfTest, 29
 getMoneyPerfTest, 30
 getNamePerfTest, 30
 getPasswordPerfTest, 30
 getProdPerfTest, 30
 getSenderPerfTest, 30
 RegisterProductTest, 30
 setUp, 31
 setUpUser, 31
 stablishConnection, 31
 suite, 31
 tearDown, 31
 testBuyProduct, 31
 testGetAllProd, 32
 testGetAmount, 32
 testGetCharacteristics, 32
 testGetLogin, 32

- testGetMoney, 32
- testGetName, 32
- testGetPassword, 33
- testGetProd, 33
- testGetSender, 33
- testGetUser, 33
- testRegisterUser, 33
- testRetrieveMoney, 33
- testRetrieveUser, 34
- testSearchProduct, 34
- testSendMoney, 34
- testStoreMoney, 34
- testStoreProduct, 34
- testStoreUser, 34
- testUpdateMoney, 35
- testUpdateProduct, 35
- es::deusto::server::Server
 - main, 42
- es::deusto::server::db::DB
 - buyProd, 17
 - DB, 17
 - getAllProd, 17
 - insertMoney, 18
 - insertProd, 18
 - insertUser, 18
 - showProd, 18
 - showUser, 18
- es::deusto::server::db::IDB
 - buyProd, 22
 - getAllProd, 22
 - insertMoney, 22
 - insertProd, 23
 - insertUser, 23
 - showProd, 23
 - showUser, 23
- es::deusto::server::db::dao::DAO
 - DAO, 14
 - getAllProd, 14
 - getAllUser, 14
 - retrieveMoney, 14
 - retrieveProdSearch, 14
 - retrieveUser, 15
 - storeMoney, 15
 - storeProd, 15
 - storeUser, 15
 - updateMoney, 15
 - updateProd, 16
 - updateUser, 16
- es::deusto::server::db::dao::IDAO
 - getAllProd, 19
 - getAllUser, 20
 - retrieveMoney, 20
 - retrieveProdSearch, 20
 - retrieveUser, 20
 - storeMoney, 20
 - storeProd, 20
 - storeUser, 21
 - updateMoney, 21
 - updateProd, 21
 - updateUser, 21
- es::deusto::server::db::data::Money
 - getAmount, 36
 - getProd, 36
 - getSender, 36
 - Money, 36
 - setProduct, 37
 - setUserSending, 37
 - toString, 37
- es::deusto::server::db::data::Product
 - dnGetuser, 40
 - getBuyersPayment, 40
 - getCharacteristics, 40
 - getName, 40
 - Product, 39
 - setName, 41
 - setOwner, 41
 - toString, 41
 - toStringShort, 41
- es::deusto::server::db::data::User
 - addMoney, 48
 - getLogin, 49
 - getMoney, 49
 - getPassword, 49
 - getSuper, 49
 - removeMoney, 50
 - setAmount, 50
 - setPassword, 50
 - setSuper, 51
 - toString, 51
 - User, 48
- es::deusto::server::remote::ITransferer
 - buyProd, 24
 - getAllProd, 25
 - getAllUser, 25
 - getUser, 25
 - registerProd, 26
 - registerUser, 26
 - searchProd, 27
 - sendMoney, 27
- es::deusto::server::remote::Transferer
 - buyProd, 43
 - getAllProd, 44
 - getAllUser, 44
 - getUser, 45
 - registerProd, 45
 - registerUser, 46
 - searchProd, 46
 - sendMoney, 47
 - Transferer, 43
- getAllProd
 - es::deusto::server::db::DB, 17
 - es::deusto::server::db::IDB, 22
 - es::deusto::server::db::dao::DAO, 14
 - es::deusto::server::db::dao::IDAO, 19
 - es::deusto::server::remote::ITransferer, 25
 - es::deusto::server::remote::Transferer, 44

- getAllUser
 - es::deusto::server::db::dao::DAO, 14
 - es::deusto::server::db::dao::IDAO, 20
 - es::deusto::server::remote::ITransferer, 25
 - es::deusto::server::remote::Transferer, 44
- getAmount
 - es::deusto::server::db::data::Money, 36
- getAmountPerfTest
 - es::deusto::server::JUnitTest, 29
- getBuyersPayment
 - es::deusto::server::db::data::Product, 40
- getCharacteristics
 - es::deusto::server::db::data::Product, 40
- getCharacteristicsPerfTest
 - es::deusto::server::JUnitTest, 29
- getLogin
 - es::deusto::server::db::data::User, 49
- getLoginPerfTest
 - es::deusto::server::JUnitTest, 29
- getMoney
 - es::deusto::server::db::data::User, 49
- getMoneyPerfTest
 - es::deusto::server::JUnitTest, 30
- getName
 - es::deusto::server::db::data::Product, 40
- getNamePerfTest
 - es::deusto::server::JUnitTest, 30
- getPassword
 - es::deusto::server::db::data::User, 49
- getPasswordPerfTest
 - es::deusto::server::JUnitTest, 30
- getProd
 - es::deusto::server::db::data::Money, 36
- getProdPerfTest
 - es::deusto::server::JUnitTest, 30
- getSender
 - es::deusto::server::db::data::Money, 36
- getSenderPerfTest
 - es::deusto::server::JUnitTest, 30
- getSuper
 - es::deusto::server::db::data::User, 49
- getUser
 - es::deusto::server::remote::ITransferer, 25
 - es::deusto::server::remote::Transferer, 45
- insertMoney
 - es::deusto::server::db::DB, 18
 - es::deusto::server::db::IDB, 22
- insertProd
 - es::deusto::server::db::DB, 18
 - es::deusto::server::db::IDB, 23
- insertUser
 - es::deusto::server::db::DB, 18
 - es::deusto::server::db::IDB, 23
- main
 - es::deusto::client::Client, 12
 - es::deusto::server::Server, 42
- Money
 - es::deusto::server::db::data::Money, 36
- NewProdWindow
 - es::deusto::client::NewProdWindow, 38
- Product
 - es::deusto::server::db::data::Product, 39
- registerProd
 - es::deusto::server::remote::ITransferer, 26
 - es::deusto::server::remote::Transferer, 45
- RegisterProductTest
 - es::deusto::server::JUnitTest, 30
- registerUser
 - es::deusto::server::remote::ITransferer, 26
 - es::deusto::server::remote::Transferer, 46
- rellenarTablaProd
 - es::deusto::client::Client, 12
- rellenarTablaUser
 - es::deusto::client::Client, 12
- removeMoney
 - es::deusto::server::db::data::User, 50
- retrieveMoney
 - es::deusto::server::db::dao::DAO, 14
 - es::deusto::server::db::dao::IDAO, 20
- retrieveProdSearch
 - es::deusto::server::db::dao::DAO, 14
 - es::deusto::server::db::dao::IDAO, 20
- retrieveUser
 - es::deusto::server::db::dao::DAO, 15
 - es::deusto::server::db::dao::IDAO, 20
- searchProd
 - es::deusto::server::remote::ITransferer, 27
 - es::deusto::server::remote::Transferer, 46
- sendMoney
 - es::deusto::server::remote::ITransferer, 27
 - es::deusto::server::remote::Transferer, 47
- setAmount
 - es::deusto::server::db::data::User, 50
- setName
 - es::deusto::server::db::data::Product, 41
- setOwner
 - es::deusto::server::db::data::Product, 41
- setPassword
 - es::deusto::server::db::data::User, 50
- setProduct
 - es::deusto::server::db::data::Money, 37
- setSuper
 - es::deusto::server::db::data::User, 51
- setTransferer
 - es::deusto::client::NewProdWindow, 38
- setUp
 - es::deusto::server::JUnitTest, 31
- setUpUser
 - es::deusto::server::JUnitTest, 31
- setUserSending
 - es::deusto::server::db::data::Money, 37
- showProd

- es::deusto::server::db::DB, [18](#)
 - es::deusto::server::db::IDB, [23](#)
- showUser
 - es::deusto::server::db::DB, [18](#)
 - es::deusto::server::db::IDB, [23](#)
- stablishConnection
 - es::deusto::server::JUnitTest, [31](#)
- storeMoney
 - es::deusto::server::db::dao::DAO, [15](#)
 - es::deusto::server::db::dao::IDAO, [20](#)
- storeProd
 - es::deusto::server::db::dao::DAO, [15](#)
 - es::deusto::server::db::dao::IDAO, [20](#)
- storeUser
 - es::deusto::server::db::dao::DAO, [15](#)
 - es::deusto::server::db::dao::IDAO, [21](#)
- suite
 - es::deusto::server::JUnitTest, [31](#)
- tearDown
 - es::deusto::server::JUnitTest, [31](#)
- testBuyProduct
 - es::deusto::server::JUnitTest, [31](#)
- testGetAllProd
 - es::deusto::server::JUnitTest, [32](#)
- testGetAmount
 - es::deusto::server::JUnitTest, [32](#)
- testGetCharacteristics
 - es::deusto::server::JUnitTest, [32](#)
- testGetLogin
 - es::deusto::server::JUnitTest, [32](#)
- testGetMoney
 - es::deusto::server::JUnitTest, [32](#)
- testGetName
 - es::deusto::server::JUnitTest, [32](#)
- testGetPassword
 - es::deusto::server::JUnitTest, [33](#)
- testGetProd
 - es::deusto::server::JUnitTest, [33](#)
- testGetSender
 - es::deusto::server::JUnitTest, [33](#)
- testGetUser
 - es::deusto::server::JUnitTest, [33](#)
- testRegisterUser
 - es::deusto::server::JUnitTest, [33](#)
- testRetrieveMoney
 - es::deusto::server::JUnitTest, [33](#)
- testRetrieveUser
 - es::deusto::server::JUnitTest, [34](#)
- testSearchProduct
 - es::deusto::server::JUnitTest, [34](#)
- testSendMoney
 - es::deusto::server::JUnitTest, [34](#)
- testStoreMoney
 - es::deusto::server::JUnitTest, [34](#)
- testStoreProduct
 - es::deusto::server::JUnitTest, [34](#)
- testStoreUser
 - es::deusto::server::JUnitTest, [34](#)
- testUpdateMoney
 - es::deusto::server::JUnitTest, [35](#)
- testUpdateProduct
 - es::deusto::server::JUnitTest, [35](#)
- toString
 - es::deusto::server::db::data::Money, [37](#)
 - es::deusto::server::db::data::Product, [41](#)
 - es::deusto::server::db::data::User, [51](#)
- toStringShort
 - es::deusto::server::db::data::Product, [41](#)
- Transferer
 - es::deusto::server::remote::Transferer, [43](#)
- updateMoney
 - es::deusto::server::db::dao::DAO, [15](#)
 - es::deusto::server::db::dao::IDAO, [21](#)
- updateProd
 - es::deusto::server::db::dao::DAO, [16](#)
 - es::deusto::server::db::dao::IDAO, [21](#)
- updateUser
 - es::deusto::server::db::dao::DAO, [16](#)
 - es::deusto::server::db::dao::IDAO, [21](#)
- User
 - es::deusto::server::db::data::User, [48](#)