

Project: AI MoodMate

“Music that matches your mood”



▶ PROJECT OVERVIEW


- FEATURES
- DATASET OVERVIEW AND KEY INSIGHTS
- METHODOLOGY
- DATA PREPROCESSING
- DATA PREPROCESSING
- MODEL ARCHITECTURE
- TRAINING AND EVALUATION
- RESULTS
- USER INTERFACE
- CHALLENGES
- FUTURE SCOPE
- CONCLUSION

FEATURES



Real-time emotion detection

Real-time emotion detection help to amenacinated and valaet radiances.



Modular backend design

Modular backend design- designet d unconquendar emotions, locationallization and delivered.



Emotion-aware music recommendation

Emotion-aware antare music recommendation to using the skilt of coniaaw music technology.



Spotify redirection

Spotify redirection from turivn promote emotion aware of misnecion and performance?.



► Datasets

► **FER2013:**

Used to train the emotion detection model

Contains facial images labeled with emotions: Angry, Disgust, Fear, Happy, Neutral, Sad, Surprise

► **Spotify Dataset:**

Contains song-level audio features such as: Energy, valence, tempo, danceability, loudness, etc. to understand mood of song

► Preprocessing

01

FER Dataset Preprocessing



- Images resized to **48×48** pixel
- Converted to grayscale for consistency
- Pixel values normalized between **0 and 1**
- Data augmentation applied (rotation, flipping, zoom)
- This helped reduce class imbalance
- Improved generalization of the model

02

Spotify Dataset Preprocessing



- Removing missing and duplicate values
- Selecting relevant audio features
- Normalizing features using **MinMaxScaler**
- Creating a new “**mood**” **column** using rule-based logic
 - Example: high valence + high energy → Happy
- Preprocessed data was saved to CSV for faster reuse

CNN Model for Emotion Detection



A Convolutional Neural Network (CNN) was used because:

- 🧠 CNNs are effective for image-based tasks
- 🧠 They automatically learn facial features like eyes, mouth, and expressions

Key components:

- 🧠 Convolution layers for feature extraction
- 🧠 Dropout layers to reduce overfitting
- 🧠 Regularizers
- 🧠 Softmax layer for multi-class emotion prediction
- 🧠 Confidence score to decide reliable predictions

	precision	recall	f1-score	support
angry	0.51	0.46	0.49	799
disgust	0.26	0.74	0.39	87
fear	0.48	0.29	0.36	819
happy	0.85	0.81	0.83	1443
neutral	0.55	0.64	0.59	993
sad	0.46	0.46	0.46	966
surprise	0.65	0.82	0.72	634
accuracy			0.60	5741
macro avg	0.54	0.60	0.55	5741
weighted avg	0.60	0.60	0.59	5741

Emotion to Mood Mapping

Facial emotions and music moods are **not always one-to-one**, so mapping was designed carefully.

Examples:

- Happy → Happy, Excited
- Sad → Sad, Calm
- Angry → Angry, Relaxed

This allows:

- » More flexibility
- » Better personalization
- » Avoids repetitive or extreme recommendations

FACIAL EMOTIONS & MUSIC MOODS: NOT ALWAYS ONE-TO-ONE

EMOTION (FACIAL)

MUSIC MOOD



Happy



Sad



Angry



Happy, Excited



Sad, Calm



Angry, Relaxed

Music Recommendation Engine



Once the mood is determined:

1. Songs matching the mood are filtered



2. Audio features are scaled



3. **Cosine similarity** is used to find similar songs

Audio features are scaled

Cosine similarity is used
to find similar songs

4. A random anchor song is selected to increase diversity

5. Top-N similar songs are recommended



A random anchor song is
selected to increase diversity



Top-N similar songs are
recommended


Streamlit User Interface



Streamlit was used to build a simple and interactive UI:



Camera input to
capture face image



Button to trigger
emotion detection



Displays detected
emotion




Shows recommended
songs


Spotify Integration

To provide real-world usability:

- Each recommended song includes a **Spotify link**
- Clicking the link opens:
 - Spotify app (if installed)
 - Or Spotify web player
- No authentication or API login required

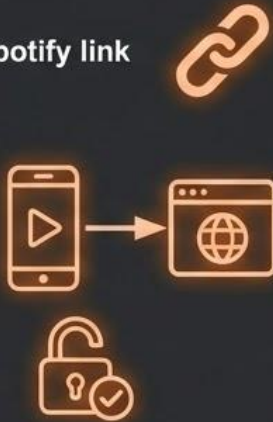

This makes the system lightweight and user-friendly.

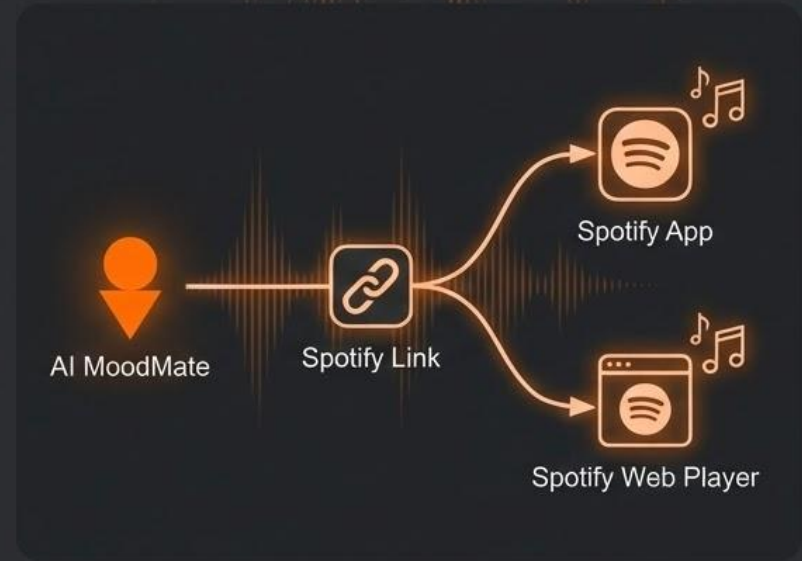

► Challenges Faced

01 Class imbalance in emotion dataset



Expand on this point.
Delve deeper into the...

02 Model confusion between similar emotions



Expand on this point.
Delve deeper into the...

03 Tuning confidence threshold



Expand on this point.
Expand on this point...

04 Integrating OpenCV with Streamlit



Expand on this point.
Expand on this point...

Conclusion

Key performance indicators



Integration of computer vision and recommender systems



Real-time emotion-based personalization



Practical application of ML in entertainment



A scalable and extensible system design

Future Enhancements



Advanced Models: Vision Transformers

Leverage state-of-the-art ViT for superior emotion recognition accuracy.



Automated Spotify Playlists

Generate personalized playlists directly based on detected moods.



Multi-Face Emotion Detection

Analyze emotions of multiple individuals simultaneously in real-time.



Cross-Platform Deployment

Launch as a seamless mobile app and responsive web application.



Ensemble Models for Accuracy

Combine multiple models to achieve robust and reliable emotion detection.

Thank you!
Up for questions!