
git push

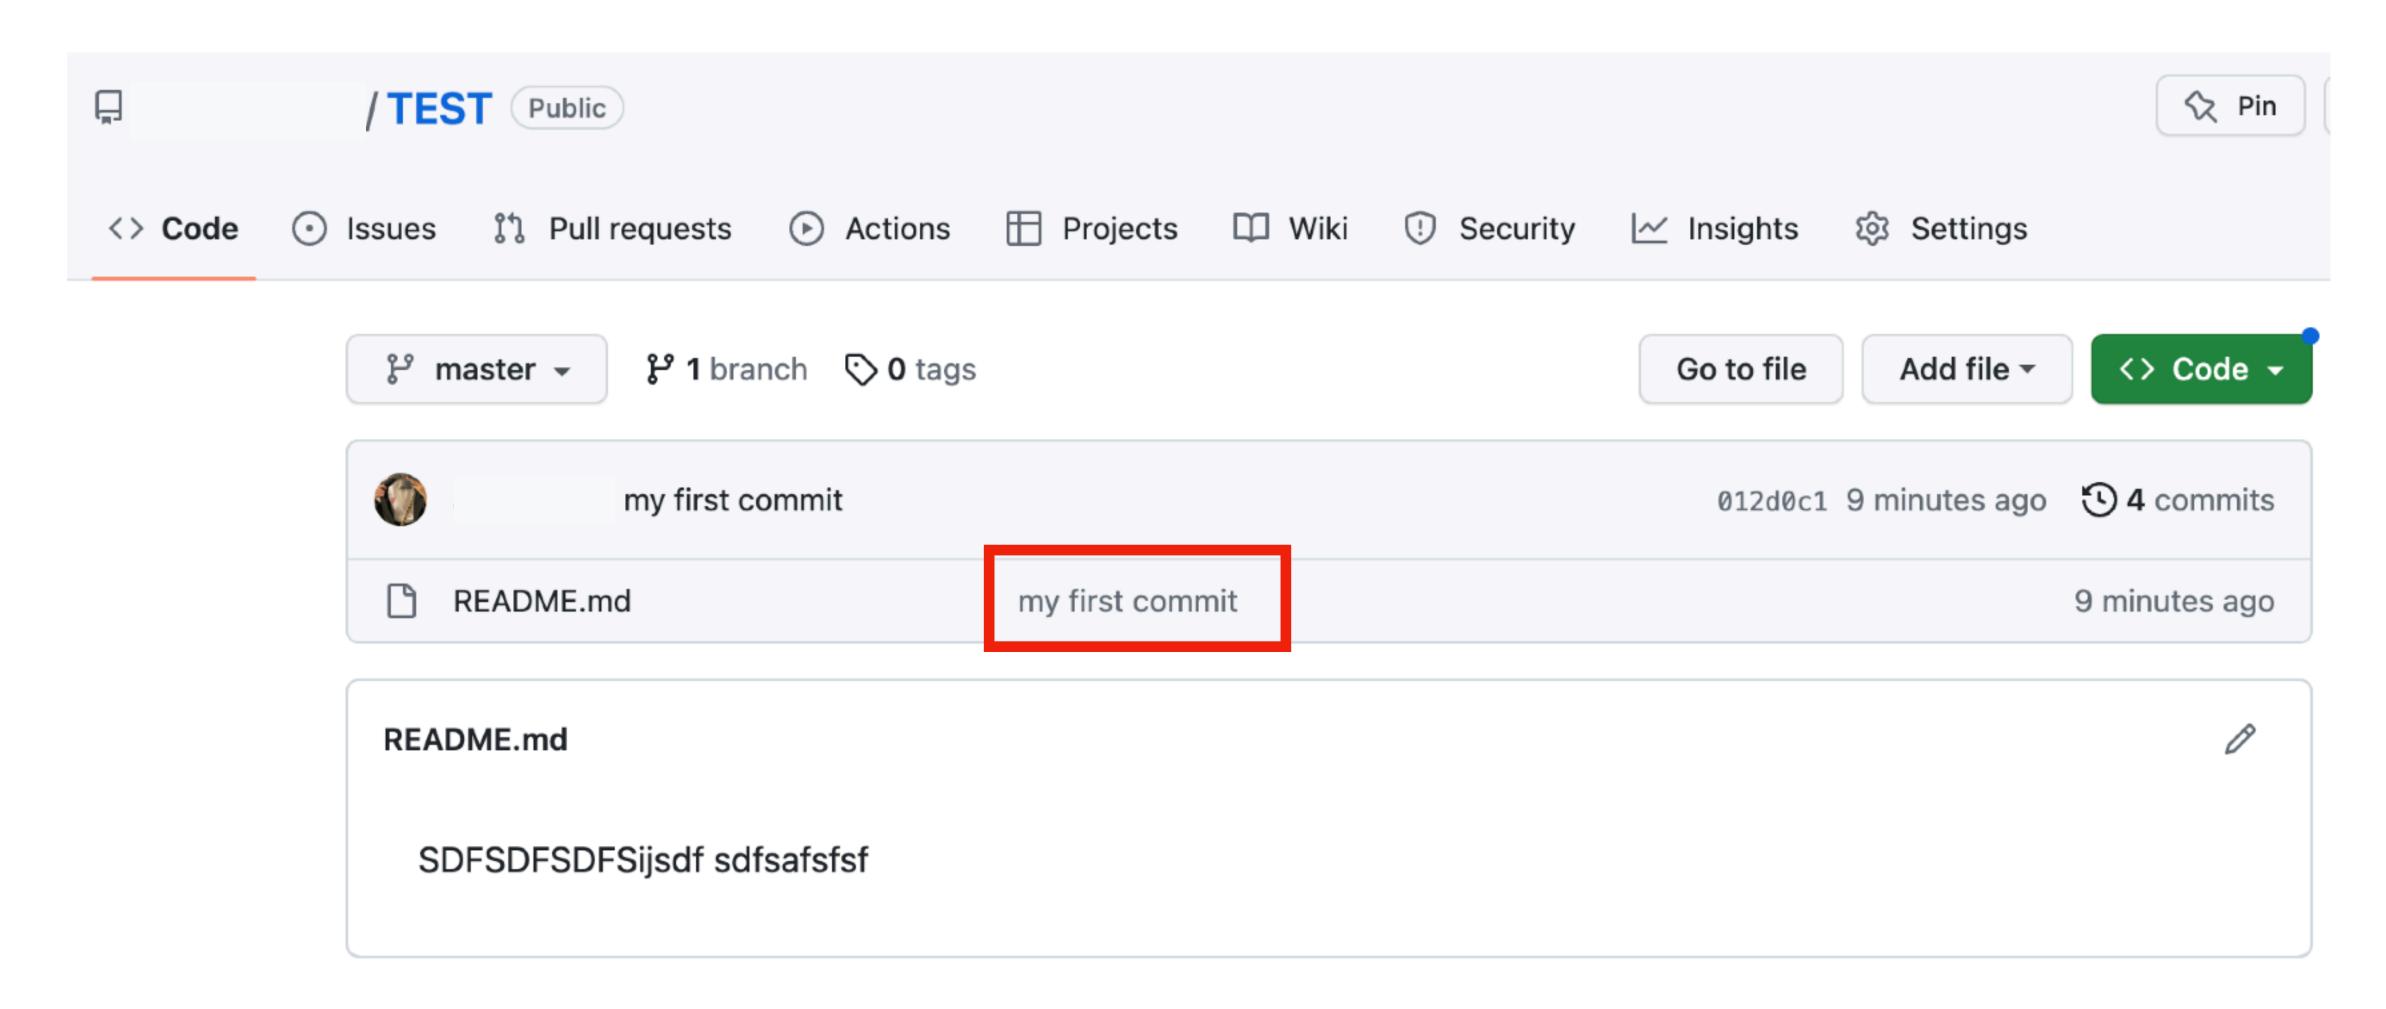

git pull

- git pull origin
branch>
- repository에 올라가 있는 것들을 로컬 저장소에 가져올 때 사용
- git remote가 지정되어 있어야지 사용 가능
 - 즉, git init 한 폴더에서만 작업 가능

```
$ git pull origin master
remote: Enumerating objects: 12, done.
remote: Counting objects: 100% (12/12), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 12 (delta 0), reused 12 (delta 0),
pack-reused 0
Unpacking objects: 100% (12/12), 852 bytes |
284.00 KiB/s, done.
From github.com : /test
 * branch
                             → FETCH_HEAD
                   master
 * [new branch]
                             → origin/master
                   master
```