

Project Design Phase-II Data Flow Diagram & User Stories


Date	03-10-2026
Team ID	SWTID-2026-8713
Project Name	Implement Client Script & UI Policy (Incident)
Maximum Marks	4 Marks

Data Flow Diagrams:

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

Example: DFD Level 0 – Client Scripts and UI Policies

DFD Level 0 - Client Scripts & UI Policies on the Incident Form

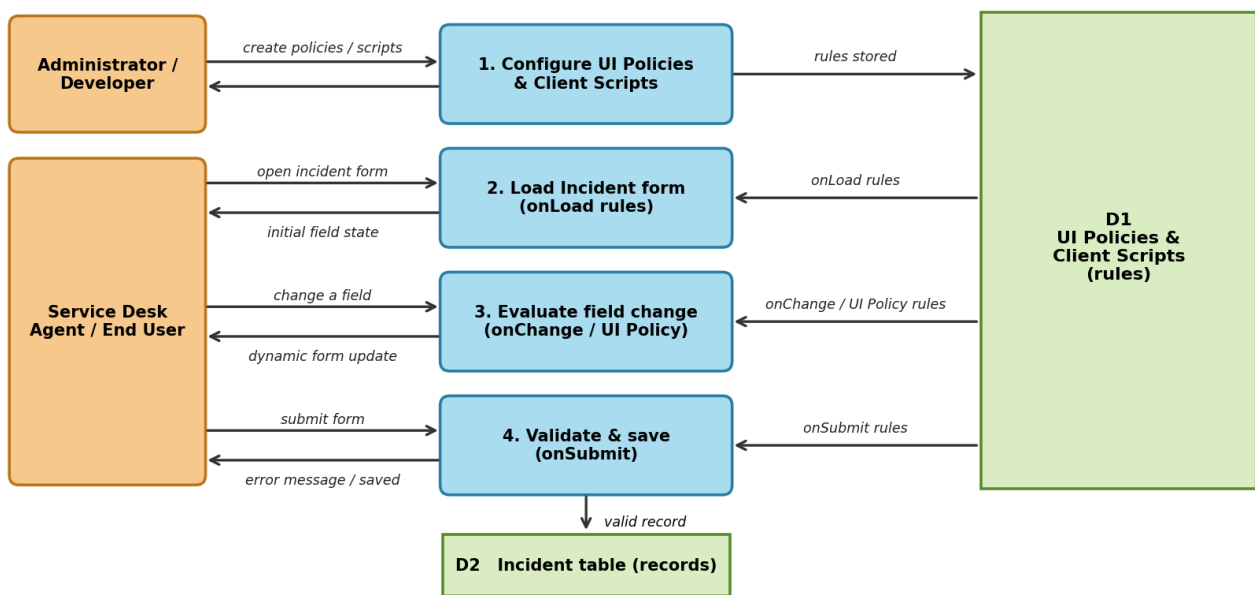

Flow

1. The Administrator / Developer creates the UI Policies and Client Scripts for the Incident form (Process 1, stored in D1).
2. A service desk agent / end user opens the Incident form.
3. The onLoad Client Scripts and UI Policies are read from D1 and set the initial field state (Process 2).
4. When the agent changes a field, the onChange Client Scripts and UI Policy conditions are evaluated (Process 3) and the form is updated immediately: fields are shown, hidden, made mandatory or read-only, and messages are displayed.
5. When the agent submits, the onSubmit Client Script validates the data (Process 4). If the data is invalid, a message is shown and the save is stopped.
6. If the data is valid, the incident is saved in the Incident table (D2).

User Stories

Use the below template to list all the user stories for the product.

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Developer	UI Policy – Mandatory Fields	USN-1	As a developer, I can create a UI policy that makes Close code and Close notes mandatory when State is Resolved or Closed.	The fields become mandatory on the form as soon as State changes, and the incident cannot be saved without them.	High	Sprint-1

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
		USN-2	As a developer, I can make Short description mandatory for every new incident.	A new incident cannot be saved with an empty Short description.	High	Sprint-1
	UI Policy – Visibility and Read-only	USN-3	As a developer, I can show or hide fields (for example, On hold reason) based on State and Category.	Fields appear or disappear immediately without reloading the form.	High	Sprint-1
		USN-4	As a developer, I can make fields read-only for closed incidents.	Closed incidents cannot be edited by normal users.	Medium	Sprint-2
	Client Script – onLoad	USN-5	As a developer, I can write an onLoad Client Script that sets the initial form state and shows guidance.	The form opens with the correct default state and a helpful message.	High	Sprint-2
	Client Script – onChange	USN-6	As a developer, I can write an onChange Client Script on Category, State, Impact or Urgency that updates other fields.	Dependent fields update correctly when the source field changes and not while the form is loading.	High	Sprint-2
	Client Script – onSubmit	USN-7	As a developer, I can write an onSubmit Client Script that validates the data before save.	Invalid data shows a clear message and the save is blocked; valid data is saved.	High	Sprint-2
	Testing and Verification	USN-8	As a developer, I can test every rule by changing fields on the form and checking the browser console.	Results are checked for each State and field, and script errors can be traced.	Medium	Sprint-3
Service Desk Agent / End User	Form Guidance	USN-9	As a service desk agent, I see only the fields that matter for the current State and Category.	The form is shorter and easier to read, with mandatory fields clearly marked.	High	Sprint-2
		USN-10	As an agent, I get a clear message when I enter incorrect or inconsistent data.	A field message or alert explains what to correct before I save.	High	Sprint-2
Administrator	Rule Maintenance	USN-11	As an administrator, I can activate, deactivate and update the Client Scripts and UI Policies.	Changes take effect on the form without changing other configuration.	Medium	Sprint-3