(a) Phases repeated in every increment

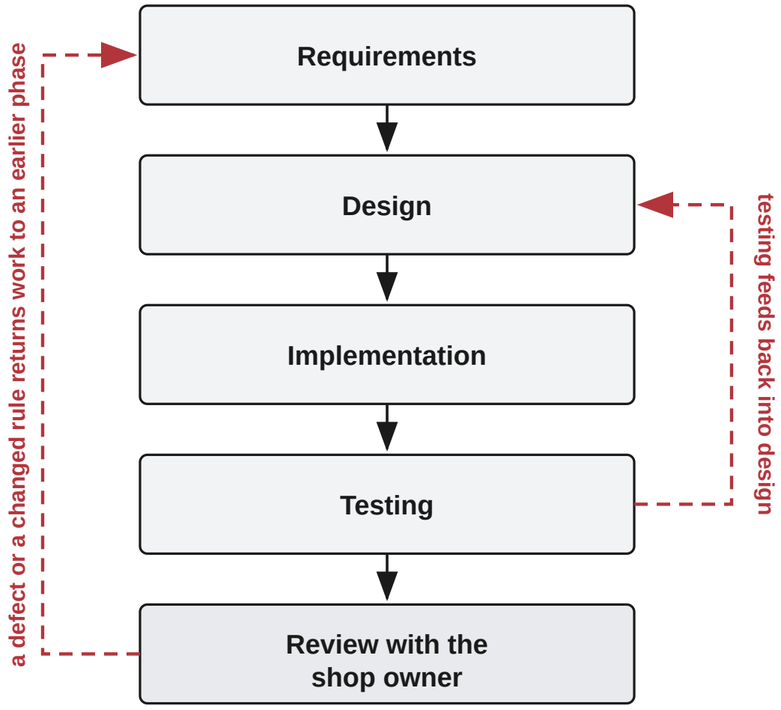

This is the ITERATIVE half: the same phases are run again whenever something is found to be wrong or incomplete, rather than once and only once.

(b) Increments delivered over the project

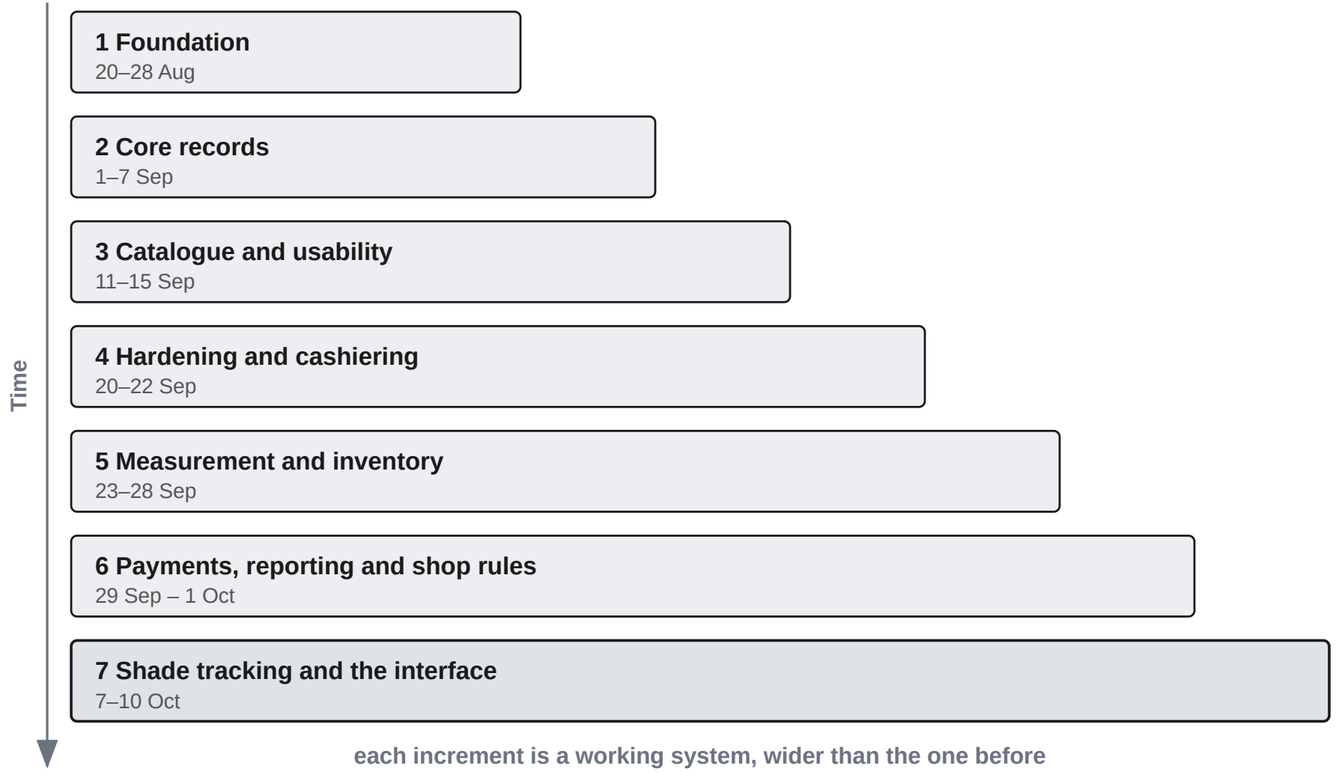

This is the INCREMENTAL half: the system was not delivered all at once. Each increment was usable before the next was begun, and later increments revisited earlier ones — 74% of source files were returned to in a later increment, and 49% in three or more.