The Sr. Phishermen's Green Team Documentation

About Us

Combustion Dynamics Corporation (CDC) is a manufacturing and consumer products company preparing to launch its new energy drink line, Fahrenheit. The organization operates a mixed technology environment consisting of internal infrastructure, web-facing services, and proprietary formulation systems. CDC's mission is to maintain secure, reliable operations by protecting sensitive data, ensuring system availability, and defending against both external threats and insider risk leading up to launch.

Table of Contents

About Us **0**
Services **2**
RDP (Remote Desktop Protocol) Externally 3
Windows (Graphical User Interface) 3
SSH (Secure Shell) 4
Linux (Command Line) 5
HTTPS (Hyper Text Transfer Protocol, Secure) 11
Machines **12**
AD (Active Directory) 12
TICKETS (Ticketing Machine) 14
MGMT (Management Backend) 14
ADMIN (Admin User Interface) 15
WWW (Website) 19

Services

RDP (Remote Desktop Protocol) Externally

Purpose: RDP (Remote Desktop Protocol) allows users to connect to the intended machine over a network connection.

Windows (Graphical User Interface)

Prerequisite: Ensure you have the Remote Desktop Connection application installed; it is normally installed by default

1. Click on the search bar at the bottom of the screen

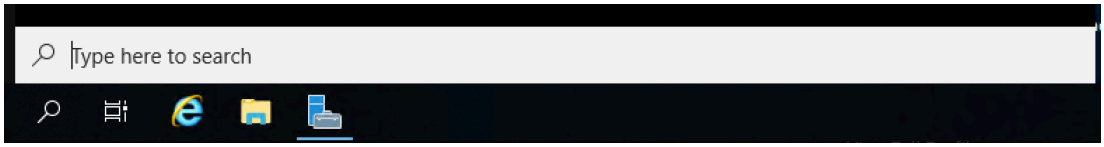

2. Type in Remote Desktop Connection, and click on the application

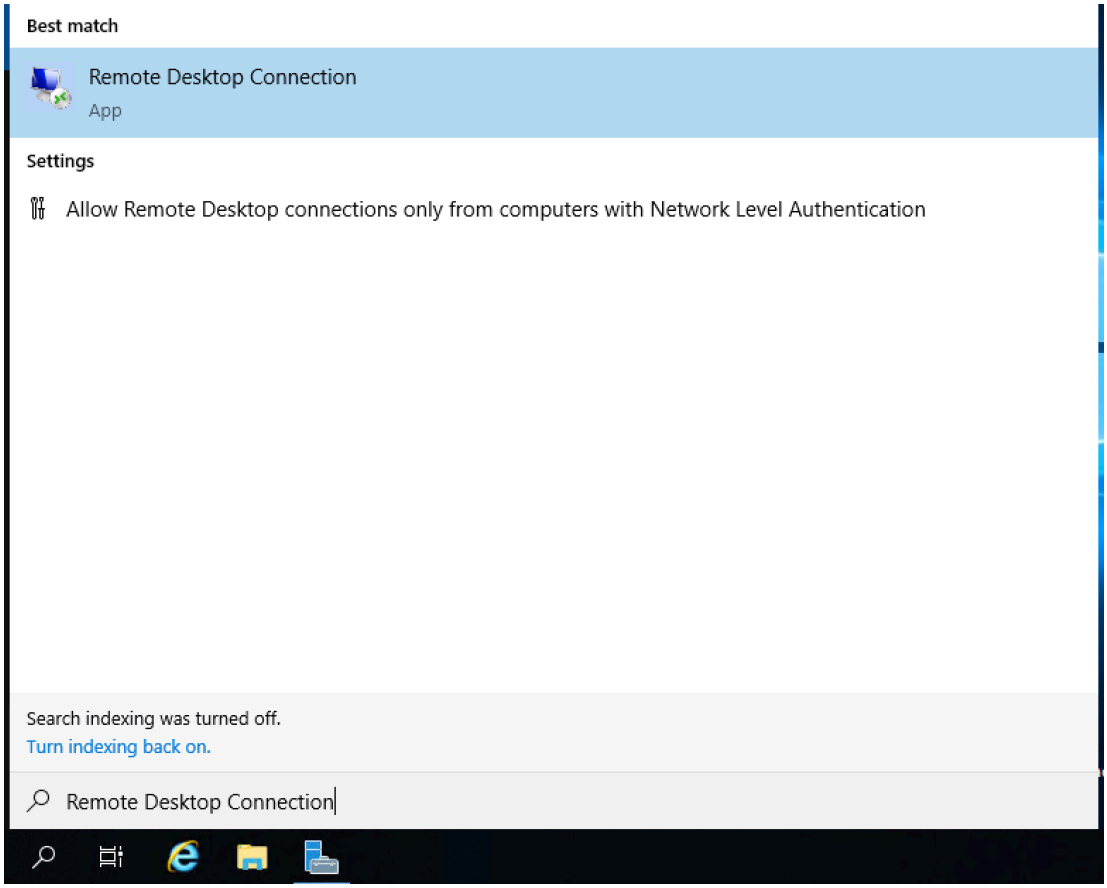

3. Type the domain name of your target machine in the field labeled Computer and click Connect

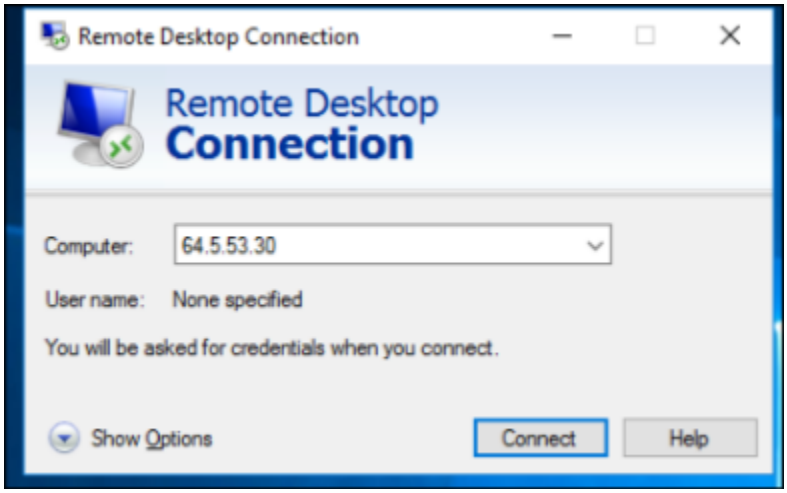

4. Input your credentials, and click OK
    a. Note: it is against company policy to enable the “Remember Me” option

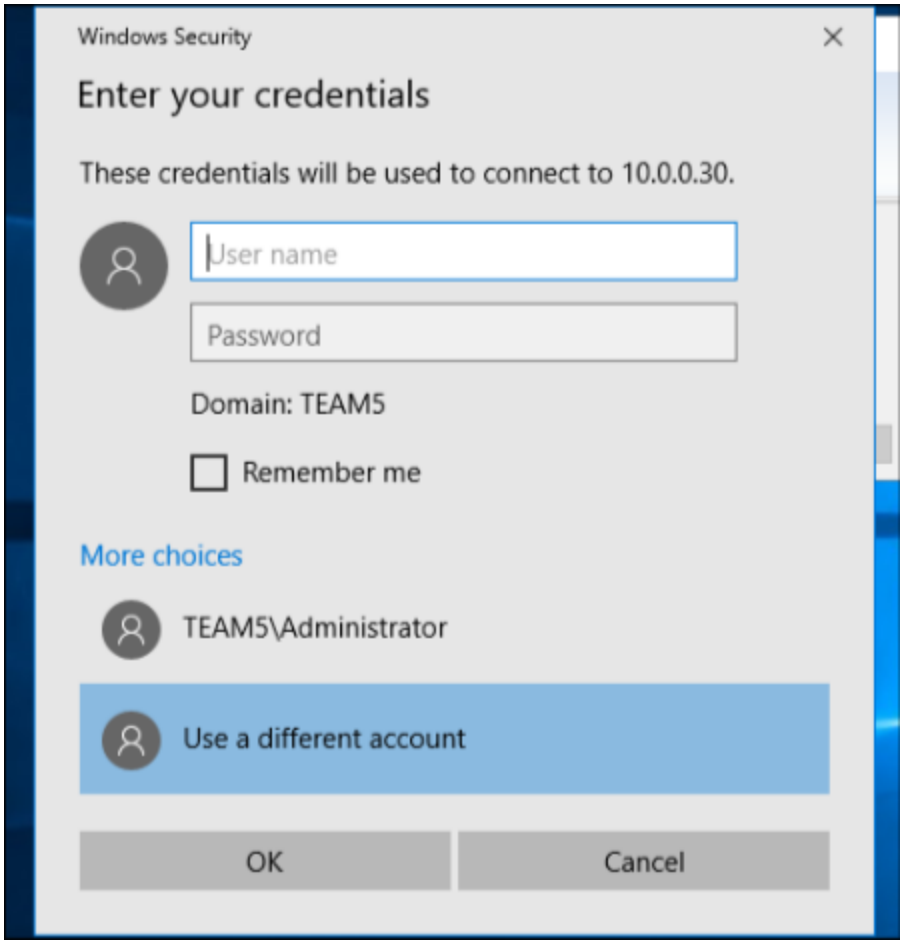

SSH (Secure Shell)

Purpose: SSH allows users and administrators to securely access the intended machine.

Linux (Command Line)

Prerequisites: Ensure you have ssh installed

1. While in the terminal, run `ssh <username>@<ip>`
    a. Replace `<username>` with your username

b. Replace `<ip>` with the domain of the machine into which you'd like to SSH

```
[johnlee@dingus ~]$ ssh christy.davis@64.5.53.20
```

2. Type `yes` to accept the certificate

```
The authenticity of host '64.39.3.50 (64.39.3.50)' can't b
e established.
ED25519 key fingerprint is: SHA256:FiGfghiAdEy00pLc0hBiDlz
7gh+GEhSb3CGsRCfy25s
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fing
erprint])?
```

3. Enter your user's password
   a. Note: you will not see your password as it is entered; for security reasons, the password is hidden as you type

```
christy.davis@64.5.53.20's password:
```

   a.

HTTPS (Hyper Text Transfer Protocol, Secure)

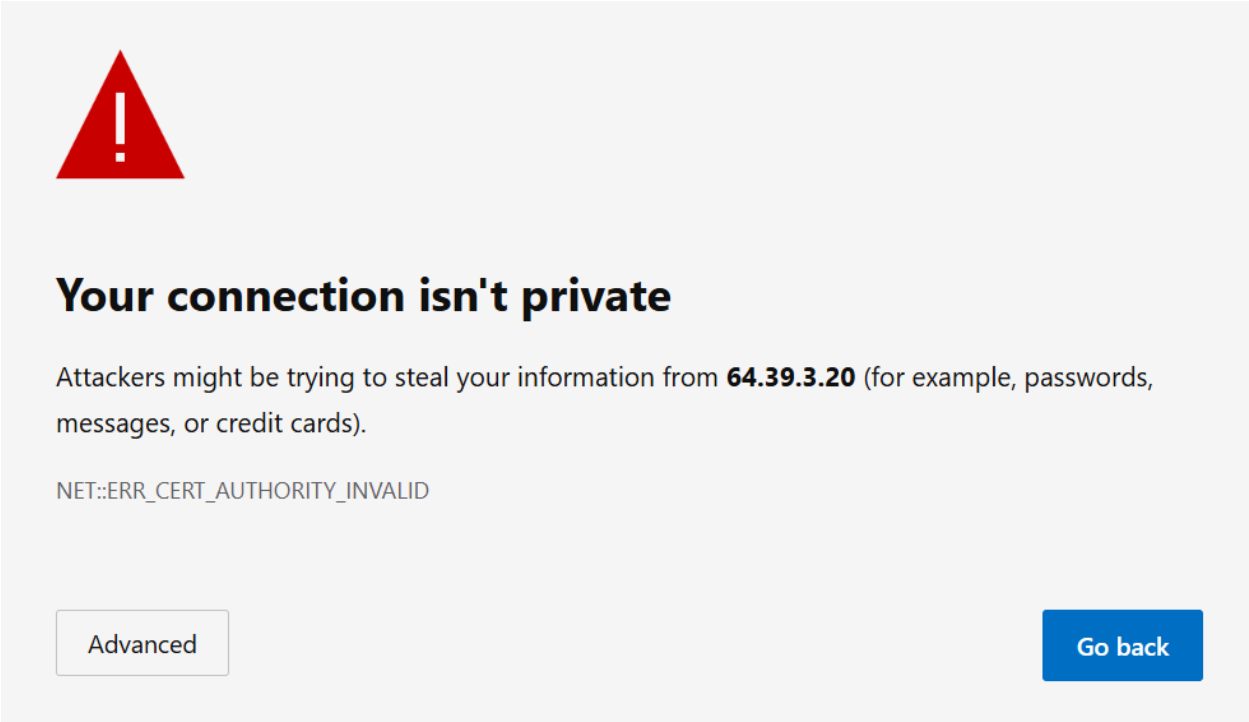

When navigating the website(s), you may receive a privacy warning. The warning is due to additional securities we have put in place. To accept the warning (seen above), you should:

1. Select `Advanced`
2. Select `Continue to <the website>`

Machines

AD (Active Directory)

Purpose: The Active Directory machine serves as the Domain Controller for our network. Domain Computers use this server to authenticate users and allow access to various resources in the network. In addition, IT Administrators may add or delete users on the network.

Services: RDP (3389)

Access RDP (3389):

1. Follow the directions given in the "RDP" section; however, replace `<ip>` with `64.5.53.10`.

1. Manage Users (GUI):

   a. Open the Active Directory Users and Computers by hitting WIN+R, and typing `dsa.msc`.
   b. Navigate to the correct OU.

1. **Adding a User:**
   a. Right-click the `OU` → `New` → `User`
   b. Fill in the `First name`, `Last name`, `User logon name` (`samAccountName`)
   c. Click Next
   d. Set password
      i. Uncheck `User must change password at next logon` if desired
   e. Click Finish
2. **Disabling a User:**
   a. Locate the user you wish to disable

b. `Right-click` → `Disable Account`

c. `Confirm`

3. **Removing (Deleting) a User**

a. Locate the user you wish to delete

b. `Right-click` → `Delete`

c. `Confirm`

Manage Users (PowerShell):

1. Launch PowerShell as Administrator
2. Run: `Import-Module ActiveDirectory`
3. **Create a New User:**

a. Run: `New-ADUser -Name "<full name>" -SamAccountName "<username>" -AccountPassword (Read-Host -AsSecureString "Enter Password") -Enabled $true`

i. Replace `<full name>` with your user's full name (e.g.: `John Doe`)

ii. Replace `<username>` with your user's username (e.g.: `john.doe`)

b. Run: `Set-ADUser "<username>" -ChangePasswordAtLogon $true`

i. Replace `<username>` with your user's username (e.g.: `john.doe`)

4. **Add User to Groups**

a. Run: `Add-ADGroupMember -Identity "<group>" -Members "<username>"`

i. Replace `<group>` with your user's group (e.g.: `IT Administrators`)

ii. Replace `<username>` with your user's username (e.g.: `john.doe`)

5. **Disable a User**

a. Run: `Disable-ADAccount -Identity "<username>"`
    i. Replace `<username>` with your user's username (e.g.: `john.doe`)

6. **Enable a User**
    a. Run: `Enable-ADAccount -Identity "<username>"`
    i. Replace `<username>` with your user's username (e.g.: `john.doe`)

7. **Delete a User**
    a. Run: `Remove-ADUser -Identity "<username>"`
    i. Replace `<username>` with your user's username (e.g.: `john.doe`)

WWW (Website)

Purpose: The Website machine hosts the company's public website. Customers can sign up, view loyalty points, manage their account information, place store orders, and view current orders.

Services: SSH (22), HTTP (80)

Access SSH (22):

1. Follow the directions given in the "SSH" section; however, replace `<ip>` with `64.5.53.20`.

Access HTTP (80):

1. In your preferred browser, enter http://64.5.5.3.20 into the searchbar
2. **Register (Sign Up)**
    a. In the top-right corner, click Login

    b. Under the Sign In prompt, click Register here

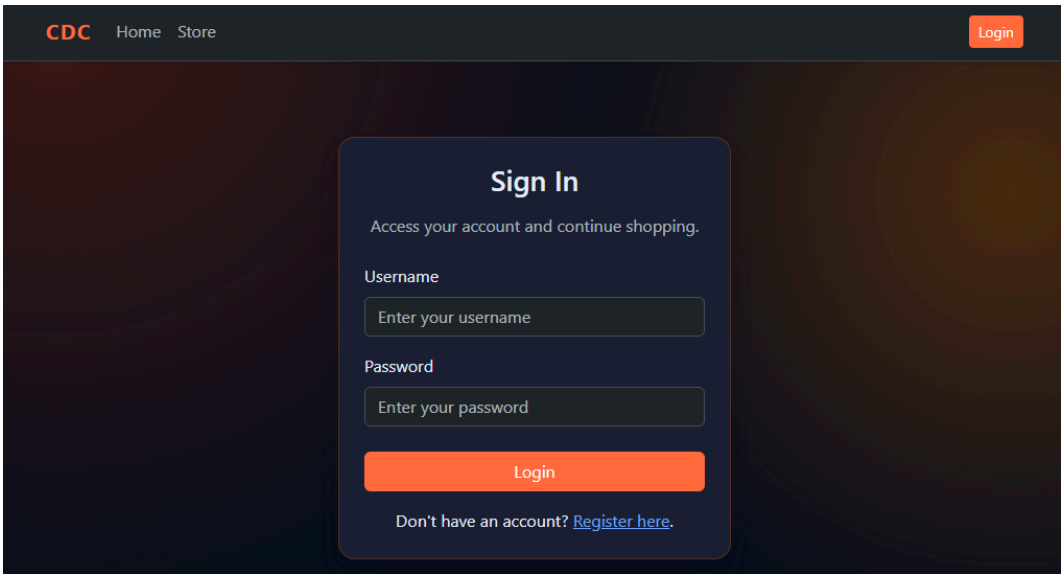

c. Enter in your credentials

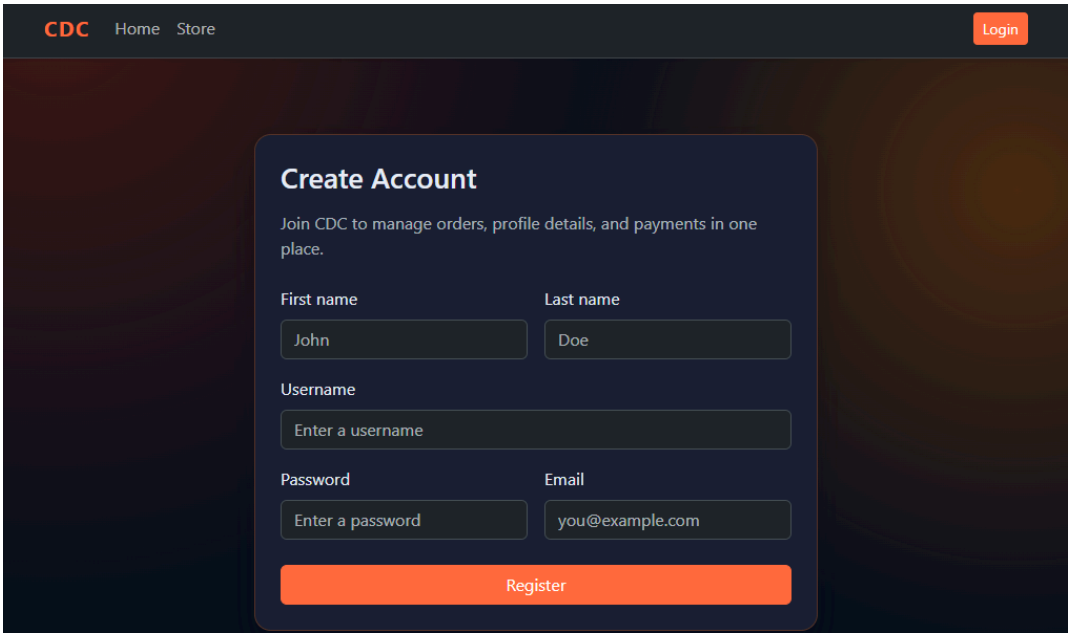

d. Register

3. **Login (Sign In)**

a. In the top-right corner, click Login

b. Enter your username into the username field, and your password into the password field

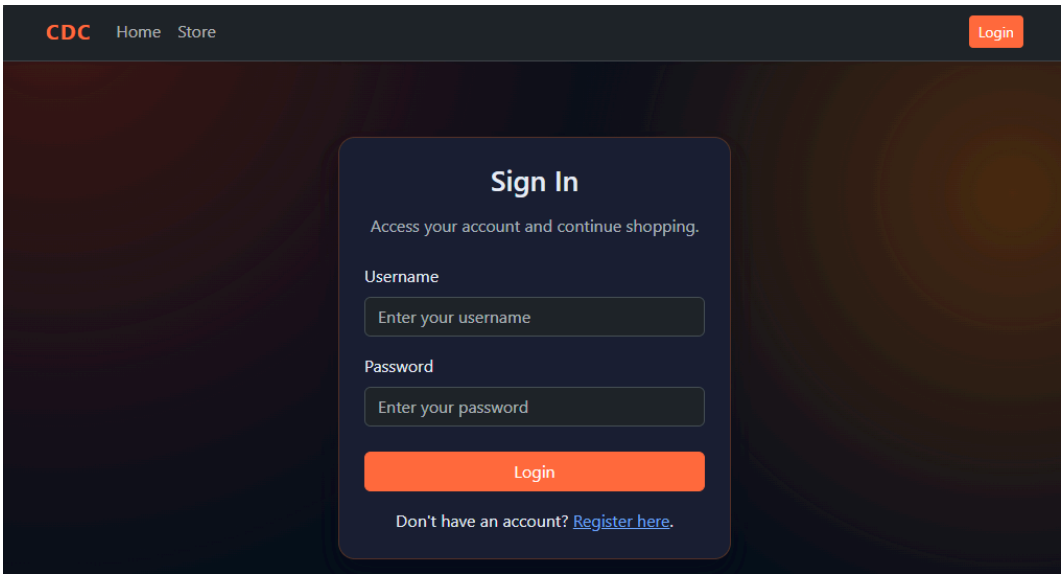

c. Click Login

4. **View the Store**

a. In the top-left corner, click Store

5. **Place an Order**

a. View the Store (seen above)

b. For any desired items, click Add to cart

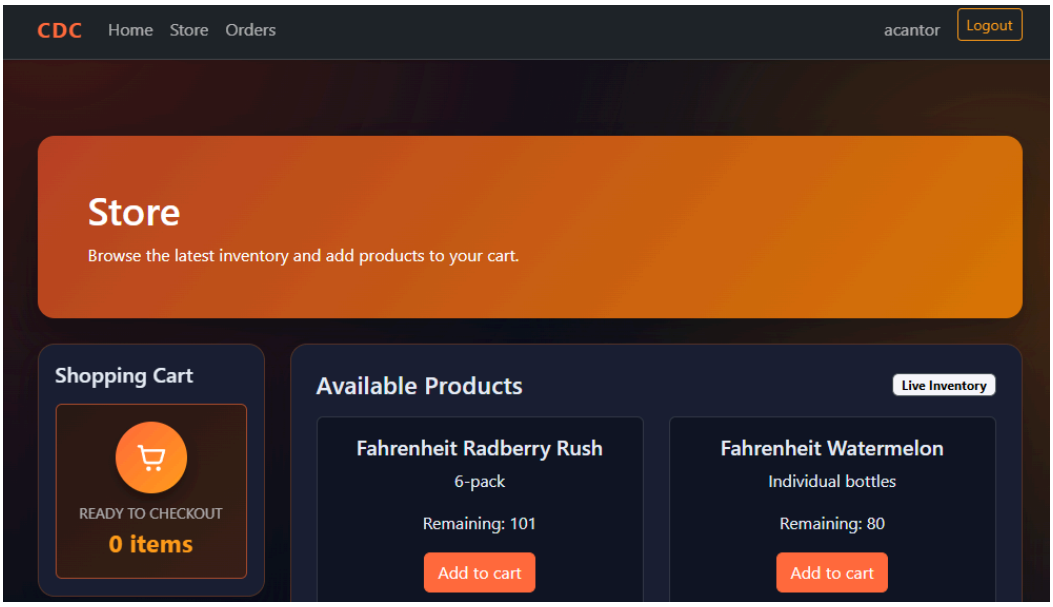

c. When ready to check out, click READY TO CHECKOUT

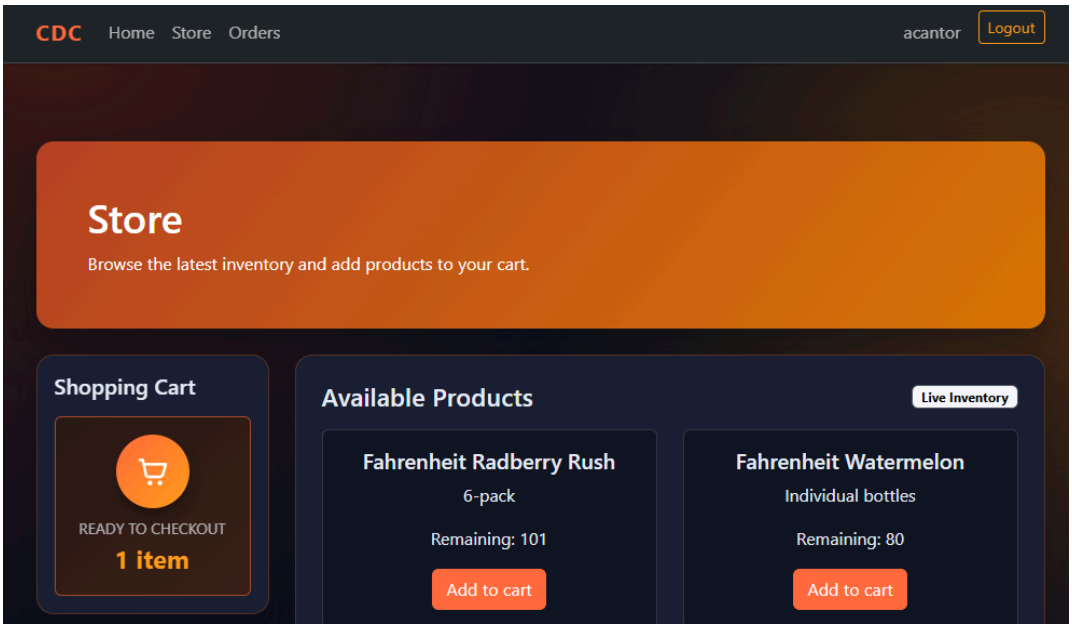

6. **Track Orders**

a. In the top-left corner, click Orders

b.

c. For any orders you no longer wish to receive, click Cancel Order

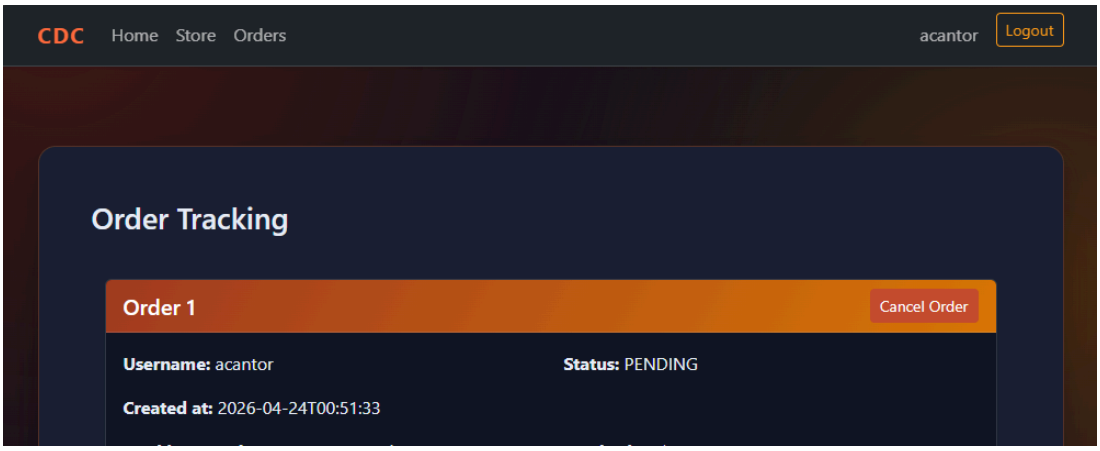

7. **Update Shipping Address and Payment Information**

a. In the top-right corner, click your username (eg. acantor)

b.

c. Enter in either a new Shipping Address or new Payment Information, and click Save Address or Update Payment respectively

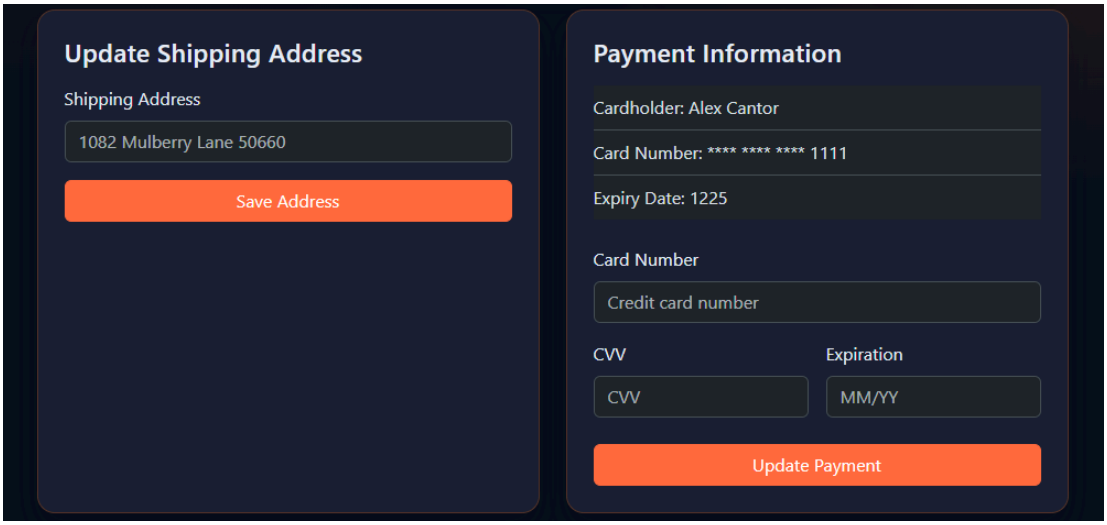

LP (Label Printer)

Purpose: The Label Printer machine hosts, stores, and creates the labels for outgoing orders. The labels are also viewable or printable from this machine.

Services: RDP (3389)

Access RDP (3389):

1. Follow the directions given in the "RDP" section; however, replace `<ip>` with `64.5.53.30`.

WMS (Warehouse Management System)

Purpose: The Warehouse Management System is the warehouse backend for the WWW Storefront. It connects to the database and performs CRUD operations for stock and order management. It also generates files for label printing by retrieving and consolidating details from both the WWW frontend and the database.

Services: SSH (22)

Access SSH (22):

1. Follow the directions given in the "SSH" section; however, replace `<ip>` with `64.5.53.40`.

DB (Database)

Purpose: The Database machine hosts the central MySQL database for the WWW Storefront and Warehouse Management System (WMS). It stores and manages WWW and WMS data including user authentication records, loyalty points, payment information, shipping details, inventory items, and order transactions.

Services: SSH (22), MySQL (3306)

Access SSH (22):

1. Follow the directions given in the "SSH" section; however, replace `<ip>` with `64.5.53.50`.

Access MySQL (3306):

1. In a terminal, run: `mysql -h 64.5.53.50 -u <username> -p --skip-ssl`
2. Select the `iseage_db` database: `USE iseage_db;`
3. View the current items table: `SELECT * FROM items;`
4. Update the table, as necessary: `UPDATE items SET quantity = quantity - 1 where ID = 1;`