Team ISEd Tea

Iowa State University

(Team 7)

Green Team Documentation

Remotely Connecting to a Machine

Using RDP

RDP, or remote desktop protocol, is a common method to remotely connect to Windows computers. To use RDP, you will need an RDP client. If you are using Windows, then you can use the built-in RDP client. For Linux users, there are many RDP clients like Remmina or rdesktop. These instructions will use Remmina on Ubuntu.

Windows

1. In the Windows search bar type “rdp”. Select the “Remote Desktop Connection” app. This will open the RDP client.

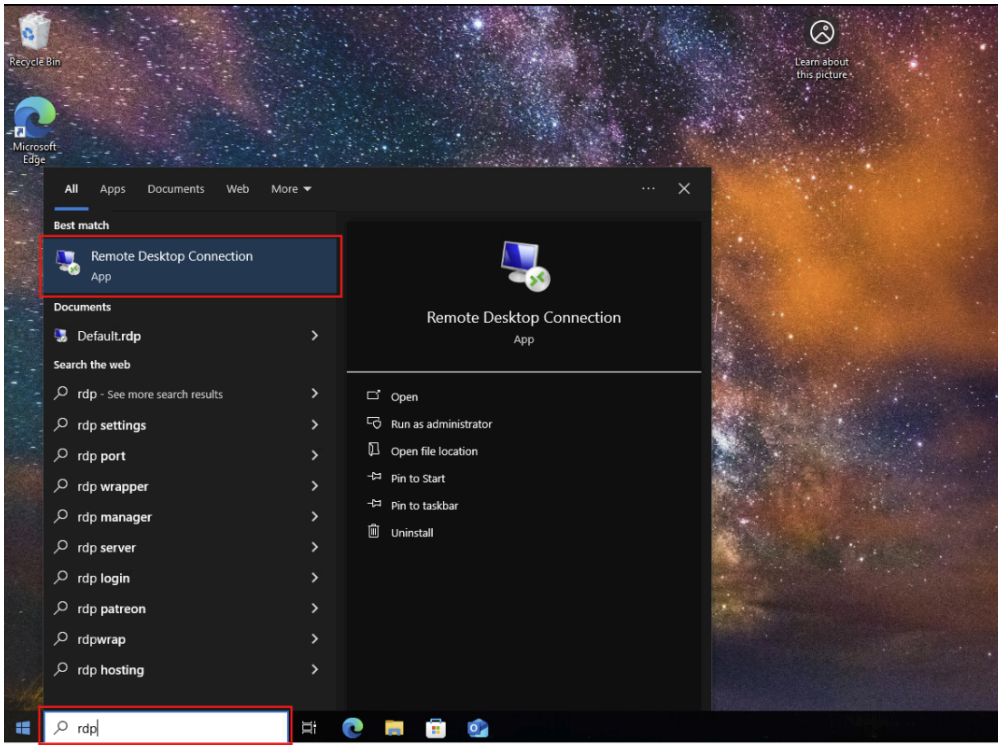

2. In the “Computer” field, enter the name or IP address of the computer you would like to connect to then click “Connect”.

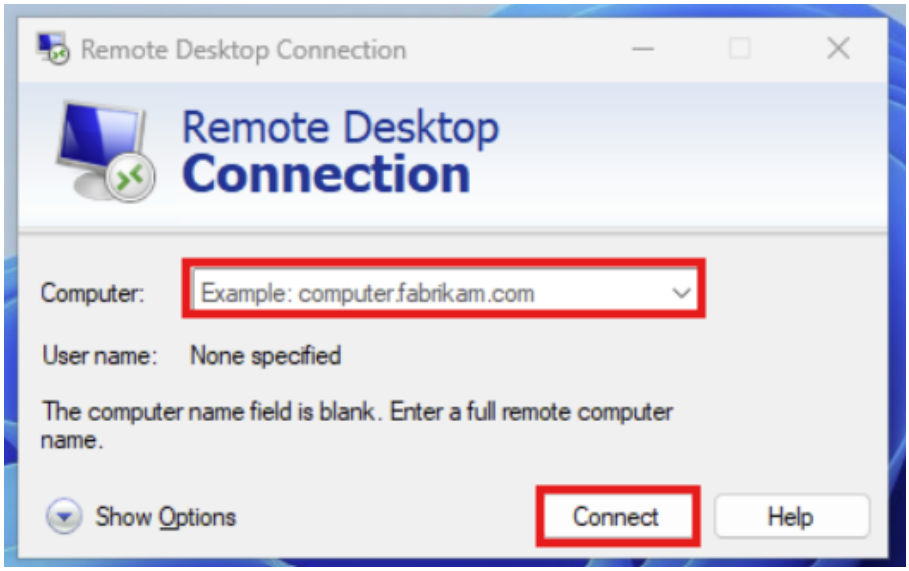

3. You should be prompted for a username and password to connect. Enter this information and click “OK”.

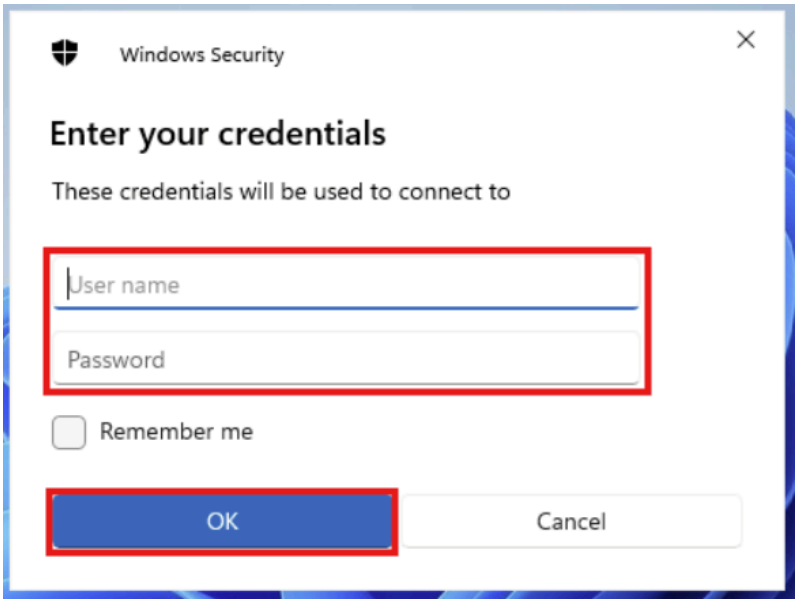

4. There may be a warning about certificate errors. In this case, click “Yes” to connect anyway.

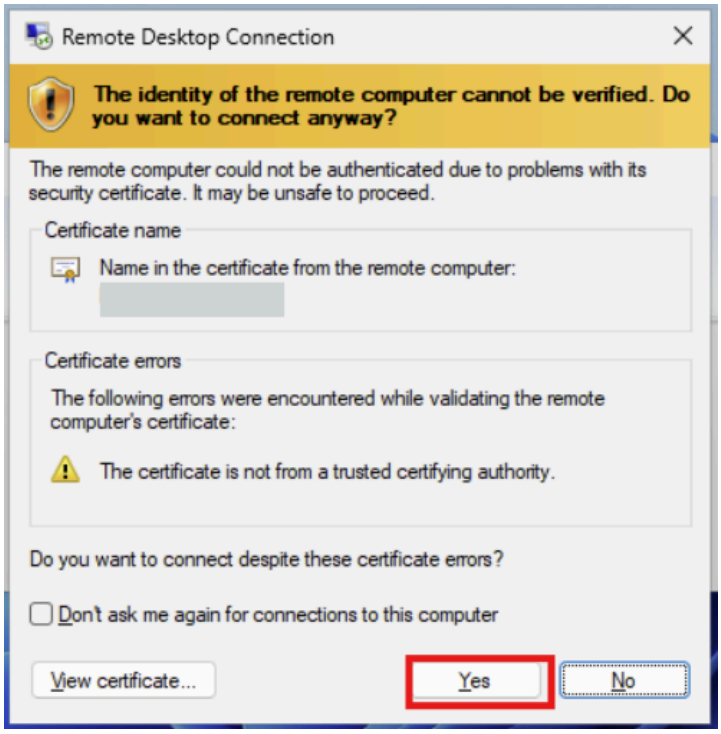

Linux

1. If it is not installed already, install Remmina using your system’s package manager. For Ubuntu use the following command:

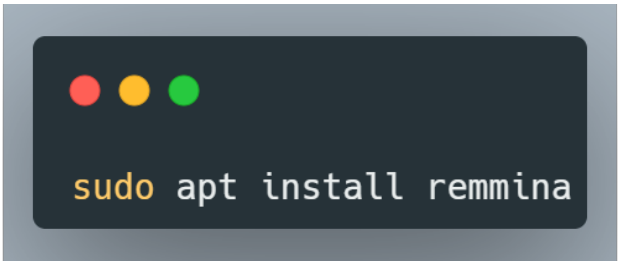

2. Open a terminal using "*CTRL+ALT+T*" or by clicking on the desktop icon, and enter the command "*remmina*". This will open the Remmina application.

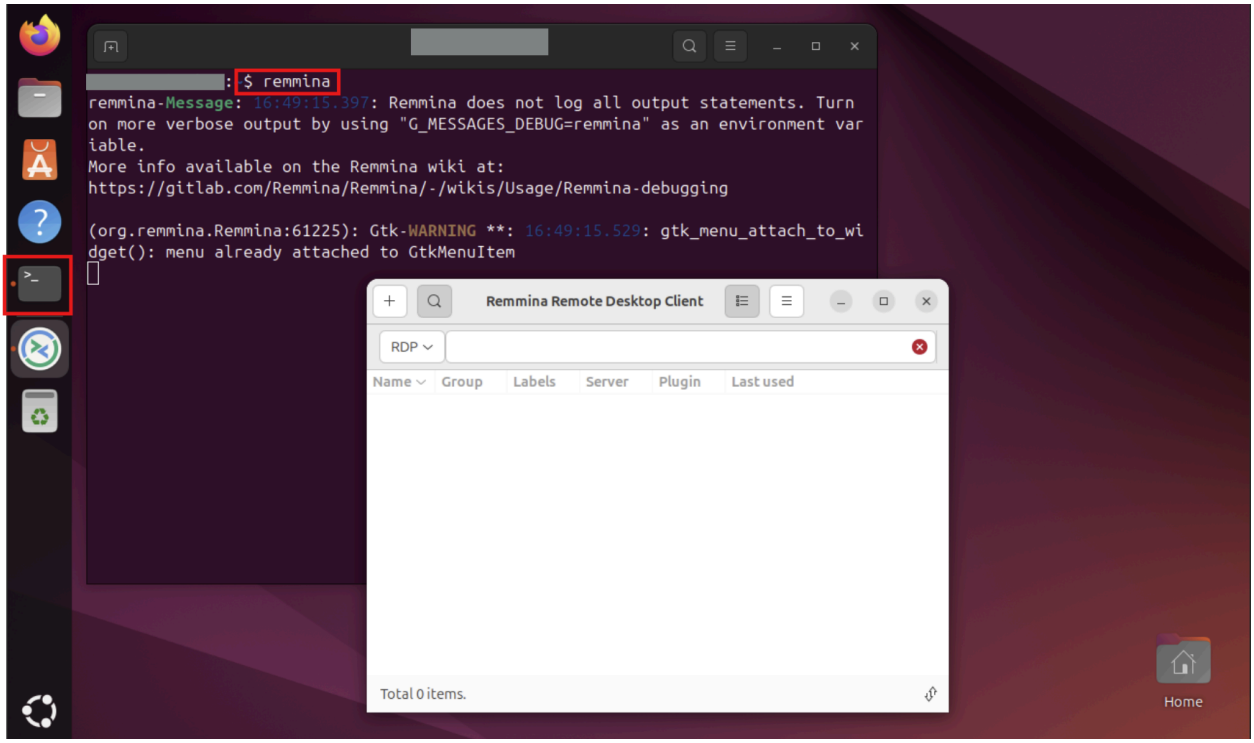

3. Ensure "RDP" is selected, then click the plus icon to add a connection.

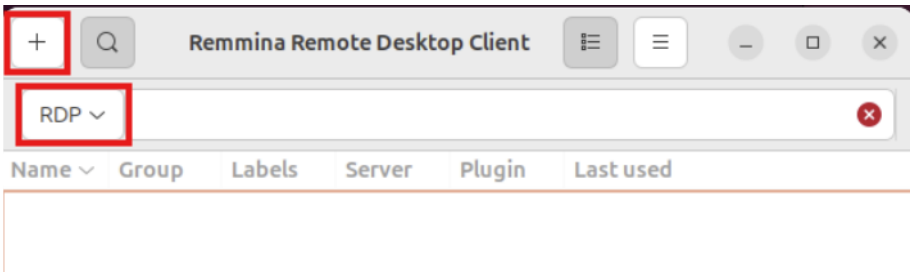

4. In the new window enter the connection information, like server name or IP address, username, and password. Then click “Save and Connect”.

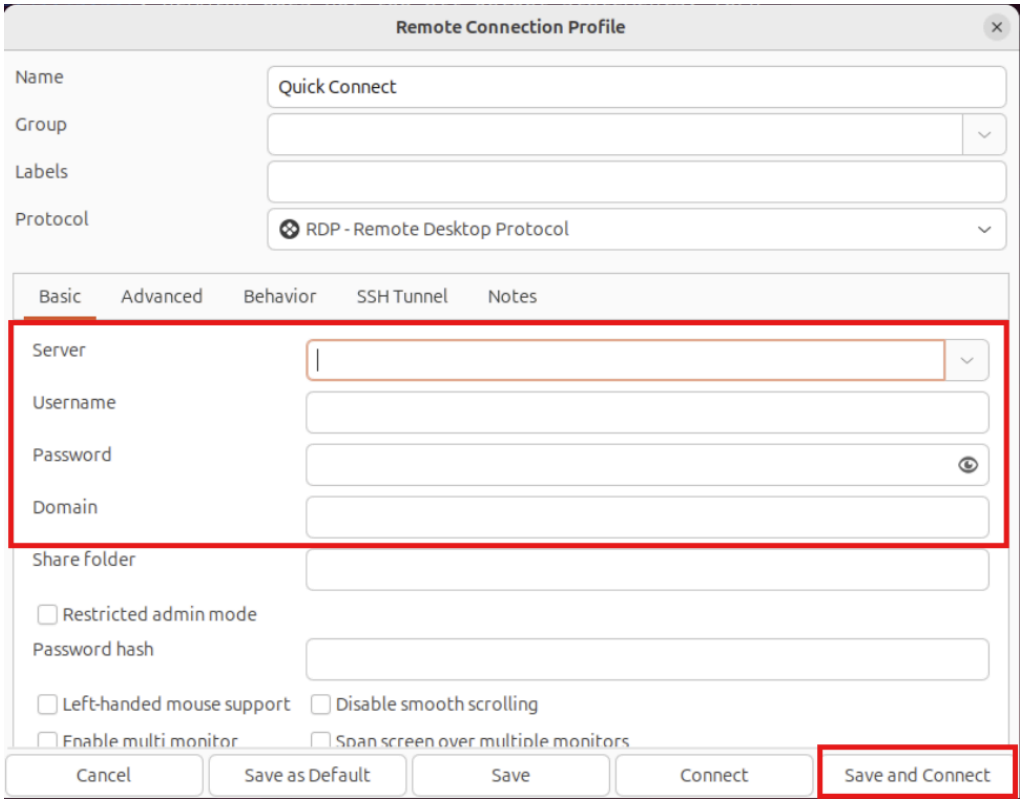

5. Click “Yes” to accept the certificate and connect.

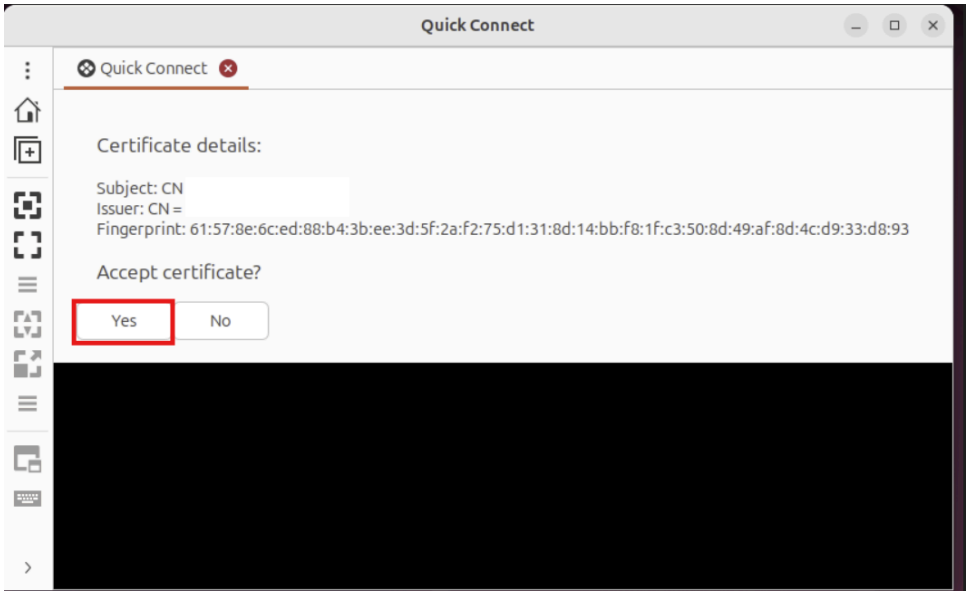

Using SSH

SSH, or secure shell, is a widely used protocol for remotely connecting to both Linux and Windows machines. By default, SSH is available on almost all Linux machines and more recent versions of Windows.

1. Begin by opening a terminal (PowerShell if on Windows). On Linux, this can be done with the keyboard shortcut "*CTRL+ALT+T*". For both Linux and Windows, you can also search the application in the search bar and click the terminal application.

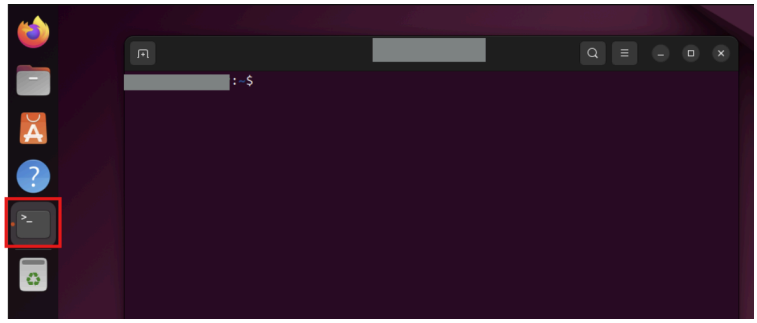

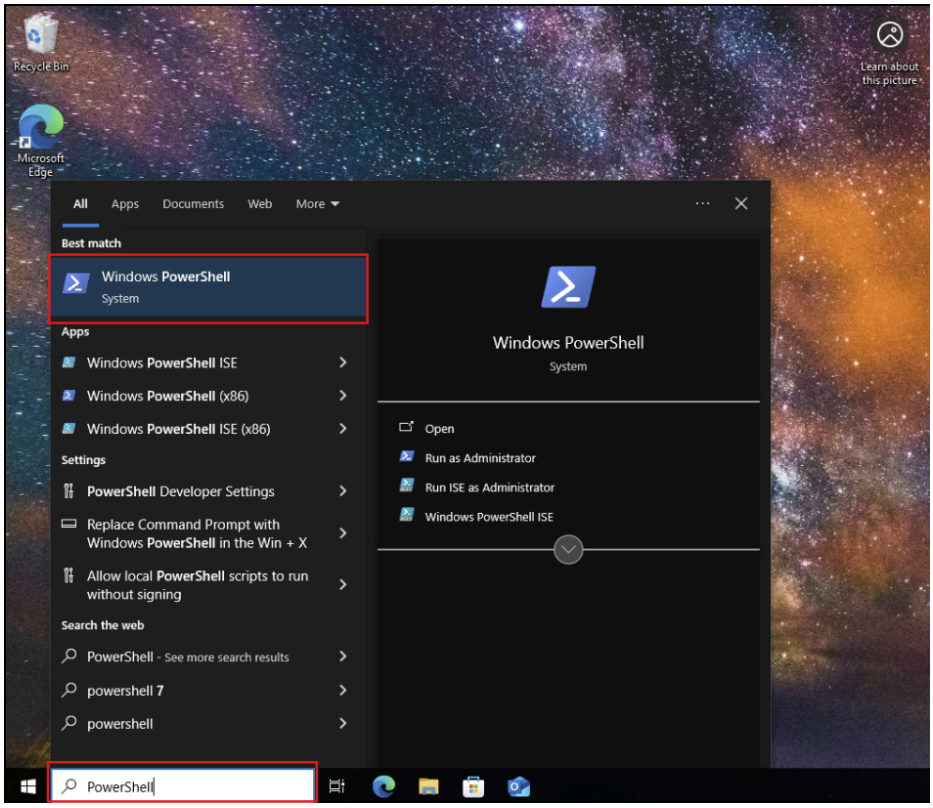

2. Enter the following command, substituting the correct information for the placeholders (including the “< >”).

```
ssh <username>@<server name or IP address>
```

3. If this is your first time connecting to this machine, you will be prompted to accept the host’s fingerprint. Type “yes” to continue.

```
ED25519 key fingerprint is SHA256:xpDDuMlqwlh4AMx1CR1F5FsQeBaAPX91bNR8c/2osq0.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])?
```

4. When prompted, enter the user’s password to connect.