TCS CORPORATE WEBSITE

Filter List — Authoring Guide

Role / audience	Authoring — Content authors, content managers, AEM authoring leads
Version	1.0
Status	Draft for review
Owner	Content Lead / AEM Authoring Lead (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Filter List — Authoring Guide
- Where to see it
- For Content Authors
- Authorable Fields
- Screenshot-Based Authoring Steps
- Variations
- Complete Authoring Example
- Content and Asset Guidelines
- Troubleshooting
- Screenshots
- Known limitations
- Open items
- Change history

Filter List — Authoring Guide

Attribute	Value
Document ID	AUT-C-filter-list
Audience	Content authors, content managers, AEM authoring leads
Purpose	How to add, fill in and check the Filter List component
Scope	—
Prerequisites	—
Owner	Content Lead / AEM Authoring Lead (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	8 November 2026
Source files	blocks/filter-list/README.md, blocks/filter-list/_filter-list.json
Related documents	—
Related AEM paths	—

1. Where to see it

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/filter-list
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/filter-list/content-types
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/filter-list/filter-list
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/filter-list/filters
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/filter-list/insights-listing
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/filter-list/layouts-and-card-styles
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/filter-list/rules

2. For Content Authors

1. **Prepare the pages.** Each listed page needs its metadata: Title, Description, Tags, Page Type, `content-type`, `publish-date` (YYYY-MM-DD), `reading-time`, `featured-image` or `thumbnail-image`, and `author-id` (Authors sheet) or `author`; `featured` / `priority` for spotlights. Publish the pages so they are in the query index.
2. **Add the block.** Select a Section, a Columns Container column or a Tabs Container tab, choose Add (+) and pick **Filter List**.
3. **Open its properties.** Tabs: **Content** (title, description, layout, paging, source, filters), **Cards** (card style, featured cards, hero card, card mapping), **Additional**.
4. **Enter content.** Title (e.g. "Insights"), an optional Description, Default layout, Cards per page and Load more count.
5. **Choose the source.** Datasource **Query Index** (with an optional Root path, Page types, Content types and Sort by) or **Manual List** (then add Filter Page items with Use = Listed).
6. **Add filters.** Either set a **Primary filter category** (its tags used by the pages become pills) or add **Filter Tag** items (one pill per tag, in item order). For the advanced filter, keep Enable advanced filter

on and add **Filter Category** items (Category label, Taxonomy root). Choose Allow multi select, Show All filter and Filter logic.
7. **Select the presentation.** In the Cards tab choose Card style, and turn on featured cards (Featured rule, count; Manual: Filter Page items with Use = Featured) or the hero card (Hero rule; Manual: Hero page).
8. **Add / reorder items** with Add (+) on the block; drag them in the content tree. Filter Tags render in item order; Filter Pages in their order for a Manual List and Manual featured rule.
9. **Preview** on the preview URL (aem.page): Universal Editor and AEM author show a hint instead of cards, because AEM author has no query index.
10. **Publish** the page (and the listed pages, the taxonomy and the Authors sheet when they changed).
11. **Validate the published output:** cards appear with images and labels; pills and the panel filter the cards; Load more adds cards; the count is right.

- **Minimum required:** none in the model; with the defaults the block lists every indexed page of the locale. A Manual List needs Filter Pages (Use = Listed); a Filter Category needs a Taxonomy root.
- **Recommended:** a Title (the block's `h2`), a Root path, filter tags or a Primary filter category, Show result count for large lists.
- **Optional:** Description, hero and featured spotlights, sorting, the card mapping fields, the Additional tab.

3. Authorable Fields

Filter List (`filter-list`)

Model `filter-list`; template name "Filter List" (the block class AEM renders); key-value block (one row per property); children: `filter-list-tag`, `filter-list-category`, `filter-list-page`.

Stored on a new component (definition template): `showResultCount` = `false`, `layout` = `"masonry"`, `cardsPerPage` = `9`, `loadMoreCount` = `6`, `source` = `"query-index"`, `sortBy` = `"latest"`, `showAll` = `true`, `multiSelect` = `false`, `advancedFilter` = `true`, `filterLogic` = `"and"`, `cardStyle` = `"mixed"`, `enableFeatured` = `true`, `featuredRule` = `"featured"`, `featuredCount` = `2`, `enableHero` = `false`, `heroRule` = `"featured"`, `imageSource` = `"featured-image"`, `fallbackImage` = `"thumbnail-image"`, `eyebrowSource` = `"content-type"`, `titleSource` = `"title"`, `descriptionSource` = `"description"`, `tagSource` = `"tags"`, `urlSource` = `"path"`, `authorSource` = `"author"`.

Content tab — Filter List

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Title	`title`	text	No	—	—	e.g. Explore the Agentic bank	Insights
Description	`description`	richtext	No	—	—	—	—
Show result count	`showResultCount`	boolean	No	`false`	on / off	—	true
Default layout	`layout`	select	No	`masonry`	Masonry (`masonry`), Grid (`grid`), List (`list`)	—	grid
Cards per page	`cardsPerPage`	number	No	9	—	Cards shown first; Load more shows the next ones.	6

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Load more count	`loadMoreCount`	number	No	6	—	Cards added by each Load more.	3
Datasource	`source`	select	No	`query-index`	Query Index (`query-index`), Manual List (`manual`)	—	manual
Root path	`rootPath`	aem-content	No	—	—	Pages below this page, e.g. /en/insights. Empty: the whole site of the language. Shown when `source` is not `manual`.	/design-block-master/en/dummy-pages/insights
Pages (authored before Page items)	`pageItems`	container (multiple)	No	—	—	Kept for lists authored before; add items with Add instead. Shown when `source` is `manual`.	—
Pages (authored before Page items) › Page	`page`	aem-content	No	—	—	—	—
Page types	`pageTypes`	multiselect	No	—	Article (`article`), Blog (`blog`), Press release (`press-release`)	Only pages of these page types (page-type metadata). None: every page type.	—
Content types	`contentTypes`	multiselect	No	—	Article (`article`), Blog (`blog`), Insights (`insights`), Case study (`case-study`), Whitepaper (`whitepaper`), Report (`report`), News (`news`), Event (`event`), Press release (`press-release`)	Only pages of these content types (content-type metadata). None: every content type.	—
Sort by	`sortBy`	select	No	`latest`	Latest First (`latest`), Featured First (`featured`), Priority (`priority`), Alphabetical (`alphabetical`)	—	latest
Primary filter category	`primaryCategory`	aem-tag	No	—	—	A tag root, e.g. tcs:industry. Without Primary filter tags, its tags used by the pages are the filters.	tcs-corp:industry
Primary filter tags (authored before Tag items)	`primaryTags`	container (multiple)	No	—	—	Kept for lists authored before; add items with Add instead.	—
Primary filter tags (authored before Tag items) › Tag Id	`tagId`	aem-tag	No	—	—	—	—
Show All filter	`showAll`	boolean	No	`true`	on / off	—	true
Allow multi select	`multiSelect`	boolean	No	`false`	on / off	Several filters at once: pages with every selected tag.	true

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Enable advanced filter	`advancedFilter`	boolean	No	`true`	on / off	The filter button opens the Advanced filter categories.	false
Advanced filter categories (authored before Category items)	`advancedCategories`	container (multiple)	No	—	—	Kept for lists authored before; add items with Add instead.	—
Advanced filter categories (authored before Category items) › Category label	`categoryLabel`	text	No	—	—	e.g. Industry	—
Advanced filter categories (authored before Category items) › Taxonomy root	`taxonomyRoot`	aem-tag	No	—	—	e.g. tcs:industry; its tags used by the pages are the options.	—
Filter logic	`filterLogic`	select	No	and	AND (`and`), OR (`or`)	AND: pages with every selected option. OR: pages with any of them.	or

Cards tab — Filter List

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Card style	`cardStyle`	select	No	`mixed`	Default (`default`), Compact (`compact`), Featured (`featured`), Mixed (`mixed`)	—	default
Enable featured cards	`enableFeatured`	boolean	No	`true`	on / off	Large cards, one after each page of cards.	false
Featured rule	`featuredRule`	select	No	`featured`	Marked as featured (featured metadata) (`featured`), Priority 1 to 3 (priority metadata) (`priority`), Manual (`manual`)	Shown when `enableFeatured` is `true`.	priority
Featured pages (authored before Page items)	`featuredItems`	container (multiple)	No	—	—	Kept for lists authored before; add items with Add instead. Shown when `enableFeatured` is `true` and `featuredRule` is `manual`.	—
Featured pages (authored before Page items) › Featured page	`featuredPage`	aem-content	No	—	—	—	—
Featured card count	`featuredCount`	number	No	2	—	Shown when `enableFeatured` is `true`.	1
Enable hero card	`enableHero`	boolean	No	`false`	on / off	A large spotlight card first.	true
Hero rule	`heroRule`	select	No	`featured`	Latest (`latest`), Featured (`featured`), Manual (`manual`)	Shown when `enableHero` is `true`.	latest

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Hero page	heroPage	aem-content	No	—	—	Shown when enableHero is true and heroRule is manual.	—
Image source	imageSource	text	No	featured-image	—	The metadata column of the card image.	featured-image
Fallback image	fallbackImage	text	No	thumbnail-image	—	The column used when the page has no image source.	thumbnail-image
Eyebrow source	eyebrowSource	text	No	content-type	—	The content type label, e.g. Article.	—
Title source	titleSource	text	No	title	—	—	—
Description source	descriptionSource	text	No	description	—	—	—
Tag source	tagSource	text	No	tags	—	—	—
Url source	urlSource	text	No	path	—	—	—
Author source	authorSource	text	No	author	—	author, or author-id (from the Authors sheet).	author

Additional tab — Filter List

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Anchor ID	classes_anchor	text	No	—	regExp: ^anchor-[a-z0-9][a-z0-9-]*$; customErrorMsg: Start with anchor-, then lower-case letters, digits and hyphens.	A unique ID of the block on the page, starting with anchor-, e.g. anchor-our-services; link to it with #anchor-our-services. Delivered as a block class.	—
Hide block	classes_hideblock	boolean	No	false	on / off	Hides the whole block on the page until it is turned off (shown faded in the editor). Delivered as a block class.	—
AnimationType	classes_animation	select	No	""	None (""), Fade in (motion-fade-in), Fade up (motion-fade-up), Fade down (motion-fade-down), Fade left (motion-fade-left), Fade right (motion-fade-right), Slide up (motion-slide-up), Slide down (motion-slide-down), Slide left (motion-slide-left), Slide right (motion-slide-right), Scale in (motion-scale-in)	How the block's content appears; repeated items (cards, list items, accordion items, columns) appear one after another. None: shown as is. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	motion-fade-in

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Motion Speed	`classes_animationspeed`	select	No	""	Medium (""), Fast (`motion-fast`), Slow (`motion-slow`)	How fast the animation runs: 0.3, 0.6 or 0.9 seconds. Shown when `classes_animation` is set and `classes_animation` is not empty. Delivered as a block class.	—
Animation Trigger	`classes_animationtrigger`	select	No	""	On Scroll / Viewport Entry (""), On Page Load (`motion-on-load`)	When the block's animations run. On Scroll: when the block comes into view (at once if it is in view when the page opens). On Page Load: as soon as the block is ready, wherever it is on the page. Shown when `classes_animation` is set and `classes_animation` is not empty. Delivered as a block class.	—
Padding left	`classes_paddingleft`	select	No	""	Default (""), 0 (none) (`pl-0`), 0.25rem (space-100) (`pl-100`), 0.5rem (space-200) (`pl-200`), 0.75rem (space-300) (`pl-300`), 1rem (space-400) (`pl-400`), 1.25rem (space-500) (`pl-500`), 1.5rem (space-600) (`pl-600`), 2rem (space-800) (`pl-800`), 2.5rem (space-1000) (`pl-1000`), 3rem (space-1200) (`pl-1200`), 4rem (space-1600) (`pl-1600`), 5rem (space-2000) (`pl-2000`), 6rem (space-2400) (`pl-2400`), 7.5rem (space-3000) (`pl-3000`)	Delivered as a block class.	—
Padding right	`classes_paddingright`	select	No	""	Default (""), 0 (none) (`pr-0`), 0.25rem (space-100) (`pr-100`), 0.5rem (space-200) (`pr-200`), 0.75rem (space-300) (`pr-300`), 1rem (space-400) (`pr-400`), 1.25rem (space-500) (`pr-500`), 1.5rem (space-600) (`pr-600`), 2rem (space-800) (`pr-800`), 2.5rem (space-1000) (`pr-1000`), 3rem (space-1200) (`pr-1200`), 4rem (space-1600) (`pr-1600`), 5rem (space-2000) (`pr-2000`), 6rem (space-2400) (`pr-2400`), 7.5rem (space-3000) (`pr-3000`)	Delivered as a block class.	—
Padding top	`classes_paddingtop`	select	No	""	Default (""), 0 (none) (`pt-0`), 0.25rem (space-100) (`pt-100`), 0.5rem (space-200) (`pt-200`), 0.75rem (space-300) (`pt-300`), 1rem (space-400) (`pt-400`), 1.25rem (space-500) (`pt-500`), 1.5rem (space-600) (`pt-600`), 2rem (space-800) (`pt-800`), 2.5rem (space-1000) (`pt-1000`), 3rem (space-1200) (`pt-1200`), 4rem (space-1600) (`pt-1600`), 5rem (space-2000) (`pt-2000`), 6rem (space-2400) (`pt-2400`), 7.5rem (space-3000) (`pt-3000`)	Delivered as a block class.	—
Padding bottom	`classes_paddingbottom`	select	No	""	Default (""), 0 (none) (`pb-0`), 0.25rem (space-100) (`pb-100`), 0.5rem (space-200) (`pb-200`), 0.75rem (space-300) (`pb-300`), 1rem (space-400) (`pb-400`), 1.25rem (space-500) (`pb-500`), 1.5rem (space-600) (`pb-600`), 2rem (space-800) (`pb-800`), 2.5rem (space-1000) (`pb-1000`), 3rem (space-1200) (`pb-1200`), 4rem (space-1600) (`pb-1600`), 5rem (space-2000) (`pb-2000`), 6rem (space-2400) (`pb-2400`), 7.5rem (space-3000) (`pb-3000`)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Margin left	`classes_marginleft`	select	No	""	Default (""), 0 (none) (`ml-0`), 0.25rem (space-100) (`ml-100`), 0.5rem (space-200) (`ml-200`), 0.75rem (space-300) (`ml-300`), 1rem (space-400) (`ml-400`), 1.25rem (space-500) (`ml-500`), 1.5rem (space-600) (`ml-600`), 2rem (space-800) (`ml-800`), 2.5rem (space-1000) (`ml-1000`), 3rem (space-1200) (`ml-1200`), 4rem (space-1600) (`ml-1600`), 5rem (space-2000) (`ml-2000`), 6rem (space-2400) (`ml-2400`), 7.5rem (space-3000) (`ml-3000`)	Delivered as a block class.	—
Margin right	`classes_marginright`	select	No	""	Default (""), 0 (none) (`mr-0`), 0.25rem (space-100) (`mr-100`), 0.5rem (space-200) (`mr-200`), 0.75rem (space-300) (`mr-300`), 1rem (space-400) (`mr-400`), 1.25rem (space-500) (`mr-500`), 1.5rem (space-600) (`mr-600`), 2rem (space-800) (`mr-800`), 2.5rem (space-1000) (`mr-1000`), 3rem (space-1200) (`mr-1200`), 4rem (space-1600) (`mr-1600`), 5rem (space-2000) (`mr-2000`), 6rem (space-2400) (`mr-2400`), 7.5rem (space-3000) (`mr-3000`)	Delivered as a block class.	—
Margin top	`classes_margintop`	select	No	""	Default (""), 0 (none) (`mt-0`), 0.25rem (space-100) (`mt-100`), 0.5rem (space-200) (`mt-200`), 0.75rem (space-300) (`mt-300`), 1rem (space-400) (`mt-400`), 1.25rem (space-500) (`mt-500`), 1.5rem (space-600) (`mt-600`), 2rem (space-800) (`mt-800`), 2.5rem (space-1000) (`mt-1000`), 3rem (space-1200) (`mt-1200`), 4rem (space-1600) (`mt-1600`), 5rem (space-2000) (`mt-2000`), 6rem (space-2400) (`mt-2400`), 7.5rem (space-3000) (`mt-3000`)	Delivered as a block class.	—
Margin bottom	`classes_marginbottom`	select	No	""	Default (""), 0 (none) (`mb-0`), 0.25rem (space-100) (`mb-100`), 0.5rem (space-200) (`mb-200`), 0.75rem (space-300) (`mb-300`), 1rem (space-400) (`mb-400`), 1.25rem (space-500) (`mb-500`), 1.5rem (space-600) (`mb-600`), 2rem (space-800) (`mb-800`), 2.5rem (space-1000) (`mb-1000`), 3rem (space-1200) (`mb-1200`), 4rem (space-1600) (`mb-1600`), 5rem (space-2000) (`mb-2000`), 6rem (space-2400) (`mb-2400`), 7.5rem (space-3000) (`mb-3000`)	Delivered as a block class.	—

Filter Tag (`filter-list-tag`)

Model `filter-list-tag`; template name "Filter Tag" (the block class AEM renders).

Fields — Filter Tag

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Tag	`tagId`	aem-tag	Yes	—	—	A primary filter, in the order of the items (label from the taxonomy).	—

Filter Category (`filter-list-category`)

Model `filter-list-category`; template name "Filter Category" (the block class AEM renders).

Category tab — Filter Category

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Category label	`categoryLabel`	text	No	—	—	e.g. Industry	—
Taxonomy root	`taxonomyRoot`	aem-tag	Yes	—	—	e.g. tcs:industry; its tags used by the pages are the options of the advanced filter.	—

Filter Page (`filter-list-page`)

Model `filter-list-page`; template name "Filter Page" (the block class AEM renders).

Page tab — Filter Page

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Page	page	aem-content	Yes	—	—	—	—
Use	pageRole	select	No	`listed`	Listed (Manual List) (`listed`), Featured (`featured`)	Listed: a page of the Manual List (Datasource). Featured: a featured page (Featured rule Manual).	—

Notes on the fields (see the tables above for labels, properties, defaults and values):

- **Title** renders as `h2.filter-list-title`; it is the component's `dc:title` in the data layer (without a Title, the first card heading is).
- **Description** (rich text) is moved into `div.filter-list-description`.
- **Show result count** shows `p.filter-list-count`; when off it stays visually hidden but is still a `role="status"` live region (set after the first count, so the initial count isn't announced).
- **Cards per page / Load more count / Featured card count:** read as `Math.max(1, parseInt(value) || default)`; the model limits them (1 to 48, 1 to 48, 1 to 12), the code enforces only the minimum of 1.
- **Datasource Query Index:** pages strictly below Root path (not the root page itself), the current page excluded, filtered by Page types (`page-type`) and Content types (`content-type`) when selected, sorted by Sort by. **Manual List:** the Filter Pages (Use = Listed) in authored order, only those in the locale's index; Root path, types and Sort by are not applied; the current page is not excluded.
- **Sort by:** Latest First = `publish-date` descending, then last modified; Priority = `priority` ascending (pages without it last), then latest; Featured First = featured pages first, then priority; Alphabetical = title with the page language's collator (case and accents ignored).
- **Primary filter category / Filter Tag:** Filter Tags (and the multifield authored before) are the pills; without them, the category's tags used by the listed pages are the pills, sorted by label. Labels come from the locale's taxonomy, else from the tag ID; a pill matches a page that has the tag or a tag below it.
- **Show All filter** adds the All pill (pressed when nothing is selected). **Allow multi select:** pills toggle and a page must have every selected tag; off: one pill at a time, clicking the pressed pill clears it.
- **Enable advanced filter / Filter Category:** each category's options are the tags below its Taxonomy root used by the listed pages; categories without options are left out; with none, there is no filter button. **Filter logic** combines the checked options (AND: every option; OR: any); the result is combined with the pills by AND.
- **Card style:** see Variations. **Enable featured cards / Featured rule / Featured card count**, **Enable hero card / Hero rule / Hero page:** see Variations "Hero spotlight" and "Featured spotlights"; a page is used once (hero, then featured, then standard cards).
- **Card mapping (Image source … Author source):** metadata column names (e.g. `featured-image`, read as the index column `featuredImage`). Image: Image source, else Fallback image, else the page's own image (index `image`, og:image). Title: Title source, else the page title, else the path. Url: Url

source, else the path (on AEM author, the AEM page). Eyebrow: Eyebrow source; a `content-type` value is shown with its taxonomy label (e.g. "Case study"). Tags: the first two tags of Tag source plus the reading time (a whole number becomes "{n}m", placeholder `minutesShort`). Author: the Author source value looked up as an Authors sheet id, else the page's `author-id`, else the value as a name. A misspelt column empties that part of every card.

- **Legacy mapping (still read):** the composite multifields `pageItems` (Pages), `featuredItems` (Featured pages), `primaryTags`, `advancedCategories`; the multi-value fields `pages` and `featuredPages` of lists made before them; the older `filters` multifield (tag title and tags, read when `primaryTags` is empty) and `filtersLabel` (replaces the "Filters" label). Their values come before those of the items.
- **Additional tab:** as in AGENTS.md "Additional tab"; the Filter List isn't in `CONTENT_TARGETS`, so its Animation Type animates the block as a whole, released after the skeleton.

4. Screenshot-Based Authoring Steps

Authoring Step 1: Add the block and set the content

```
[Screenshot Placeholder]

File name:
filter-list-authoring-step-1.png

Purpose:
The Filter List added to a section, its Content tab with Title, Description, Default layout and paging
filled in.

Annotations:
A = Title
B = Description
C = Default layout
D = Cards per page
E = Load more count
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Title	Insights	The list's heading	h2 "Insights"
B	Description	Research, perspectives and case studies from across our industries and technologies.	Introduces the list	Text below the title
C	Default layout	Grid	Aligned rows	Class `layout-grid`
D	Cards per page	6	First page of cards	Six standard cards
E	Load more count	3	Cards per Load more	Three more per click

- **Author action:** Add (+) › Filter List, then fill the Content tab.
- **Expected preview:** in Universal Editor the hint "The results show on the published page, from the pages' metadata."; cards on aem.page.
- **Business rules:** the numbers must be at least 1.
- **Validation:** on the preview URL the title and six cards show.
- **Common mistake:** expecting cards in the editor. Resolution: check the preview URL.

Authoring Step 2: Choose the source

```
[Screenshot Placeholder]

File name:
filter-list-authoring-step-2.png

Purpose:
The Content tab with Datasource Query Index, Root path, Page types, Content types and Sort by.

Annotations:
A = Datasource
B = Root path
C = Content types
D = Sort by
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Datasource	Query Index	Automatic list	Pages from the index
B	Root path	/language-masters/en/dummy-pages/insights	Only pages below it	The root page itself isn't listed
C	Content types	Article, Report	Narrow the list	Only pages with those `content-type` values
D	Sort by	Latest First	Newest first	Ordered by `publish-date`

- **Author action:** select the source and its settings (or Manual List and Filter Page items, Use = Listed).
- **Expected published result:** the matching pages, sorted.
- **Business rules:** Root path, types and Sort by apply only to Query Index.
- **Validation:** compare with `/query-index.json` rows below the Root path.
- **Common mistake:** "No resources found." with no filter selected. Resolution: check the Root path locale and the type selections against the pages' metadata.

Authoring Step 3: Add the filters

```
[Screenshot Placeholder]

File name:
filter-list-authoring-step-3.png

Purpose:
Filter Tag and Filter Category items in the content tree, a Filter Category's properties with Category
label and Taxonomy root, and the rendered pills.

Annotations:
A = Filter Tag items
B = Filter Category item
C = Category label
D = Taxonomy root
E = Rendered pills and filter button
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Filter Tag › Tag	tcs-corp:industry/banking, tcs-corp:industry/retail, tcs-corp:service/ai, tcs-corp:service/cloud	One pill each, in order	Pills with taxonomy labels after All

Call out	Field	Value	Reason	Expected result
C	Filter Category › Category label	Industry	Legend of the option group	"Industry" fieldset
D	Filter Category › Taxonomy root	tcs-corp:industry	Options: its tags used by the pages	Checkboxes for the used industry tags
—	Allow multi select	On	Combine pills	A page must match every selected pill
—	Filter logic	OR	Any checked option	More results per added option

- **Author action:** Add (+) › Filter Tag per pill and Filter Category per group; set the toggles in the Content tab.
- **Expected preview:** the items show as chips below the block in the editor.
- **Business rules:** tag values must be tag IDs (`namespace:path`); categories without used tags are hidden.
- **Validation:** on the preview URL, click a pill and open the panel.
- **Common mistake:** no filter button. Resolution: turn Enable advanced filter on and choose roots the pages are tagged with.

Authoring Step 4: Cards, spotlights and preview

```
[Screenshot Placeholder]

File name:
filter-list-authoring-step-4.png

Purpose:
The Cards tab with Card style, Enable featured cards, Featured rule, Featured card count, Enable hero
card and Hero rule; the preview with the hero and a featured spotlight.

Annotations:
A = Card style
B = Featured rule
C = Featured card count
D = Enable hero card / Hero rule
E = Hero spotlight in the preview
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Card style	Default	Image, description and meta on every card	Class `card-default`
B	Featured rule	Priority 1 to 3 (priority metadata)	Pages with `priority` 1 to 3	Spotlights by priority
C	Featured card count	1	One spotlight	One featured spotlight after the first page of cards
D	Enable hero card / Hero rule	On / Latest	The newest page first, large	Hero spotlight above the cards

- **Author action:** set the Cards tab, publish, check the preview URL.
- **Expected published result:** hero first, then the cards with a spotlight after the first page, Load more.
- **Business rules:** a page appears once; Manual rules use only pages that match the source and filters.

- **Validation:** the hero is the newest matching page; the spotlight has priority 1 to 3.
- **Common mistake:** no spotlights. Resolution: check the pages' `featured` / `priority` values in the index (`featured` accepts yes, true, 1, on, y).

5. Variations

Layout: Masonry

Aspect	Detail
Purpose	Cards of different heights packed in columns without row gaps, in reading order
When to use / not	Mixed content with varying card heights; not when rows must align (Grid)
Fields / dialog	Default layout = Masonry (the default)
Rendering	`div.filter-list-grid.layout-masonry` with `masonry-native` (CSS `grid-template-rows: masonry` where supported) or `masonry-spans` (`decorators/masonry-decorator.js` sets each card's row span; spotlights start below every column)
Desktop / tablet / mobile	4 columns from 1200px (3 for Featured style), 3 from 900px (2 for Featured), 2 from 600px, 1 below
Accessibility / data layer	DOM order is the reading order across columns; as the block
Personalization / fallback	None; without masonry support and `ResizeObserver` the grid stays a plain grid

```
[Screenshot Placeholder]

File name:
filter-list-layout-masonry-tablet.png

Purpose:
The masonry layout at 768px: two columns of cards packed by height.

Annotations:
A = Column 1
B = Column 2
```

Layout: Grid

Aspect	Detail
Purpose	Aligned rows of cards
When to use / not	Uniform cards (Default, Compact); not for very uneven heights
Fields / dialog	Default layout = Grid
Rendering	`div.filter-list-grid.layout-grid`; block class `layout-grid`
Desktop / tablet / mobile	Same column counts as Masonry
Accessibility / data layer	As the block
Personalization / fallback	None

```
[Screenshot Placeholder]

File name:
filter-list-layout-grid-mobile.png
```

```
Purpose:
The grid layout at 375px: one column of cards.

Annotations:
A = Card
```

Layout: List

Aspect	Detail
Purpose	One card per row with a divider, for scanning titles
When to use / not	Text-led lists; not for image-led walls
Fields / dialog	Default layout = List
Rendering	Block class `layout-list`; cards (not spotlights) get a bottom border; from 600px a card with an image shows it in the left third and the text in the right two thirds
Desktop / tablet / mobile	One column at every width; image beside the text from 600px, above it below
Accessibility / data layer	As the block
Personalization / fallback	Cards without an image take the full row

```
[Screenshot Placeholder]

File name:
filter-list-layout-list-mobile.png

Purpose:
The list layout at 375px: image above the text, divider below each card.

Annotations:
A = Card image
B = Card text
C = Divider
```

Card style: Default

Aspect	Detail
Purpose	Image, tag line, title link, description (3 lines) and meta line on every card
Fields / dialog	Card style = Default
Rendering	`article.filter-list-card-standard`; 4:3 image (`object-fit: cover`); the title link covers the card
Desktop / tablet / mobile	4 / 3 / 2 / 1 columns (1200 / 900 / 600 / below)
Accessibility	One link per card (the title); images decorative (empty alt)
Data layer	Card link `cmp:click`
Personalization / fallback	No image: no media area

```
[Screenshot Placeholder]

File name:
filter-list-card-default-mobile.png

Purpose:
A Default card at 375px: image, tag line, title, description and meta line.

Annotations:
```

```
A = Image
B = Tag line
C = Title link
D = Description
E = Meta line
```

Card style: Compact

Aspect	Detail
Purpose	Text-only outlined cards: tag line, title link, meta line
Fields / dialog	Card style = Compact
Rendering	`article.filter-list-card-compact`; no image or description
Desktop / tablet / mobile	4 / 3 / 2 / 1 columns
Accessibility / data layer	As Default
Personalization / fallback	None

```
[Screenshot Placeholder]

File name:
filter-list-card-compact-tablet.png

Purpose:
Compact cards at 768px in two columns.

Annotations:
A = Compact card outline
B = Title link
```

Card style: Featured

Aspect	Detail
Purpose	Large cards with image, tag line, title, description, meta line and a Read more button
Fields / dialog	Card style = Featured
Rendering	`article.filter-list-card-large`; the Read more link (placeholder `readMore`, `aria-label` "Read more: {title}") covers the card
Desktop / tablet / mobile	3 columns from 1200px, 2 from 900px, 2 from 600px, 1 below
Accessibility	The button's accessible name includes the page title
Data layer	`cmp:click` with `dc:title` = the `aria-label`
Personalization / fallback	No image: no media area

```
[Screenshot Placeholder]

File name:
filter-list-card-featured-mobile.png

Purpose:
A Featured style card at 375px with its Read more button.

Annotations:
A = Image
B = Read more button
```

Card style: Mixed

Aspect	Detail
Purpose	A varied wall (the default style): image cards without description, report panels and dark panels
Fields / dialog	Card style = Mixed
Rendering	Report card (`filter-list-card-report`, light brand gradient, Download secondary button, placeholder `download`) when the eyebrow value contains "report"; dark card (`filter-list-card-dark`, brand dark panel, first tag only, Explore tertiary button, placeholder `explore`) when the page has no image; else a standard image card without description
Desktop / tablet / mobile	4 / 3 / 2 / 1 columns
Accessibility	Button names "Download: {title}" / "Explore: {title}"; check contrast of the panels with real content
Data layer	`cmp:click` on the button
Personalization / fallback	Pages without images become dark cards

```
[Screenshot Placeholder]

File name:
filter-list-card-mixed-mobile.png

Purpose:
The Mixed style at 375px: an image card, a report panel and a dark panel in one column.

Annotations:
A = Image card
B = Report panel with Download
C = Dark panel with Explore
```

Hero spotlight

Aspect	Detail
Purpose	One large spotlight card above the cards
Fields / dialog	Enable hero card on; Hero rule Latest / Featured / Manual (Hero page)
Rules	Latest: the newest matching page. Featured: the featured matching page with the lowest priority, else the newest. Manual: the Hero page if it matches the source and current filters, else no hero
Rendering	`article.filter-list-card-spotlight.filter-list-card-hero` before the grid: image behind (1600px from 900px, 750px below, loaded eagerly), tag line, title link, description, author lockup (Authors sheet)
Desktop / tablet / mobile	Full width, at least 35rem high; title 3rem and larger padding from 900px
Accessibility	Title link; decorative image
Data layer	Card link `cmp:click`
Personalization / fallback	The hero follows the filters (it is chosen from the matching pages)

```
[Screenshot Placeholder]

File name:
filter-list-hero-mobile.png
```

```
Purpose:
The hero spotlight at 375px with its tag line, title, description and author lockup.

Annotations:
A = Hero image
B = Title link
C = Author lockup
```

Featured spotlights

Aspect	Detail
Purpose	Large spotlight cards placed between pages of cards
Fields / dialog	Enable featured cards on (default); Featured rule: Marked as featured / Priority 1 to 3 / Manual (Filter Page, Use = Featured); Featured card count (default 2)
Rules	Marked as featured: featured pages by priority, else (none) pages with priority 1 to 3. Priority 1 to 3: those pages by priority. Manual: the featured pages that match, in authored order. At most the count
Placement	One spotlight after the first page of cards and after each Load more; once every standard card is shown, the rest follow
Rendering	`article.filter-list-card-spotlight.filter-list-card-featured` (full width, at least 30rem); like the hero without description, image lazy
Accessibility / data layer	As the hero
Personalization / fallback	No matching page: no spotlight

```
[Screenshot Placeholder]

File name:
filter-list-featured-tablet.png

Purpose:
A featured spotlight at 768px after the first page of cards.

Annotations:
A = Cards of the first page
B = Featured spotlight
C = Load more
```

Datasource: Query Index

Aspect	Detail
Purpose	Automatic list from published pages
Fields / dialog	Datasource = Query Index; Root path, Page types, Content types, Sort by
Rendering	Candidates below the Root path, current page excluded, filtered by type, sorted
Desktop / tablet / mobile	Per layout
Accessibility / data layer	As the block
Personalization / fallback	No index (AEM author, editor): the editor hint; no matching page: "No resources found."

```
[Screenshot Placeholder]

File name:
filter-list-source-query-index-mobile.png

Purpose:
```

```
A Query Index Filter List at 375px sorted Latest First.

Annotations:
A = Newest card
```

Datasource: Manual List

Aspect	Detail
Purpose	A hand-picked, ordered list with the same cards and filters
Fields / dialog	Datasource = Manual List; Filter Page items with Use = Listed
Rendering	The pages in item order, only those in the locale's index; Sort by, Root path and types not applied
Desktop / tablet / mobile	Per layout
Accessibility / data layer	As the block
Personalization / fallback	A page not in the index is left out

```
[Screenshot Placeholder]

File name:
filter-list-source-manual-mobile.png

Purpose:
A Manual List at 375px in the authored order.

Annotations:
A = First authored page
```

Filter pills (single or multi select)

Aspect	Detail
Purpose	Quick filtering by a few tags
Fields / dialog	Filter Tag items or Primary filter category; Show All filter; Allow multi select
Rendering	`div.filter-list-filters[role="group"]` (name from `filters`) with `button.filter-list-filter[aria-pressed]`, `aria-controls` on the results; a "Filters" label before them
Desktop / tablet / mobile	From 900px the pills sit on the toolbar row; below, on their own row below the label and the filter button
Accessibility	Toggle buttons with `aria-pressed`; result count in a live region
Data layer	`cmp:click`, `interaction` `filter`, `value` tag ID or `all`
Personalization / fallback	No pills when there are no tags and Show All is off

```
[Screenshot Placeholder]

File name:
filter-list-pills-mobile.png

Purpose:
The pills at 375px wrapping below the Filters label and the filter button, one pill pressed.

Annotations:
A = Filters label
B = Pressed pill
C = Filter button
```

Advanced filter (AND or OR)

Aspect	Detail
Purpose	Filtering by several taxonomy groups
Fields / dialog	Enable advanced filter (default on); Filter Category items; Filter logic AND (default) / OR
Rendering	Round filter button (`icons/filter.svg`, name from `advancedFilters`, `aria-expanded`, `aria-controls`, a count badge) and `div.filter-list-panel[role="region"]` with a `fieldset` and `legend` per category, checkboxes and Clear all
Desktop / tablet / mobile	From 600px the fieldsets sit side by side (auto-fit, at least 12rem); below, stacked
Accessibility	Opening focuses the first checkbox; Escape closes and returns focus to the button; Clear all returns focus to the first checkbox
Data layer	`cmp:change`, `interaction` `filter-option`, `value` tag ID, `checked`
Personalization / fallback	No used tags below a root: the category is left out

```
[Screenshot Placeholder]

File name:
filter-list-advanced-tablet.png

Purpose:
The open panel at 768px with two categories side by side and Clear all.

Annotations:
A = Industry fieldset
B = Topic fieldset
C = Clear all
```

Sort order

Aspect	Detail
Purpose	Order of the Query Index list
Fields / dialog	Sort by: Latest First (default), Featured First, Priority, Alphabetical
Rendering	See the field notes above; no effect on a Manual List
Desktop / tablet / mobile	Per layout (masonry keeps the order across columns)
Accessibility / data layer	As the block
Personalization / fallback	Pages without date or priority sort last within their rule

```
[Screenshot Placeholder]

File name:
filter-list-sort-alphabetical-mobile.png

Purpose:
The Alphabetical order at 375px.

Annotations:
A = First card A to Z
```

6. Complete Authoring Example

Scenario: the "Explore insights & opinions" hub (block library `block-library/filter-list/filter-list`).

Field	Example value	Guidance
Title	Explore insights & opinions	The block's h2
Description	Research, perspectives and case studies from across our industries and technologies.	One sentence
Default layout	Masonry	Mixed heights
Cards per page / Load more count	6 / 6	
Datasource	Manual List	With eight Filter Pages, Use = Listed
Sort by	Latest First	Not applied to a Manual List
Filter Tag items	tcs-corp:industry/banking, tcs-corp:industry/retail, tcs-corp:service/ai, tcs-corp:service/cloud	Pills in this order
Filter Category items	Industry / tcs-corp:industry; Topic / tcs-corp:topic	Advanced filter groups
Show All filter / Allow multi select / Filter logic	On / Off / AND	Defaults
Card style	Mixed	Default style
Enable featured cards / Featured rule / count	On / Marked as featured / 2	
Enable hero card / Hero rule	On / Featured	
Card mapping	Defaults (featured-image, thumbnail-image, content-type, title, description, tags, path, author)	Change only for other indexed columns

Steps: add the block, fill the Content tab, add the Filter Pages, Filter Tags and Filter Categories, set the Cards tab, publish the page, check aem.page.

- **Expected output:** title and description; Filters label with All and four pills; the filter button with Industry and Topic; the hero spotlight; a masonry wall of Mixed cards with a featured spotlight after the first six; Load more.
- **Responsive:** 4 columns from 1200px, 3 from 900px, 2 from 600px, 1 below; the pills wrap on their own row below 900px.
- **Accessibility:** pills are toggle buttons; the panel is a labelled region; Escape closes it; the result count is announced on changes.
- **Analytics / data layer:** the block is `anchor-filter-list-desktop` (its Anchor ID); a Banking pill click pushes `cmp:click` with `interaction` `filter` and `value` `tcs-corp:industry/banking`; checking an option pushes `cmp:change`.
- **Personalization fallback:** none; every visitor sees the same list.
- **Pre-publish checklist:** listed pages published with images, tags, content type and dates; taxonomy published with the tags; Authors sheet published; placeholders translated; Root path in the same locale; cards checked on aem.page at 375px, 768px and 1440px; keyboard check of pills, panel and Load more.

7. Content and Asset Guidelines

- **Title / description:** the handover recommends up to 60 characters for the title and 1 to 2 sentences for the description (not enforced).
- **Card titles and descriptions:** come from the pages (title / description or the mapped columns); descriptions are clamped to 3 lines by CSS; write page titles that make sense out of context (they are the link text of most cards).
- **Eyebrows and labels:** the eyebrow is the `content-type` label by default; use consistent Content type values (a value containing "report" makes a report card in the Mixed style). CTA labels (Read more, Download, Explore, Load more, Reset filters) come from placeholders, not from the block.

- **Images and alt text:** card images use the mapped image columns, else the page's own image; all card and author images are decorative (empty alt). Site media (`/media_` URLs on the same origin) are optimized responsive pictures; other URLs are plain lazy `img` elements. Card media is 4:3 (`object-fit: cover`); spotlights cover a full-width card (at least 35rem hero, 30rem featured) — keep the subject clear of the text side.
- **Icons:** `icons/filter.svg` for the filter button.
- **Tags and metadata:** tag IDs below a namespace (e.g. `tcs-corp:industry/banking`); publish the locale taxonomy with translated titles; card tags show the first two tags of each page.
- **Min / max items:** No verified technical limit was identified for pills, categories or listed pages; the numeric fields have model limits (Cards per page and Load more count 1 to 48, Featured card count 1 to 12) of which the code enforces the minimum.
- **Loading:** the hero image loads eagerly, all others lazily; a page without any image shows no media (or a dark card in Mixed).

8. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
Hint instead of cards in the editor	No query index on AEM author (expected)	Open the preview URL	Review on aem.page / aem.live	Cards on the preview
"No resources found." without filters	Root path in another locale, types too narrow, pages not published or excluded by `helix-query.yaml`, index request failed	`/query-index.json` rows below the Root path; their `pageType` / `contentType`; Network panel	Fix Root path or types; publish the pages	Cards and count appear
A new page is missing	Not yet in the live index; it is the Root path page or the current page; another locale	Its row in `/query-index.json` on aem.live	Publish again; ask an administrator to re-index	The card appears
Pills show derived labels or are missing	Tag missing from the locale taxonomy; value isn't a tag ID; no page uses the category's tags	`/{locale}/taxonomy.json`; the items' values	Publish the taxonomy; pick tags with the tag picker	Taxonomy titles on the pills
No filter button	Enable advanced filter off; no Taxonomy root; no page uses tags below the roots	Content tab; pages' tags in the index	Turn it on; choose used roots	Button and panel appear
Dark cards everywhere (Mixed) or no images	Image columns empty or misspelt in the card mapping	Index columns `featuredImage`, `thumbnailImage`, `image`	Fill the metadata; restore the default mapping	Image cards
Wrong hero or no spotlights	Rule fallbacks; Manual pages outside the source or filters; `featured` values other than yes / true / 1 / on / y	Pages' `featured` / `priority` in the index	Correct metadata or rules	Expected spotlights
Author lockup shows only a name	`author-id` / Author source doesn't exactly match an Authors sheet id (case-sensitive) or the sheet isn't published	Compare with `/{locale}/data/authors.json`	Correct the id; publish the sheet	Photo, name and designation
English labels on a localized page	Placeholder keys missing in the locale sheet	`/{locale}/placeholders.json`	Add and publish the keys	Localized labels

Evidence to collect (no secrets): page URL, viewport, a screenshot, the block's settings, the relevant `/query-index.json` rows, the Network status of the index / taxonomy / Authors / placeholders requests, console errors.

9. Screenshots

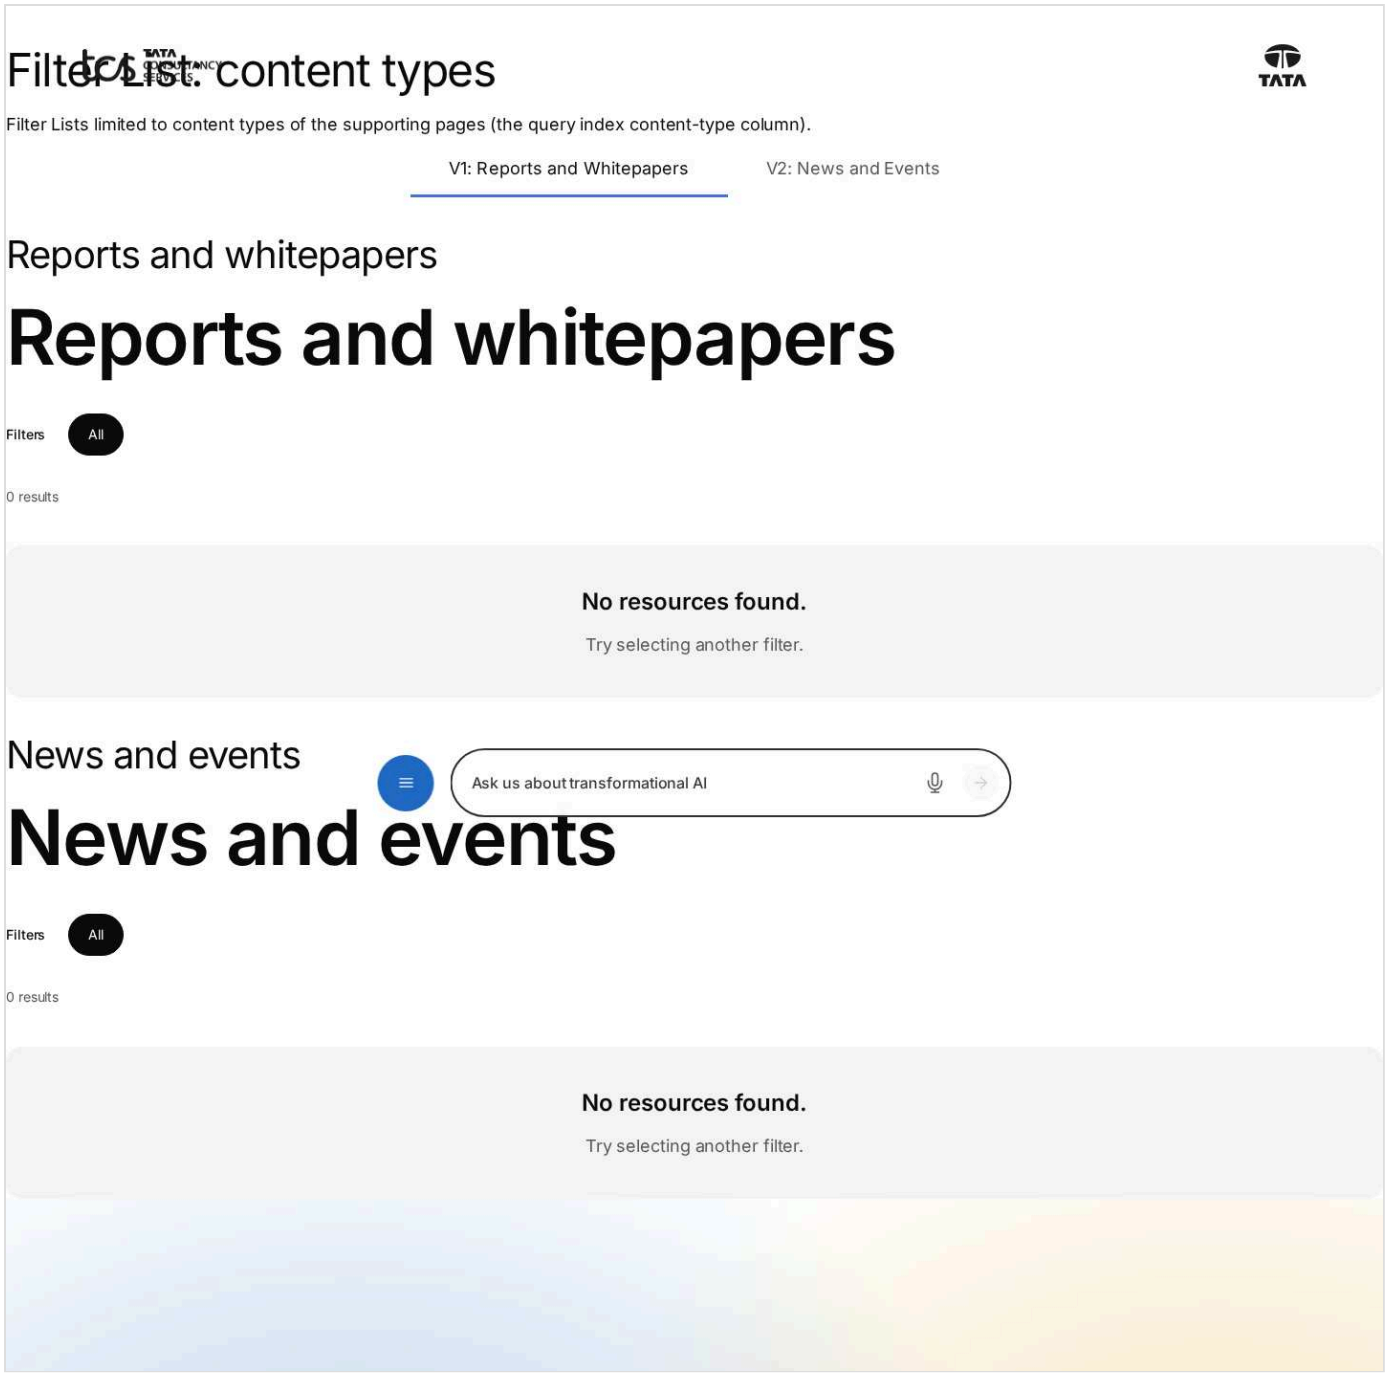


Figure: Filter List as published (block library) — desktop 1440 × 900 (/design-block-master/en/block-library/filter-list/content-types, captured 2026-11-08).

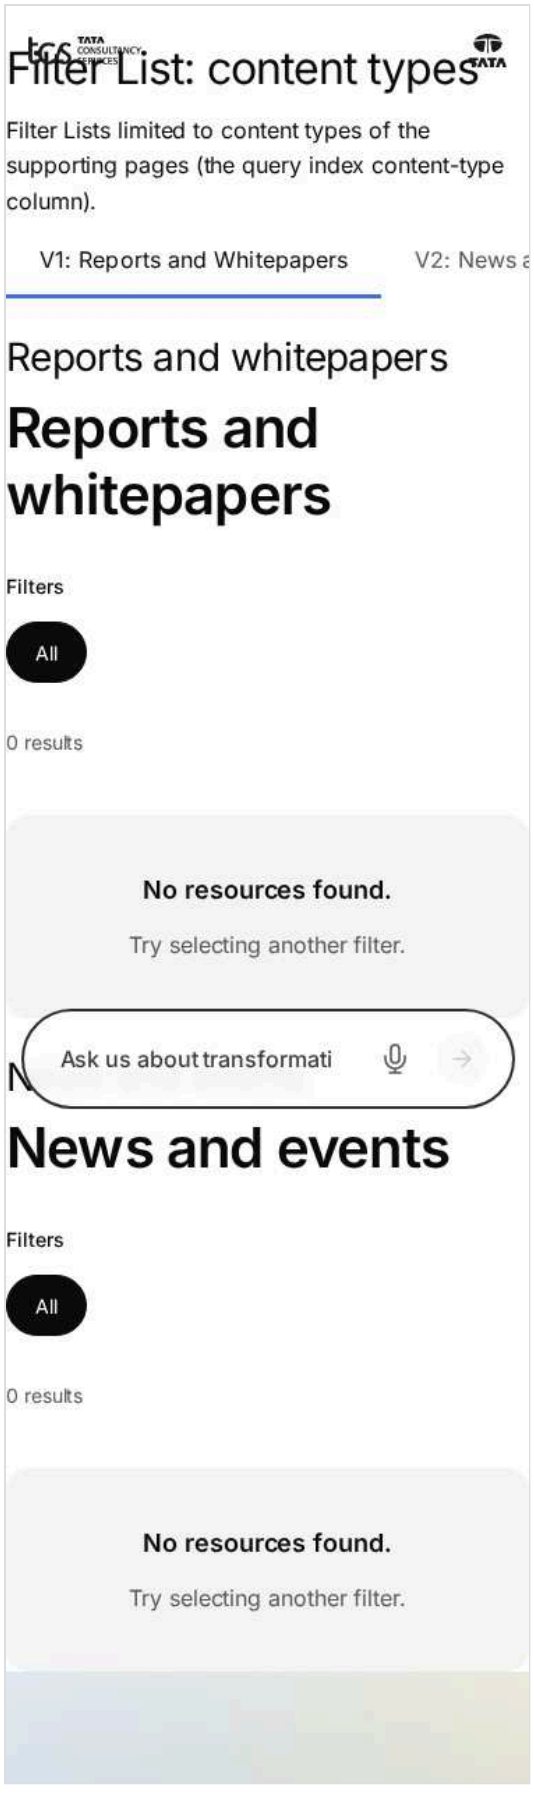


Figure: Filter List as published (block library) — mobile 375 × 812 (/design-block-master/en/block-library/filter-list/content-types, captured 2026-11-08).

> **Screenshot required**

> - Required screen: Filter List dialog in Universal Editor (every tab, including Additional)
> - Required role/access: AEM Sites author with Universal Editor (content author)
> - Required navigation steps: AEM Sites console > /content/tcs-corp/language-masters/en > open a page in Universal Editor
> - Reason unavailable: No AEM author access in the documentation program (access blocker AB-01)
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

10. Known limitations

- Universal Editor screenshots are placeholders: no author access in this program.

11. Open items

- None.

12. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages