TCS CORPORATE WEBSITE

Page Header — Authoring Guide

Role / audience	Authoring — Content authors, content managers, AEM authoring leads
Version	1.0
Status	Draft for review
Owner	Content Lead / AEM Authoring Lead (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Page Header — Authoring Guide
- Where to see it
- For Content Authors
- Authorable Fields
- Screenshot-Based Authoring Steps
- Variations
- Complete Authoring Example
- Content and Asset Guidelines
- Troubleshooting
- Screenshots
- Known limitations
- Open items
- Change history

Page Header — Authoring Guide

Attribute	Value
Document ID	AUT-C-page-header
Audience	Content authors, content managers, AEM authoring leads
Purpose	How to add, fill in and check the Page Header component
Scope	—
Prerequisites	—
Owner	Content Lead / AEM Authoring Lead (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	8 November 2026
Source files	blocks/page-header/README.md, blocks/page-header/_page-header.json
Related documents	—
Related AEM paths	—

1. Where to see it

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/article
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/article-default
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/cta-primary
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/cta-secondary
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/cta-text-link
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/default-by-page-type
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/display
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/guest-author
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/landing
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/landing-default
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/landing-featured-image
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/landing-text-only
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/press-release
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/secondary

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/tablet-widths
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/tags-and-content-type

2. For Content Authors

1. **Check the page metadata first.** The header shows the page's Title (H1) and Description (page properties) and the metadata sheet's `content-type`, `publish-date` (YYYY-MM-DD), `reading-time` (a number), `author-id` (or `author`), `featured-image` (with `image-alt`) and `listen-link`, and the page tags. Article, blog and press-release pages get a Page Header automatically.
2. **Add the block (only if the page needs an authored one).** In Universal Editor select the first Section, choose **Add (+)** and pick **Page Header**. It is offered only in Sections.
3. **Open its properties.** Select the Page Header in the content tree; the panel shows **Style**, **CTAs** and **Additional**.
4. **Select the layout (Style tab).** Leave **Layout** on Default (Landing for landing / listing page types, else Article) or choose Landing, Secondary, Article or Display.
5. **Add CTAs.** Select the Page Header, choose **Add (+)** › **CTA**, fill **CTA Link** (required) and **CTA Title**, choose **CTA Link Style** (Primary Button by default, Secondary Button, Text link) and **CTA Link Type** (Open in New Window only when needed). Reorder CTAs by dragging them in the content tree.
6. **Additional tab.** Anchor ID, Hide block, Animation Type and spacing only when needed.
7. **Preview.** After changing page properties, reload the editor (metadata is read when the page loads); check desktop and mobile.
8. **Publish.** Publish the page; the Authors sheet, taxonomy and placeholders of the locale must be published too.
9. **Validate the published output.** One H1 equal to the page Title, the date as dd/mm/yy, the author lookup complete, tags with proper labels, CTAs working.

Minimum required content: a page Title. **Recommended:** Description, content-type, and for articles publish-date, reading-time and author-id. **Optional:** CTAs, featured-image (Landing), listen-link (Article), Layout, Additional tab options.

3. Authorable Fields

Page Header (`page-header`)

Model `page-header`; template name "Page Header" (the block class AEM renders); key-value block (one row per property); children: `page-header-cta`.

Style tab — Page Header

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Layout	classes	select	No	""	Default (from the Page Type) (""), Landing (with the featured image) (`landing`), Secondary (title left, text right) (`secondary`), Article (meta row, author) (`article`), Display (large title) (`display`)	The content comes from the page's metadata (title, description, tags, content type, publish date, reading time, author, featured image, listen link). Default: Landing for the landing and listing page types, else Article.	article

CTAs tab — Page Header

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
CTA List	`ctas`	container (multiple)	No	—	—	CTAs authored before CTA items. Add CTAs to the page header with Add (CTA) instead.	—
CTA List › CTA Title	`ctaText`	text	No	—	—	—	—
CTA List › CTA Link	`cta`	aem-content	No	—	—	—	—
CTA List › CTA Link Type	`ctaTarget`	select	No	""	Default (""), Open in New Window (`new-window`)	—	—
CTA List › CTA Link Style	`ctaStyle`	select	No	`primary`	Text link (""), Primary Button (`primary`), Secondary Button (`secondary`)	—	—

Additional tab — Page Header

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Anchor ID	`classes_anchor`	text	No	—	regExp: ^anchor-[a-z0-9][a-z0-9-]*$; customErrorMsg: Start with anchor-, then lower-case letters, digits and hyphens.	A unique ID of the block on the page, starting with anchor-, e.g. anchor-our-services; link to it with #anchor-our-services. Delivered as a block class.	—
Hide block	`classes_hideblock`	boolean	No	false	on / off	Hides the whole block on the page until it is turned off (shown faded in the editor). Delivered as a block class.	—
Animation Type	`classes_animation`	select	No	""	None (""), Fade in (`motion-fade-in`), Fade up (`motion-fade-up`), Fade down (`motion-fade-down`), Fade left (`motion-fade-left`), Fade right (`motion-fade-right`), Slide up (`motion-slide-up`), Slide down (`motion-slide-down`), Slide left (`motion-slide-left`), Slide right (`motion-slide-right`), Scale in (`motion-scale-in`)	How the block's content appears; repeated items (cards, list items, accordion items, columns) appear one after another. None: shown as is. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	—
Motion Speed	`classes_animationspeed`	select	No	""	Medium (""), Fast (`motion-fast`), Slow (`motion-slow`)	How fast the animation runs: 0.3, 0.6 or 0.9 seconds. Shown when `classes_animation` is set and `classes_animation` is not empty. Delivered as a block class.	—
Animation Trigger	`classes_animationtrigger`	select	No	""	On Scroll / Viewport Entry (""), On Page Load (`motion-on-load`)	When the block's animations run. On Scroll: when the block comes into view (at once if it is in view when the page opens). On Page Load: as soon as the block is ready, wherever it is on the page. Shown when `classes_animation` is set and `classes_animation` is not empty. Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Padding left	classes_paddingleft	select	No	""	Default (""), 0 (none) (pl-0), 0.25rem (space-100) (pl-100), 0.5rem (space-200) (pl-200), 0.75rem (space-300) (pl-300), 1rem (space-400) (pl-400), 1.25rem (space-500) (pl-500), 1.5rem (space-600) (pl-600), 2rem (space-800) (pl-800), 2.5rem (space-1000) (pl-1000), 3rem (space-1200) (pl-1200), 4rem (space-1600) (pl-1600), 5rem (space-2000) (pl-2000), 6rem (space-2400) (pl-2400), 7.5rem (space-3000) (pl-3000)	Delivered as a block class.	—
Padding right	classes_paddingright	select	No	""	Default (""), 0 (none) (pr-0), 0.25rem (space-100) (pr-100), 0.5rem (space-200) (pr-200), 0.75rem (space-300) (pr-300), 1rem (space-400) (pr-400), 1.25rem (space-500) (pr-500), 1.5rem (space-600) (pr-600), 2rem (space-800) (pr-800), 2.5rem (space-1000) (pr-1000), 3rem (space-1200) (pr-1200), 4rem (space-1600) (pr-1600), 5rem (space-2000) (pr-2000), 6rem (space-2400) (pr-2400), 7.5rem (space-3000) (pr-3000)	Delivered as a block class.	—
Padding top	classes_paddingtop	select	No	""	Default (""), 0 (none) (pt-0), 0.25rem (space-100) (pt-100), 0.5rem (space-200) (pt-200), 0.75rem (space-300) (pt-300), 1rem (space-400) (pt-400), 1.25rem (space-500) (pt-500), 1.5rem (space-600) (pt-600), 2rem (space-800) (pt-800), 2.5rem (space-1000) (pt-1000), 3rem (space-1200) (pt-1200), 4rem (space-1600) (pt-1600), 5rem (space-2000) (pt-2000), 6rem (space-2400) (pt-2400), 7.5rem (space-3000) (pt-3000)	Delivered as a block class.	—
Padding bottom	classes_paddingbottom	select	No	""	Default (""), 0 (none) (pb-0), 0.25rem (space-100) (pb-100), 0.5rem (space-200) (pb-200), 0.75rem (space-300) (pb-300), 1rem (space-400) (pb-400), 1.25rem (space-500) (pb-500), 1.5rem (space-600) (pb-600), 2rem (space-800) (pb-800), 2.5rem (space-1000) (pb-1000), 3rem (space-1200) (pb-1200), 4rem (space-1600) (pb-1600), 5rem (space-2000) (pb-2000), 6rem (space-2400) (pb-2400), 7.5rem (space-3000) (pb-3000)	Delivered as a block class.	—
Margin left	classes_marginleft	select	No	""	Default (""), 0 (none) (ml-0), 0.25rem (space-100) (ml-100), 0.5rem (space-200) (ml-200), 0.75rem (space-300) (ml-300), 1rem (space-400) (ml-400), 1.25rem (space-500) (ml-500), 1.5rem (space-600) (ml-600), 2rem (space-800) (ml-800), 2.5rem (space-1000) (ml-1000), 3rem (space-1200) (ml-1200), 4rem (space-1600) (ml-1600), 5rem (space-2000) (ml-2000), 6rem (space-2400) (ml-2400), 7.5rem (space-3000) (ml-3000)	Delivered as a block class.	—
Margin right	classes_marginright	select	No	""	Default (""), 0 (none) (mr-0), 0.25rem (space-100) (mr-100), 0.5rem (space-200) (mr-200), 0.75rem (space-300) (mr-300), 1rem (space-400) (mr-400), 1.25rem (space-500) (mr-500), 1.5rem (space-600) (mr-600), 2rem (space-800) (mr-800), 2.5rem (space-1000) (mr-1000), 3rem (space-1200) (mr-1200), 4rem (space-1600) (mr-1600), 5rem (space-2000) (mr-2000), 6rem (space-2400) (mr-2400), 7.5rem (space-3000) (mr-3000)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Margin top	`classes_margintop`	select	No	""	Default (""), 0 (none) (`mt-0`), 0.25rem (space-100) (`mt-100`), 0.5rem (space-200) (`mt-200`), 0.75rem (space-300) (`mt-300`), 1rem (space-400) (`mt-400`), 1.25rem (space-500) (`mt-500`), 1.5rem (space-600) (`mt-600`), 2rem (space-800) (`mt-800`), 2.5rem (space-1000) (`mt-1000`), 3rem (space-1200) (`mt-1200`), 4rem (space-1600) (`mt-1600`), 5rem (space-2000) (`mt-2000`), 6rem (space-2400) (`mt-2400`), 7.5rem (space-3000) (`mt-3000`)	Delivered as a block class.	—
Margin bottom	`classes_marginbottom`	select	No	""	Default (""), 0 (none) (`mb-0`), 0.25rem (space-100) (`mb-100`), 0.5rem (space-200) (`mb-200`), 0.75rem (space-300) (`mb-300`), 1rem (space-400) (`mb-400`), 1.25rem (space-500) (`mb-500`), 1.5rem (space-600) (`mb-600`), 2rem (space-800) (`mb-800`), 2.5rem (space-1000) (`mb-1000`), 3rem (space-1200) (`mb-1200`), 4rem (space-1600) (`mb-1600`), 5rem (space-2000) (`mb-2000`), 6rem (space-2400) (`mb-2400`), 7.5rem (space-3000) (`mb-3000`)	Delivered as a block class.	—

CTA (`page-header-cta`)

Model `page-header-cta`; template name "CTA" (the block class AEM renders).

Stored on a new component (definition template): `linkStyle` = `"primary"`.

Fields — CTA

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
CTA Link	`link`	aem-content	Yes	—	—	—	—
CTA Title	`linkText`	text	No	—	—	Delivered with `link` (field collapse).	—
CTA Link Type	`linkTarget`	select	No	""	Default (""), Open in New Window (`new-window`)	—	—
CTA Link Style	`linkStyle`	select	No	`primary`	Text link (`tertiary`), Primary Button (`primary`), Secondary Button (`secondary`)	—	—
Button background	`buttonBackground`	select	No	""	Style default (""), Blue (`button-bg-blue`)	For Primary and Secondary Buttons. Blue: #216AC3 with white text.	—
Button shape	`buttonShape`	select	No	""	Style default (""), Round (`button-round`)	For Primary and Secondary Buttons. Round: a 6rem circle, for a short label (words of up to 12 characters, up to 24 in all); a longer label stays a pill.	—

Notes on the significant fields:

- **Button background and Button shape** (CTA items, the Teaser link's field names and classes). For a Primary or Secondary Button: **Button background: Blue** (`button-bg-blue`) fills it with the brand blue `#216ac3` (`--color-bg-brand`, border `--color-border-brand-secondary`) and white text (5.4:1), hover and focus `#1b5ea3`; **Button shape: Round** (`button-round`) makes it a 6rem circle with the label (12px, wrapped between words) above the arrow. A label with a word over 12 characters or over 24 characters in all doesn't fit the circle and stays a pill. A Text link ignores both. **Style default** keeps the CTA Link Style. The legacy CTA List has neither (use CTA items); Blue and Round authored before as CTA Link Style `blue` / CTA Shape `round` are shown as Blue and Round.
- **Layout.** Becomes the block class (`landing`, `secondary`, `article`, `display`); any other layout class is removed and the resolved one added. Default resolves from the Page Type (`page-type`, else `template` metadata).
- **CTA (item) fields.** CTA Link Style Primary / Secondary render `a.button.primary` / `a.button.secondary`; Text link (`tertiary`, or empty in content authored before) renders `a.button.tertiary`. A new CTA stores Primary Button (definition template). Open in New Window sets `target="_blank"`, `rel="noopener noreferrer"` and appends the visually hidden placeholder `opensInNewTab`. A CTA without a link isn't rendered (in Universal Editor it is a dashed placeholder, `itemEditorHint`).
- **Metadata (not dialog fields).** Title → `h1.page-header-title`; Description → `div.page-header-description`; content-type → eyebrow (Landing, Secondary) or `p.page-header-collection` (Article); tags → `ul.page-header-tags` (Article meta row; Display eyebrow; Landing / Secondary eyebrow when there is no content-type), labels from the taxonomy, else derived from the tag ID; publish-date (`publication-date` as a fallback) → "Published" + `<time>` (dd/mm/yy); reading-time → "{n} min read" for a number; author-id → Authors sheet name, designation and region, image, LinkedIn; author → name only; featured-image and image-alt → the Landing image; listen-link → the listen action.
- **Accessibility impact.** One H1 per page; the featured image's alt comes from `image-alt` (empty: decorative); the author image is decorative (`alt=""`).
- **Data-layer impact.** The H1 text is the component's `dc:title`; CTAs and the actions are tracked as clicks.
- **Legacy mapping.** CTAs authored in the former **CTA List** composite multifield (`ctas`: CTA Title, CTA Link, CTA Link Type, CTA Link Style) are still read and shown before the CTA items; a style stored as empty renders as a Text link.
- **Additional tab.** Anchor ID, Hide block, Animation Type, Motion Speed, Animation Trigger and spacing (no Background animation): see AGENTS.md "Additional tab" and "Animation and skeletons". The content animation moves the block as a whole.

4. Screenshot-Based Authoring Steps

Authoring Step 1: Prepare the page metadata

```
[Screenshot Placeholder]

File name:
page-header-authoring-step-1.png

Purpose:
The page properties (Title, Description, Page Type) and the locale metadata sheet row of the page.

Annotations:
A = Title
B = Description
C = Page Type
D = Metadata sheet row (content-type, publish-date, reading-time, author-id)
```

Values to Enter

Call out	Field	Value	Reason	Expected result
A	Title (page properties)	Cloud transformation for banks	The H1	`h1.page-header-title`
B	Description (page properties)	How banks modernise their core on the cloud.	Supporting text	Description beside the title
C	Page Type	article	Default layout	Article layout
D	content-type / publish-date / reading-time / author-id	Insight / 2026-03-12 / 6 / an author-id of the Authors sheet	Meta row and author	"Insight", "Published 12/03/26", "6 min read", the author lockup

Author action: edit the page properties and the metadata sheet, publish the sheet. Expected preview: the Article header with the meta row. Business rule: the date must be ISO (YYYY-MM-DD) to be formatted. Validation: `<meta name="publish-date">` in the page source. Common mistake: typing the date as "March 12" (shown as typed); resolution: use YYYY-MM-DD.

Authoring Step 2: Add the Page Header and choose the layout

```
[Screenshot Placeholder]

File name:
page-header-authoring-step-2.png

Purpose:
The Page Header added to the first Section, the Style tab with the Layout select open.

Annotations:
A = Page Header in the content tree
B = Layout
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Add (+)	Page Header	Authored header (pages without a template header)	Header from metadata
B	Layout	Secondary (title left, text right)	Title and description side by side	Eyebrow above two columns from 900px

Author action: select the first Section, Add (+) › Page Header, open Style, choose Layout. Expected preview: the chosen layout. Business rule: only one Page Header per page; the templates don't add another when one is authored. Validation: the block has the layout class. Common mistake: leaving Default on a page whose page-type is set by a sheet row to `landing`; resolution: choose the layout explicitly.

Authoring Step 3: Add CTAs

```
[Screenshot Placeholder]

File name:
page-header-authoring-step-3.png

Purpose:
Two CTA items in the content tree, the first one's dialog open.

Annotations:
A = CTA Link
B = CTA Title
```

```
C = CTA Link Type
D = CTA Link Style
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	CTA Link	/en/contact (first), /en/services (second)	Destinations	Links rendered
B	CTA Title	Talk to an expert / Explore services	Labels	Button texts
C	CTA Link Type	Default	Same tab	No `target`
D	CTA Link Style	Primary Button / Secondary Button	One primary action	Black filled and outlined pill buttons

Author action: Add (+) › CTA twice, fill each dialog. Expected preview: the CTAs below the description. Business rule: CTA Link is required. Validation: both CTAs open their pages. Common mistake: a CTA Title without a CTA Link (dashed placeholder in the editor, nothing on the page); resolution: fill the link.

Authoring Step 4: Preview, publish and verify

```
[Screenshot Placeholder]

File name:
page-header-authoring-step-4.png

Purpose:
The published Article header compared with the Universal Editor preview.

Annotations:
A = H1 title
B = Meta row
C = Author lockup
D = CTAs
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Preview	Reload the editor	Metadata is read on load	The header shows the new values
B	Publish	Page, metadata sheet, Authors sheet, taxonomy	All sources live	The header complete on aem.live

Author action: reload, preview, publish. Validation: one H1, labels from the taxonomy, author complete. Common mistake: the Authors sheet not published (no lockup); resolution: publish `data/authors`.

5. Variations

The layouts are the Layout select values in `blocks/page-header/_page-header.json`; Default resolves in `page-header.js` `layoutOf`.

Default (from the Page Type)

Purpose: the right layout without a choice: Landing for `landing` / `listing`, else Article. Use on template pages. Rendering: as the resolved layout. The automatic header of the templates always uses Default.

Landing (`landing`)

Purpose: landing and listing pages with a large title and, optionally, the featured image. Required: Title; optional Description, content-type, CTAs, featured-image (+ image-alt). Rendering: `div.page-header-intro`

with eyebrow, title (`--display-font-size-1`, semibold; 6rem from 900px), description and CTAs; `div.page-header-media` with the featured image; with an image the block gets `page-header-has-image` and, from 900px, a two-column grid (`--space-2000` gap). The image is requested 1200px wide from 900px, 750px below, eager with high priority when it is same-origin site media (`/media_`). Without an image the text stacks on the left.

```
[Screenshot Placeholder]

File name:
page-header-landing-tablet.png

Purpose:
The Landing layout with a featured image at 768px: text and CTAs stacked, the image below them (two
columns only from 900px).

Annotations:
A = Intro column
B = Featured image
```

Secondary (`secondary`)

Purpose: title on one side, description and CTAs on the other. Rendering: the eyebrow above `div.page-header-columns` (intro: semibold title; summary: description and CTAs, `--space-300` lower from 900px); two columns from 900px.

Article (`article`)

Purpose: articles, blogs, insights, press releases. Rendering: `div.page-header-meta-row` (labels: tags and `p.page-header-collection`; info: date, reading time, `div.page-header-actions` with listen (only with listen-link), download (prints the page) and share (device share dialog, else copies the URL with a `role="status"` message for 3 seconds)), then the columns (intro: title at `--display-font-size-2` and the author lockup; summary: description and CTAs).

```
[Screenshot Placeholder]

File name:
page-header-article-no-author-desktop.png

Purpose:
The Article layout on a page without author-id and author: no lockup under the title.

Annotations:
A = Title without author
B = Meta row
```

Display (`display`)

Purpose: a very large statement title under the tags. Rendering: the tags separated by "|" as the eyebrow, the title at `--display-font-size-1` (6rem from 900px, medium weight, `--color-text-neutral`), the summary vertically centred from 900px.

Automatic Page Header (templates)

The Article, Blog and Press Release templates prepend an empty `div.page-header` in its own section when the page has none; it renders with Default layout and no CTAs.

Author from the Authors sheet / from Author metadata

With `author-id` found in the Authors sheet: photo (2.5rem circle), name linked to LinkedIn in a new tab (with the new-tab hint) and "designation, region". With only `author`: the name alone. Without either: no lockup.

6. Complete Authoring Example

Scenario: an insight article page on the English site.

Field	Example value	Guidance
Title (page properties)	Cloud transformation for banks	Becomes the H1
Description (page properties)	How banks modernise their core on the cloud.	One or two sentences
Page Type	article	Default layout Article
content-type (metadata)	Insight	One or two words
Tags (page properties)	Banking, Artificial intelligence (taxonomy tags)	1–4 tags
publish-date (metadata)	2026-03-12	ISO date
reading-time (metadata)	6	A number
author-id (metadata)	An id listed in `/en/data/authors.json`	Maintained in the Authors sheet
Layout	Default	Resolves to Article
CTA 1	Talk to an expert, /en/contact, Primary Button	Main action

Steps: set the page properties and the metadata row (Authoring Step 1); the article template adds the header (or add it, Step 2); add the CTA (Step 3); publish and verify (Step 4).

Expected output: the meta row (tags, "Insight" | "Published 12/03/26", "6 min read", download and share), the H1 with the author lockup, the description and the CTA.

Responsive: one column below 900px, two columns from 900px; the meta row wraps.

Accessibility: one H1, `<time datetime>`, named icon buttons, announced share status, LinkedIn new-tab hint.

Analytics / data layer: `page-header-1` with `dc:title` "Cloud transformation for banks"; clicks on the CTA, LinkedIn, download and share.

Personalization fallback: none; the metadata is what renders.

Pre-publish checklist:

- [ ] Page Title and Description final (they are the H1 and the description).
- [ ] publish-date in YYYY-MM-DD; reading-time a number.
- [ ] author-id present in the locale's Authors sheet (published).
- [ ] Tags present in the locale's taxonomy.
- [ ] Only one Page Header and one H1 on the page.
- [ ] Every CTA has a link.

7. Content and Asset Guidelines

- **Titles and descriptions.** Edited in the page properties, not in the block; keep them consistent with `meta-title` / `meta-description` (the block reads the page Title and Description as delivered, before the SEO decorator applies those columns).
- **Eyebrows.** The content-type (one or two words), else the tags.
- **CTAs and links.** Start with a verb; one Primary Button. No verified technical limit on the number of CTAs was identified.

- **Images and alt text.** `featured-image` (Landing only) with `image-alt`; no aspect ratio is enforced (full column width, height automatic). Use DAM images delivered as site media so they load eagerly. Author photos are shown as a 2.5rem circle (`object-fit: cover`) and are decorative.
- **Icons.** `icons/headphones.svg`, `download.svg`, `share.svg` (code).
- **Tags and metadata.** Taxonomy tags with titles in each locale's taxonomy; dates as YYYY-MM-DD (shown as dd/mm/yy in every locale).
- **Min / max items.** No verified technical limit was identified.
- **Loading.** The Landing image is eager with high priority only for same-origin `/media_` URLs; other URLs are a plain lazy `<img>` (F-14).
- **Missing-asset fallback.** Missing metadata parts are left out; a missing Authors sheet or taxonomy gives no author and ID-derived tag labels.

8. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
Title or description wrong / missing	Page properties not updated or not republished	Page source: `og:title`, `description`	Update the page properties; publish	H1 matches the Title
Wrong layout	Default with an unexpected page-type (e.g. a sheet row)	`<meta name="page-type">`; block classes	Choose the Layout explicitly or fix the sheet	Expected layout class
No author lockup	author-id missing from the Authors sheet, sheet not published, or layout not Article	`<meta name="author-id">`; open `/{locale}/data/authors.json`	Fix the author row; publish	Lockup shows
Tags show technical labels	Tag missing from the locale taxonomy / language sheet	Open `/{locale}/taxonomy.json`	Add / translate the tag; publish	Proper labels
Date not formatted	publish-date not ISO	Check the metadata value	Use YYYY-MM-DD	dd/mm/yy with `datetime`
Landing image loads late	featured-image not same-origin site media (F-14)	`img` with `loading="lazy"`, no `<picture>`	Use DAM / site media	Eager, high priority
Share does nothing	No share dialog and clipboard blocked	Test on HTTPS, check permissions	Use the HTTPS hosts	Dialog or message
Two H1s	Hero with H1 or a second Page Header	List headings	Change other H1s to H2; keep one Page Header	One H1

Evidence to collect (no secrets): URL, viewport, the page's `<meta>` tags, the rendered block HTML, Network status of the three JSON resources, console errors.

9. Screenshots

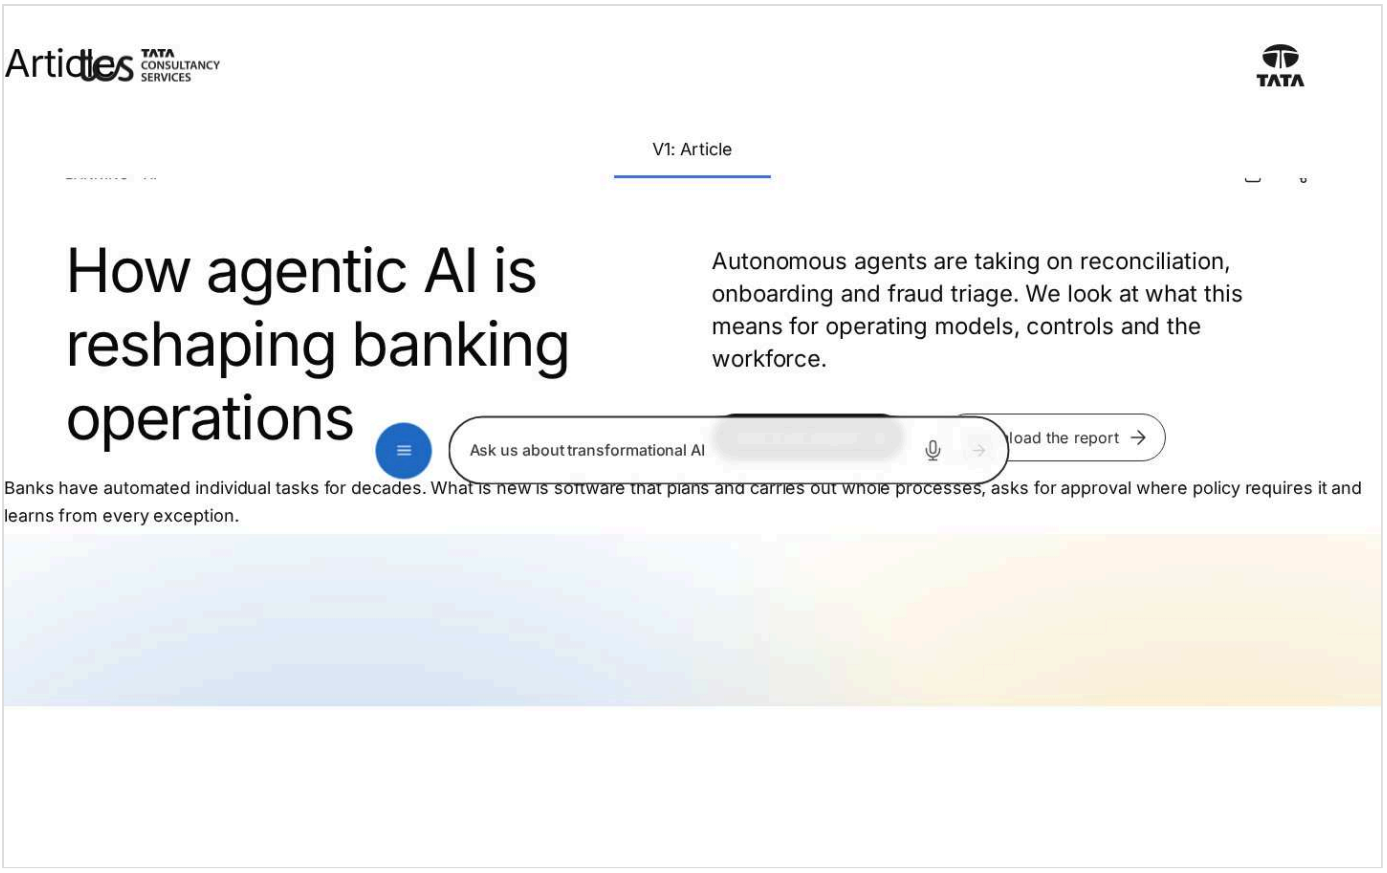


Figure: Page Header as published (block library) — desktop 1440 × 900 (/design-block-master/en/block-library/page-header/article, captured 2026-11-08).

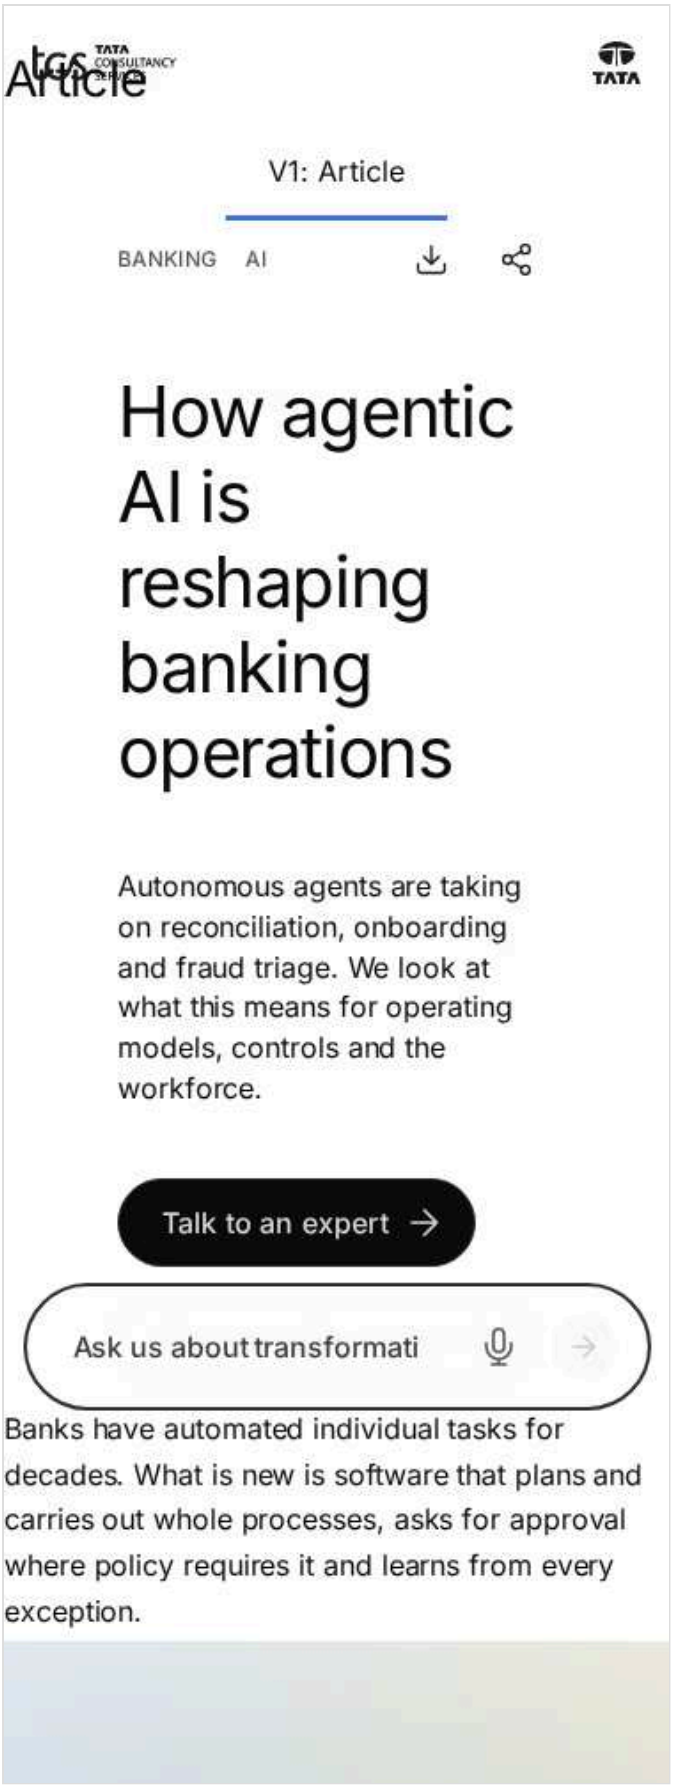


Figure: Page Header as published (block library) — mobile 375 × 812 (/design-block-master/en/block-library/page-header/article, captured 2026-11-08).

> **Screenshot required**

> - Required screen: Page Header dialog in Universal Editor (every tab, including Additional)
> - Required role/access: AEM Sites author with Universal Editor (content author)
> - Required navigation steps: AEM Sites console > /content/tcs-corp/language-masters/en > open a page in Universal Editor
> - Reason unavailable: No AEM author access in the documentation program (access blocker AB-01)
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

10. Known limitations

- Universal Editor screenshots are placeholders: no author access in this program.

11. Open items

- None.

12. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages