TCS CORPORATE WEBSITE

Media Contacts Block — Developer Guide

Role / audience	Development — Developers, technical leads, block owners, AI coding agents
Version	1.0
Status	Draft for review
Owner	Technical Lead / Block Owner (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Media Contacts Block — Developer Guide
- Summary
- Overview
- Source files
- Components, models and filters
- Fields
- Dependencies
- For Developers
- Extending the Block
- Responsive Behavior
- Accessibility
- Data Layer and Analytics
- Performance Considerations
- Security and Privacy
- For Architects
- Troubleshooting
- Known limitations of the block
- Change history of the block
- Reference pages
- Coverage of the required topics
- Screenshots
- Known limitations
- Open items
- Change history

Media Contacts Block — Developer Guide

Attribute	Value
Document ID	DEV-B-media-contacts
Audience	Developers, technical leads, block owners, AI coding agents
Purpose	How the Media Contacts block is built: files, model, structure, behaviour, variations, tests and limitations
Scope	blocks/media-contacts/ and its components media-contacts
Prerequisites	—
Owner	Technical Lead / Block Owner (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	2026-11-08 (model, files, imports from the code; reference pages from the live site)
Source files	blocks/media-contacts/README.md, blocks/media-contacts/_media-contacts.json, blocks/media-contacts/media-contacts-data.js, blocks/media-contacts/media-contacts.css, blocks/media-contacts/media-contacts.js
Related documents	Variations, Test coverage, Authoring guide
Related AEM paths	—

1. Summary

Attribute	Value
Block	Media Contacts
Folder	`blocks/media-contacts`
Type	Independent
Category	listing
Status	Active
Purpose	The media contacts of the locale's Media Contacts sheet, grouped by designation and region
Variations (summary)	Title and Title Type; contacts of the page's region, else all
Children	—
Code size	251 lines of JS and CSS

2. Overview

- **Business purpose:** journalists find the right press contact for their region at the end of every press release, from one list maintained in one place (the sheet).
- **User experience:** the title (e.g. "TCS media contacts"), then the groups: the brand-blue group heading and, below it, each e-mail address and phone number as an underlined link with its icon. Two

columns from 900px (filled top to bottom), one column below.

- **Templates / page types:** press releases (Page Type `press-release`). The Press Release template no longer adds the contacts by itself: authors add this block (KB-D-054 in the knowledge base decision log).
- **Data source:** the Media Contacts sheet of the page's locale (`utils/data.js getMediaContacts`): the rows whose `region` is the page's `region` metadata, else all rows. Placeholders `mediaContacts`, `email`, `phone`, `mediaContactsEditorHint`.
- **Related blocks:** Page Header (the press release's header), Teaser and List (the other press release sections).
- **When to use:** on press releases and media pages that should show the press contacts.
- **When not to use:** for one-off contacts of a single page (author a Text with links, or a Teaser); for contacts that aren't in the Media Contacts sheet.
- **Realistic use cases:** the "TCS media contacts" section at the end of a press release; a newsroom contact page; a regional press page whose `region` metadata shows only that region's contacts.

3. Source files

File	Link
`README.md`	GitHub
`_media-contacts.json`	GitHub
`media-contacts-data.js`	GitHub
`media-contacts.css`	GitHub
`media-contacts.js`	GitHub

4. Components, models and filters

Component	Title	Resource type	Template name	Model	Children allowed
`media-contacts`	Media Contacts	`core/franklin/components/block/v1/block`	Media Contacts	`media-contacts`	—

5. Fields

The Additional tab fields (anchor, hide, padding, margin, animation) are common to the blocks and described in the content modeling guide.

5.1 Media Contacts (`media-contacts`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Content	Title	`title`	text	No	—	—	—
Content	Title Type	`titleType`	select	No	h2	6 options	—

"Required in model" is the model's `required` flag; whether a field is required in practice is stated in the authoring guide where it is known.

6. Dependencies

Import
../../decorators/contact-list-decorator.js
../../decorators/heading-decorator.js
../../decorators/skeleton-decorator.js
../../utils/data.js
../../utils/environment.js
../../utils/metadata.js
../../utils/placeholders.js
../../utils/properties.js
./media-contacts-data.js

7. For Developers

```
blocks/media-contacts/
├── README.md
├── _media-contacts.json
├── media-contacts-data.js
├── media-contacts.css
└── media-contacts.js
```

Decorator/Utility	Purpose	Execution or dependency point
decorators/contact-list-decorator.js	buildContactGroups (groups of contacts, each with its heading and its mail / phone links one below the other; the links carry data-cmp-interaction email / phone)	media-contacts.js: { buildContactGroups }
decorators/heading-decorator.js	buildHeading (Title + Title Type), HEADINGS	media-contacts.js: { buildHeading, HEADINGS }
decorators/skeleton-decorator.js	renderWhenLoaded (a block from data that may take time: directly within 150ms, else after a skeleton so its section is shown; removed on success and failure), skeletonWhile (a skeleton in a part that fills in by itse	media-contacts.js: { bone, renderWhenLoaded, skeletonElement }
utils/data.js	loadDataSheet, getAuthor, getAuthors, getLocations, getPartners, getSocialLinks, getMediaContacts, inRegion (the locale's data sheets)	media-contacts.js: { getMediaContacts, inRegion }
utils/environment.js	prefersReducedMotion, scrollBehavior, isEditing, isInEditor, isAuthor (the page is rendered by AEM author, which has no query index)	media-contacts.js: { isAuthor, isEditing }
utils/metadata.js	getPageMetadata, getPageTags (article:tag and the AEM page Tags published as cq-tags), getPageLanguage (page properties and bulk metadata columns: page-type, author-id, publish-date, reading-time, ...)	media-contacts.js: { getPageMetadata }
utils/placeholders.js	getPlaceholders, loadPlaceholders, fillPlaceholder (UI text from the locale's placeholders, with English fallbacks)	media-contacts.js: { getPlaceholders }
utils/properties.js	readProperties, textOf, isOn, isOnByDefault (a toggle that defaults to on), optionOf, normalizeKey, textSource (key-value block properties)	media-contacts.js: { readProperties, textOf }

- **JavaScript (`media-contacts.js`):** an async `decorate(block)`. It reads Title and Title Type (`readProperties`), requests the sheet and the placeholders, and renders through `renderWhenLoaded` (a skeleton when the sheet takes longer than 150ms). It selects the page region's rows (`inRegion`, else all), groups them (`media-contacts-data.js` `groupContacts`, `telHref`) and builds the list with `decorators/contact-list-decorator.js` `buildContactGroups`.

- **Pure logic (`media-contacts-data.js`):** `groupHeading`, `groupContacts`, `telHref`; unit tested in `test/media-contacts/media-contacts-data.test.mjs`.
- **CSS (`media-contacts.css`):** headings, links with `::before` icons (CSS masks of `icons/mail.svg` / `icons/phone.svg`), underlined text, two columns from 900px.
- **Input DOM:** key-value rows for `title` (with Title Type collapsed into it as the heading level) and `titleType`; the `classes_*` fields arrive as block classes.
- **Rendered DOM:**

```
<div class="media-contacts block">
  <h2 class="media-contacts-title">TCS media contacts</h2>
  <ul class="contact-list-groups">
    <li class="contact-list-group" data-cmp-position="1">
      <h3 class="contact-list-heading">Corporate Communications &amp; India</h3>
      <ul class="contact-list-entries">
        <li class="contact-list-email">
          <a class="contact-list-link" href="mailto:…" data-cmp-interaction="email" data-cmp-
value="Corporate Communications &amp; India">
            <span class="visually-hidden">Email: </span><span class="contact-list-text">…</span>
          </a>
        </li>
        <li class="contact-list-phone">…</li>
      </ul>
    </li>
  </ul>
</div>
```

- **Empty state:** no contacts: the block and its wrapper are hidden on the page; in Universal Editor and on AEM author the title and the hint `mediaContactsEditorHint` show.
- **Errors:** a failing sheet request counts as no contacts (`loadDataSheet`); a failing render is logged by `renderWhenLoaded`.
- **Motion:** `CONTENT_TARGETS['media-contacts']` animates the title and the groups one after another.

8. Extending the Block

1. Add fields in `_media-contacts.json` (at most three short tabs, Additional last), run `npm run build:json`, `npm run lint`, `npm run build:docs`.
2. Respect the delivery rules (no Text / Title / Type / Alt / MimeType suffixes for values that must be read; no sample content in the template).
3. Keep the grouping in `media-contacts-data.js` pure and extend its tests.
4. A new sheet column: read it in `utils/data.js` `getMediaContacts` and document it in the knowledge base (content architecture, data sheets).
5. Keep link names and the data layer's address-free click events.

9. Responsive Behavior

Viewport	Layout	Image behavior	Interaction behavior
Below 900px (mobile, tablet)	One column; group headings at `--heading-font-size-l`, links at `--heading-font-size-m`	Icons 1.5rem	Tap a link to write or call
900px and wider (desktop)	Two columns (`columns: 2`, gap 4rem), filled top to bottom, a group never split	Icons 1.5rem	As above

10. Accessibility

- **Semantic HTML:** the title is a heading; the groups are a list, each with its heading (one level below the title) and a list of links.
- **Link names:** each link starts with a visually hidden "Email:" / "Phone:" (placeholders `email`, `phone`), so its purpose is clear out of context; the icons are CSS backgrounds without text.
- **Keyboard and focus:** links are reachable with Tab and have a visible focus outline.
- **Contrast:** text in `--color-text-default`, headings and icons in `--color-text-brand` (5.4:1 on white).
- **Reflow:** one column below 900px; long addresses wrap (`overflow-wrap: anywhere`).
- **Reduced motion:** the Additional tab's animations don't play for visitors who prefer reduced motion or in the editor.
- **Loading:** while the sheet loads for longer than 150ms, a skeleton marked `aria-busy` (hidden from assistive technology) holds the place.

Author responsibilities: choose the heading level. Sheet owners: consistent designations and regions.

11. Data Layer and Analytics

- **Component:** `decorators/data-layer-decorator.js` adds the block once rendered: `@type` `tcs-corp/components/media-contacts`, id = the Anchor ID else `media-contacts-{n}`, `dc:title` = the title.
- **Item positions:** each group has `data-cmp-position` (1, 2, ...).
- **Interactions:** the links carry `data-cmp-interaction` (`email` / `phone`) and `data-cmp-value` (the group heading).

Trigger	Data-layer event	Required properties	Analytics behavior
Block rendered	component state (`component.{id}`)	`@type`, `parentId`, `dc:title`	Component inventory of the page
Click on an e-mail address	`cmp:click`	`interaction` `email`, `dc:title` `email`, `xdm:linkURL` `mailto:`, `xdm:linkType` `other`, `value` (group), `position`	Contact interest per group, without the address
Click on a phone number	`cmp:click`	`interaction` phone, `dc:title` phone, `xdm:linkURL` `tel:`, `xdm:linkType` `other`, `value`, `position`	As above

The data layer never records the address or number: `decorators/data-layer-decorator.js` reports every `mailto:` / `tel:` link of the site by its kind (`utils/privacy.js` `contactLinkKind`). Tags and the Web SDK aren't configured yet.

12. Performance Considerations

- **Request:** one sheet request per page view (shared with other users of `utils/data.js`), plus the placeholders (already loaded by the page).
- **Skeleton:** only when the sheet takes longer than 150ms, so the section isn't held back.
- **DOM size:** a few elements per contact; no listeners.
- **Layout shift:** the block sits below the fold on press releases; above the fold, the skeleton reserves part of its height.

13. Security and Privacy

- **Content:** text nodes only (`textContent`); no HTML from the sheet is injected.
- **Personal data:** the sheet's names, e-mail addresses and phone numbers are public by design; the data layer records none of them.
- **Links:** `mailto:` and `tel:` only.

14. For Architects

- **Role:** a data-driven listing block; the sheet is the single source of the contacts.
- **Rendering:** client side from the sheet JSON (cached per page view by `utils/data.js`); the title is in the delivered HTML, the contacts are not (not indexed by search engines from the HTML).
- **Dependencies:** `decorators/contact-list-decorator.js`, `heading-decorator.js`, `skeleton-decorator.js`; `utils/data.js`, `environment.js`, `metadata.js`, `placeholders.js`, `properties.js`.
- **Privacy:** the data layer records the kind of contact link and the group, never the address (`utils/privacy.js`).
- **Replaces:** the Media contacts section the Press Release template appended at the end of the page (not in the content tree, not authorable).



15. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
The block doesn't show on the page	The sheet has no rows (or isn't published)	Open `/{locale}/data/media-contacts.json`	Add rows and publish the sheet	The groups appear
A group appears twice	Different spelling of the designation or region	Compare the rows	Spell them the same	One group
Only some contacts show	The page's `region` matches some rows	Check the page's `region` metadata	Change the region, or the rows' regions	The expected rows
A phone link dials a wrong number	Letters or extra characters in phone	Check the cell	Write the number with digits, spaces and a leading +	`tel:` link correct

16. Known limitations of the block

Limitation	Impact	Workaround	Planned correction
Contacts aren't in the delivered HTML	Search engines see them only after rendering	None needed for press contacts	Not planned
No per-block region	All blocks on a page use the page's `region`	Set the page's region	Not planned
Pages that relied on the template's Media contacts	They show no contacts until the block is added	Add the block (end of the page)	Not planned

17. Change history of the block

Version	Change	Source	Date
1.0	New block: the media contacts of the Media Contacts sheet as an authorable block, grouped by designation and region; the Press Release template no longer appends them	Feature branch feature/media-contacts-block	22 October 2026

18. Reference pages

Kind	Page	Live URL

19. Coverage of the required topics

Topic	Where
Purpose	Overview
Source files	generated: Files
Model, definition, filters, children	generated: Components
Dependencies	generated: Dependencies
Authored input / rendered output / DOM transformation	For Developers
Configuration fields, defaults, required fields	generated: Fields
Variations	MEDIA-CONTACTS-VARIATIONS.md
Responsive behaviour	Responsive Behavior
Accessibility and keyboard	Accessibility
Analytics / data layer	Data Layer and Analytics
Performance	Performance Considerations
Security	Security and Privacy
Extending	Extending the Block
Known limitations	Known Limitations
Troubleshooting	Troubleshooting
Tests	MEDIA-CONTACTS-TEST-COVERAGE.md
SEO behaviour	Not recorded
Caching considerations	Not recorded (Edge Delivery default caching; no block-specific rule)
Ownership	Technical Lead / Block Owner (proposed)

20. Screenshots

> **Screenshot required**
>
> - Required screen: Media Contacts on its block library page
> - Required role/access: none (published page)
> - Required navigation steps: Open https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/media-contacts
> - Reason unavailable: No block library page of this block was found under /design-block-master/en/block-library
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

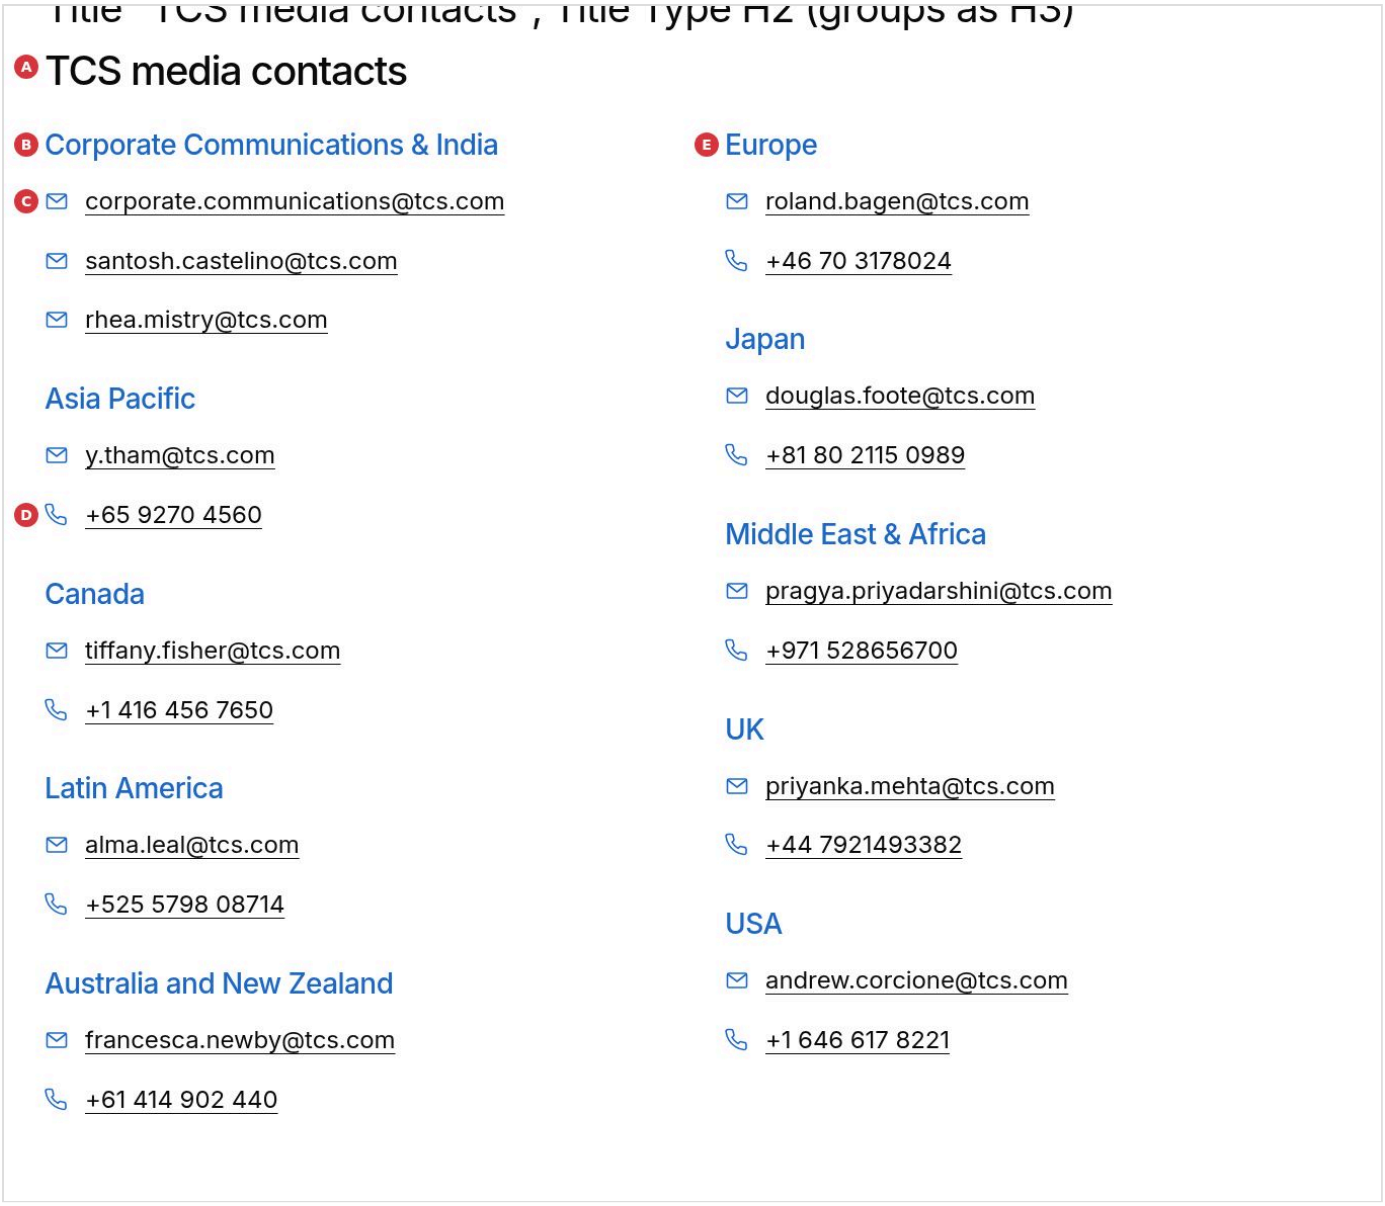


Figure: Desktop rendering — The Media Contacts block at 1440 px on the block library page Media Contacts variations: the H2 TCS media contacts, then two columns filled top to bottom: Corporate Communications & India with three e-mail addresses one below the other, Asia Pacific, Canada, Latin America and Australia and New Zealand on the left; Europe, Japan, Middle East & Africa, UK and USA on the right, each with an e-mail address and a phone number, a blue mail or phone icon before each underlined link. (Sample content on the preview: the tcs.com media contacts; callout letters as in the Field Entry Table; file screenshots/media-contacts-desktop-view.jpg) (handover screenshot; rendering at the time it was taken).

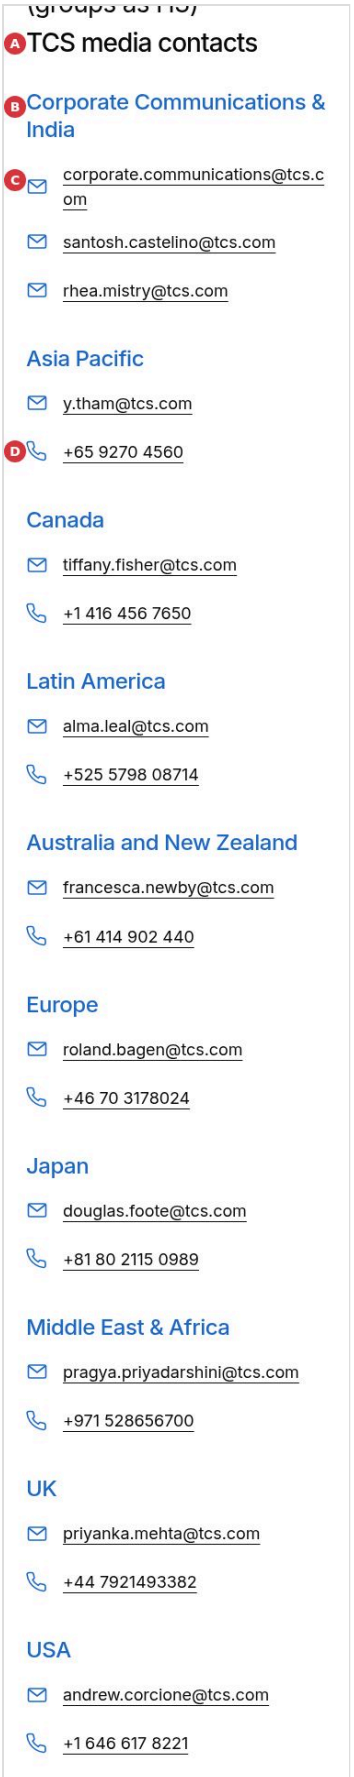


Figure: Mobile rendering — The same block at 375 px: the H2 TCS media contacts and the groups in one column, Corporate Communications & India with its three e-mail addresses, then Asia Pacific, Canada and the other regions, each address and number on its own line with its icon. (Sample content on the preview;

callout letters as in the Field Entry Table; file screenshots/media-contacts-mobile-view.jpg) (handover screenshot; rendering at the time it was taken).

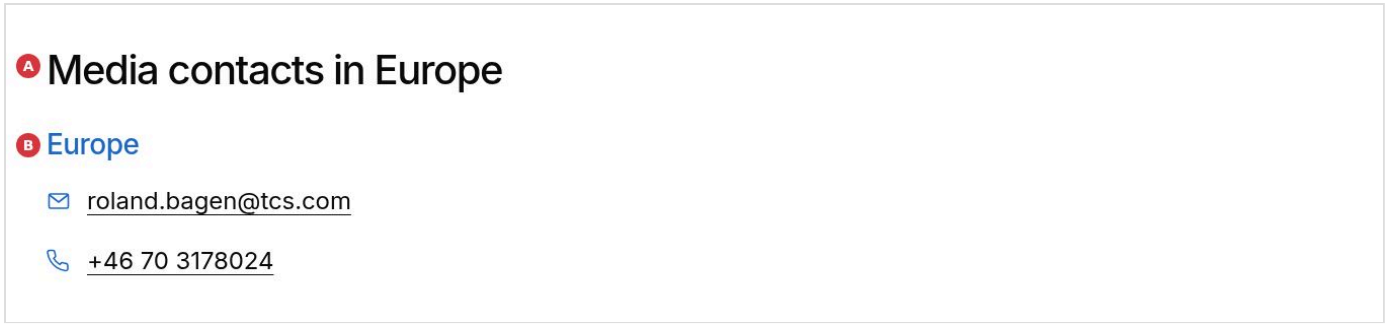


Figure: Regional variation — The block library page Media Contacts: one region at 1440 px, whose region metadata is Europe: the H2 Media contacts in Europe and the single group Europe with roland.bagen@tcs.com and +46 70 3178024. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/media-contacts-region.jpg) (handover screenshot; rendering at the time it was taken).


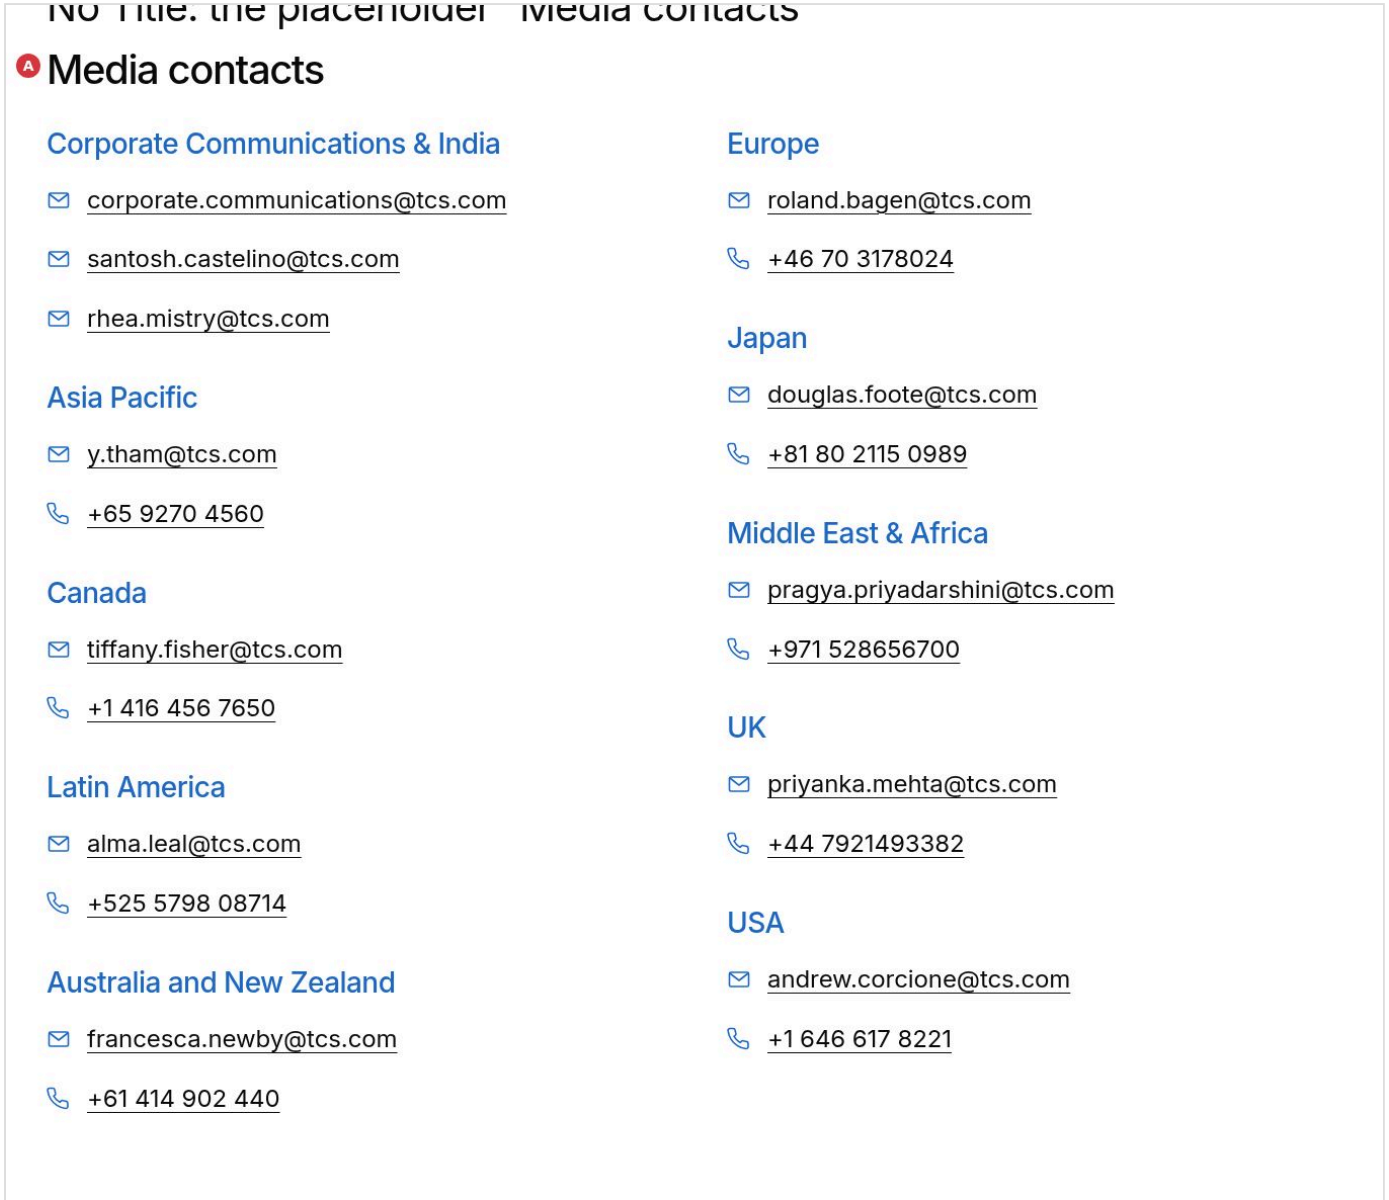


Figure: Default title — The second example of the variations page at 1440 px: the block without a Title shows the heading Media contacts (placeholder) above the same groups. (Sample content on the preview;

callout letters as in the Field Entry Table; file screenshots/media-contacts-default-title.jpg) (handover screenshot; rendering at the time it was taken).

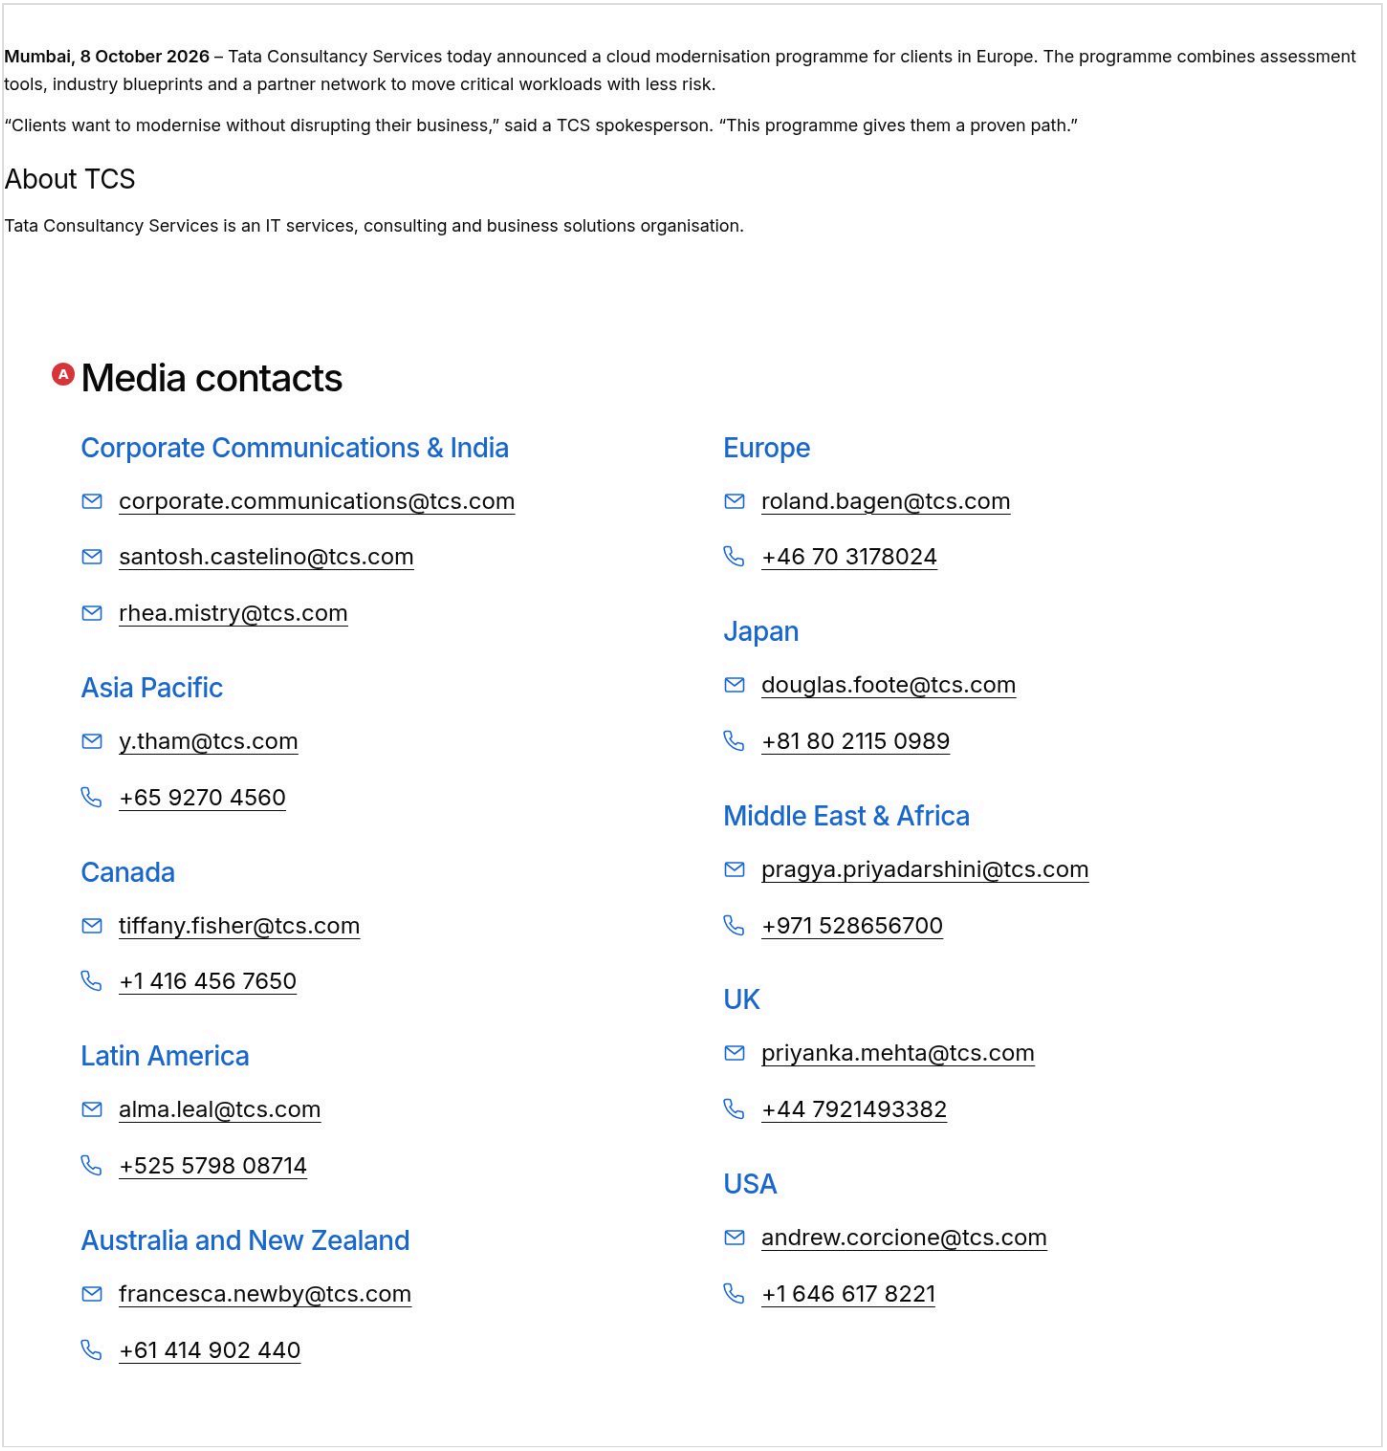

Mumbai, 8 October 2026 – Tata Consultancy Services today announced a cloud modernisation programme for clients in Europe. The programme combines assessment tools, industry blueprints and a partner network to move critical workloads with less risk.

"Clients want to modernise without disrupting their business," said a TCS spokesperson. "This programme gives them a proven path."

About TCS

Tata Consultancy Services is an IT services, consulting and business solutions organisation.

A Media contacts

Corporate Communications & India

corporate.communications@tcs.com

santosh.castelino@tcs.com

rhea.mistry@tcs.com

Asia Pacific

y.tham@tcs.com

+65 9270 4560

Canada

tiffany.fisher@tcs.com

+1 416 456 7650

Latin America

alma.leal@tcs.com

+525 5798 08714

Australia and New Zealand

francesca.newby@tcs.com

+61 414 902 440

Europe

roland.bagen@tcs.com

+46 70 3178024

Japan

douglas.foote@tcs.com

+81 80 2115 0989

Middle East & Africa

pragya.priyadarshini@tcs.com

+971 528656700

UK

priyanka.mehta@tcs.com

+44 7921493382

USA

andrew.corcione@tcs.com

+1 646 617 8221

Figure: Press release template — The end of the block library page Press release template at 1440 px: the release text with About TCS, then the Media Contacts block with the H2 Media contacts and the groups in two columns; the Press Release template no longer appends a section of its own. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/template-press-release-media-contacts.jpg) (handover screenshot; rendering at the time it was taken).

21. Known limitations

- Universal Editor dialogs were not captured: no author access in this program (see the access blockers).

22. Open items

- None.

23. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages