TCS CORPORATE WEBSITE

Table Block — Developer Guide

Role / audience	Development — Developers, technical leads, block owners, AI coding agents
Version	1.0
Status	Draft for review
Owner	Technical Lead / Block Owner (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Table Block — Developer Guide
- Summary
- Overview
- Source files
- Components, models and filters
- Fields
- Dependencies
- For Developers
- Extending the Block
- Responsive Behavior
- Accessibility
- Data Layer and Analytics
- Performance Considerations
- Security and Privacy
- For Architects
- Troubleshooting
- Known limitations of the block
- Change history of the block
- Reference pages
- Coverage of the required topics
- Screenshots
- Known limitations
- Open items
- Change history

Table Block — Developer Guide

Attribute	Value
Document ID	DEV-B-table
Audience	Developers, technical leads, block owners, AI coding agents
Purpose	How the Table block is built: files, model, structure, behaviour, variations, tests and limitations
Scope	blocks/table/ and its components table, table-row, table-col-2, table-col-3, table-col-4, table-col-5, table-col-6, table-col-7, table-col-8, table-col-9
Prerequisites	—
Owner	Technical Lead / Block Owner (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	2026-11-08 (model, files, imports from the code; reference pages from the live site)
Source files	blocks/table/README.md, blocks/table/_table.json, blocks/table/table.css, blocks/table/table.js
Related documents	Variations, Test coverage, Authoring guide
Related AEM paths	/content/tcs-corp/design-block-master/en/block-library/table, /content/tcs-corp/design-block-master/en/block-library/table/table

1. Summary

Attribute	Value
Block	Table
Folder	`blocks/table`
Type	Container
Category	content
Status	Active
Purpose	A data table of rows with 1–9 columns
Variations (summary)	Header row, column counts
Children	table-row, table-col-2, table-col-3, table-col-4, table-col-5, table-col-6, table-col-7, table-col-8, table-col-9
Code size	157 lines of JS and CSS

2. Overview

Business purpose. Publish tabular data (facts, comparisons, schedules, specifications) that is readable on every device, understood by screen readers and indexable, without images of tables.

User experience. A full-width table with a semibold header row on a 2px rule, light row separators, optional zebra stripes or cell borders; on narrow screens a wide table scrolls sideways inside the block while the page stays put.

Templates / page types. Any page type.

Data source. The Row items authored in the block; the heading before it names the table.

Related blocks. Table List (`blocks/table-list`, list-style rows with actions), Columns Container (layout, not data), List / Cards (collections of items).

When to use. Two-dimensional data where each value relates to a row and a column; up to nine columns of short values (wider tables scroll inside the block on small screens).

When not to use. Page layout or side-by-side content (Columns Container); a single list (a bulleted list or List / Cards); more than nine columns, merged cells (flatten them: one header row, the value repeated in each cell it spanned), sorting, filtering or pagination (not implemented). A table in a Text (rich text) isn't delivered as a table by AEM (its cells arrive as paragraphs): use this block.

Realistic use cases.

- Quarterly results in a press release (Quarter, Revenue, Growth, Margin).
- Key facts as label / value rows (Founded, Headquarters, Employees, Countries).
- An event agenda (Time, Session, Speaker).
- Capability by region matrix with row headers.

3. Source files

File	Link
`README.md`	GitHub
`_table.json`	GitHub
`table.css`	GitHub
`table.js`	GitHub

4. Components, models and filters

Component	Title	Resource type	Template name	Model	Children allowed
`table`	Table	`core/franklin/components/block/v1/block`	Table	`table`	table-row
`table-row`	Row	`core/franklin/components/block/v1/block/item`	Row	`table-row`	—
`table-col-2`	Row	`core/franklin/components/block/v1/block/item`	Row	`table-col-2`	—
`table-col-3`	Row	`core/franklin/components/block/v1/block/item`	Row	`table-col-3`	—
`table-col-4`	Row	`core/franklin/components/block/v1/block/item`	Row	`table-col-4`	—
`table-col-5`	Row	`core/franklin/components/block/v1/block/item`	Row	`table-col-5`	—
`table-col-6`	Row	`core/franklin/components/block/v1/block/item`	Row	`table-col-6`	—
`table-col-7`	Row	`core/franklin/components/block/v1/block/item`	Row	`table-col-7`	—
`table-col-8`	Row	`core/franklin/components/block/v1/block/item`	Row	`table-col-8`	—

Component	Title	Resource type	Template name	Model	Children allowed
table-col-9	Row	core/franklin/components/block/v1/block/item	Row	table-col-9	—

5. Fields

The Additional tab fields (anchor, hide, padding, margin, animation) are common to the blocks and described in the content modeling guide.

5.1 Table (`table`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Content	Options	classes	multiselect	No	""	2 options	—
Content	Columns	filter	select	No	table	9 options	—

5.2 Row (`table-row`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	column1text	richtext	No	—	—	—

5.3 Row (`table-col-2`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	column1text	richtext	No	—	—	—
—	Column 2	column2text	richtext	No	—	—	—

5.4 Row (`table-col-3`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	column1text	richtext	No	—	—	—
—	Column 2	column2text	richtext	No	—	—	—
—	Column 3	column3text	richtext	No	—	—	—

5.5 Row (`table-col-4`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	column1text	richtext	No	—	—	—
—	Column 2	column2text	richtext	No	—	—	—
—	Column 3	column3text	richtext	No	—	—	—
—	Column 4	column4text	richtext	No	—	—	—

5.6 Row (`table-col-5`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	column1text	richtext	No	—	—	—
—	Column 2	column2text	richtext	No	—	—	—

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 3	`column3text`	richtext	No	—	—	—
—	Column 4	`column4text`	richtext	No	—	—	—
—	Column 5	`column5text`	richtext	No	—	—	—

5.7 Row (`table-col-6`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	`column1text`	richtext	No	—	—	—
—	Column 2	`column2text`	richtext	No	—	—	—
—	Column 3	`column3text`	richtext	No	—	—	—
—	Column 4	`column4text`	richtext	No	—	—	—
—	Column 5	`column5text`	richtext	No	—	—	—
—	Column 6	`column6text`	richtext	No	—	—	—

5.8 Row (`table-col-7`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	`column1text`	richtext	No	—	—	—
—	Column 2	`column2text`	richtext	No	—	—	—
—	Column 3	`column3text`	richtext	No	—	—	—
—	Column 4	`column4text`	richtext	No	—	—	—
—	Column 5	`column5text`	richtext	No	—	—	—
—	Column 6	`column6text`	richtext	No	—	—	—
—	Column 7	`column7text`	richtext	No	—	—	—

5.9 Row (`table-col-8`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	`column1text`	richtext	No	—	—	—
—	Column 2	`column2text`	richtext	No	—	—	—
—	Column 3	`column3text`	richtext	No	—	—	—
—	Column 4	`column4text`	richtext	No	—	—	—
—	Column 5	`column5text`	richtext	No	—	—	—
—	Column 6	`column6text`	richtext	No	—	—	—
—	Column 7	`column7text`	richtext	No	—	—	—
—	Column 8	`column8text`	richtext	No	—	—	—

5.10 Row (`table-col-9`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 1	`column1text`	richtext	No	—	—	—
—	Column 2	`column2text`	richtext	No	—	—	—

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	Column 3	`column3text`	richtext	No	—	—	—
—	Column 4	`column4text`	richtext	No	—	—	—
—	Column 5	`column5text`	richtext	No	—	—	—
—	Column 6	`column6text`	richtext	No	—	—	—
—	Column 7	`column7text`	richtext	No	—	—	—
—	Column 8	`column8text`	richtext	No	—	—	—
—	Column 9	`column9text`	richtext	No	—	—	—

"Required in model" is the model's `required` flag; whether a field is required in practice is stated in the authoring guide where it is known.

6. Dependencies

Import
`../../scripts/scripts.js`
`../../utils/ids.js`
`../../utils/placeholders.js`

7. For Developers

```
blocks/table/
├── README.md
├── _table.json
├── table.css
└── table.js
```

Decorator/Utility	Purpose	Execution or dependency point
`scripts/scripts.js`	Page decoration (moveInstrumentation and shared page helpers)	`table.js`: { moveInstrumentation }
`utils/ids.js`	`nextInstance`, `uniqueId`, `createIdFactory` (unique ids per block instance), `availableId` (an authored id kept, suffixed -2, -3, ... only when taken)	`table.js`: { uniqueId }
`utils/placeholders.js`	`getPlaceholders`, `loadPlaceholders`, `fillPlaceholder` (UI text from the locale's placeholders, with English fallbacks)	`table.js`: { getPlaceholders }

JavaScript (`table.js`). `decorate` awaits the placeholders, skips the leading empty rows AEM delivers for the dialog tabs (`isTabRow`: at most one cell, no text, no image or link), and turns every following row into a `tr` (`moveInstrumentation(row, tr)`) and every cell into a `td` or `th` (`moveInstrumentation(cell, td)`, content moved as authored). The first row goes to `thead` unless `no-header`; with `row-header` the first cell of body rows is a row header. Rows are padded to the widest row. `headingBefore` finds the naming heading; `uniqueId('table-title')` gives it an id. The block's children are replaced with the table; a ResizeObserver toggles `tabindex`, `role` and `aria-label` on the block. The module exports only `decorate`.

CSS (`table.css`). Scoped to `.table.block`; `overflow-x: auto`; header rule, body separators, `no-header`, `striped`, `bordered`, row header styles; one media query at 900px.

Input DOM. Not key-value: empty rows for the Content and Additional tabs, then one row per Row item with one cell per column field. Options and the Additional tab arrive as block classes.

Rendered DOM contract. `.table.block[.striped][.bordered][.no-header][.row-header] [tabindex="0"] [role="region"][aria-label] > table[aria-labelledby] > thead > tr > th[scope=col], tbody > tr > (th[scope=row]) td`.

Events and async behavior. One ResizeObserver per table (never disconnected); no network requests besides the placeholders.

Error handling. No Rows: an empty `table` with an empty `tbody`. Malformed rows are padded.

Parent / child contracts. Row items are plain rows; Universal Editor instrumentation moves to the `tr` / cells, so in-place editing of cells keeps working.

8. Extending the Block

1. **A new option:** add a value to the `classes` multiselect in `_table.json`, style it as `.table.block.{value}`; `npm run build:json`, `npm run lint`.
2. **More columns:** add a `table-col-N` model and definition, a filter `table-N-columns` and a Columns option in `_table.json`; the code needs no change.
3. **Responsive / accessibility:** keep `th` scopes, the heading name and the scroll region.
4. **Data layer:** links in cells are tracked centrally; mark other controls with `data-cmp-interaction`.
5. **Tests:** no block-specific unit tests exist; a pure row-to-table function would be testable in `test/` with Node's test runner.
6. **Backward compatibility:** tab rows must keep being skipped (AGENTS.md delivery rules); keep the row padding for Rows authored with another Columns value.
7. **Library and docs:** update the block library page, this README, `npm run build:docs`; `npm run build:modules` after changing imports.

9. Responsive Behavior

Viewport	Layout	Image behavior	Interaction behavior
Below 900px	Full width; text `--body-font-size-s` (0.75rem in `styles/styles.css` below 900px)	No images by design	A table wider than the block scrolls inside it (focusable region)
900px and wider	Full width; text `--body-font-size-m` (1.125rem from 900px)	—	Scroll region only if the table still overflows

10. Accessibility

- **Semantics:** a real `table` with `thead` / `tbody`, `th scope="col"` and `th scope="row"`.
- **Headings and name:** the heading directly before the block (last element of the previous default content wrapper, or the previous sibling of the block's wrapper) gets an id (`table-title-N`) if needed, and the table `aria-labelledby` to it.
- **Keyboard and focus:** a table wider than its container becomes a focusable, named region with a visible focus outline, so keyboard users can scroll it with the arrow keys.
- **Reflow:** no page-level horizontal scrolling; the block scrolls.
- **Contrast:** text `--color-text-default`; on dark section backgrounds the theme tokens apply.
- **Reduced motion:** the Additional tab animation doesn't play.
- **Empty state:** an empty table (no rows) is invisible.

Author responsibilities: a heading before every table, a header Row (or row headers), no layout tables, no empty header cells, units in headers.

Developer responsibilities: keep the `scope` attributes, the naming from the heading and the scroll region with its label from placeholders.

Key	Expected behavior
Tab	Moves focus to the table's scroll region when the table overflows, then to links in cells
Arrow Left / Arrow Right	Scroll the focused region horizontally (browser behaviour)

11. Data Layer and Analytics

`decorators/data-layer-decorator.js` adds the block as `tcs-corp/components/table`, id = Anchor ID else `table-{n}`; `dc:title` only if a heading is inside the block (normally not). The block adds no `data-cmp-*` attributes and pushes nothing itself.

Trigger	Data-layer event	Required properties	Analytics behavior
Block decorated	component state	`@type`, `parentId`	One entry per table
Click on a link in a cell	`cmp:click`	`interaction` `link`, `dc:title`, `xdm:linkURL`, `xdm:linkType` (`other`, `exit`, `download`), `breakpoint`	Link and download tracking

The intended path is Adobe Client Data Layer, then Adobe Data Collection (Tags), the AEP Web SDK, the Edge Network and Analytics / CJA, but Tags and the Web SDK aren't configured yet (blocked: measurement plan); no consent mechanism is implemented.

12. Performance Considerations


- Decorated with its section (eager in the first section, else lazy); no images; only placeholders fetched.
- Rendered once (no layout shift after decoration); the ResizeObserver only toggles attributes.
- DOM size grows with the rows; split very long tables under separate headings.

13. Security and Privacy

- Cell content is moved as delivered by AEM (no HTML strings built); no external content, query strings or personal data.

14. For Architects

- **Role:** presentational container block; no data fetching.
- **Content model:** block with Options and Columns (a filter switch) and Row items of 1 to 5 rich-text fields.
- **Rendering:** client-side conversion of delivered rows into a semantic table.
- **Dependencies:** `scripts/scripts.js` (`moveInstrumentation`), `utils/ids.js`, `utils/placeholders.js`.
- **Data layer / Web SDK / Target:** generic component state and link clicks only.
- **Consent / identity / security:** no personal data, no external content.
- **Caching / performance:** part of the page HTML (CDN); tiny JS and CSS; one ResizeObserver.
- **Scalability:** DOM size grows with rows × columns; very long tables are better split.

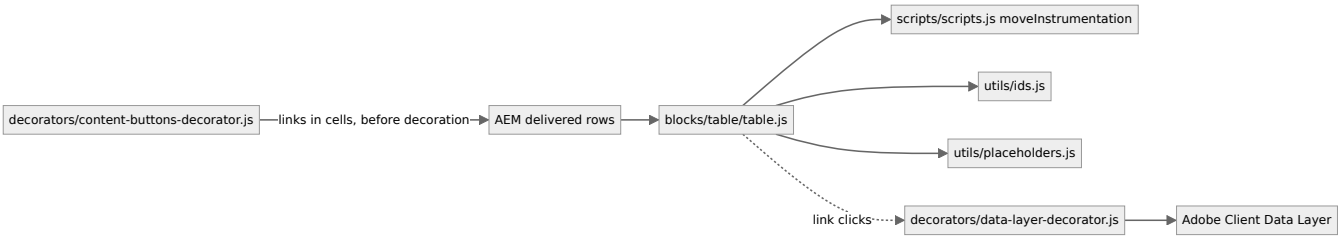

15. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
First data row shown as header	The first Row is the header unless No Header	Check Options	Add a header Row first, or select No Header	Header as intended
Add offers one-column Rows	Columns is 1 Column	Check Columns	Set Columns; recreate the Rows	New Rows have N fields
Empty cells at row ends	Rows of different column counts	Count fields per Row	Recreate short Rows with the right Columns	All rows equal
Page scrolls sideways on mobile	A wide element (long URL) or large margins	Device mode; find the overflowing element	Link text instead of URLs; reset margins	Only the table scrolls
Screen reader says "Table"	No heading directly before the block	Check `aria-labelledby` and the preceding element	Put the heading right before the Table	Region named after the heading
A cell link looks like a button	Link alone in its paragraph (content buttons decorator)	Check the cell's rich text	Write the link inside a sentence	Inline link
The first Row disappears	It is empty and has at most one cell (read as a tab row)	Check the first Row's content	Fill or delete the empty Row	The header row shows

Evidence to collect (no secrets): page URL, `.plain.html` of the block, a screenshot at the failing width, the block's classes and the accessibility tree of the table.

16. Known limitations of the block

Limitation	Impact	Workaround	Planned correction
Maximum 9 columns	Wider data doesn't fit	Split the table	Not recorded
No merged cells, sorting, filtering, `caption`, column alignment or sticky headers	Limited table features	Simplify the data	Not recorded
No stacked mobile layout	Wide tables scroll	Fewer columns	Not recorded
Changing Columns doesn't convert existing Rows	Padded empty cells	Recreate the Rows	Not planned
Only the heading immediately before names the table	Unnamed table otherwise	Place the heading right before	Not recorded
An empty first Row with at most one cell is skipped as a tab row	The next Row becomes the header	Don't leave the first Row empty	Not recorded

17. Change history of the block

Version	Change	Source	Date
Not recorded	README generated from verified implementation and approved handover documentation	Repository review	Not recorded

Version	Change	Source	Date
Handover 2.18	Additional tab content animation (Animation Type, Motion Speed, Animation Trigger)	docs/handover revision history	18 October 2026
Handover 2.27	Block audit: the Table header taken from the tab rows corrected (tab rows skipped); ragged rows padded (D-D-14)	docs/handover revision history; docs/audit/BLOCK-ECOSYSTEM-AUDIT.md	19 October 2026
Handover 2.29	Re-audit: Row templates no longer store "Column1" … (R-D-9); sample content removed from templates	docs/handover revision history; docs/audit/REAUDIT-2026-10-20.md	20 October 2026

18. Reference pages

Kind	Page	Live URL
Block library	/design-block-master/en/block-library/table	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/table
Block library	/design-block-master/en/block-library/table/table	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/table/table

19. Coverage of the required topics

Topic	Where
Purpose	Overview
Source files	generated: Files
Model, definition, filters, children	generated: Components
Dependencies	generated: Dependencies
Authored input / rendered output / DOM transformation	For Developers
Configuration fields, defaults, required fields	generated: Fields
Variations	TABLE-VARIATIONS.md
Responsive behaviour	Responsive Behavior
Accessibility and keyboard	Accessibility
Analytics / data layer	Data Layer and Analytics
Performance	Performance Considerations
Security	Security and Privacy
Extending	Extending the Block
Known limitations	Known Limitations
Troubleshooting	Troubleshooting
Tests	TABLE-TEST-COVERAGE.md
SEO behaviour	Not recorded
Caching considerations	Not recorded (Edge Delivery default caching; no block-specific rule)
Ownership	Technical Lead / Block Owner (proposed)

20. Screenshots

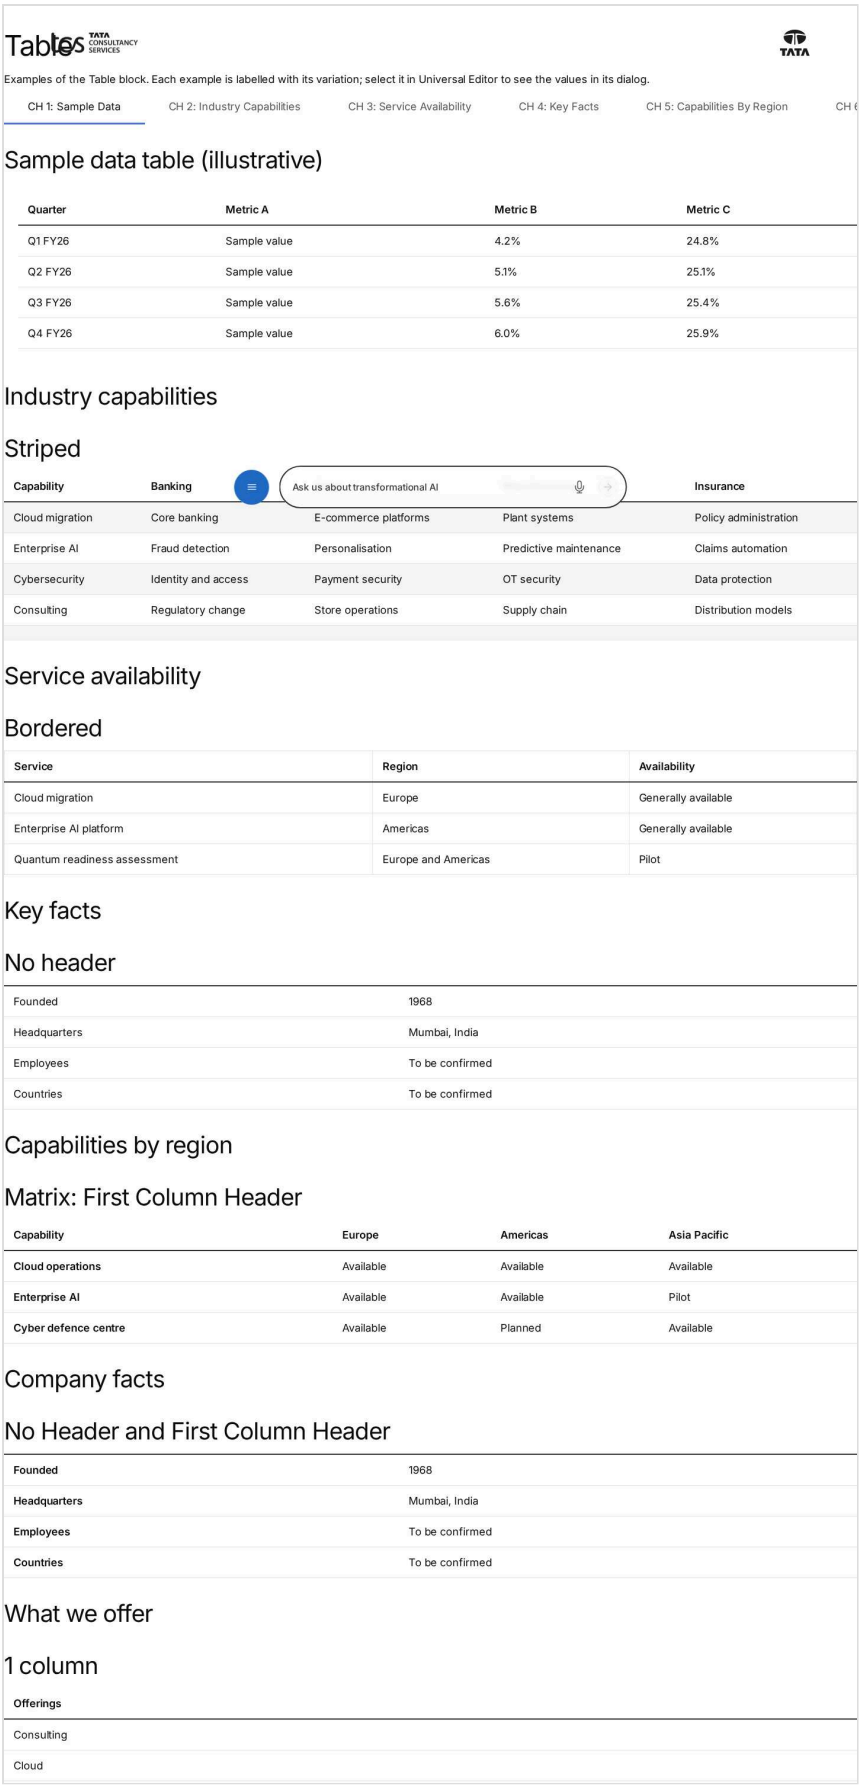


Figure: Table block library page — desktop 1440 × 900 (/design-block-master/en/block-library/table/table, captured 2026-11-08).

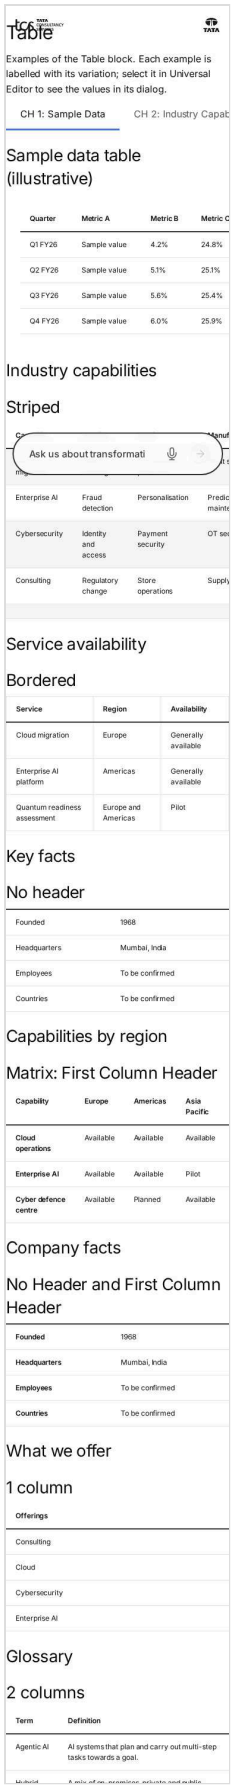


Figure: Table block library page — mobile 375 × 812 (/design-block-master/en/block-library/table/table, captured 2026-11-08).

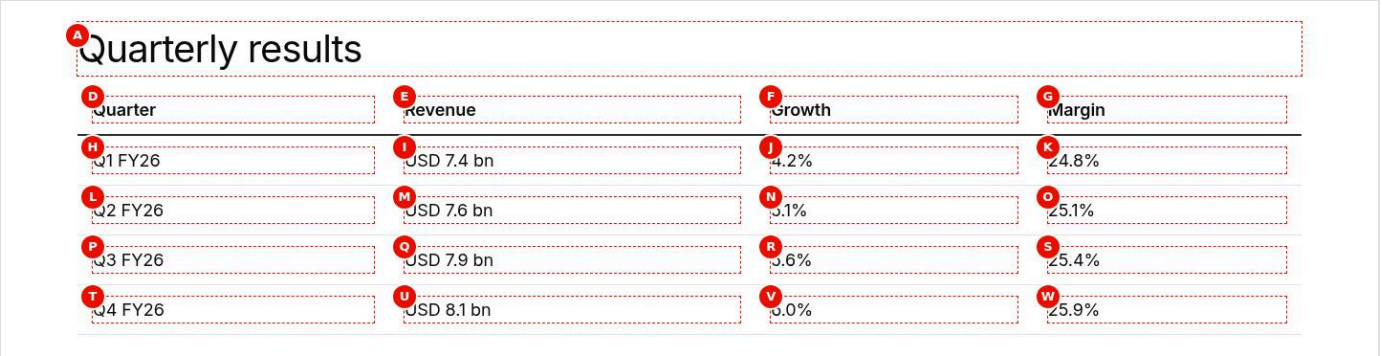


Figure: Desktop rendering — At 1440 px: the H2 Quarterly results above a full-width 4-column table, the header row Quarter, Revenue, Growth, Margin in semibold with a 2px dark rule below, and four body rows Q1 FY26 to Q4 FY26 separated by light 1px rules, text 1.125rem. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-desktop-view.jpg) (handover screenshot; rendering at the time it was taken).

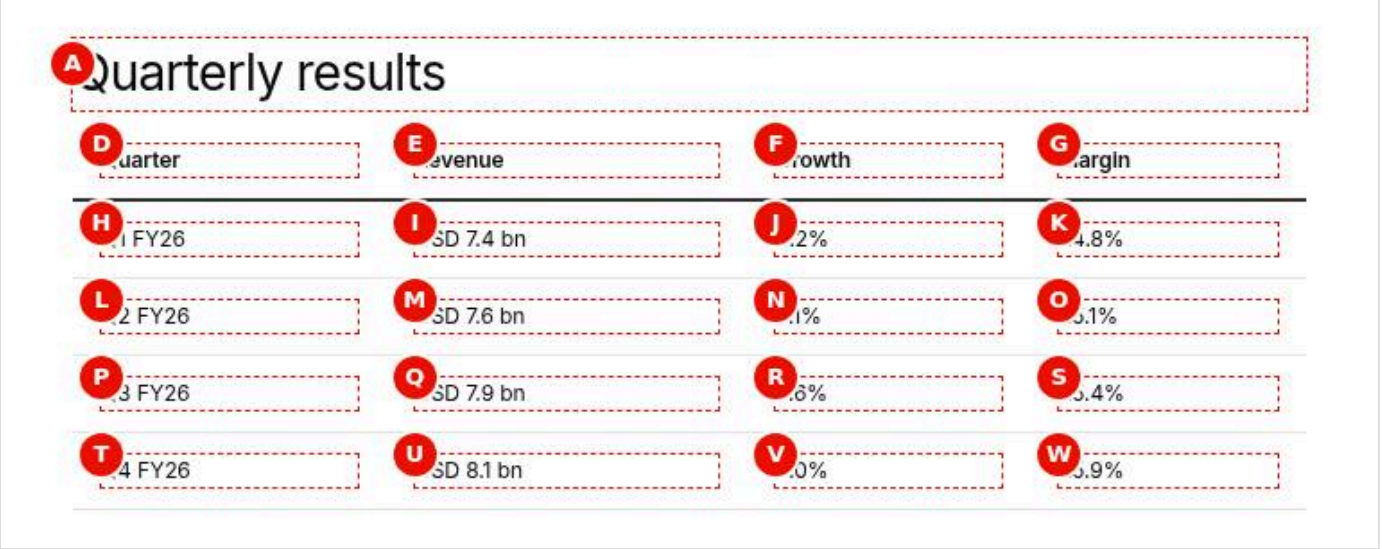


Figure: Tablet rendering — At 768 px: the H2 Quarterly results and the same 4-column table (Quarter, Revenue, Growth, Margin; Q1 FY26 to Q4 FY26) still fitting the content width, with the smaller 0.75rem text used below 900 px. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-tablet-view.jpg) (handover screenshot; rendering at the time it was taken).

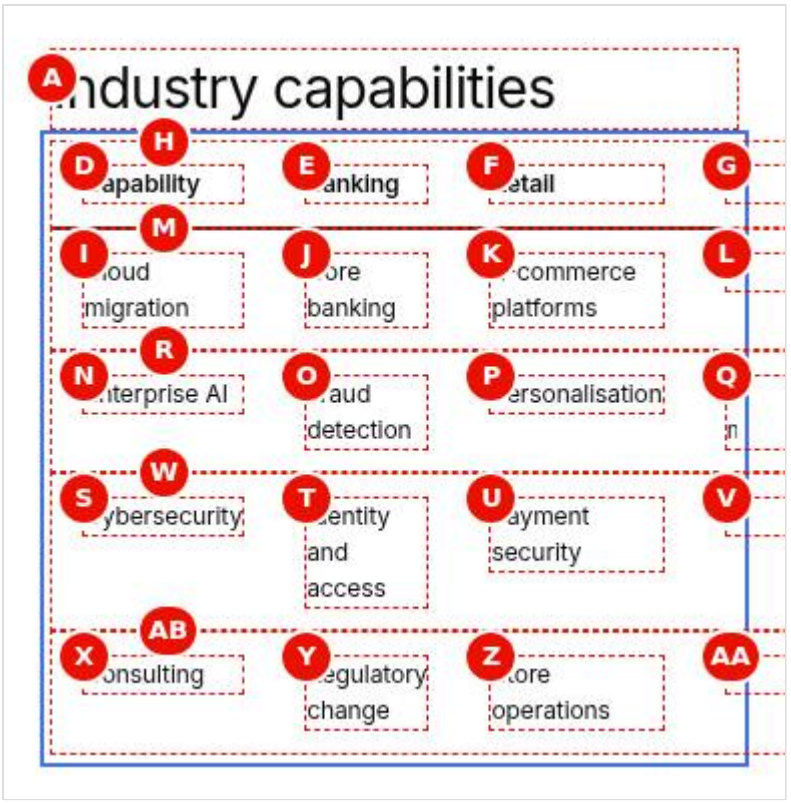


Figure: Mobile rendering — At 390 px: the H2 Industry capabilities and a 5-column table wider than the screen, showing its first columns with the rest reachable by horizontal scrolling, and a 2px brand-blue focus outline around the block after pressing Tab. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-mobile-view.jpg) (handover screenshot; rendering at the time it was taken).

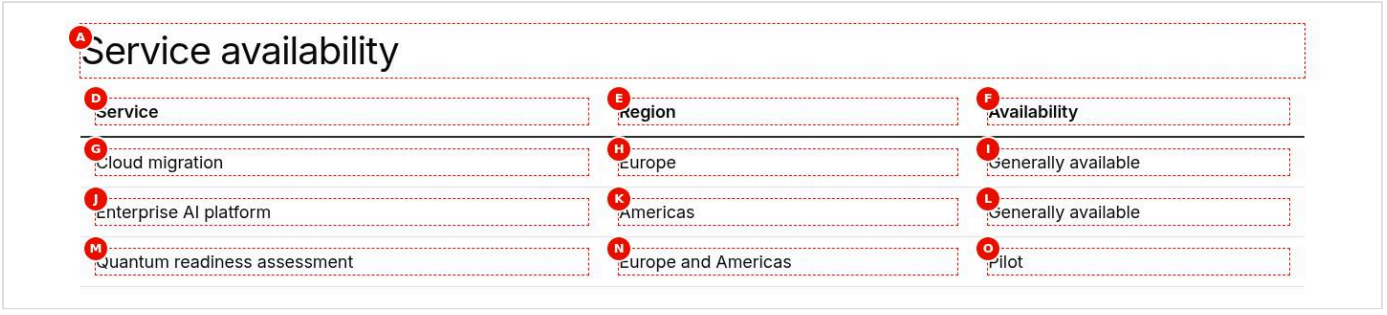


Figure: Variation example — At 1440 px: the H2 Service availability above a 3-column table with the semibold header row Service, Region, Availability on a 2px dark rule and three body rows (Cloud migration, Enterprise AI platform, Quantum readiness assessment) with light separators. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-standard.jpg) (handover screenshot; rendering at the time it was taken).

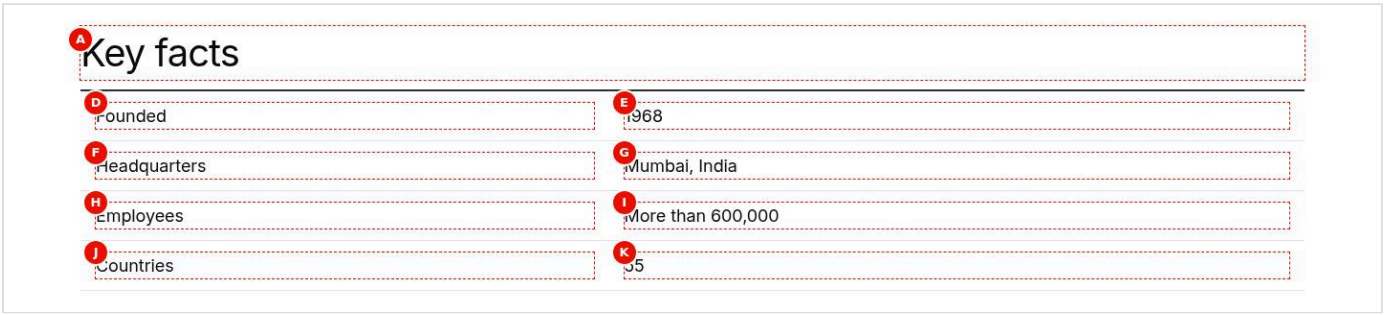


Figure: Variation example — At 1440 px: the H2 Key facts above a 2-column table without a header row: four rows Founded 1968, Headquarters Mumbai, India, Employees More than 600,000 and Countries 55, all in regular weight, with a 2px dark rule above the first row. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-no-header.jpg) (handover screenshot; rendering at the time it was taken).

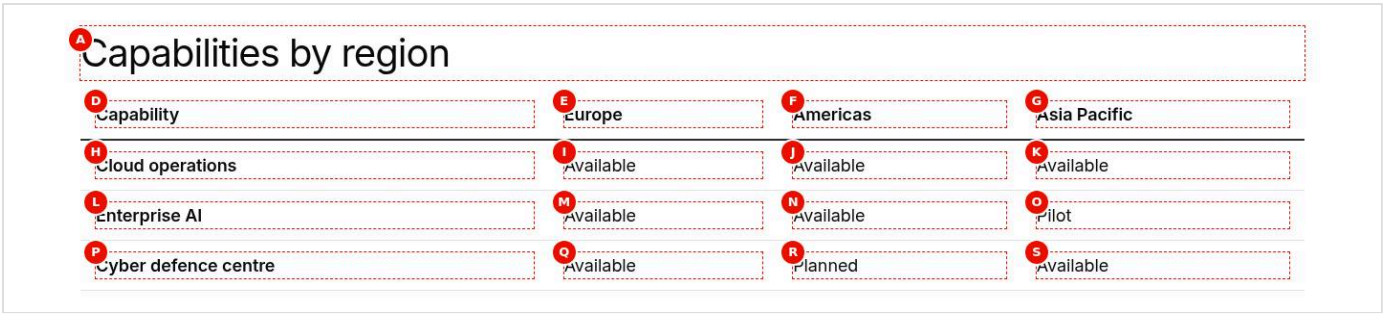


Figure: Variation example — At 1440 px: the H2 Capabilities by region above a 4-column matrix: the header row Capability, Europe, Americas, Asia Pacific and, in each body row, the first cell (Cloud operations, Enterprise AI, Cyber defence centre) in semibold as the row title, values Available, Pilot or Planned. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-first-column-header.jpg) (handover screenshot; rendering at the time it was taken).

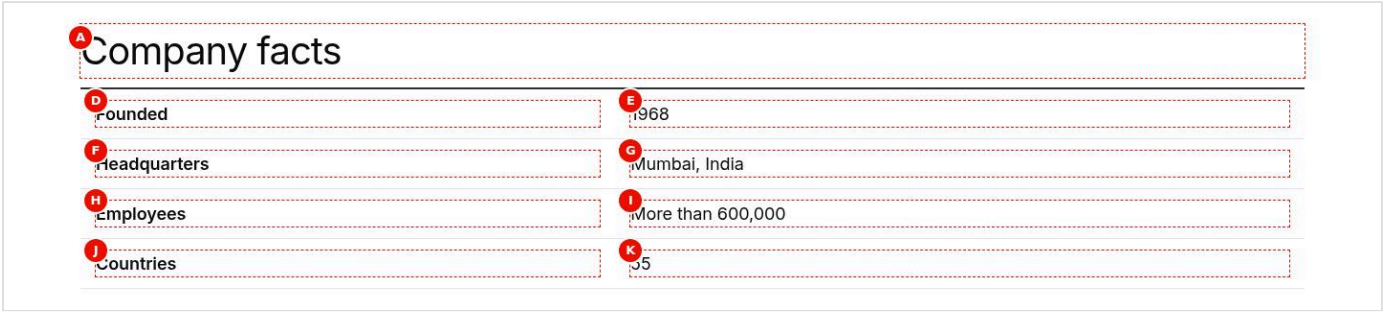


Figure: Variation example — At 1440 px: the H2 Company facts above a 2-column table without a header row and with a 2px dark rule above the first row; the labels Founded, Headquarters, Employees and Countries in semibold, the values 1968, Mumbai, India, More than 600,000 and 55 in regular weight. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-row-headers-only.jpg) (handover screenshot; rendering at the time it was taken).

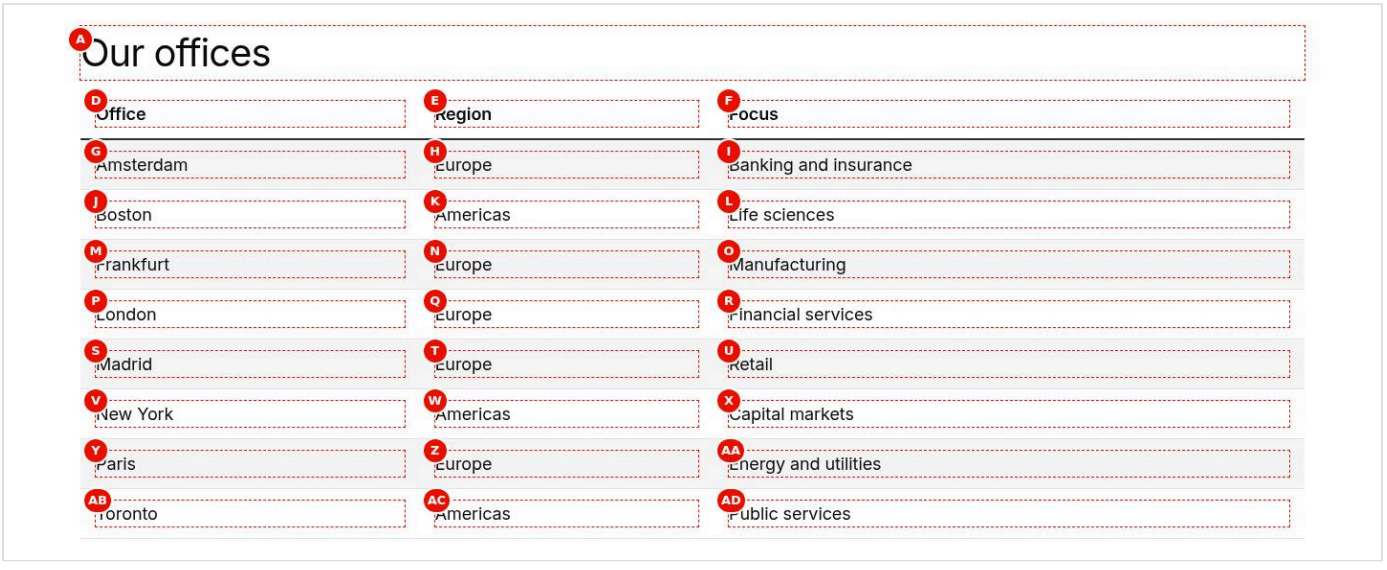


Figure: Variation example — At 1440 px: the H2 Our offices above a 3-column table with the header row Office, Region, Focus and eight body rows from Amsterdam to Toronto; the 1st, 3rd, 5th and 7th body rows

(Amsterdam, Frankfurt, Madrid, Paris) on a light grey background. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-striped.jpg) (handover screenshot; rendering at the time it was taken).

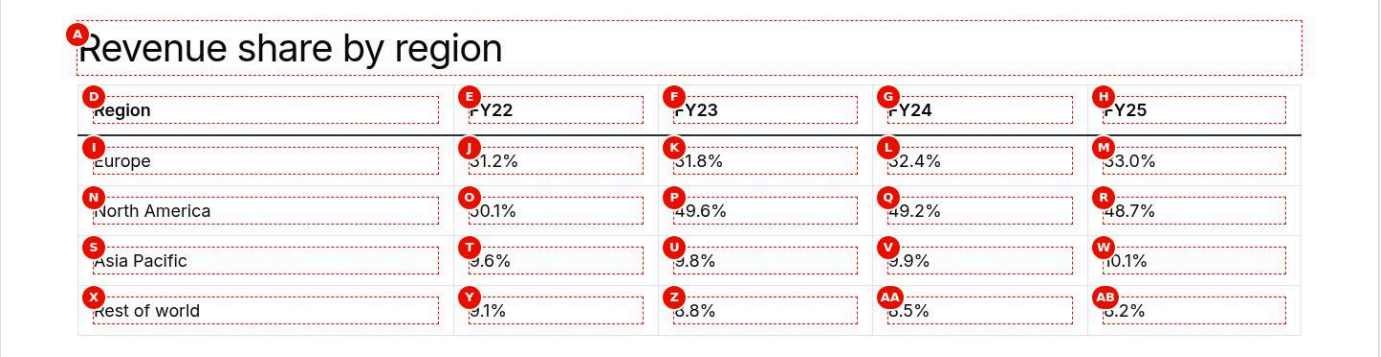


Figure: Variation example — At 1440 px: the H2 Revenue share by region above a 5-column numeric table, the header row Region, FY22, FY23, FY24, FY25 and four rows (Europe, North America, Asia Pacific, Rest of world) with percentages, a 1px light grey border around every cell. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-bordered.jpg) (handover screenshot; rendering at the time it was taken).

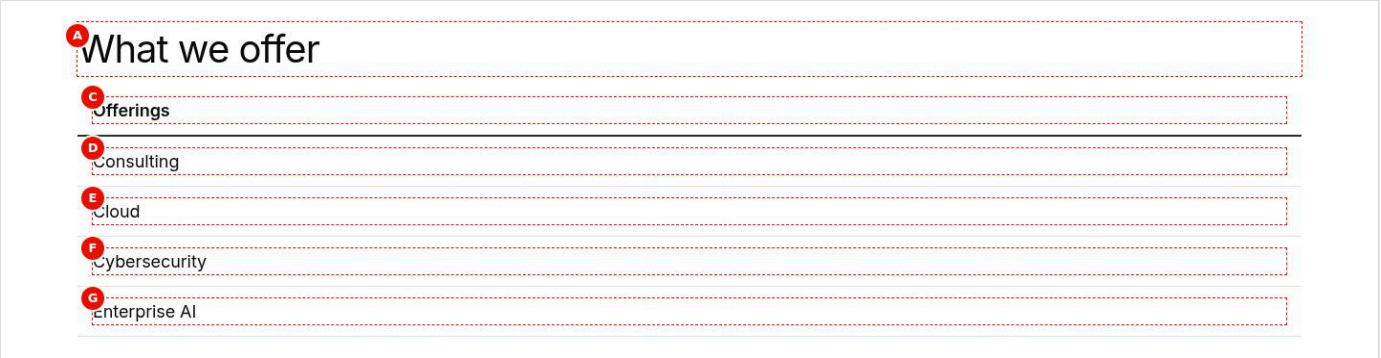


Figure: Variation example — At 1440 px: the H2 What we offer above a one-column table with the semibold header cell Offerings and four rows Consulting, Cloud, Cybersecurity and Enterprise AI separated by light rules. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-1-column.jpg) (handover screenshot; rendering at the time it was taken).

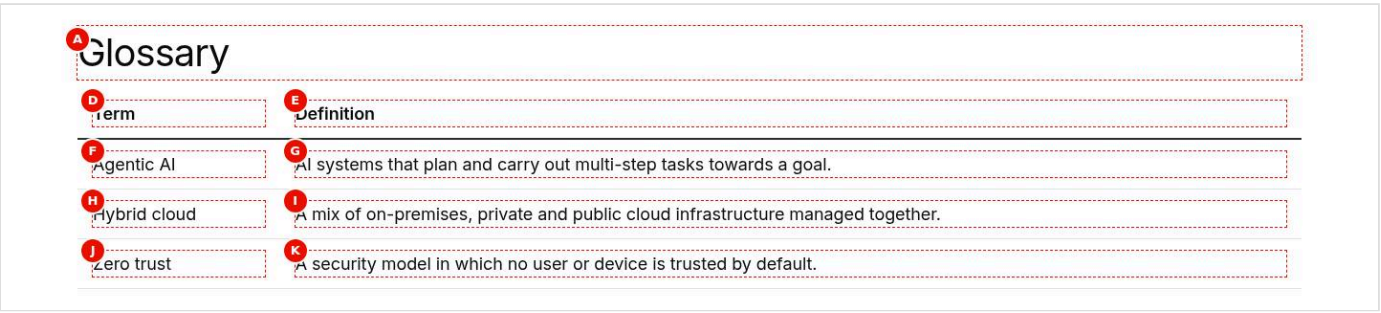


Figure: Variation example — At 1440 px: the H2 Glossary above a 2-column table with the header row Term, Definition and three rows defining Agentic AI, Hybrid cloud and Zero trust in full sentences. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-2-columns.jpg) (handover screenshot; rendering at the time it was taken).



Figure: Variation example — At 1440 px: the H2 Agenda above a 3-column table with the header row Time, Session, Speaker and three rows: 09:00 Welcome and keynote with Anita Rao, 10:00 Modernising the core on hybrid cloud with Marcus Khan, 11:15 Panel: security by design with Sara Lee. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-3-columns.jpg) (handover screenshot; rendering at the time it was taken).

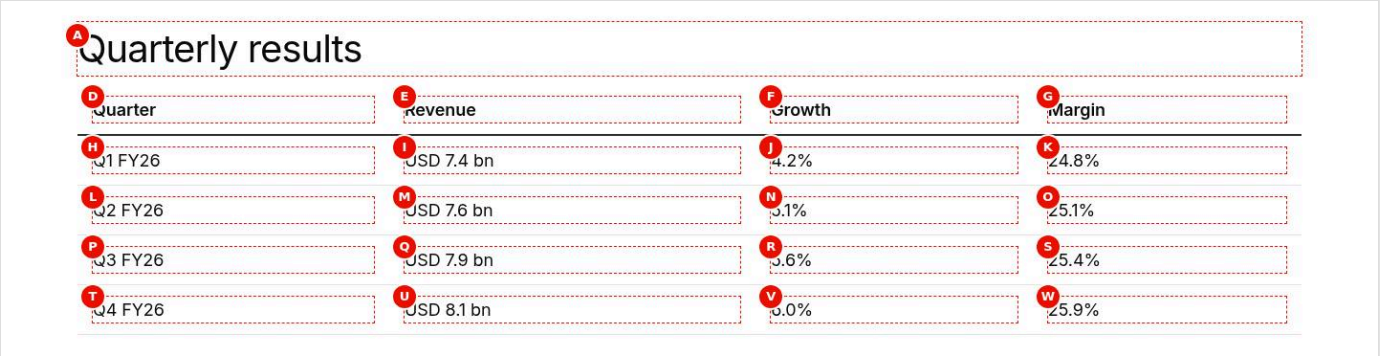


Figure: Variation example — At 1440 px: the H2 Quarterly results above a 4-column table, the header row Quarter, Revenue, Growth, Margin in semibold and four body rows Q1 FY26 to Q4 FY26 with revenue, growth and margin figures. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-4-columns.jpg) (handover screenshot; rendering at the time it was taken).

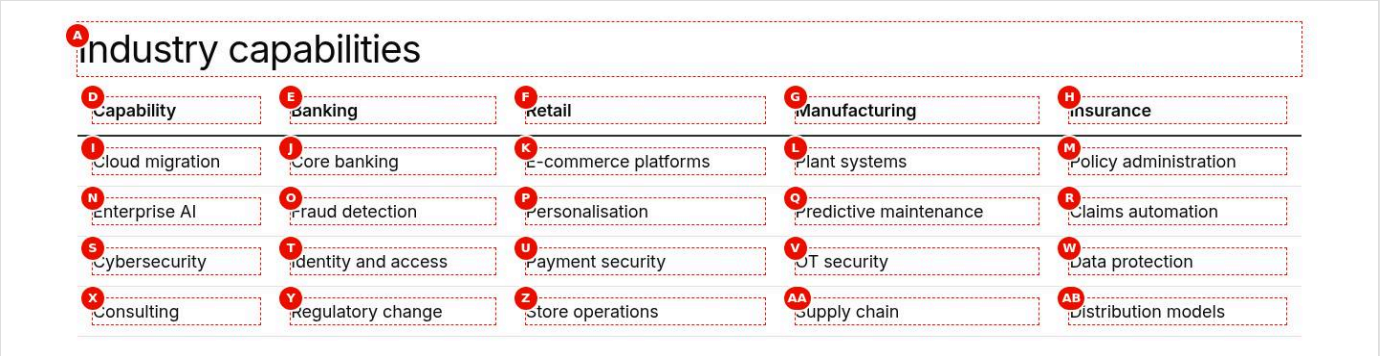


Figure: Variation example — At 1440 px: the H2 Industry capabilities above a 5-column table, the header row Capability, Banking, Retail, Manufacturing, Insurance and four rows (Cloud migration, Enterprise AI, Cybersecurity, Consulting), fitting the desktop width without scrolling. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-5-columns.jpg) (handover screenshot; rendering at the time it was taken).

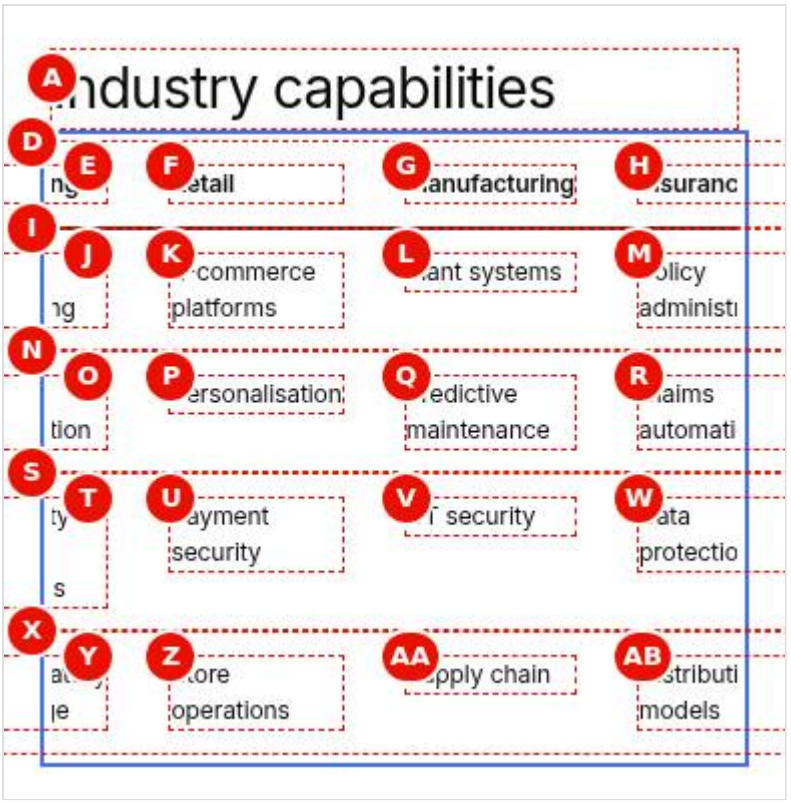


Figure: Variation example — At 390 px: the H2 Industry capabilities and the 5-column table scrolled sideways inside the block to its middle columns, with the 2px brand-blue focus outline around the block after pressing Tab; the page itself does not scroll. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/table-scroll-region.jpg) (handover screenshot; rendering at the time it was taken).

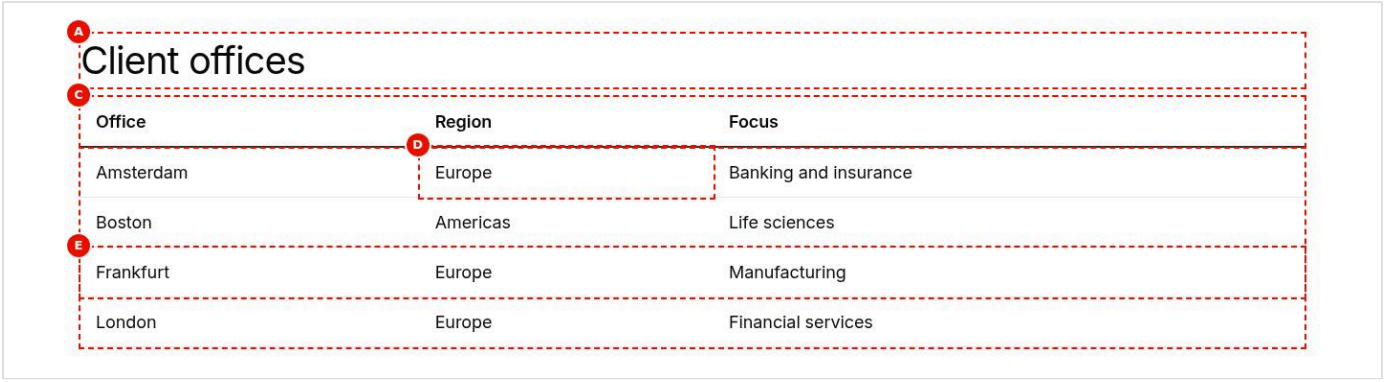


Figure: Universal Editor canvas — Universal Editor edit mode at 1440 px: the H2 Client offices (A) above a 3-column Table (B) with the header row Office, Region, Focus (C) and four body rows Amsterdam to London, the second row hovered; D marks a cell, E a body Row. F, the Add (+) of the Table in the content tree, is not on the canvas. (Annotated preview in editor mode with sample content; letters as in the annotations list, not a Universal Editor screenshot; file screenshots/table-authoring-view.jpg) (handover screenshot; rendering at the time it was taken).

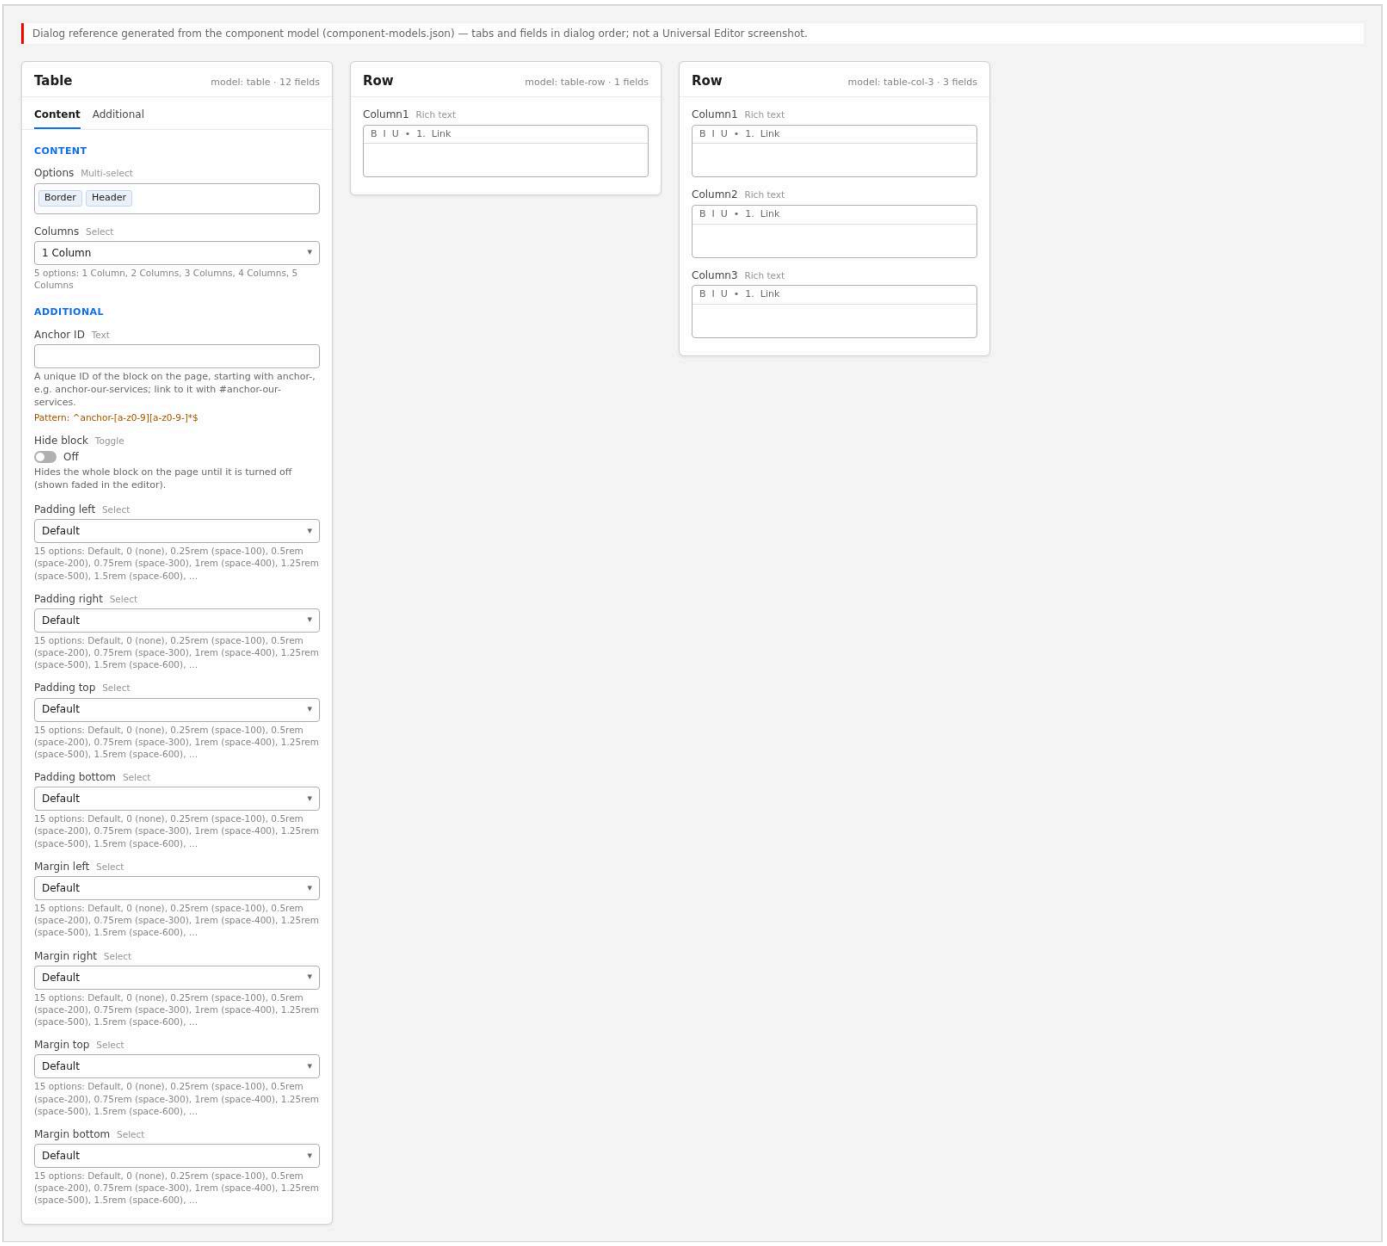


Figure: Properties panel — The properties panel of the selected Table showing the Content tab (Options multiselect with Border and Header groups, Columns select) and the Additional tab. (Dialog reference generated from the component model, not a Universal Editor screenshot; file screenshots/table-properties-panel.jpg) (handover screenshot; rendering at the time it was taken).

21. Known limitations

- Universal Editor dialogs were not captured: no author access in this program (see the access blockers).

22. Open items

- None.

23. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages