TCS CORPORATE WEBSITE

Tabs Block — Developer Guide

Role / audience	Development — Developers, technical leads, block owners, AI coding agents
Version	1.0
Status	Draft for review
Owner	Technical Lead / Block Owner (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Tabs Block — Developer Guide
- Summary
- Overview
- Source files
- Components, models and filters
- Fields
- Dependencies
- For Developers
- Extending the Block
- Responsive Behavior
- Accessibility
- Data Layer and Analytics
- Performance Considerations
- Security and Privacy
- For Architects
- Troubleshooting
- Known limitations of the block
- Change history of the block
- Reference pages
- Coverage of the required topics
- Screenshots
- Known limitations
- Open items
- Change history

Tabs Block — Developer Guide

Attribute	Value
Document ID	DEV-B-tabs
Audience	Developers, technical leads, block owners, AI coding agents
Purpose	How the Tabs block is built: files, model, structure, behaviour, variations, tests and limitations
Scope	blocks/tabs/ and its components tabs, tabs-block, tabs-item
Prerequisites	—
Owner	Technical Lead / Block Owner (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	2026-11-08 (model, files, imports from the code; reference pages from the live site)
Source files	blocks/tabs/README.md, blocks/tabs/_tabs.json, blocks/tabs/tabs.css, blocks/tabs/tabs.js
Related documents	Variations, Test coverage, Authoring guide
Related AEM paths	/content/tcs-corp/design-block-master/en/block-library/tabs, /content/tcs-corp/design-block-master/en/block-library/tabs/fragments, /content/tcs-corp/design-block-master/en/block-library/tabs/fragments/cloud-overview

1. Summary

Attribute	Value
Block	Tabs
Folder	`blocks/tabs`
Type	Container (section) and block
Category	container
Status	Active
Purpose	Tabs Container section (Tab items and content) and the Tabs block (tabs of fragments)
Variations (summary)	Styles, alignment, orientation
Children	tab (Tab), column-break (Column Break), tabs-item (Tab, Tabs block)
Code size	586 lines of JS and CSS

2. Overview

Business purpose. Related views of one topic (service lines, industries, regions, reporting periods) share one area of the page: visitors switch between them without scrolling past the others, and every view stays one selection or one `#id` link away.

User experience. A row of tab buttons (or, from 900px, a column on the left with Orientation Vertical) above the panel of the selected tab. Clicking a tab or using the arrow keys shows its panel; links to a tab's ID (or to anything inside a tab) open that tab and scroll to it.

The two forms.

Form	Component	Where the content comes from	Use it when
Tabs Container	`tabs` (a section)	The components after each Tab item, up to the next Tab, authored on the page	Each tab has its own content on this page (text, images, buttons, blocks, columns)
Tabs block	`tabs-block` (a block)	The Fragment page chosen on each Tab item (`tabs-item`)	The same tab content is reused on several pages and maintained once

Templates / page types. Any page; no template adds Tabs. **Data source:** authored content only (Tabs Container) or fragment pages (Tabs block); placeholders for UI text. No query index, sheet or taxonomy.

Related blocks. Tab (the tab marker of a Tabs Container), Column Break (columns inside a tab), Columns Container (the layout built in a tab with Column Breaks), the Fragment block (`blocks/fragment/fragment.js`, which loads the Tabs block's fragment pages), Accordion (collapsible alternative), Anchor List (its links open tabs through the `tabs:reveal` event).

When to use. Two or more parallel, mutually exclusive views with short labels, where visitors usually need one view at a time.

When not to use. Content that must be compared side by side or read in sequence (use default content or a Columns Container); many short question / answer items (use the Accordion); a single tab (use a normal section); navigation between pages (use the header or an Anchor List); content that must be visible without interaction (legal notices, the page's main call to action).

Realistic use cases. A services overview with the tabs Consulting, Cloud and Cybersecurity, each a heading, a text and a two-column image and text layout (Tabs Container); an industries panel reused on several landing pages (Tabs block with fragment pages under the locale's `references/` or a fragments folder); investor information by period.

3. Source files

File	Link
`README.md`	GitHub
`_tabs.json`	GitHub
`tabs.css`	GitHub
`tabs.js`	GitHub

4. Components, models and filters

Component	Title	Resource type	Template name	Model	Children allowed
`tabs`	Tabs Container	`core/franklin/components/section/v1/section`	Tabs	`tabs`	tab, column-break, text, image, button-block, title, hero, teaser, image-collage, quote, media-contacts, testimonial, anchor-list, accordion, table, table-list, list, separator, embed, video, modal, form-variations, filter-list, cards, fragment, tabs-block
`tabs-block`	Tabs	`core/franklin/components/block/v1/block`	Tabs	`tabs-block`	tabs-item

Component	Title	Resource type	Template name	Model	Children allowed
`tabs-item`	Tab	`core/franklin/components/block/v1/block/item`	Tab	`tabs-item`	—

5. Fields

The Additional tab fields (anchor, hide, padding, margin, animation) are common to the blocks and described in the content modeling guide.

5.1 Tabs Container (`tabs`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Content	Component	`style`	select	No	`tabs-section`	1 options	—
Content	Anchor name	`anchorName`	text	No	—	—	—
Content	Width Type	`sectionWidth`	select	No	`full-width`	2 options	—
Content	Label	`tabsAriaLabel`	text	No	—	—	—
Styles	Style	`tabsStyle`	select	No	`underline`	3 options	—
Styles	Alignment	`tabsAlignment`	select	No	`left`	3 options	—
Styles	Orientation	`tabsOrientation`	select	No	`horizontal`	2 options	—
Additional	Anchor ID	`containerAnchor`	text	No	—	—	—
Additional	Hide block	`containerHide`	boolean	No	`false`	—	—
Additional	Animation Type	`containerAnimation`	select	No	`""`	11 options	—
Additional	Motion Speed	`containerAnimationSpeed`	select	No	`""`	3 options	Conditional
Additional	Animation Trigger	`containerAnimationTrigger`	select	No	`""`	2 options	Conditional
Additional	Padding left	`containerPaddingLeft`	select	No	`""`	15 options	—
Additional	Padding right	`containerPaddingRight`	select	No	`""`	15 options	—
Additional	Padding top	`containerPaddingTop`	select	No	`""`	15 options	—
Additional	Padding bottom	`containerPaddingBottom`	select	No	`""`	15 options	—
Additional	Margin left	`containerMarginLeft`	select	No	`""`	15 options	—
Additional	Margin right	`containerMarginRight`	select	No	`""`	15 options	—
Additional	Margin top	`containerMarginTop`	select	No	`""`	15 options	—

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Additional	Margin bottom	`containerMarginBottom`	select	No	`""`	15 options	—

5.2 Tabs (`tabs-block`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Content	Tab ID prefix	`tabsId`	text	No	—	—	—
Content	Label	`tabsAriaLabel`	text	No	—	—	—
Styles	Style	`tabsStyle`	select	No	`underline`	3 options	—
Styles	Alignment	`tabsAlignment`	select	No	`left`	3 options	—
Styles	Orientation	`tabsOrientation`	select	No	`horizontal`	2 options	—

5.3 Tab (`tabs-item`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Tab	Title	`title`	text	Yes	—	—	—
Tab	ID	`tabId`	text	No	—	—	—
Tab	Active tab	`activeTab`	boolean	No	—	—	—
Fragment	Fragment	`fragment`	aem-content	No	—	—	—

"Required in model" is the model's `required` flag; whether a field is required in practice is stated in the authoring guide where it is known.

6. Dependencies

Import
`../../decorators/data-layer-decorator.js`
`../../utils/analytics.js`
`../../scripts/aem.js`
`../../scripts/scripts.js`
`../../utils/buttons.js`
`../../utils/cells.js`
`../../utils/environment.js`
`../../utils/ids.js`
`../../utils/placeholders.js`
`../../utils/properties.js`
`../fragment/fragment.js`
`../tab/tab.js`

7. For Developers

```
blocks/tabs/
├── README.md
```

```
├── _tabs.json
├── tabs.css
└── tabs.js
```

Decorator/Utility	Purpose	Execution or dependency point
decorators/data-layer-decorator.js	trackPage, trackBlocks, trackInteractions, componentIdOf (Adobe Client Data Layer for every block, Core Components schema, read by Adobe Tags / Web SDK; see "Data layer" below)	tabs.js: { componentIdOf }
utils/analytics.js	pushToDataLayer, pushComponents, pushComponentEvent (Adobe Client Data Layer, Core Components schema; never throws)	tabs.js: { pushComponentEvent, pushComponents }
scripts/aem.js	Edge Delivery core library (block loading, CSS, metadata, optimized pictures)	tabs.js: { decorateBlock, loadBlock, toClassName }
scripts/scripts.js	Page decoration (moveInstrumentation and shared page helpers)	tabs.js: { moveInstrumentation }
utils/buttons.js	BUTTON_VIEWS, BUTTON_TYPES, BUTTON_ALIGNMENTS, pick, readButtonOptions	tabs.js: { pick }
utils/cells.js	itemRows, KEY_VALUE_ITEM, FIELD_ROW_ITEM (the item rows of a block: by model in the editor, by their cells on the page), withoutTabCells (drops the empty cell AEM renders for each dialog tab of an item model), `m	tabs.js: { withoutTabCells }
utils/environment.js	prefersReducedMotion, scrollBehavior, isEditing, isInEditor, isAuthor (the page is rendered by AEM author, which has no query index)	tabs.js: { isEditing }
utils/ids.js	nextInstance, uniqueId, createIdFactory (unique ids per block instance), availableId (an authored id kept, suffixed -2, -3, ... only when taken)	tabs.js: { availableId, uniqueId }
utils/placeholders.js	getPlaceholders, loadPlaceholders, fillPlaceholder (UI text from the locale's placeholders, with English fallbacks)	tabs.js: { getPlaceholders }
utils/properties.js	readProperties, textOf, isOn, isOnByDefault (a toggle that defaults to on), optionOf, normalizeKey, textSource (key-value block properties)	tabs.js: { isOn, normalizeKey, textOf }
blocks/fragment/fragment.js	—	tabs.js: { loadFragment }
blocks/tab/tab.js	—	tabs.js: { readTab }

Responsibilities. tabs.js builds the tab list and panels for both forms, the keyboard, deep links, editor integration and data layer; tabs.css styles the list, the three styles, alignment, vertical orientation and panels (child selectors only, so nested Tabs keep their own style), hides the Tab wrappers outside edit mode and styles the empty hint. scripts/scripts.js buildTabsSections creates the synthetic block of a Tabs Container.

Input DOM.

- Tabs Container: a section with the class tabs-section and the data attributes data-tabsstyle, data-tabsalignment, data-tabsorientation, data-tabsarialabel and data-container*. buildTabsSections creates div.tabs[data-source="section"], adds the style values as classes and the Label as data-label, applies applySectionBlockOptions (container fields to classes) and wrapSectionContent (the section's wrappers move into the block; blocks among them are decorated).
- Tabs block: a key-value block: two-cell rows whose normalized key is tabsid, tabsarialabel, tabsstyle, tabsalignment or tabsorientation are properties; every other row is a Tab item, ITEM_LAYOUT = [null, 'title', 'tabId', 'activeTab', null, 'fragment'] (an empty cell per dialog tab, dropped by withoutTabCells); the Fragment is a link or text in the last cell.

Rendered DOM.

```
<div class="tabs block underline left horizontal" data-source="section" data-cmp-id="…">
  <div class="tabs-list" role="tablist" aria-label="Our services">
    <button type="button" class="tabs-tab" id="consulting-tab" role="tab" aria-controls="consulting"
aria-selected="true" tabindex="0">Consulting</button>
  </div>
  <div class="tabs-panel" id="consulting" data-tab-id="consulting" data-cmp-id="consulting"
role="tabpanel" tabindex="0" aria-labelledby="consulting-tab">
    <!-- Tabs Container: the authored wrappers (the Tab wrapper first); Tabs block: div.tabs-fragment --
>
  </div>
</div>
```

Decoration flow.

1. Load placeholders. Container: `groupContainerTabs` (a wrapper with `:scope > .tab` starts a group; `readTab` reads Title, ID, Active tab; a Tab with `hideblock` drops its group outside edit mode; its `per-row-N` class is kept), then `columnsOf` per group. Block: `readBlockProperties` (classes, `data-label`), then `readItem` per item (fragments loaded in parallel with `loadFragment(path, row)`).
2. No group: the block is emptied; in edit mode a `p.tabs-empty` hint.
3. Panel ids are reserved first (`availableId`, plus a local set) as the Tab's ID or `{base}-item-{n}` (base: section id / Tab ID prefix, else `uniqueId('tabs')`); button ids `{panel}-tab`.
4. Panels pushed to the data layer; `select()` shows the first tab without notifying: the tab shown before an editor re-render (`shownTabs`, keyed by the `data-aue-resource`), else the tab holding the `#hash` target, else the first Active tab, else the first.
5. One `hashchange` listener per page (`listenToHash`); a page opened with a hash in a tab scrolls to it after `load`.

Events. Listened on the block: `click` (tab buttons), `keydown` (tab list), `aue:ui-select` (editor selection inside a panel selects it), `tabs:reveal` (bubbling, dispatched by deep links and the Anchor List: the panel containing the target opens), `tabs:tab-update` (dispatched by a re-rendered Tab: updates the button label). Dispatched: `tabs:change` and `tabs:reveal`.

Error handling. A fragment that isn't a site path, fails to load, is the page itself or is already in the chain of including fragments gives an empty panel. Unknown Style / Alignment / Orientation values are ignored (Tabs block).

Exports. `default decorate(block)` only. It imports `readTab` from `blocks/tab/tab.js` and `loadFragment` from `blocks/fragment/fragment.js`.

Parent / child contracts. The Tab marker caches its fields on `data-tab-title`, `data-tab-id`, `data-tab-active` so `readTab` can be called before and after its own decoration. The columns built in a panel are a `columns-container` block (see Columns Container); Column Breaks keep their own decoration.

Data-layer hooks. `pushComponents`, `pushComponentEvent('cmp:show', …)`, `componentIdOf(block)`, `data-cmp-id` on panels and columns.

8. Extending the Block

1. **A new Style, Alignment or Orientation value:** add the option in `_tabs.json` (models `tabs` and `tabs-block`), add it to `STYLES` / `ALIGNMENTS` / `ORIENTATIONS` in `tabs.js` (the Tabs block only accepts listed values), add the CSS with child selectors (`.tabs.newstyle > .tabs-list > .tabs-tab`), check focus and selected states and contrast.
2. **A new dialog field:** add it to the model in `_tabs.json`, run `npm run build:json` and `npm run lint`. For the Tabs block, add its normalized key to `BLOCK_FIELDS`; for the Tabs Container, read it from `section.dataset` in `buildTabsSections`. For a Tab item field, update `ITEM_LAYOUT` (an empty cell per dialog tab) and keep the Fragment last.

3. **Delivery rules:** don't end field names in Text, Title, Type, Alt or MimeType (they collapse); remember that the Tabs Container is a section (its `classes_*` fields aren't delivered: use `container*` names); no sample values in definition templates.
4. **Data layer:** keep `pushComponents` for panels and `cmp:show` on change; describe clicks with `data-cmp-*` attributes rather than pushing them.
5. **Tests:** no unit test covers the Tabs decoration; the model rules are checked by `test/motion/motion.test.mjs` (container fields) and `test/models/block-names.test.mjs` (template names). Check the block library pages listed below and nested Tabs, deep links and the editor.
6. **Backward compatibility:** keep reading Tab items with more cells (Fragment last) and Tabs Containers with built-in Columns.
7. Update this README and run `npm run build:docs`; run `npm run build:modules` after changing imports.

9. Responsive Behavior

Viewport	Layout	Image behavior	Interaction behavior
Below 900px	Tab list above the panels (also with Orientation Vertical); horizontal scrolling (scrollbar hidden) when the tabs don't fit; tab padding `--space-300` / `--space-600`	Images limited to the panel width	Tap or keys; scroll the tab list sideways
900px and wider	Larger tab padding (`--space-1000`, pills `--space-800`); Orientation Vertical: grid with the tab list on the left (`minmax(12.5rem, 1fr)`) and the panel on the right (`3fr`), labels wrap	As above	Click or keys

Columns built from Column Breaks in a tab stack below 900px and sit side by side from 900px (the Columns Container default).

10. Accessibility

- **Semantics:** WAI-ARIA tabs pattern: `role="tablist"` (named by the Label or "Tabs"), `role="tab"` `<button>`s with `aria-selected` and `aria-controls`, `role="tabpanel"` panels with `aria-labelledby` and `hidden` when not shown.
- **Keyboard:** roving tabindex (only the selected tab is in the tab order); automatic activation (moving with the keys selects the tab); the panel is focusable (`tabIndex = 0`) so keyboard users reach its start.
- **Focus:** a visible brand outline on tab buttons (`:focus-visible`, inset) and on panels (0.25rem offset).
- **Headings:** the tab list adds no heading; authors start each panel with one.
- **Moving content:** when a panel is hidden its videos are paused and YouTube / Vimeo iframes get a pause command (WCAG 1.4.2).
- **Reduced motion:** the colour and border transitions of the tabs are switched off.
- **Deep links:** a link to a tab's ID or to anything inside a tab opens the tab(s), nested ones too, and scrolls below the fixed header (`scroll-margin-top: var(--nav-height)`).
- **Contrast:** text colours are design tokens (`--color-text-secondary`, `--color-text-default`, `--color-text-brand`, `--color-text-on-brand`).
- **Empty state:** nothing is rendered on the page; in edit mode a hint (placeholder text).
- **Reflow:** horizontal lists scroll inside their own box instead of widening the page.

Author responsibilities: fill the Label; use unique, descriptive Titles; start each panel with a heading; give images alt text; don't hide essential content in a non-default tab.

Developer responsibilities: keep the ARIA roles and the keyboard handler; keep UI text in placeholders (`tabs`, `tabNumber`, `tabsEmpty`, `tabsBlockEmpty`); keep media paused in hidden panels; keep the child selectors so nested Tabs keep their own style.

Key	Expected behavior
Tab	Moves focus to the selected tab, then into the panel

Key	Expected behavior
Arrow Right / Arrow Down	Selects and focuses the next tab (wraps to the first)
Arrow Left / Arrow Up	Selects and focuses the previous tab (wraps to the last)
Home	Selects and focuses the first tab
End	Selects and focuses the last tab
Enter / Space	Activates the focused tab button (native button)

11. Data Layer and Analytics

- **Components:** the Tabs block is added by `decorators/data-layer-decorator.js` as `tcs-corp/components/tabs` (both forms; id: the block's id, else `tabs-{n}`). `tabs.js` adds each panel with `pushComponents` as `tcs-corp/components/tabs/item` (id: the panel id, `parentId`: the Tabs id, `dc:title`: the tab label). Columns built in a panel get `data-cmp-id="{panel id}-columns"`. Tab markers and Column Breaks are `data-analytics="off"` (not components).
- **Item positions:** not set (no `data-cmp-position`).
- **Events:** a tab change by click, keyboard, deep link, Anchor List link or editor selection pushes `cmp:show` for the new panel with its `dc:title` and dispatches the bubbling DOM event `tabs:change` (`detail`: `index`, `id`, `title`); the tab shown on load doesn't. Clicks on tab buttons are captured centrally as `cmp:click` (interaction `button`, `dc:title` the label, component the Tabs). Clicks on links in a panel's default content are attributed to the panel; links inside a block in the panel to that block.
- **Path:** Adobe Client Data Layer → Adobe Data Collection (Tags) → AEP Web SDK → Edge Network → Analytics / CJA is the intended path, but Tags and the Web SDK aren't configured yet (blocked: measurement plan). No consent mechanism is implemented.

Trigger	Data-layer event	Required properties	Analytics behavior
Page load	component state	`tcs-corp/components/tabs`, `tcs-corp/components/tabs/item` per panel (`parentId`, `dc:title`)	Inventory of the tabs and panels
Another tab shown	`cmp:show`	panel id, `dc:title`	Tab views (not for the tab shown on load)
Click on a tab button	`cmp:click`	component (the Tabs), `interaction: button`, `dc:title`, `breakpoint`	Tab clicks
Click on a link in a panel	`cmp:click`	component (the panel or the block in it), `xdm:linkURL`, `xdm:linkType`	Link clicks

12. Performance Considerations


- **Loading phase:** decorated with its section (eager for the first section, lazy otherwise); `loadSection` loads the synthetic `tabs` block before the blocks inside it.
- **Network:** placeholders (cached per locale); the Tabs block fetches one `.plain.html` per Tab item, in parallel, and waits for all before rendering; each fragment is decorated and its sections loaded.
- **Dynamic imports:** a tab with Column Breaks loads the `columns-container` block (CSS and JS) with `loadBlock`.
- **DOM:** every panel is in the DOM, hidden panels included, and the blocks in them are loaded; images follow their components' loading.
- **Listeners:** per block click / keydown / editor and reveal listeners; one `hashchange` listener per page.
- **Layout shift:** the tabs are built while the section is hidden until loaded; panels of different heights move the content below when switching (keep panels of similar length).
- **High-cost configurations:** many Tab items with large fragment pages; deeply nested Tabs.

13. Security and Privacy

- Fragment paths are accepted only as same-origin site paths (start with `/`, not `//`); a fragment can't include the page itself or a fragment already in its chain.
- Labels are set with `textContent`; the hash is normalized with `toClassName` and escaped with `CSS.escape` before it is used in a selector.
- The pause command to embedded YouTube / Vimeo iframes is sent with `postMessage` to any origin; it carries only the pause command.
- No personal data is read or stored; the data layer receives tab labels and panel ids only.

14. For Architects

- **Role:** a container component in two forms. The Tabs Container is a section container (like the Columns Container and Gen Carousel) because Edge Delivery allows one level of nesting: a section holds blocks and default content, so tab content made of blocks is a section whose content `scripts.js` wraps in a synthetic block. The Tabs block reuses fragment pages.
- **Content model:** section model `tabs` (data attributes), key-value block `tabs-block` with item `tabs-item`, marker block `tab` (key-value).
- **Rendering and data source:** client-side decoration of delivered HTML; fragment pages fetched as `{path}.plain.html` from the same origin.
- **Dependencies:** `utils/properties.js`, `utils/cells.js`, `utils/ids.js`, `utils/placeholders.js`, `utils/environment.js`, `utils/buttons.js` (`pick`), `utils/analytics.js`, `decorators/data-layer-decorator.js`, `scripts/aem.js`, `scripts/scripts.js`.
- **Data layer / Web SDK / Target:** ACDL only; Tags / Web SDK not configured; no Target.
- **Consent and identity:** none.
- **Caching:** fragment pages are cached like any page by the CDN; a session-level cache isn't implemented in `tabs.js`.
- **Performance / scalability:** all panels are in the DOM (hidden ones too); see Performance Considerations.

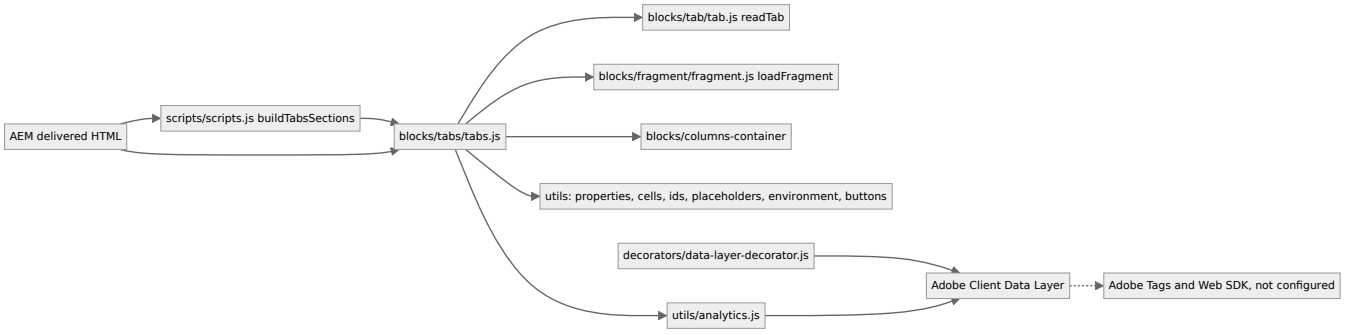

15. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
Content shown without tabs	A Section instead of a Tabs Container, or Component not `tabs-section`	Inspect the section for the class `tabs-section` and `div.tabs-wrapper`	Use a Tabs Container; keep Component Tabs	Tab list appears
An extra "Tab 1" first	A component before the first Tab	Check the content tree order	Move it after a Tab	Only titled tabs
Tabs block panel empty	No Fragment, fragment not published, not a site path	Open `{fragment}.plain.html` on the same host; check the network panel	Choose and publish the fragment	Panel shows the fragment

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
Deep link opens the first tab	ID differs (normalized), de-duplicated (-2), or the link targets the button or section id	Inspect the panel `id` / `data-tab-id`	Use the exact Tab ID after #	The tab opens
Wrong tab on load	Several Active tabs, a #hash, or the editor keeps the tab shown before a re-render	Check Active tab on every Tab; load without hash	One Active tab	Correct tab on a fresh load
Vertical tabs horizontal	Below 900px (by design) or value not delivered	Check width; inspect for the `vertical` class	Test at 900px or wider; re-save	Left column from 900px
Tab option change without effect in the editor	Tab ID, Active tab, Columns per row, Hide block apply after a re-render of the container (R-C-7)	Reload the editor	Reload	Option applied
Tab chip visible on the page	A Tab outside a Tabs Container	Check the section class	Move or delete the Tab	No chip

Evidence to collect (no secrets): page URL, viewport width, the section's classes and data attributes, the panel ids, console errors, the `adobeDataLayer` entries for the Tabs.

16. Known limitations of the block

Limitation	Impact	Workaround	Planned correction
Changing a Tab's ID, Active tab, Columns per row or Hide block in Universal Editor applies only after the container is rendered again (re-audit R-C-7, deferred)	Authors don't see the change at once	Reload the editor	Not recorded
Gap, Vertical alignment and Side by side from aren't offered for columns in a tab	Columns in tabs always use the medium gap, top alignment and 900px breakpoint	Use a Columns Container section outside the tabs	Not planned
A Conversation Canvas isn't offered inside a Tabs Container	No Canvas in a tab	Place the Canvas outside the Tabs	Not planned
The tab shown on load pushes no `cmp:show`	The first view isn't counted as a tab view	Use the component state	Not recorded
`decodeURIComponent` of the address hash has no error handling	A malformed percent-encoded hash may stop the Tabs from being built	Avoid malformed links	Not recorded
A Tabs block panel whose fragment fails shows no message	An empty panel on the page	Publish the fragment	Not recorded

17. Change history of the block

Version	Change	Source	Date
Not recorded	README generated from verified implementation and approved handover documentation	Repository review	Not recorded
Handover 2.8	Tabs dialog tabs Content / Styles / Additional (at most three tabs)	docs/handover revision history	17 October 2026
Handover 2.28	Column Breaks in a tab lay out columns (Tab field Columns per row); the Tabs Container takes the components of a Columns Container column; built-in Columns no longer offered	docs/handover revision history	20 October 2026

Version	Change	Source	Date
Handover 2.29	Re-audit: nested Tabs styling, Canvas in tabs, deep links into hidden tabs, media paused in hidden tabs, panels in the data layer	docs/handover revision history	20 October 2026
Handover 2.30	The Tabs Container's Additional tab uses `container*` fields (AEM doesn't deliver a section's `classes_*`)	docs/handover revision history	20 October 2026

18. Reference pages

Kind	Page	Live URL
Block library	/design-block-master/en/block-library/tabs	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs
Block library	/design-block-master/en/block-library/tabs/fragments	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/fragments
Block library	/design-block-master/en/block-library/tabs/fragments/cloud-overview	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/fragments/cloud-overview
Block library	/design-block-master/en/block-library/tabs/fragments/consulting-overview	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/fragments/consulting-overview
Block library	/design-block-master/en/block-library/tabs/fragments/security-overview	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/fragments/security-overview
Block library	/design-block-master/en/block-library/tabs/fragments/tab-industries	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/fragments/tab-industries
Block library	/design-block-master/en/block-library/tabs/fragments/tab-overview	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/fragments/tab-overview
Block library	/design-block-master/en/block-library/tabs/tab	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/tab
Block library	/design-block-master/en/block-library/tabs/tab-deep-link	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/tab-deep-link
Block library	/design-block-master/en/block-library/tabs/tabs-block	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/tabs-block
Block library	/design-block-master/en/block-library/tabs/tabs-block-styles	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/tabs-block-styles
Block library	/design-block-master/en/block-library/tabs/tabs-block-with-fragments	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/tabs-block-with-fragments
Block library	/design-block-master/en/block-library/tabs/tabs-fixed-width	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/tabs-fixed-width
Block library	/design-block-master/en/block-library/tabs/tabs-section	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/tabs/tabs-section
Curated design page	/design-block-master/en/curated-design-pages/story	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/curated-design-pages/story

19. Coverage of the required topics

Topic	Where
Purpose	Overview
Source files	generated: Files
Model, definition, filters, children	generated: Components
Dependencies	generated: Dependencies

Topic	Where
Authored input / rendered output / DOM transformation	For Developers
Configuration fields, defaults, required fields	generated: Fields
Variations	TABS-VARIATIONS.md
Responsive behaviour	Responsive Behavior
Accessibility and keyboard	Accessibility
Analytics / data layer	Data Layer and Analytics
Performance	Performance Considerations
Security	Security and Privacy
Extending	Extending the Block
Known limitations	Known Limitations
Troubleshooting	Troubleshooting
Tests	TABS-TEST-COVERAGE.md
SEO behaviour	Not recorded
Caching considerations	Not recorded (Edge Delivery default caching; no block-specific rule)
Ownership	Technical Lead / Block Owner (proposed)

20. Screenshots

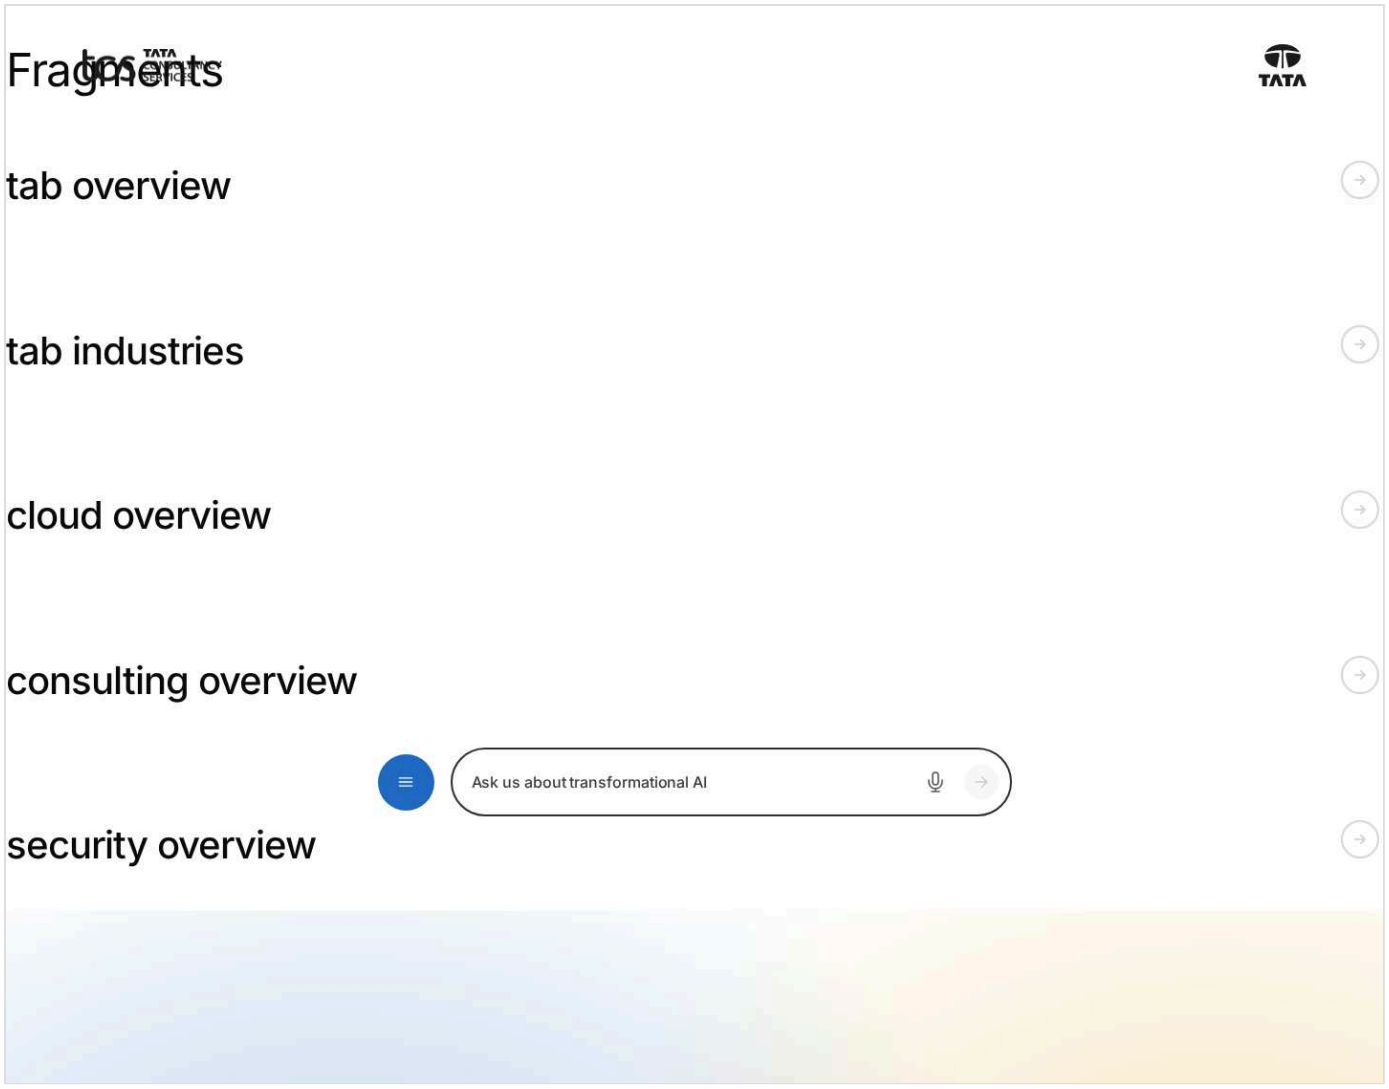


Figure: Tabs block library page — desktop 1440 × 900 (/design-block-master/en/block-library/tabs/fragments, captured 2026-11-08).

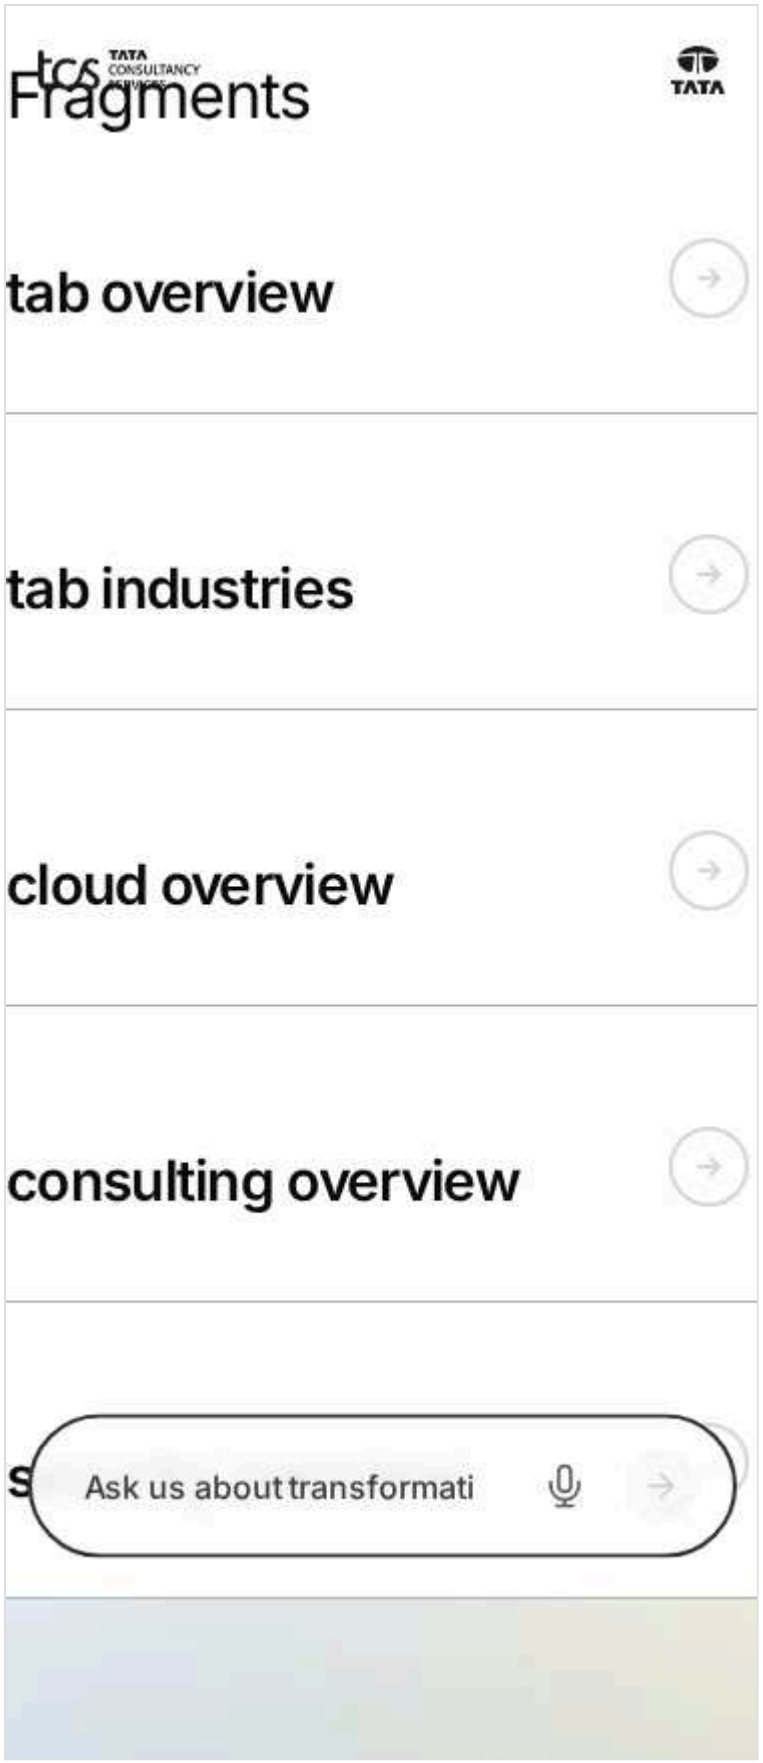


Figure: Tabs block library page — mobile 375 × 812 (/design-block-master/en/block-library/tabs/fragments, captured 2026-11-08).

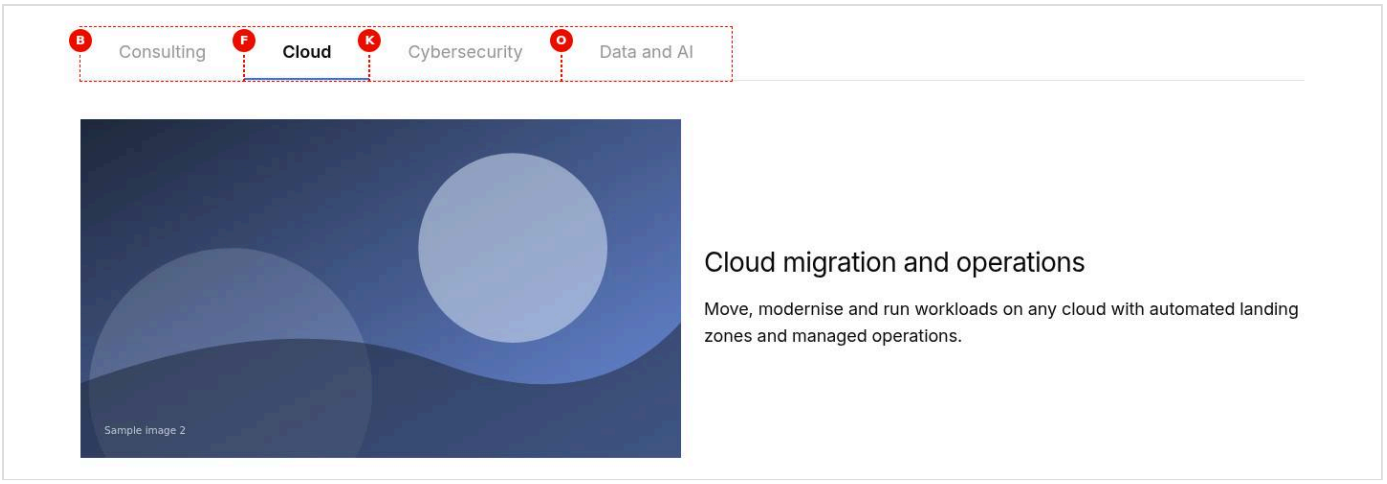


Figure: Desktop rendering — The Tabs Container at 1440 px: an Underline tab list Consulting, Cloud, Cybersecurity, Data and AI with Cloud selected (semibold, brand underline) above a grey divider; below it the Cloud panel, a Columns with photo-2.svg on the left and the H3 Cloud migration and operations with its text on the right. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-desktop-view.jpg) (handover screenshot; rendering at the time it was taken).

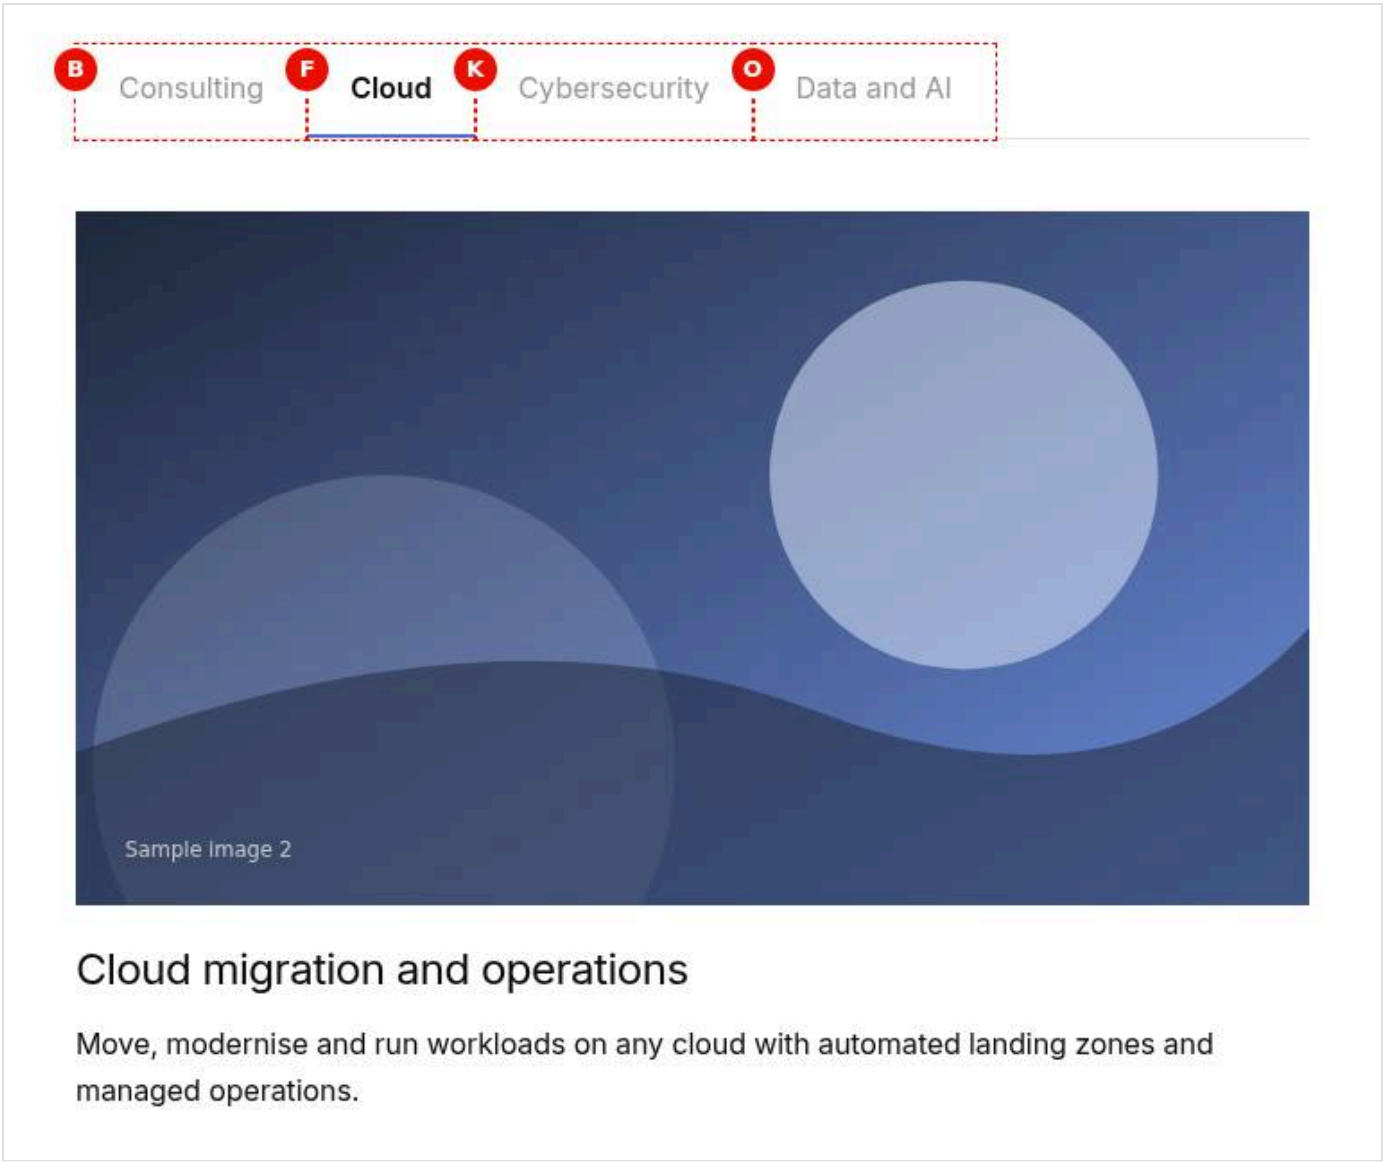


Figure: Tablet rendering — The same Tabs at 768 px: the four labels Consulting, Cloud, Cybersecurity, Data and AI fit in one row with Cloud underlined, so the list does not scroll here; the Cloud Columns is stacked,

photo-2.svg above the H3 Cloud migration and operations and its text. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-tablet-view.jpg) (handover screenshot; rendering at the time it was taken).

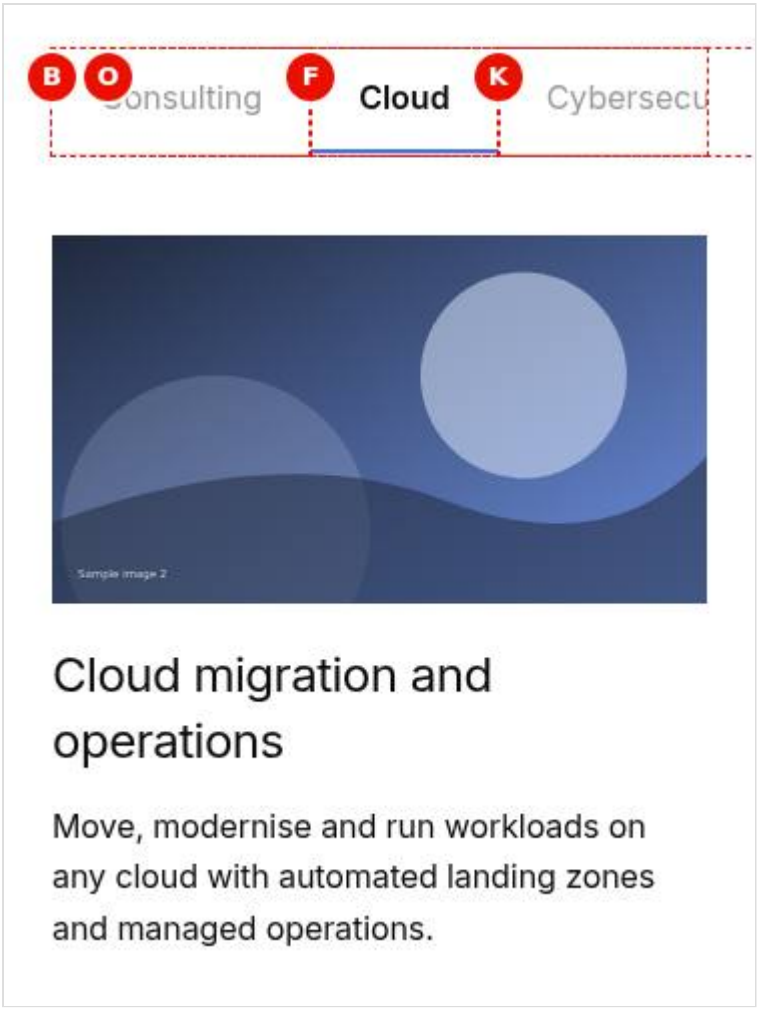


Figure: Mobile rendering — The Tabs at 375 px: the tab list shows Consulting, Cloud (selected, underlined) and a cut-off Cybersecu..., with Data and AI off-screen to the right; below it the Cloud panel stacked: photo-2.svg, the H3 Cloud migration and operations on two lines and its text. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-mobile-view.jpg) (handover screenshot; rendering at the time it was taken).

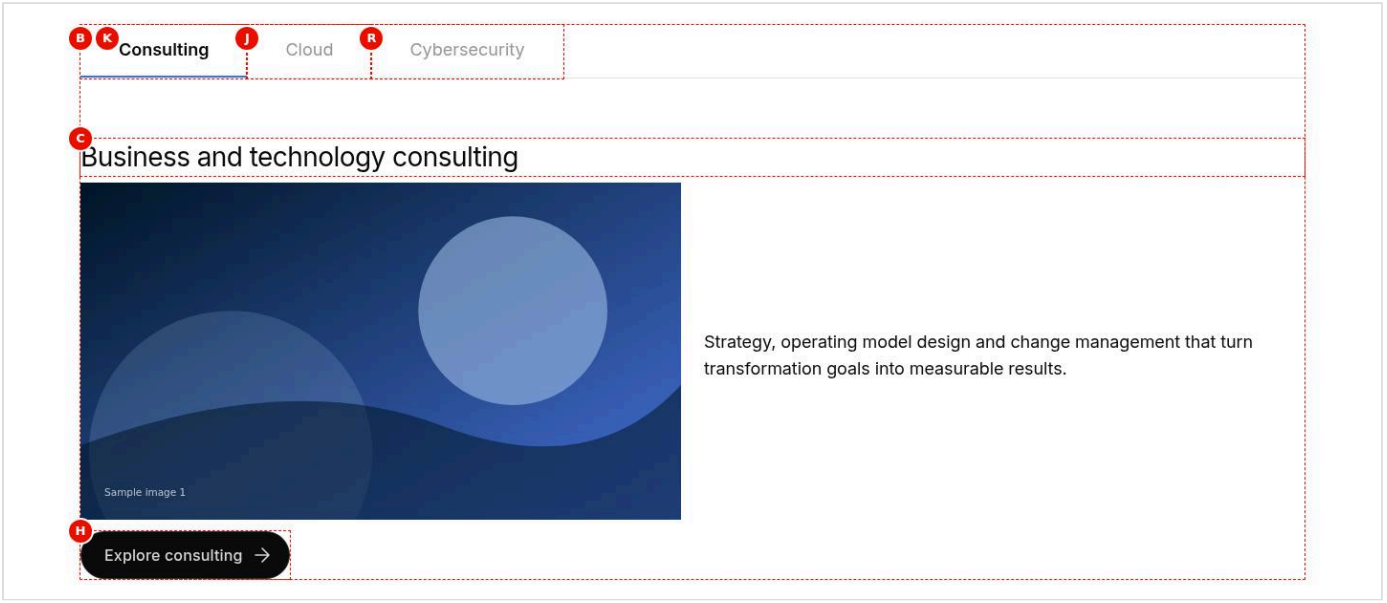


Figure: Tabs Container variation — A Tabs Container at 1440 px with the tabs Consulting (selected), Cloud and Cybersecurity; the Consulting panel shows the H3 Business and technology consulting, a Columns with photo-1.svg on the left and its text on the right, and the black primary button Explore consulting with an arrow below. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-container-mode.jpg) (handover screenshot; rendering at the time it was taken).

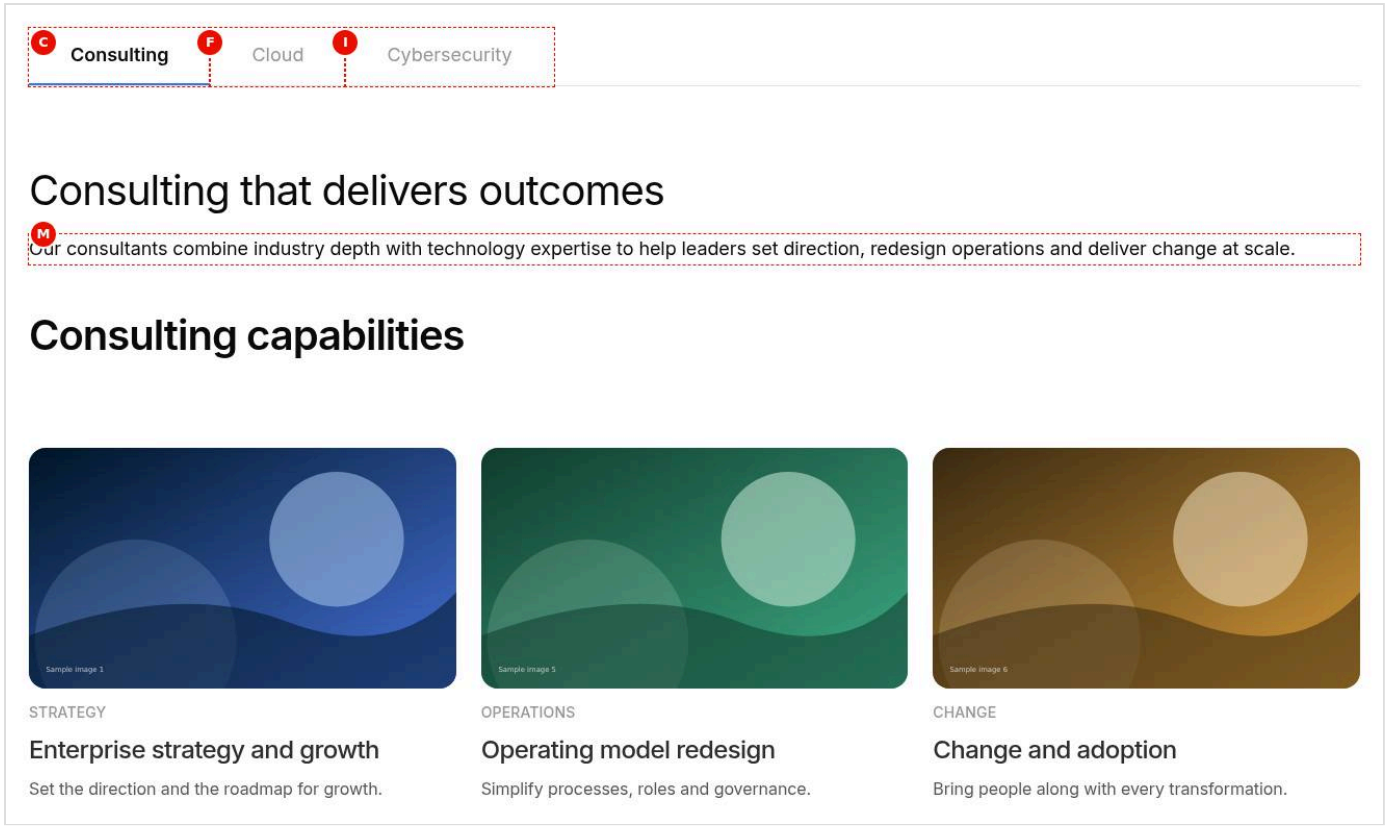


Figure: Tabs block variation — A Tabs block at 1440 px with the tabs Consulting (selected), Cloud and Cybersecurity; the panel shows the fragment page consulting-overview: the H2 Consulting that delivers outcomes and its text, then the Cards heading Consulting capabilities and three cards Strategy, Operations and Change with images, titles and descriptions. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-block-fragments.jpg) (handover screenshot; rendering at the time it was taken).

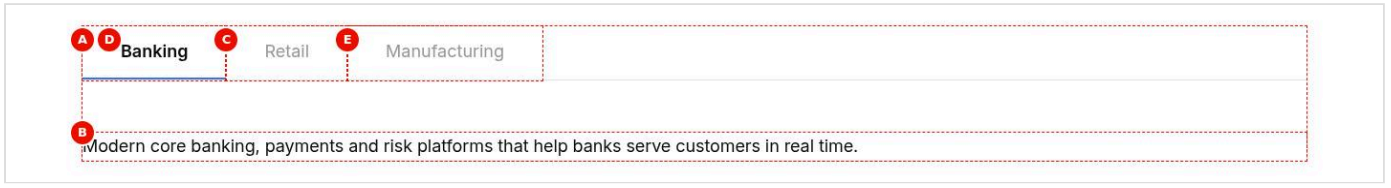


Figure: Underline style — Underline tabs at 1440 px: the plain labels Banking (selected, semibold, 3px brand underline), Retail and Manufacturing on a thin grey divider, and below it the Banking text Modern core banking, payments and risk platforms that help banks serve customers in real time. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-style-underline.jpg) (handover screenshot; rendering at the time it was taken).

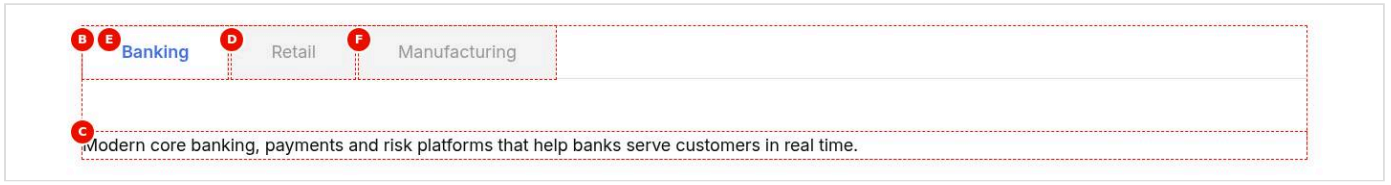


Figure: Boxed style — Boxed tabs at 1440 px: Banking (selected) is a white box with a thin border and brand-coloured text, open towards the panel; Retail and Manufacturing are light grey boxes with rounded top corners, 0.25rem apart; below, the Banking text. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-style-boxed.jpg) (handover screenshot; rendering at the time it was taken).



Figure: Pills style — Pill tabs at 1440 px: Banking (selected) is a pill filled with the brand blue and white text; Retail and Manufacturing are outlined pills 0.5rem apart, with no divider under the list; below, the Banking text. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-style-pills.jpg) (handover screenshot; rendering at the time it was taken).

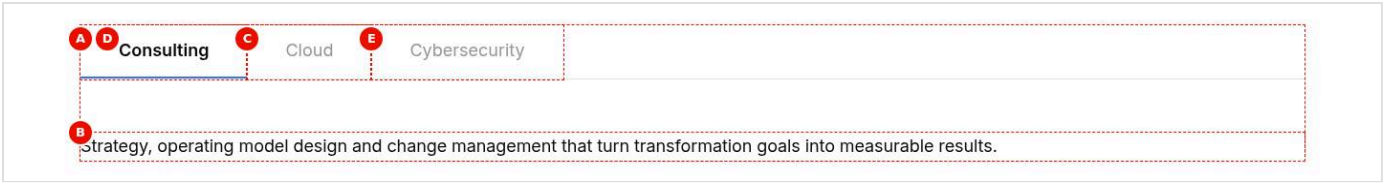


Figure: Left alignment — Left-aligned Underline tabs at 1440 px: Consulting (selected), Cloud and Cybersecurity start at the left edge of the content area with free space on the right of the divider; below, the Consulting text Strategy, operating model design and change management that turn transformation goals into measurable results. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-alignment-left.jpg) (handover screenshot; rendering at the time it was taken).

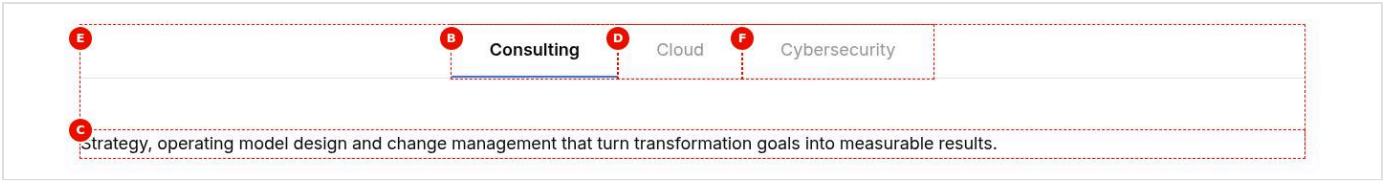


Figure: Center alignment — Centre-aligned Underline tabs at 1440 px: Consulting (selected), Cloud and Cybersecurity centred above the full-width grey divider; below, the left-aligned Consulting text. There is no centred Title above the tabs in this example (the chapter caption mentions one). (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-alignment-center.jpg) (handover screenshot; rendering at the time it was taken).

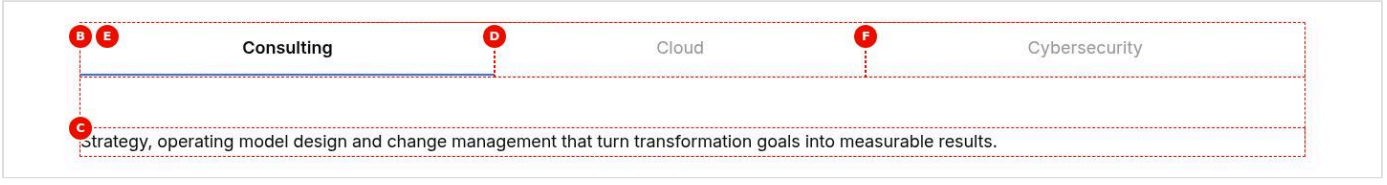


Figure: Full width alignment — Full width (stretch) Underline tabs at 1440 px: Consulting (selected, its underline a third of the width), Cloud and Cybersecurity share the full width of the content area with their labels centred in each third; below, the Consulting text. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-alignment-stretch.jpg) (handover screenshot; rendering at the time it was taken).

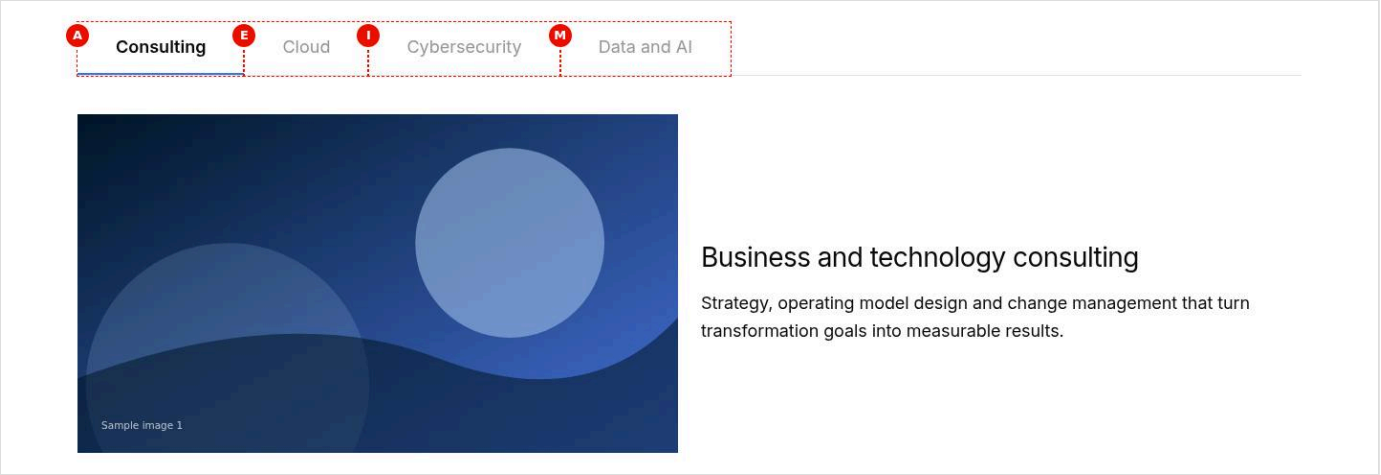


Figure: Horizontal orientation — Horizontal Underline tabs at 1440 px: Consulting (selected), Cloud, Cybersecurity and Data and AI in one row above the panel; the Consulting panel shows a Columns with photo-1.svg on the left and the H3 Business and technology consulting with its text on the right. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-orientation-horizontal.jpg) (handover screenshot; rendering at the time it was taken).

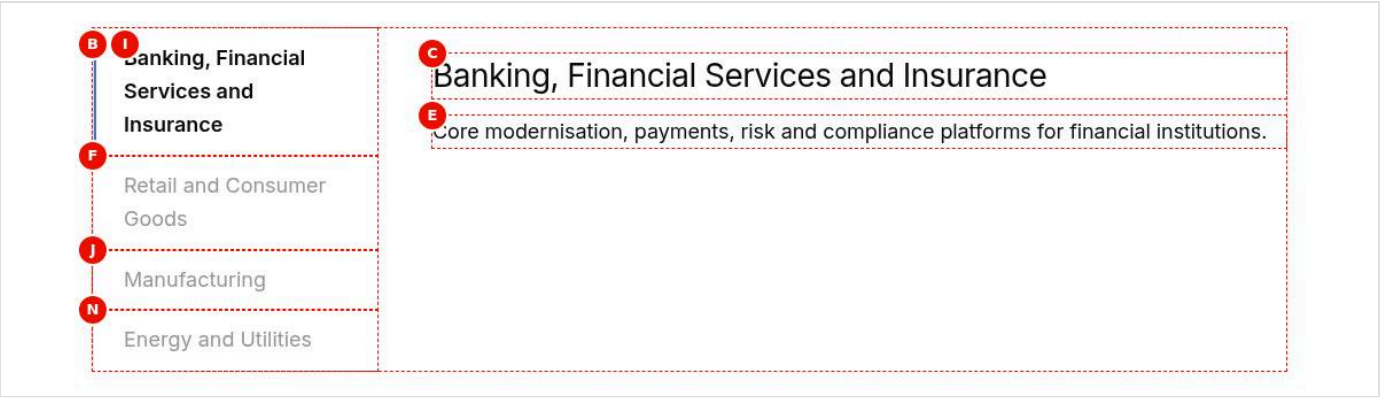


Figure: Vertical orientation — Vertical Underline tabs at 1200 px: a left column with a thin left border listing Banking, Financial Services and Insurance (selected, semibold, 3px brand left border, wrapped on three lines), Retail and Consumer Goods, Manufacturing and Energy and Utilities; on the right the panel with the H3 Banking, Financial Services and Insurance and its text. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-orientation-vertical.jpg) (handover screenshot; rendering at the time it was taken).

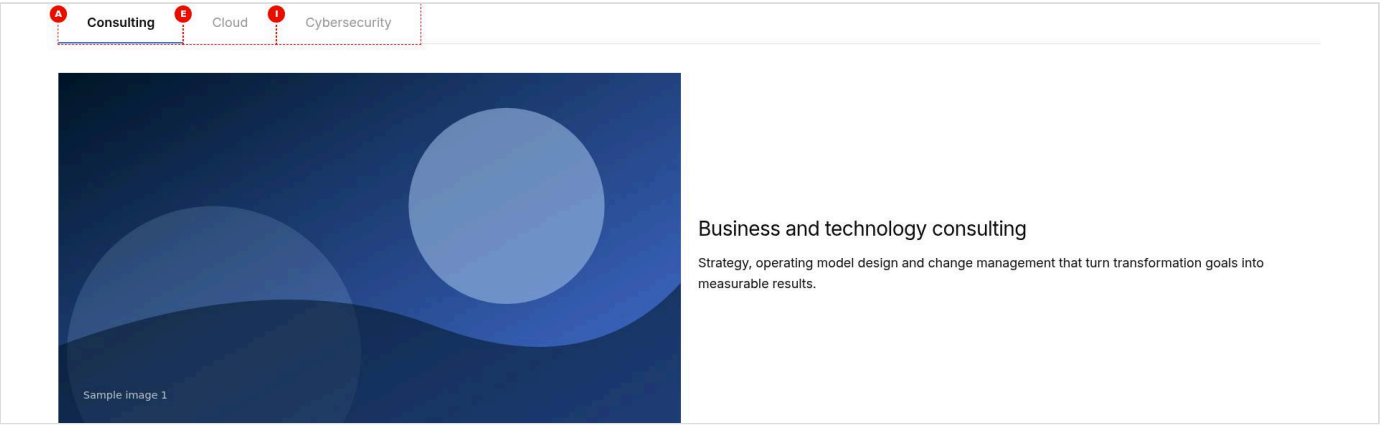


Figure: Full Width section — A Full Width Tabs Container on a 1920 px screen: the tabs Consulting (selected), Cloud and Cybersecurity and the divider span the page width inside the 5rem section padding; the Consulting Columns stretches across, a large photo-1.svg on the left and the H3 Business and technology consulting with its text on the right. (Sample content on the preview; callout letters as in the

Field Entry Table; file screenshots/tabs-width-full.jpg) (handover screenshot; rendering at the time it was taken).

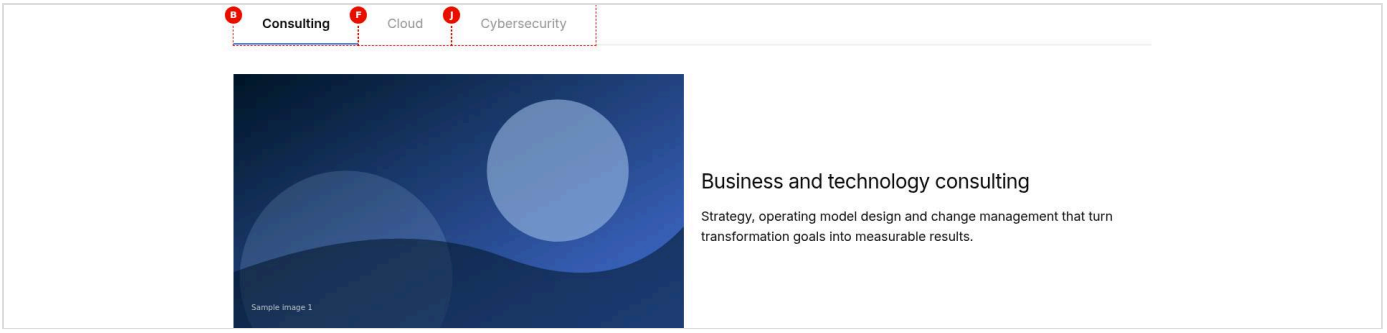


Figure: Fixed Width section — A Fixed Width Tabs Container on a 1920 px screen: the tabs Consulting (selected), Cloud and Cybersecurity and the Consulting Columns are centred at the 90rem content width, with empty space on both sides; photo-1.svg on the left, the H3 Business and technology consulting with its text on the right. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/tabs-width-fixed.jpg) (handover screenshot; rendering at the time it was taken).

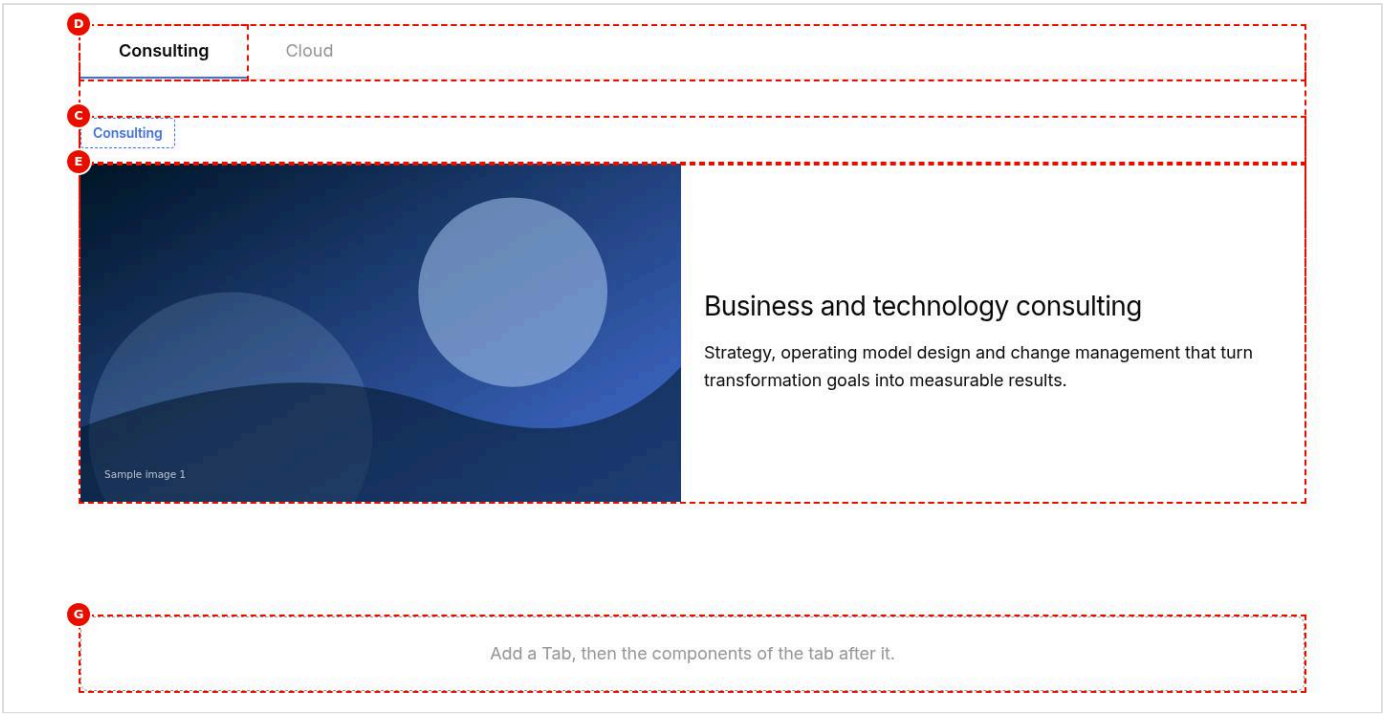


Figure: Universal Editor canvas — Edit mode preview at 1440 px with letters: D on the selected tab Consulting (A on the Tabs and B on the tab list sit under D at the same corner), C on the dashed Tab chip Consulting, E on the Columns with photo-1.svg and the H3, and G on a second, empty Tabs Container showing Add a Tab, then the components of the tab after it. No content tree is shown and F is not marked. (Annotated preview in editor mode with sample content; letters as in the annotations list, not a Universal Editor screenshot; file screenshots/tabs-authoring-view.jpg) (handover screenshot; rendering at the time it was taken).

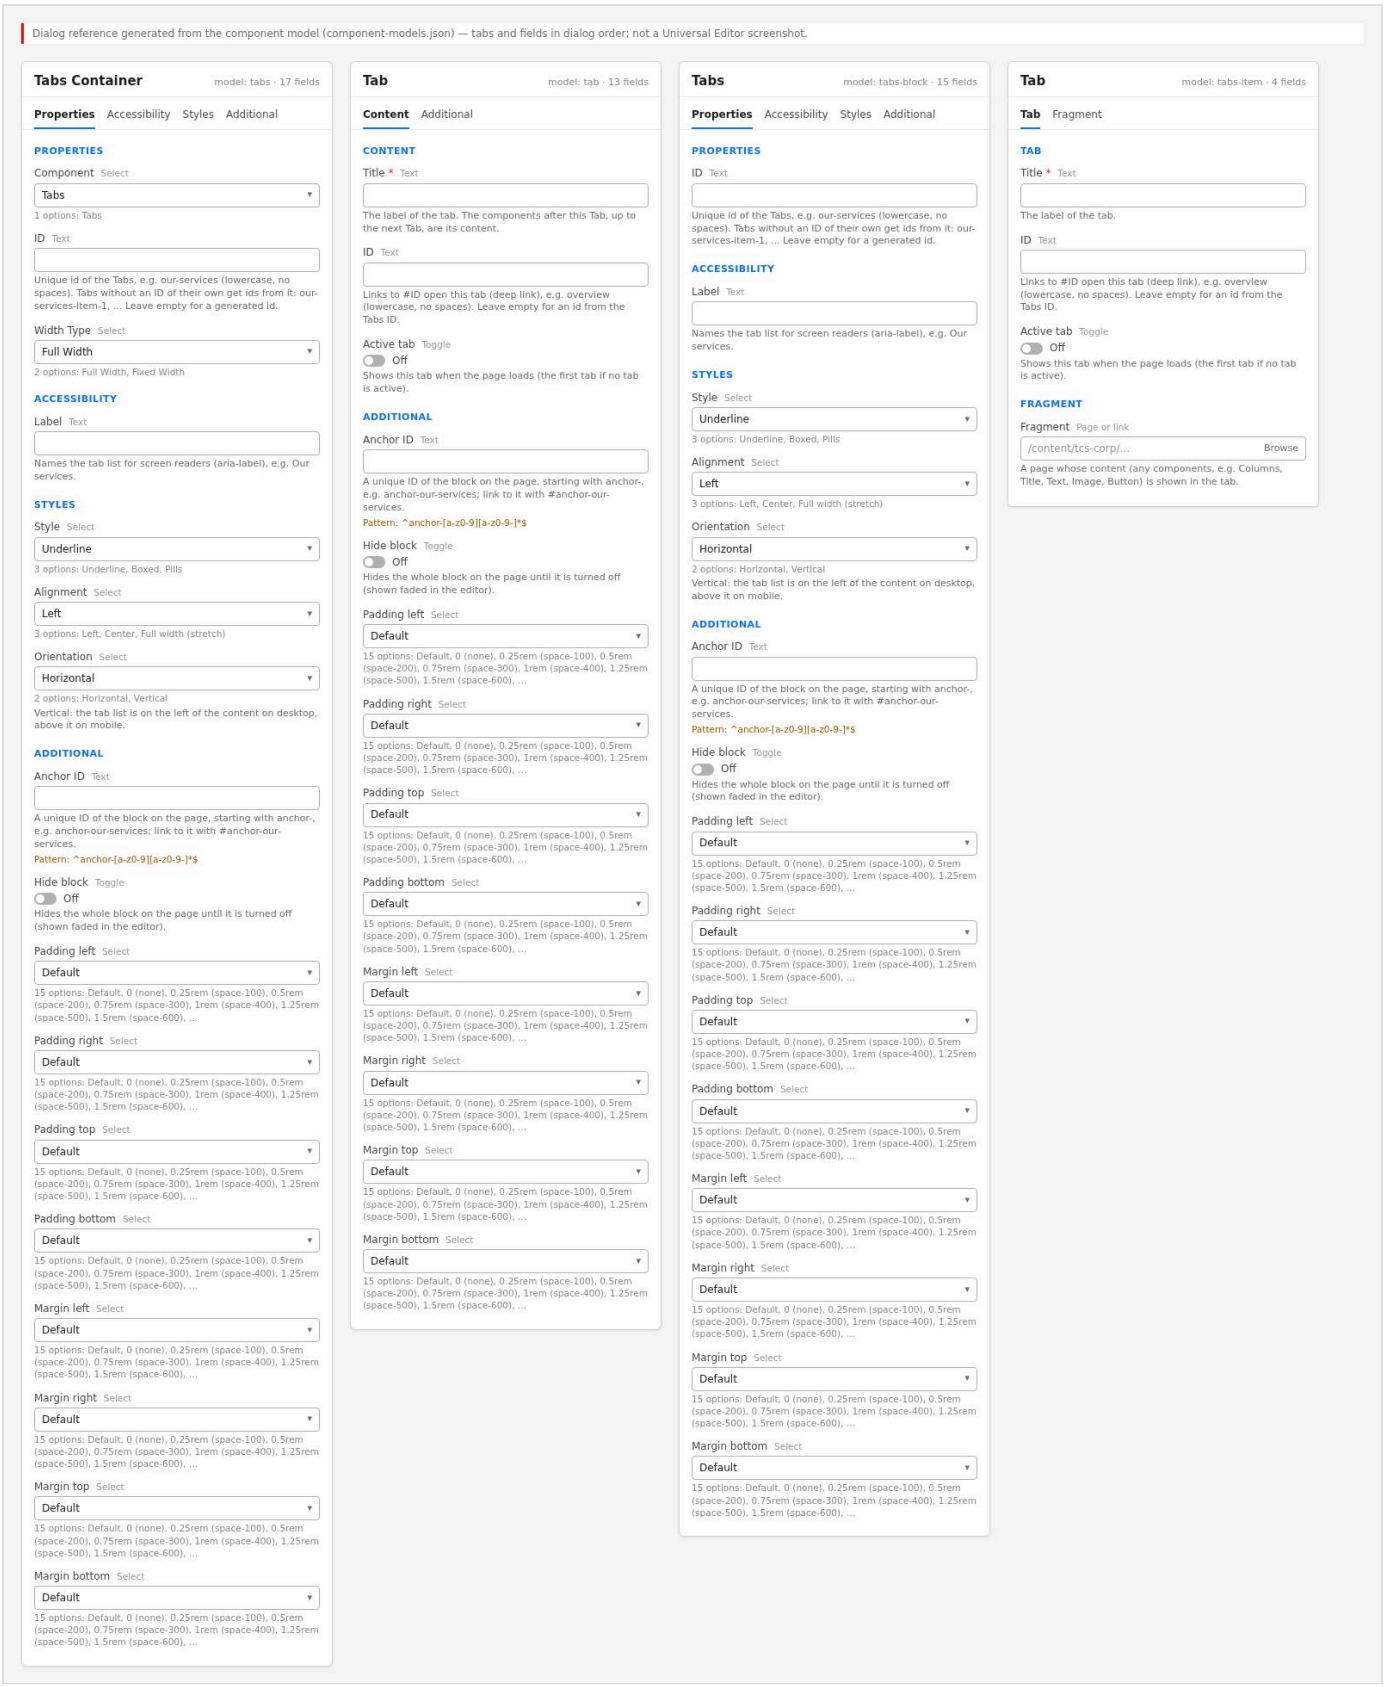


Figure: Properties panel — The properties panel of a Tabs Container with its four tabs (Properties, Accessibility, Styles, Additional), next to the properties of a Tabs block Tab item with its Tab and Fragment tabs. (Dialog reference generated from the component model, not a Universal Editor screenshot; file screenshots/tabs-properties-panel.jpg) (handover screenshot; rendering at the time it was taken).

21. Known limitations

- Universal Editor dialogs were not captured: no author access in this program (see the access blockers).

22. Open items

- None.

23. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages