TCS CORPORATE WEBSITE

Page Header Block — Developer Guide

Role / audience	Development — Developers, technical leads, block owners, AI coding agents
Version	1.0
Status	Draft for review
Owner	Technical Lead / Block Owner (proposed)
Last validated	2026-11-13
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Page Header Block — Developer Guide
- Summary
- Overview
- Source files
- Components, models and filters
- Fields
- Dependencies
- For Developers
- Extending the Block
- Responsive Behavior
- Accessibility
- Data Layer and Analytics
- Performance Considerations
- Security and Privacy
- For Architects
- Troubleshooting
- Known limitations of the block
- Change history of the block
- Reference pages
- Coverage of the required topics
- Screenshots
- Known limitations
- Open items
- Change history

Page Header Block — Developer Guide

Attribute	Value
Document ID	DEV-B-page-header
Audience	Developers, technical leads, block owners, AI coding agents
Purpose	How the Page Header block is built: files, model, structure, behaviour, variations, tests and limitations
Scope	blocks/page-header/ and its components page-header, page-header-cta
Prerequisites	—
Owner	Technical Lead / Block Owner (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	13 November 2026
Last validated	2026-11-13 (model, files, imports from the code; reference pages from the live site)
Source files	blocks/page-header/README.md, blocks/page-header/_page-header.json, blocks/page-header/page-header.css, blocks/page-header/page-header.js
Related documents	Variations, Test coverage, Authoring guide
Related AEM paths	/content/tcs-corp/design-block-master/en/block-library/page-header, /content/tcs-corp/design-block-master/en/block-library/page-header/article, /content/tcs-corp/design-block-master/en/block-library/page-header/article-default

1. Summary

Attribute	Value
Block	Page Header
Folder	`blocks/page-header`
Type	Container
Category	content
Status	Active
Purpose	The title area of a page from its metadata (title, description, tags, author, dates)
Variations (summary)	Layouts by page type
Children	page-header-cta (CTA)
Code size	561 lines of JS and CSS

2. Overview

Business purpose. One consistent, design-system header for secondary pages (landing, listing, article, blog, press release, insight) whose title, description, tags, dates and author are always the values used for SEO, the query index, cards and listings, because they come from the same metadata.

User experience. Visitors see the page title as the H1, with an eyebrow (content type or tags), the description and CTAs. Article pages add a meta row (tags, content type, "Published" date, reading time, listen / download / share icon buttons) and the author's photo, name (linked to LinkedIn) and designation. Landing pages can show the featured image next to the text.

Templates / page types. Default layout: Landing for the page types `landing` and `listing`, Article for any other. The Article, Blog and Press Release templates insert an empty Page Header as the first section when the page has none (`decorators/template-decorator.js ensurePageHeader`); an authored one wins.

Data source. Page metadata (`utils/metadata.js getPageMetadata`: title, description, tags, page-type, content-type, publish-date, reading-time, author-id, author, featured-image, image-alt, listen-link), the Authors sheet (`/{locale}/data/authors.json`), the taxonomy (`/{locale}/taxonomy.json`) and placeholders.

Related blocks. Hero (the authored opening banner, e.g. on Home), the Teaser (`blocks/teaser`, shares `decorators/article-meta-decorator.js`), List and Filter List (show the same metadata on cards).

When to use. As the first block of landing, listing, article, blog and press-release pages, once per page.

When not to use. On the Home page (use Hero or Gen Carousel); when the header needs content that isn't metadata (a video, an authored image per breakpoint: use Hero or Teaser); more than once per page (it renders an H1). There are no title or description fields: change the page properties or the metadata sheet instead.

Realistic use cases.

- A banking industry landing page: eyebrow "Industry", title, description, two CTAs and the featured image (Landing).
- An insight article: tags and content type, publish date, "6 min read", listen / download / share, the author from the Authors sheet (Article).
- A press release with the header added by the template (Article, no CTAs).
- A leadership page with the title on the left and the description and CTAs on the right (Secondary).
- A campaign page with a very large display title under its tags (Display).

3. Source files

File	Link
`README.md`	GitHub
`_page-header.json`	GitHub
`page-header.css`	GitHub
`page-header.js`	GitHub

4. Components, models and filters

Component	Title	Resource type	Template name	Model	Children allowed
`page-header`	Page Header	`core/franklin/components/block/v1/block`	Page Header	`page-header`	`page-header-cta`
`page-header-cta`	CTA	`core/franklin/components/block/v1/block/item`	CTA	`page-header-cta`	—

5. Fields

The Additional tab fields (anchor, hide, padding, margin, animation) are common to the blocks and described in the content modeling guide.

5.1 Page Header (`page-header`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Style	Layout	`classes`	select	No	`""`	5 options	—
CTAs	CTA List	`ctas`	container	No	—	—	—
CTAs	CTA List › CTA Title	`ctaText`	text	No	—	—	—
CTAs	CTA List › CTA Link	`cta`	aem-content	No	—	—	—
CTAs	CTA List › CTA Link Type	`ctaTarget`	select	No	`""`	2 options	—
CTAs	CTA List › CTA Link Style	`ctaStyle`	select	No	`primary`	3 options	—

5.2 CTA (`page-header-cta`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
—	CTA Link	`link`	aem-content	Yes	—	—	—
—	CTA Title	`linkText`	text	No	—	—	—
—	CTA Link Type	`linkTarget`	select	No	`""`	2 options	—
—	CTA Link Style	`linkStyle`	select	No	`primary`	3 options	—
—	Button background	`buttonBackground`	select	No	`""`	2 options	—
—	Button shape	`buttonShape`	select	No	`""`	2 options	—

"Required in model" is the model's `required` flag; whether a field is required in practice is stated in the authoring guide where it is known.

6. Dependencies

Import
`../../scripts/scripts.js`
`../../decorators/article-meta-decorator.js`
`../../decorators/button-decorator.js`
`../../decorators/editor-item-decorator.js`
`../../decorators/link-decorator.js`
`../../decorators/responsive-image-decorator.js`
`../../decorators/tag-decorator.js`
`../../utils/cells.js`
`../../utils/data.js`
`../../utils/links.js`
`../../utils/metadata.js`
`../../utils/placeholders.js`
`../../utils/properties.js`
`../../utils/taxonomy.js`

7. For Developers

```
blocks/page-header/
├── README.md
├── _page-header.json
├── page-header.css
└── page-header.js
```

Decorator/Utility	Purpose	Execution or dependency point
scripts/scripts.js	Page decoration (moveInstrumentation and shared page helpers)	page-header.js: { moveInstrumentation }
decorators/article-meta-decorator.js	buildPublished, buildReadingTime, buildPageActions (listen / download / share), buildAuthorLockup	page-header.js: { buildAuthorLockup, buildPageActions, buildPublished, buildReadingTime, }
decorators/button-decorator.js	decorateButton (option newTabHint: a link opening a new tab says so), createButton, setButtonDisabled, setButtonAlignment, removeButtonDecoration	page-header.js: { decorateButton }
decorators/editor-item-decorator.js	buildEditorItems, editorItemHint (in Universal Editor, an item the block doesn't render yet, e.g. a CTA just added, as a dashed placeholder the author can select; styles in styles/lazy-styles.css; the hint loaded o	page-header.js: { buildEditorItems, editorItemHint }
decorators/link-decorator.js	setLinkTarget (open in a new window), announceNewTab (tells screen reader users a link opens in a new tab: hidden text, or added to its aria-label)	page-header.js: { announceNewTab, setLinkTarget }
decorators/responsive-image-decorator.js	buildImage (image from a URL; site media and EDAM delivery images optimized), buildDeliveryPicture (responsive picture of a Dynamic Media with OpenAPI delivery image), decorateDeliveryImages (standalone delivery im	page-header.js: { buildImage }
decorators/tag-decorator.js	buildTagList	page-header.js: { buildTagList }
utils/cells.js	itemRows, KEY_VALUE_ITEM, FIELD_ROW_ITEM (the item rows of a block: by model in the editor, by their cells on the page), withoutTabCells (drops the empty cell AEM renders for each dialog tab of an item model), `m	page-header.js: { KEY_VALUE_ITEM, itemRows }
utils/data.js	loadDataSheet, getAuthor, getAuthors, getLocations, getPartners, getSocialLinks, getMediaContacts, inRegion (the locale's data sheets)	page-header.js: { getAuthor }
utils/links.js	NEW_WINDOW, linkOf, linkPathsOf (the paths of a page property, one or many), readLinkItems (CTA lists with Link Type and the items' other select values), readLinkRows (the same from link item rows, e.g. Hero CT	page-header.js: { readLinkItems, readLinkRows }
utils/metadata.js	getPageMetadata, getPageTags (article:tag and the AEM page Tags published as cq-tags), getPageLanguage (page properties and bulk metadata columns: page-type, author-id, publish-date, reading-time, ...)	page-header.js: { getPageMetadata }
utils/placeholders.js	getPlaceholders, loadPlaceholders, fillPlaceholder (UI text from the locale's placeholders, with English fallbacks)	page-header.js: { getPlaceholders }
utils/properties.js	readProperties, textOf, isOn, isOnByDefault (a toggle that defaults to on), optionOf, normalizeKey, textSource (key-value block properties)	page-header.js: { optionOf, readProperties }
utils/taxonomy.js	loadTaxonomy, resolveTags (tag labels from the locale's taxonomy)	page-header.js: { resolveTags }

Responsibilities. page-header.js reads the Layout and the legacy CTA List (readProperties), the CTA items (itemRows(block, ['page-header-cta'], KEY_VALUE_ITEM)), the page metadata, the author and the tags, and builds the layout's DOM. page-header.css styles the four layouts, with one breakpoint (900px).

Input DOM. Key-value rows (`classes` → Layout; `ctas` → the legacy multifield cell); CTA item rows after them with five cells (link, link type, style, Button background, Button shape; `test/items/item-rows.test.mjs`). Older three- and four-cell CTA rows remain supported. The template-added block is an empty `div.page-header`.

Rendered DOM.

```
div.page-header.<layout>[.page-header-has-image]
├── div.page-header-meta-row (article)
│   ├── div.page-header-labels > ul.page-header-tags > li[data-tag], p.page-header-collection
│   └── div.page-header-info > p.page-header-date > time, p.page-header-reading-time,
│       div.page-header-actions > (a|button).button.tertiary.icon-button…, p.page-header-
status[role=status]
├── p.page-header-eyebrow | ul.page-header-tags (secondary: above the columns)
├── div.page-header-columns (secondary, article, display)
│   ├── div.page-header-intro > [eyebrow (display)], h1.page-header-title, [div.page-header-author]
│   └── div.page-header-summary > div.page-header-description, div.page-header-ctas > a.button
├── div.page-header-intro (landing: eyebrow, title, description, CTAs)
└── div.page-header-media > picture | img (landing)
```

Decoration flow. Read properties and CTA rows → `getPageMetadata()` → in parallel `getPlaceholders()`, `resolveTags(metadata.tags)`, `getAuthor(metadata.authorId)`, `editorItemHint(ctaRows)` → `layoutOf` → build title, tags, eyebrow, description, CTAs (`decorateButton` with `newTabHint`, `moveInstrumentation` from each item row, `buildEditorItems` for items without link) → assemble the layout → replace the layout class, toggle `page-header-has-image` → `replaceChildren` with the non-empty parts.

Events and async behavior. `decorate` awaits placeholders, the taxonomy (only when the page has tags) and the Authors sheet (only with an author-id), each fetched once per page. Share uses `navigator.share`, else `navigator.clipboard.writeText`; errors (dismissed dialog, blocked clipboard) are ignored.

Error handling. Missing sheets resolve to empty results (`.catch`), so the header renders without author and with ID-derived tag labels; missing metadata parts are omitted.

Exported functions. Only the default `decorate`.

Parent / child contracts. `decorators/template-decorator.js` `ensurePageHeader` checks `main .page-header` before adding one. Only the `section` filter offers the Page Header (not Columns Containers, Tabs Containers or Gen Carousels).

Data-layer hooks. `data-cmp-interaction` `listen` / `download` / `share` on the actions.

8. Extending the Block

1. **Add a layout** to the Layout select in `_page-header.json` and to `LAYOUTS` in `page-header.js`, build its branch in `decorate` and its styles under `.page-header.<layout>`; run `npm run build:json` and `npm run lint`.
2. **Show another metadata column**: read it in `utils/metadata.js` `getPageMetadata` (and index it in `helix-query.yaml` if listings need it), then render it in the layouts; text that isn't metadata belongs in placeholders.
3. **Responsive and accessibility.** Mobile first with the 900px query (add 600 / 1200px only when needed), rem sizes, theme tokens for text; keep one H1.
4. **Data layer.** Use `data-cmp-interaction` for new actions.
5. **Tests.** Keep `test/items/item-rows.test.mjs` passing for `page-header-cta` (cells `link`, `linkTarget`, `linkStyle`); animation fields are checked by `test/motion/motion.test.mjs`. Run `npm test`.
6. **Backward compatibility.** Key-value block: don't use grouped (`prefix_name`) fields; fields ending in Text, Title, Type, Alt or MimeType collapse into their base field; keep reading the legacy `ctas` multifield and the empty style value.
7. **Block library and docs.** Update the Page Header library pages and this README, run `npm run build:docs`; `npm run build:modules` after changing imports.

9. Responsive Behavior

View port	Layout	Image behavior	Interaction behavior
< 900px	One column; top padding `--space-1000`; parts stacked with `--space-1000` gaps	Landing image below the text, full width; `<picture>` source 750px	Meta row, tags, CTAs wrap
>= 900px	Top padding `--space-3000`; title side and summary side in two equal columns; Landing with image a two-column grid (`--space-2000` gap); Landing and Display titles 6rem	Landing image beside the text; source 1200px	As above

10. Accessibility

- **Semantic HTML.** `h1` title, `ul` tags, `<time datetime>` dates, `<a>` CTAs and listen link, `<button>` download and share.
- **Headings.** Always H1: one Page Header per page and no other H1 (e.g. a Hero with H1).
- **Keyboard and focus.** CTAs, LinkedIn link and the icon buttons are in the tab order; icon buttons turn brand-coloured on hover and focus.
- **Accessible names.** Icon buttons named from placeholders (`listenToThisPage`, `downloadThisPage`, `shareThisPage`).
- **Alt text.** Featured image from `image-alt` (empty: decorative); author image decorative.
- **Link purpose.** New-tab CTAs and the LinkedIn link append "(opens in a new tab)" (placeholder `opensInNewTab`).
- **Announcements.** The share fallback writes "Link copied to clipboard" (`linkCopied`) into a `role="status"` element.
- **Reduced motion.** Additional tab animations don't play for reduced motion or in the editor.
- **Contrast.** Text uses the theme tokens (`--color-text-default`, `--color-text-secondary`).
- **Empty states.** Parts without data are left out.
- **Reflow.** One column below 900px; the meta row and CTAs wrap.

Author responsibilities: meaningful Title, Description and tags, `image-alt` for informative featured images, one H1, CTA labels that make sense out of context.

Developer responsibilities: keep the H1, the `role="status"` message, the named icon buttons and the new-tab hints.

Key	Expected behavior
Tab / Shift+Tab	Moves through the listen link, download and share buttons, the LinkedIn link and the CTAs
Enter	Follows the focused link
Enter / Space	Activates download (print dialog) or share

11. Data Layer and Analytics

- **Component.** `@type` `tcs-corp/components/page-header`, id = Anchor ID else `page-header-{n}`, `dc:title` the H1 text, `parentId` the page.
- **Variation.** Not pushed.
- **Interactions.** Captured centrally by `decorators/data-layer-decorator.js`; the actions carry `data-cmp-interaction` `listen`, `download` and `share` (set by `decorators/article-meta-decorator.js`). The block pushes no events of its own.

Trigger	Data-layer event	Required properties	Analytics behavior
Block decorated	component entry	`@type`, `parentId`, `dc:title`	State
CTA click	`cmp:click`	`interaction: link`, `dc:title`, `xdm:linkURL`, `xdm:linkType`, `breakpoint`	Link tracking
LinkedIn author link	`cmp:click`	`interaction: link`, `xdm:linkType: exit`	Exit link
Listen	`cmp:click`	`interaction: listen`, `xdm:linkURL` (`xdm:linkType` `download` for file links such as `.mp3`)	Audio use
Download	`cmp:click`	`interaction: download`, `dc:title`	Print / PDF use
Share	`cmp:click`	`interaction: share`, `dc:title`	Share use

The intended path is Adobe Client Data Layer → Adobe Data Collection (Tags) → AEP Web SDK → Edge Network → Analytics / CJA, but Tags and the Web SDK aren't configured yet (blocked: measurement plan). No consent mechanism is implemented.

12. Performance Considerations

- **Initialization.** Usually in the first section (eager phase); rendering waits for placeholders, the taxonomy (only with tags) and the Authors sheet (only with an author-id), fetched in parallel and cached per page.
- **Images.** Landing site-media images are eager with `fetchpriority="high"` (1200px / 750px sources); other URLs are lazy plain images (F-14); author images go through the same helper.
- **DOM size.** Small; no observers; listeners only on the download and share buttons.
- **Layout shift.** The header renders after its data arrives; the template-inserted block is empty until then.
- **High-cost configurations.** None identified beyond the Landing image size.


13. Security and Privacy

- All metadata text is inserted with `textContent` (no HTML injection).
- Link URLs (CTAs, listen-link, LinkedIn) come from authored content and sheets; they aren't validated. The LinkedIn link opens with `rel="noopener noreferrer"`.
- Share passes the current URL and page title to the device share dialog or the clipboard; no data is sent elsewhere. No personal data beyond the published author details is used.

14. For Architects

- **Role.** Metadata-driven page title area; usually the first section and the LCP area of templated pages.
- **Content model.** Key-value block with one authored option (Layout) and CTA items; everything else from metadata, sheets and taxonomy.
- **Rendering and data source.** Client-side, from `<head>` metadata of the delivered page plus three JSON resources (placeholders, taxonomy, Authors sheet), each cached per page.
- **Container / child model.** Child of Sections (or inserted by templates); parent of CTA items.
- **Dependencies.** Article meta, button, editor item, link, responsive image and tag decorators; cells, data, links, metadata, placeholders, properties and taxonomy utils.
- **Data layer / Web SDK / Target.** In the data layer as `tcs-corp/components/page-header`; no Web SDK or Target.
- **Consent and identity.** None handled.
- **Caching.** HTML and sheets cached by the Edge Delivery CDN.

- **Performance.** The block waits for its JSON resources before rendering; the Landing site-media image is eager with high priority.
- **Security.** Text is set with `textContent`; links come from authored metadata and sheets.
- **Scalability.** One fetch per resource per page, shared with other blocks.

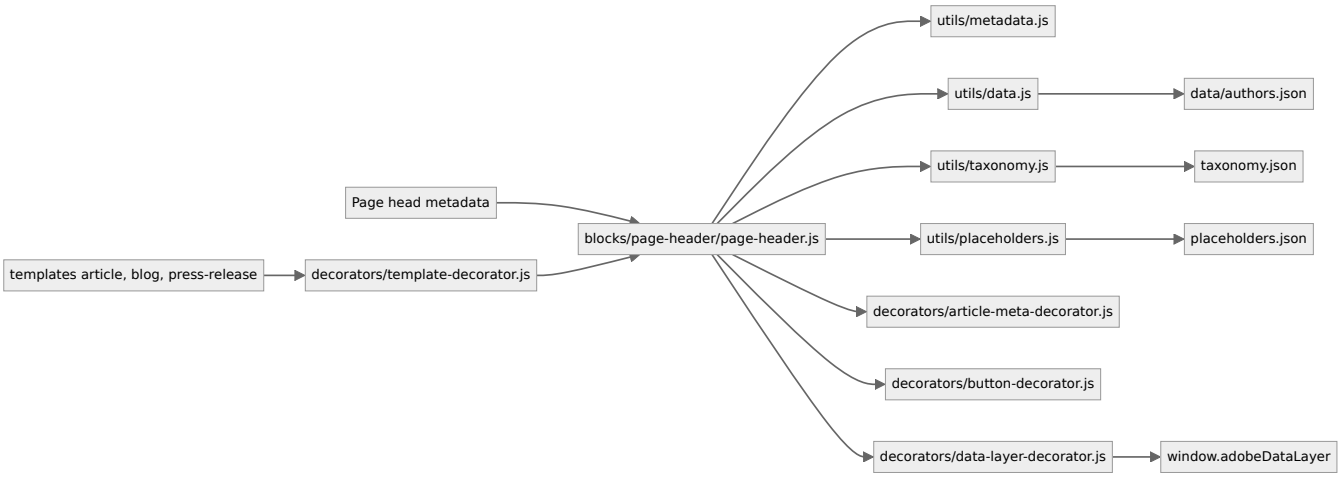

15. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
Title or description wrong / missing	Page properties not updated or not republished	Page source: `og:title`, `description`	Update the page properties; publish	H1 matches the Title
Wrong layout	Default with an unexpected page-type (e.g. a sheet row)	`<meta name="page-type">`; block classes	Choose the Layout explicitly or fix the sheet	Expected layout class
No author lockup	author-id missing from the Authors sheet, sheet not published, or layout not Article	`<meta name="author-id">`; open `/{locale}/data/authors.json`	Fix the author row; publish	Lockup shows
Tags show technical labels	Tag missing from the locale taxonomy / language sheet	Open `/{locale}/taxonomy.json`	Add / translate the tag; publish	Proper labels
Date not formatted	publish-date not ISO	Check the metadata value	Use YYYY-MM-DD	dd/mm/yy with `datetime`
Landing image loads late	featured-image not same-origin site media (F-14)	`img` with `loading="lazy"`, no `<picture>`	Use DAM / site media	Eager, high priority
Share does nothing	No share dialog and clipboard blocked	Test on HTTPS, check permissions	Use the HTTPS hosts	Dialog or message
Two H1s	Hero with H1 or a second Page Header	List headings	Change other H1s to H2; keep one Page Header	One H1

Evidence to collect (no secrets): URL, viewport, the page's `<meta>` tags, the rendered block HTML, Network status of the three JSON resources, console errors.

16. Known limitations of the block

Limitation	Impact	Workaround	Planned correction
A featured image that isn't same-origin site media is lazy-loaded (F-14)	Slower LCP on landing pages	Use DAM images delivered as site media	Not recorded
Page Type offers home, article, blog, press-release; landing / listing only via the metadata sheet (F-12)	Default can't resolve to Landing from page properties	Set page-type in the sheet or choose Landing	Not recorded (open: one list of page types, O-11)
Only the English taxonomy is published (F-09)	ID-derived tag labels in other locales	Publish each locale's taxonomy	Not recorded
Date format dd/mm/yy in every locale	Not localised	—	Not recorded
Metadata changes are read when the page loads	Editor shows old values until reloaded	Reload the editor	Not planned

17. Change history of the block

Version	Change	Source	Date
Not recorded	README generated from verified implementation and approved handover documentation	Repository review	Not recorded
Handover 2.10	CTAs as CTA items (`page-header-cta`) instead of the CTA List multifield, which is still read (F-87: a Page Header with CTAs was left out on published pages)	docs/handover revision history	17 October 2026
Handover 2.17	Item children in the Page Header field specification	docs/handover revision history	18 October 2026
Handover 2.18	Additional tab Content animation	docs/handover revision history	18 October 2026

18. Reference pages

Kind	Page	Live URL
Block library	/design-block-master/en/block-library/page-header	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header
Block library	/design-block-master/en/block-library/page-header/article	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/article
Block library	/design-block-master/en/block-library/page-header/article-default	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/article-default
Block library	/design-block-master/en/block-library/page-header/cta-primary	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/cta-primary
Block library	/design-block-master/en/block-library/page-header/cta-secondary	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/cta-secondary
Block library	/design-block-master/en/block-library/page-header/cta-text-link	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/cta-text-link
Block library	/design-block-master/en/block-library/page-header/default-by-page-type	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/default-by-page-type
Block library	/design-block-master/en/block-library/page-header/display	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/display
Block library	/design-block-master/en/block-library/page-header/guest-author	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/guest-author
Block library	/design-block-master/en/block-library/page-header/landing	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/landing

Kind	Page	Live URL
Block library	/design-block-master/en/block-library/page-header/landing-default	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/landing-default
Block library	/design-block-master/en/block-library/page-header/landing-featured-image	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/landing-featured-image
Block library	/design-block-master/en/block-library/page-header/landing-text-only	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/landing-text-only
Block library	/design-block-master/en/block-library/page-header/press-release	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/press-release
Block library	/design-block-master/en/block-library/page-header/secondary	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/secondary
Block library	/design-block-master/en/block-library/page-header/tablet-widths	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/tablet-widths
Block library	/design-block-master/en/block-library/page-header/tags-and-content-type	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/page-header/tags-and-content-type
Curated design page	/design-block-master/en/curated-design-pages/case-study	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/curated-design-pages/case-study
Curated design page	/design-block-master/en/curated-design-pages/collection	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/curated-design-pages/collection
Curated design page	/design-block-master/en/curated-design-pages/story	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/curated-design-pages/story

19. Coverage of the required topics

Topic	Where
Purpose	Overview
Source files	generated: Files
Model, definition, filters, children	generated: Components
Dependencies	generated: Dependencies
Authored input / rendered output / DOM transformation	For Developers
Configuration fields, defaults, required fields	generated: Fields
Variations	PAGE-HEADER-VARIATIONS.md
Responsive behaviour	Responsive Behavior
Accessibility and keyboard	Accessibility
Analytics / data layer	Data Layer and Analytics
Performance	Performance Considerations
Security	Security and Privacy
Extending	Extending the Block
Known limitations	Known Limitations
Troubleshooting	Troubleshooting
Tests	PAGE-HEADER-TEST-COVERAGE.md
SEO behaviour	Not recorded
Caching considerations	Not recorded (Edge Delivery default caching; no block-specific rule)
Ownership	Technical Lead / Block Owner (proposed)

20. Screenshots

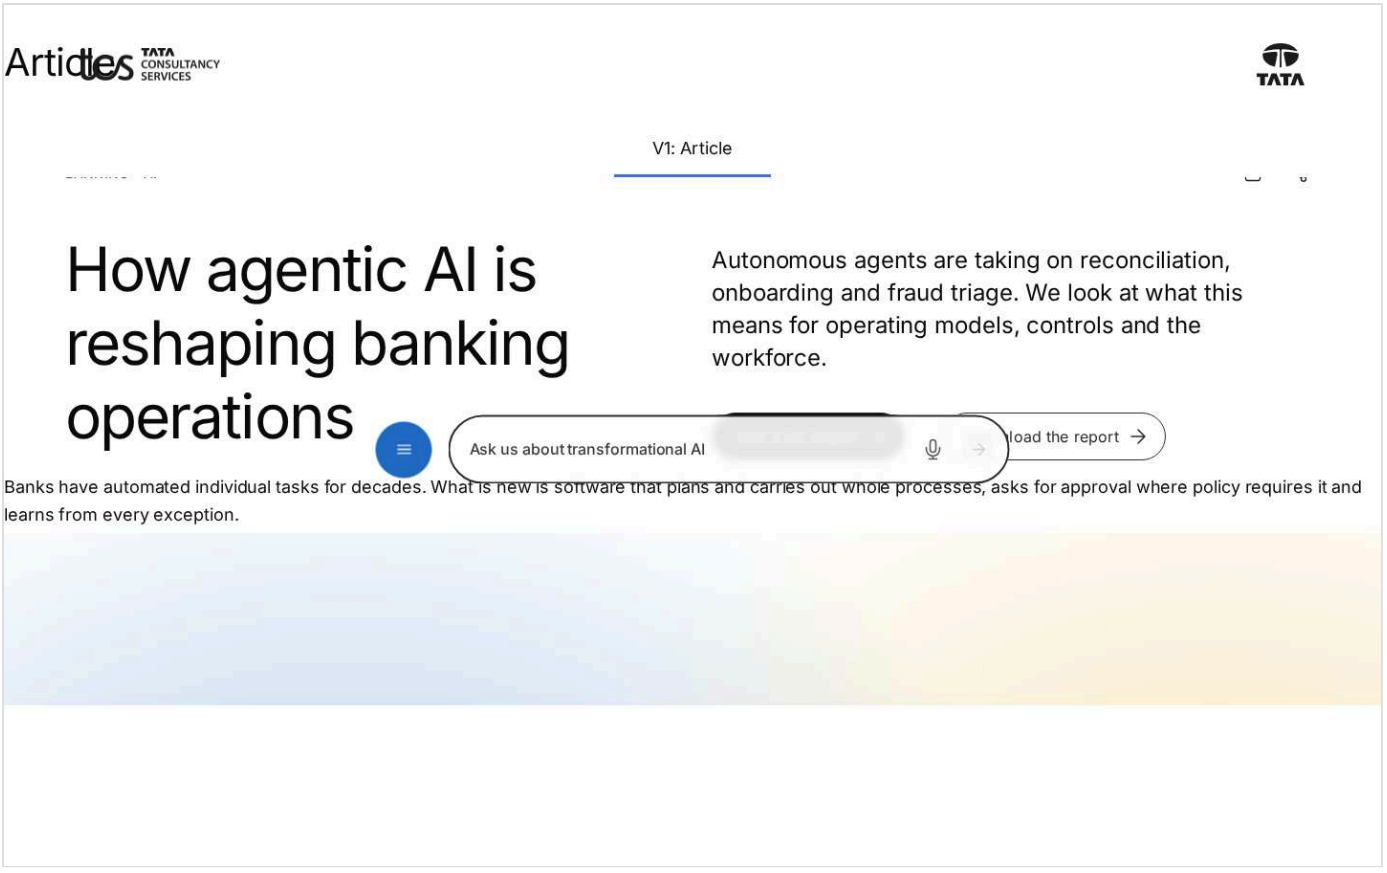


Figure: Page Header block library page — desktop 1440 × 900 (/design-block-master/en/block-library/page-header/article, captured 2026-11-08).

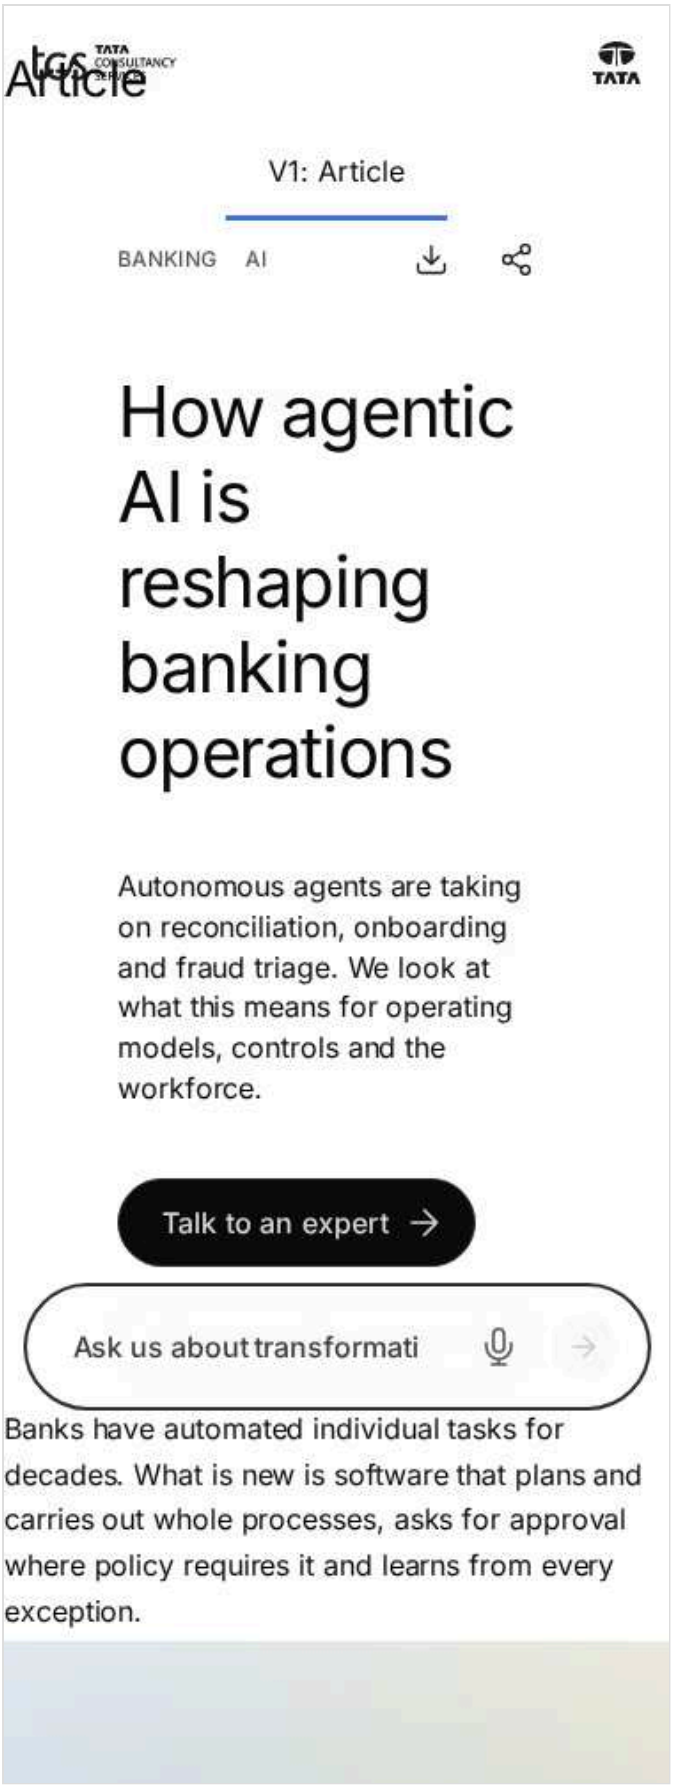


Figure: Page Header block library page — mobile 375 × 812 (/design-block-master/en/block-library/page-header/article, captured 2026-11-08).

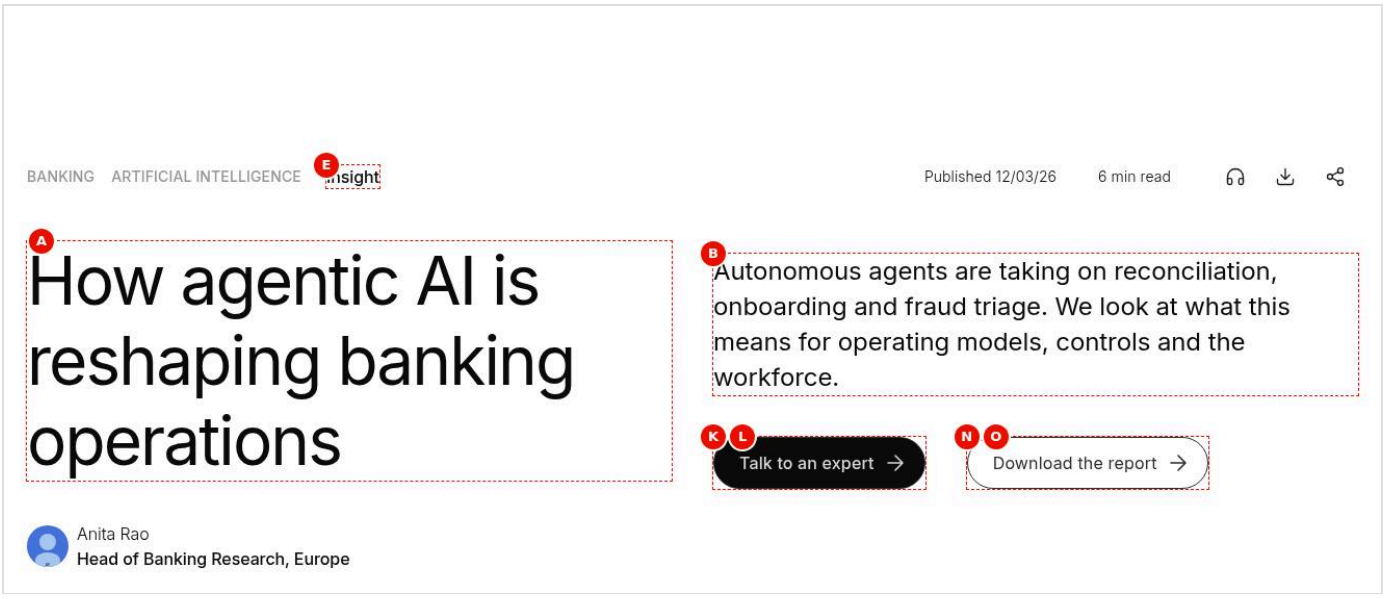


Figure: Desktop rendering — The article Page Header at 1440 px: the meta row with BANKING, ARTIFICIAL INTELLIGENCE and Insight on the left and Published 12/03/26, 6 min read and the headphones, download and share icons on the right; then the title and the Anita Rao lockup (Head of Banking Research, Europe) on the left, the description, Talk to an expert (black) and Download the report (outlined) on the right. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-desktop-view.jpg) (handover screenshot; rendering at the time it was taken).

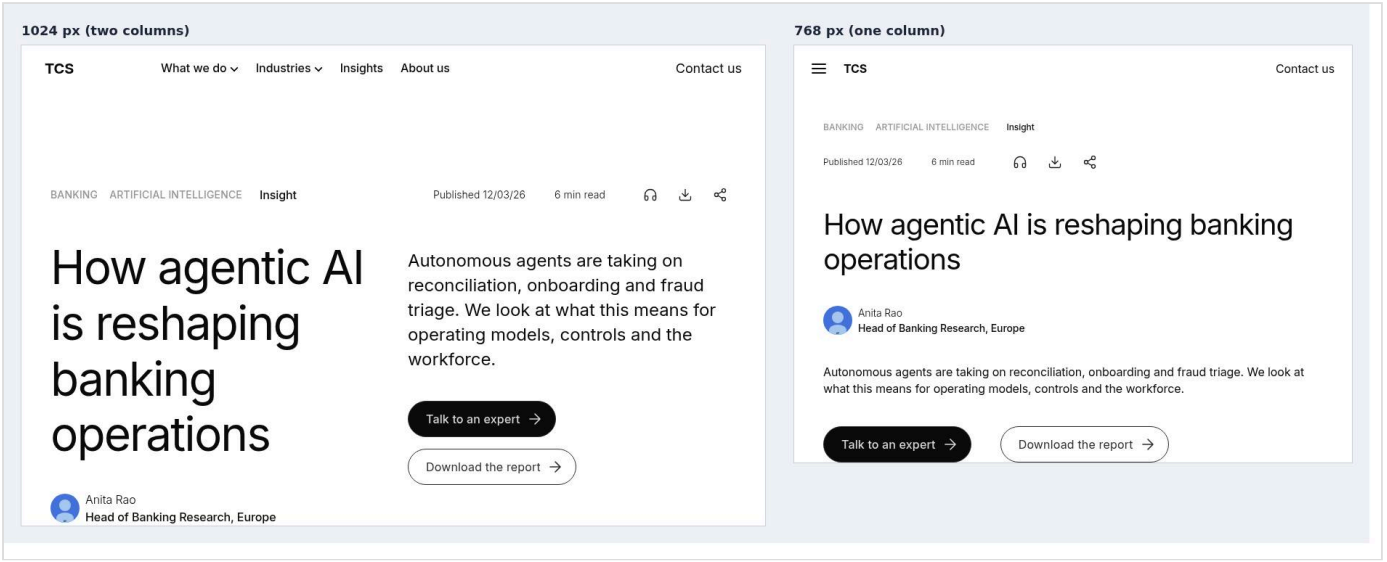


Figure: Tablet rendering — The same article at 1024 px and 768 px side by side. At 1024 px the meta row is one line and the title with the Anita Rao lockup and the description with the two CTAs are in two columns; at 768 px the labels and the info wrap onto two lines and title, lockup, description and CTAs stack in one column. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-tablet-view.jpg) (handover screenshot; rendering at the time it was taken).

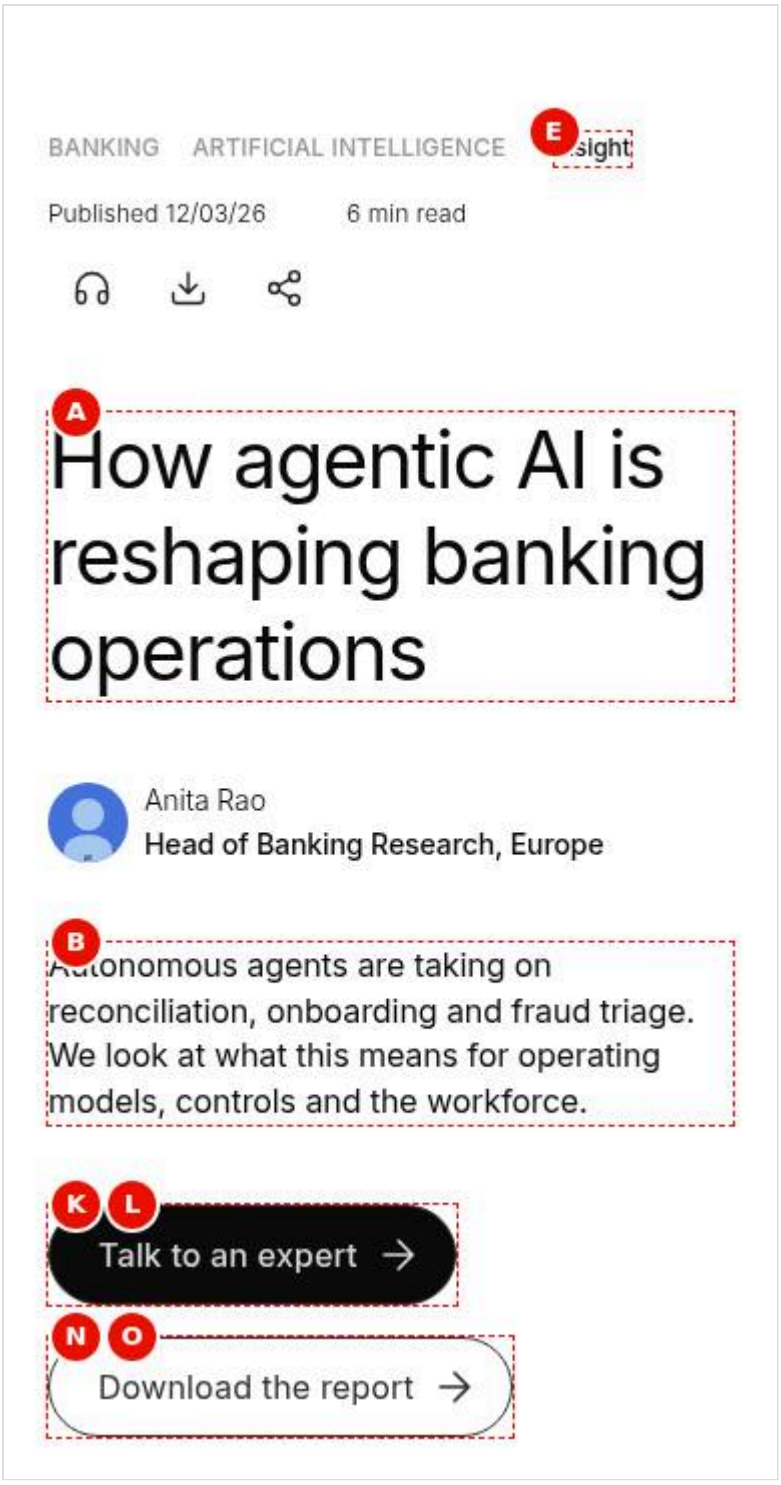


Figure: Mobile rendering — The article Page Header at 390 px: the meta row wraps onto three lines (BANKING, ARTIFICIAL INTELLIGENCE, Insight; Published 12/03/26 and 6 min read; the three icons), then the title, the Anita Rao lockup, the description, and Talk to an expert and Download the report stacked. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-mobile-view.jpg) (handover screenshot; rendering at the time it was taken).

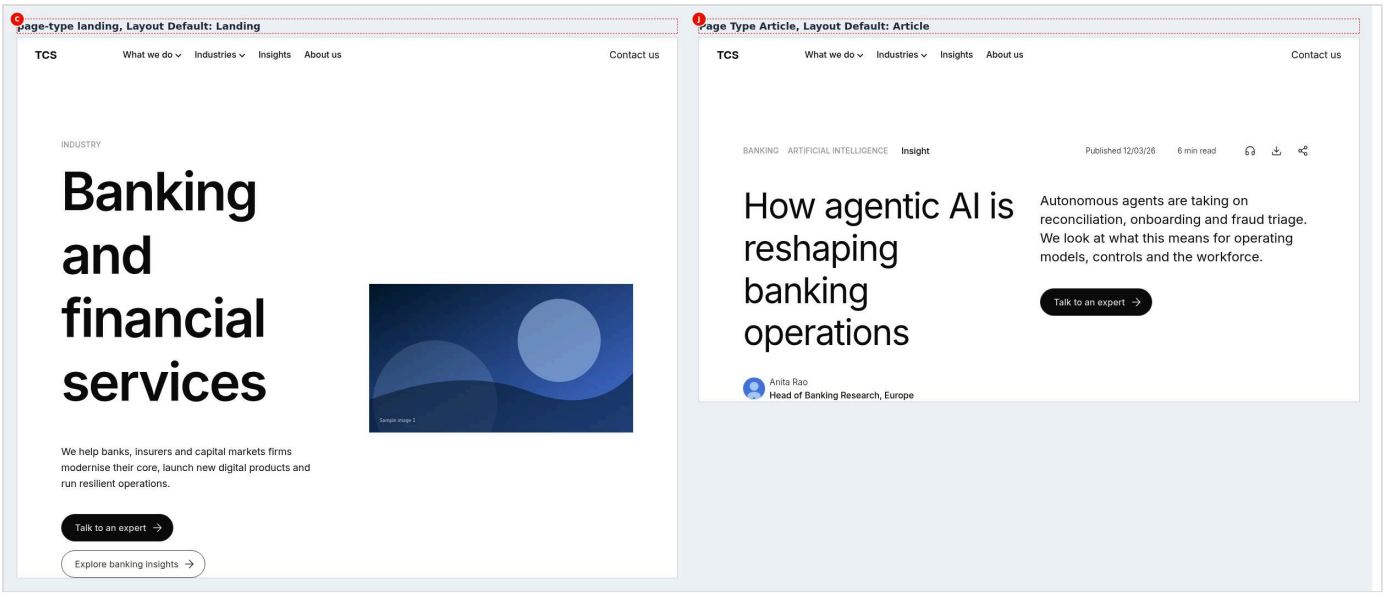


Figure: Layout chosen by Page Type — Two pages with Layout Default at 1200 px. Left, page-type landing: the Landing layout with INDUSTRY, Banking and financial services, the description and two CTAs beside the blue featured image. Right, Page Type Article: the meta row, the agentic AI title with the Anita Rao lockup, the description and one Talk to an expert button. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-default-layout.jpg) (handover screenshot; rendering at the time it was taken).

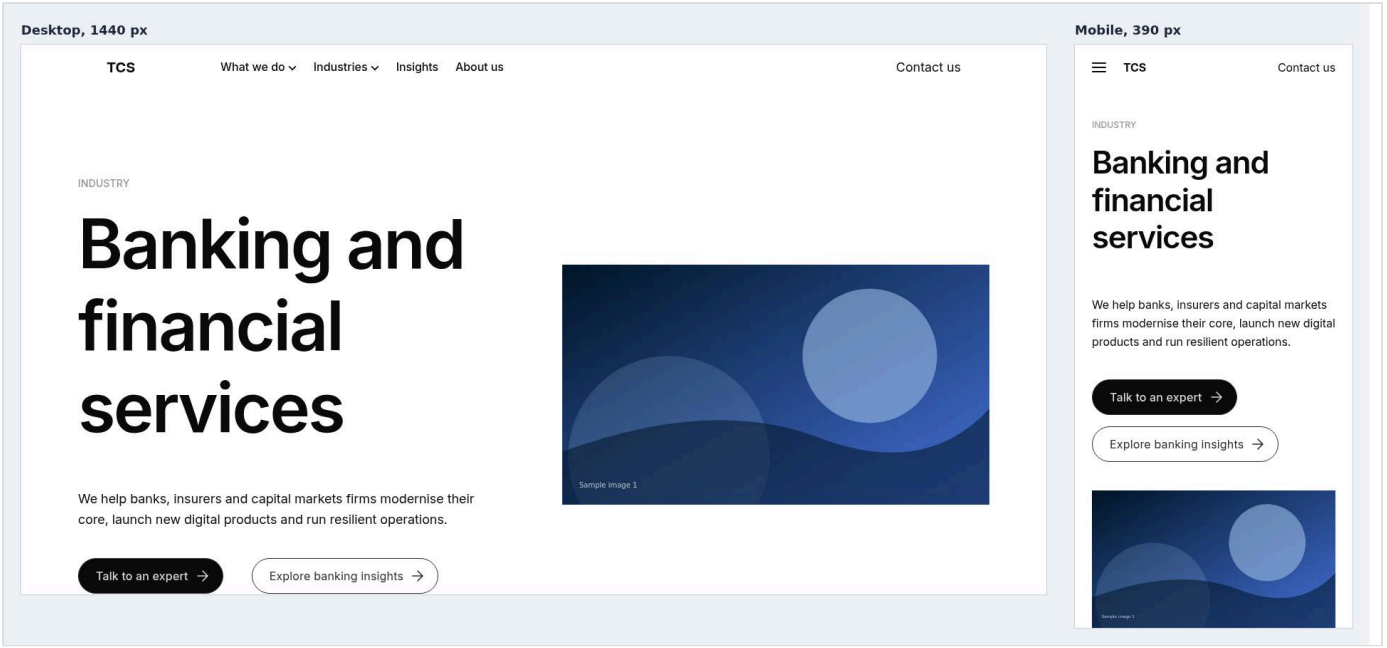


Figure: Landing with image — The Landing layout at 1440 px and 390 px. Desktop: INDUSTRY, the semibold 6rem title Banking and financial services, the description, Talk to an expert (black) and Explore banking insights (outlined) on the left, the blue sample image on the right. Mobile: the text and CTAs stacked, the image below them. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-landing-with-image.jpg) (handover screenshot; rendering at the time it was taken).

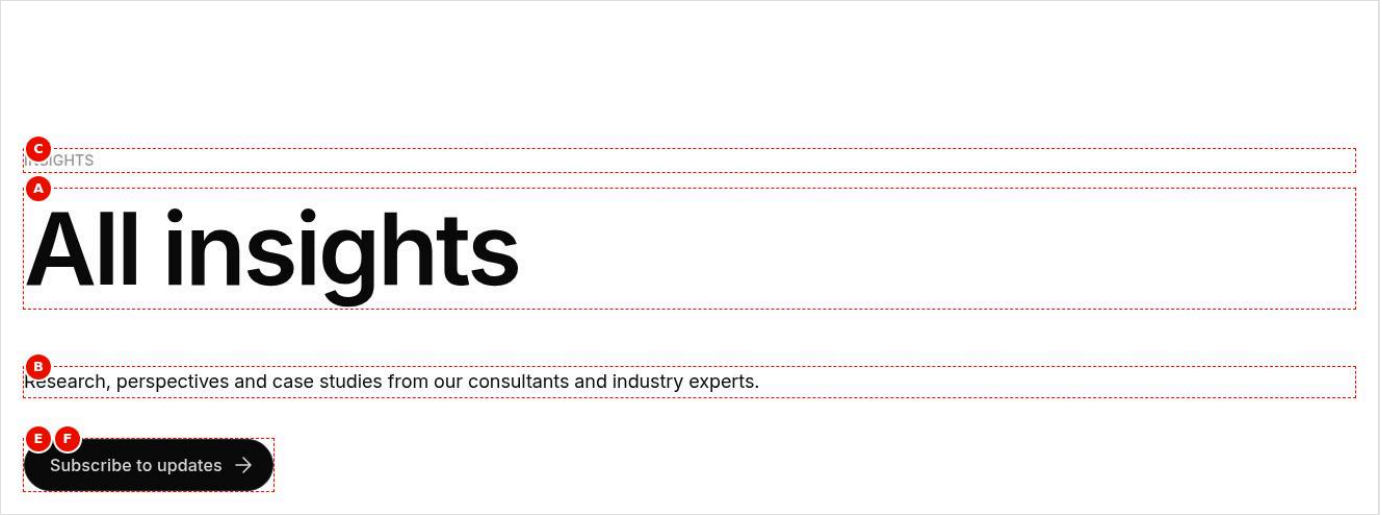


Figure: Landing without image — The Landing layout without a featured image at 1440 px: the INSIGHTS eyebrow, the very large semibold title All insights, the description Research, perspectives and case studies from our consultants and industry experts, and a black Subscribe to updates button, stacked on the left. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-landing-text-only.jpg) (handover screenshot; rendering at the time it was taken).

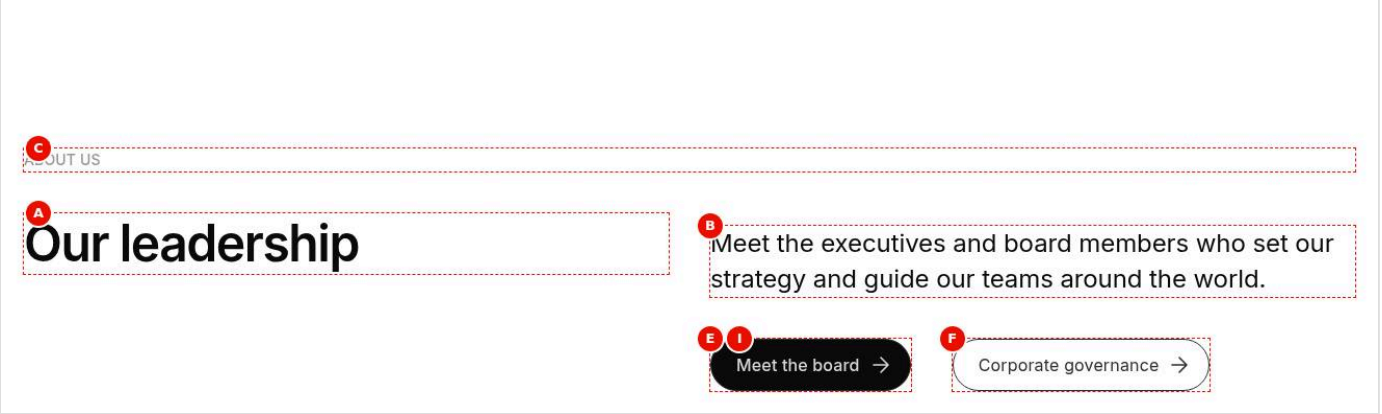


Figure: Secondary layout — The Secondary layout at 1440 px: the ABOUT US eyebrow above both columns, the semibold title Our leadership on the left; on the right, slightly lower, the description, Meet the board (black) and Corporate governance (outlined). (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-secondary.jpg) (handover screenshot; rendering at the time it was taken).

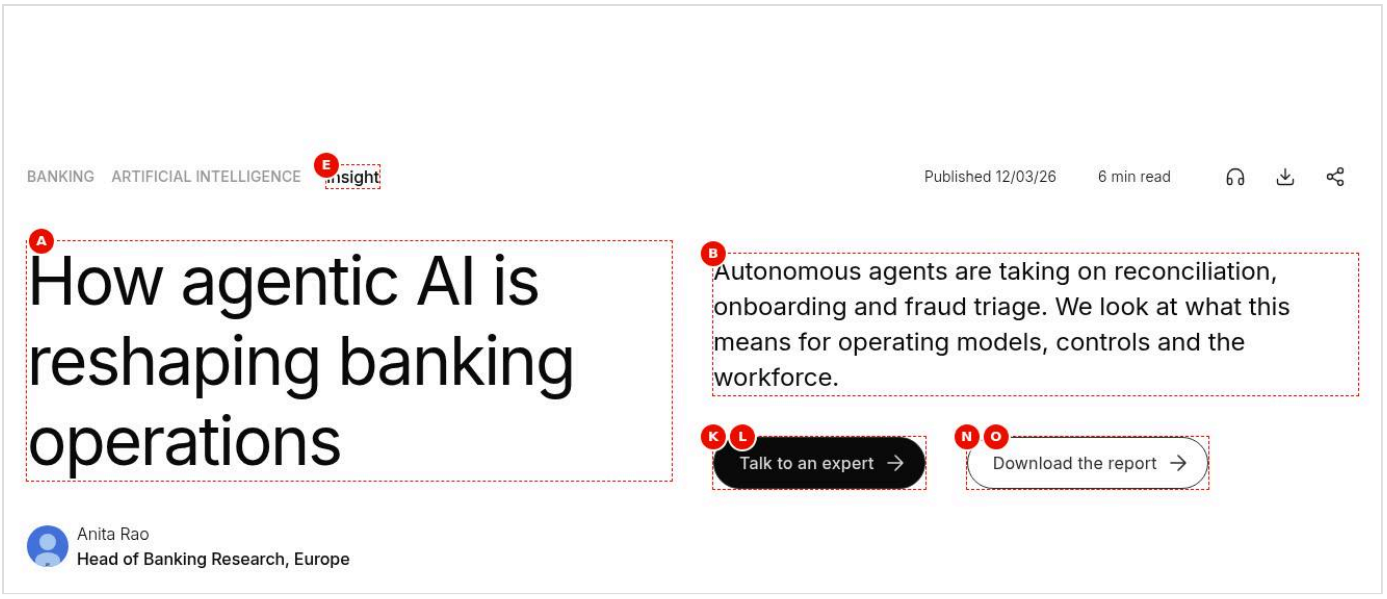


Figure: Article layout — The Article layout at 1440 px: BANKING, ARTIFICIAL INTELLIGENCE and Insight left in the meta row, Published 12/03/26, 6 min read and the headphones, download and share icons right; the title with the round Anita Rao photo, name and Head of Banking Research, Europe below it; the description, Talk to an expert and Download the report on the right. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-article.jpg) (handover screenshot; rendering at the time it was taken).

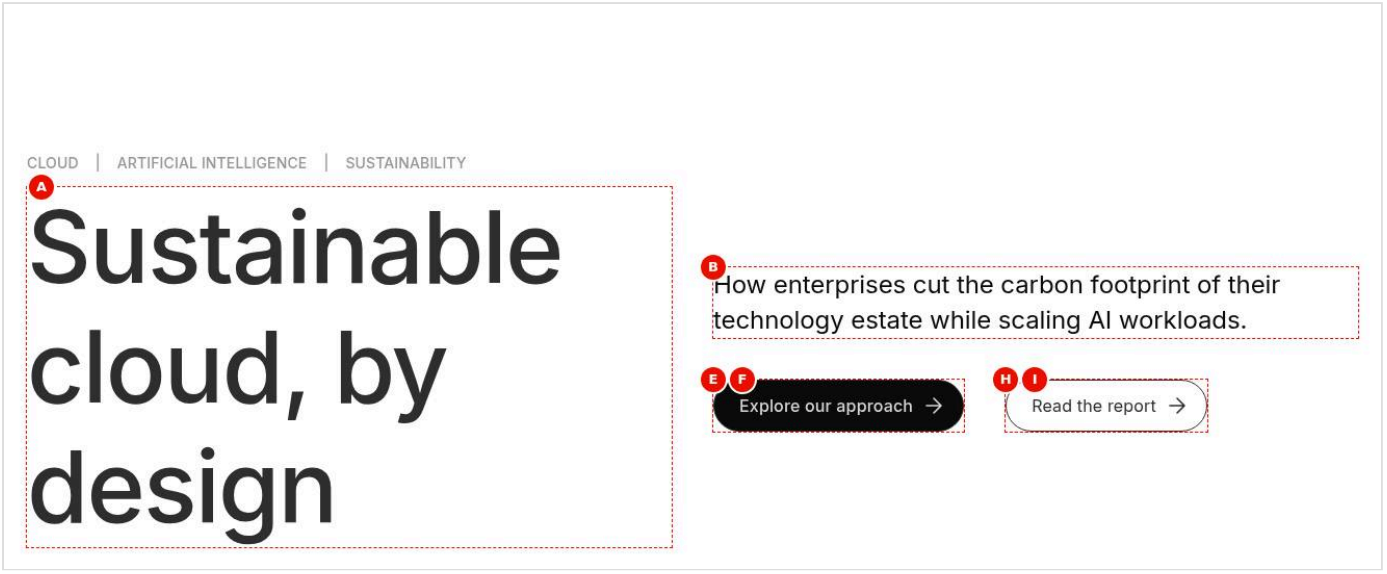


Figure: Display layout — The Display layout at 1440 px: the tags CLOUD, ARTIFICIAL INTELLIGENCE and SUSTAINABILITY separated by vertical bars above the 6rem medium-weight dark slate title Sustainable cloud, by design on the left; the description, Explore our approach (black) and Read the report (outlined) vertically centred on the right. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-display.jpg) (handover screenshot; rendering at the time it was taken).

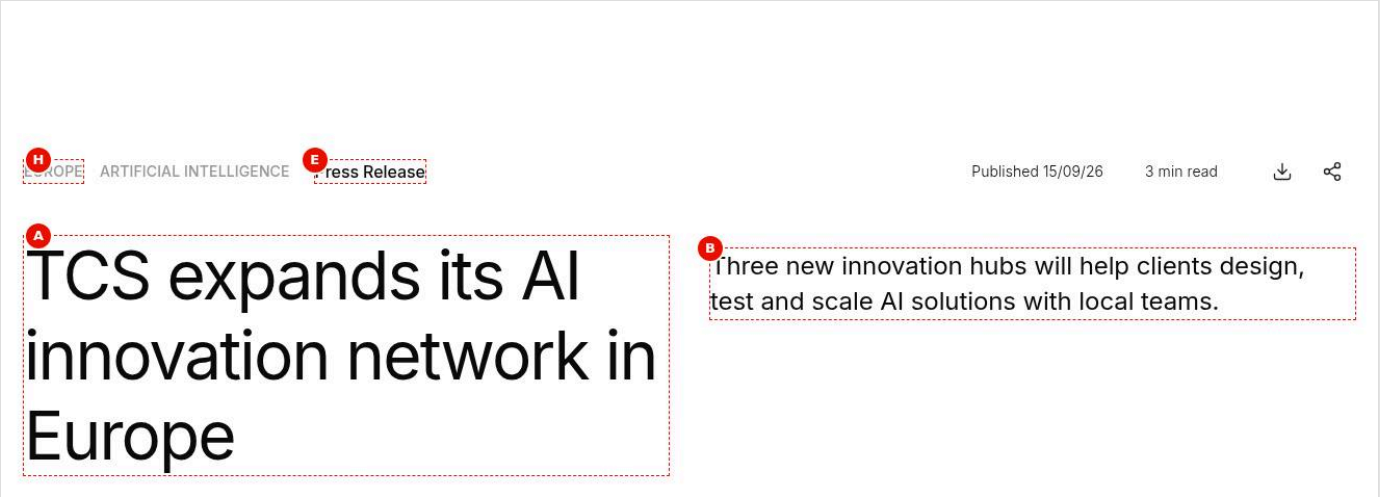


Figure: Template-generated header — The header the Press Release template adds at 1440 px, cropped to the block: EUROPE, ARTIFICIAL INTELLIGENCE and Press Release left, Published 15/09/26, 3 min read and only the download and share icons right; the title TCS expands its AI innovation network in Europe left and the description right, with no author and no CTAs. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-template-automatic.jpg) (handover screenshot; rendering at the time it was taken).



Figure: Primary CTA — The summary column of the Secondary header at 1440 px: the description Plan, migrate and run your applications on the cloud platforms that fit your business, and below it Talk to an expert as a black filled pill with white text and an arrow. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-cta-primary.jpg) (handover screenshot; rendering at the time it was taken).

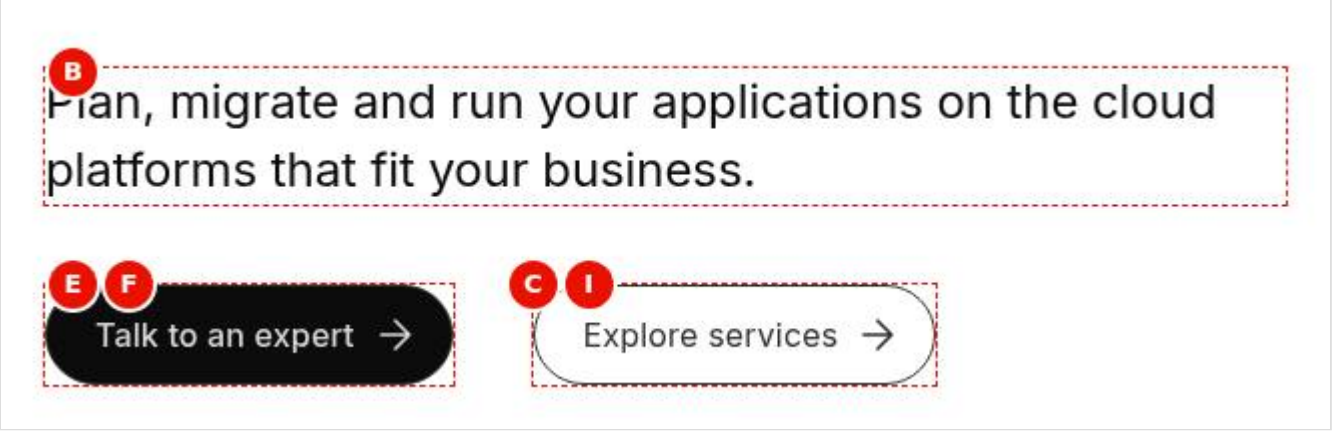


Figure: Secondary CTA — The summary column at 1440 px: the description, then Talk to an expert as a black filled pill and, beside it, Explore services as an outlined pill with dark text, both with an arrow. (Sample

content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-cta-secondary.jpg) (handover screenshot; rendering at the time it was taken).

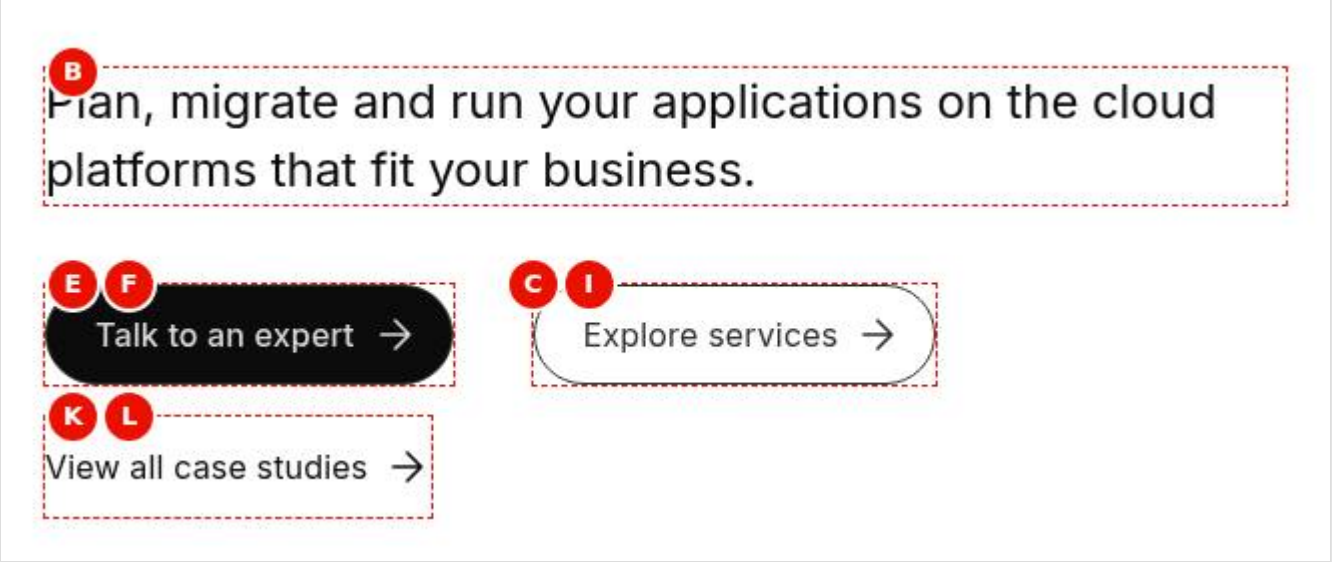


Figure: Text link CTA — The summary column at 1440 px: the description, Talk to an expert (black pill) and Explore services (outlined pill) on one line, and below them View all case studies as a plain text link with an arrow. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-cta-text-link.jpg) (handover screenshot; rendering at the time it was taken).



Figure: Name-only author — The intro column of the Article header at 1440 px: the title Lessons from a mainframe-to-cloud migration over three lines and below it the name Jordan Example in light weight, with no photo, designation or link. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-author-metadata.jpg) (handover screenshot; rendering at the time it was taken).

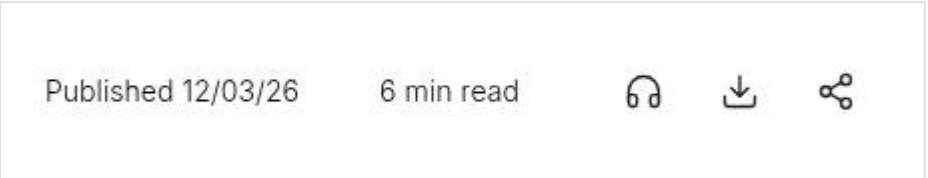


Figure: Listen icon — The info part of the article meta row at 1440 px: Published 12/03/26, 6 min read, then the headphones (listen), download and share icons. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/page-header-listen-action.jpg) (handover screenshot; rendering at the time it was taken).

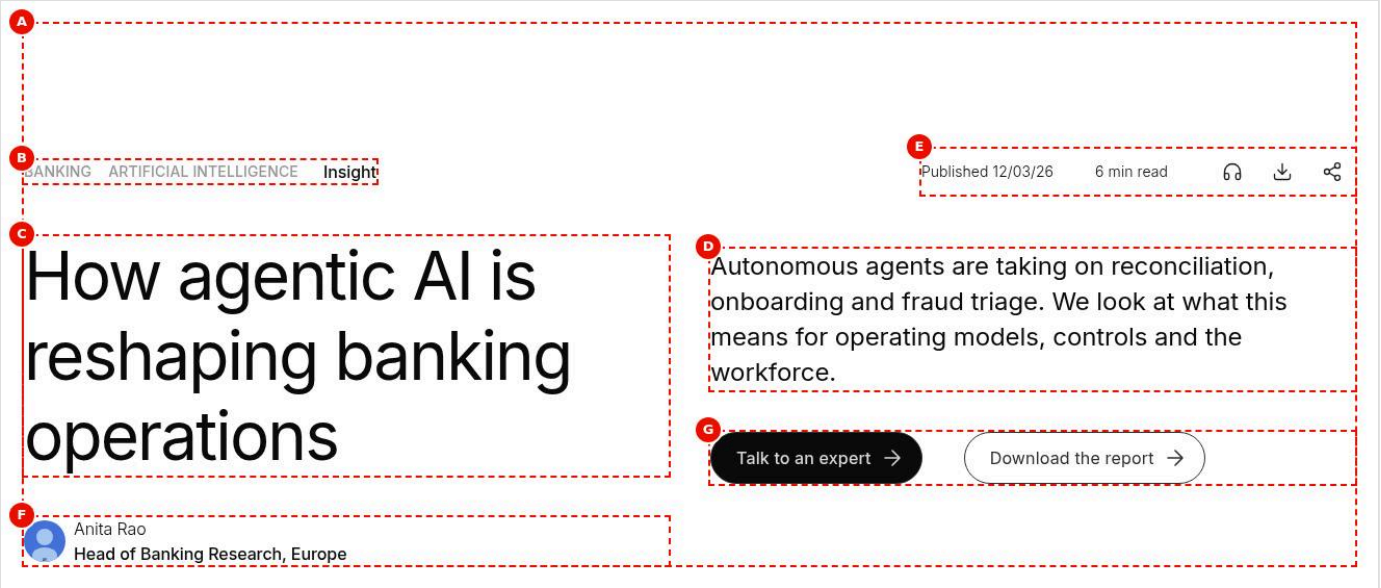


Figure: Universal Editor canvas — The article Page Header at 1440 px in editor mode with markers A to G: A the block, B BANKING, ARTIFICIAL INTELLIGENCE and Insight, C the title, D the description, E the date, reading time and icons, F the Anita Rao lockup, G the two CTAs. There is no H: the featured image appears only in the Landing layout. (Annotated preview in editor mode with sample content; letters as in the annotations list, not a Universal Editor screenshot; file screenshots/page-header-authoring-view.jpg) (handover screenshot; rendering at the time it was taken).

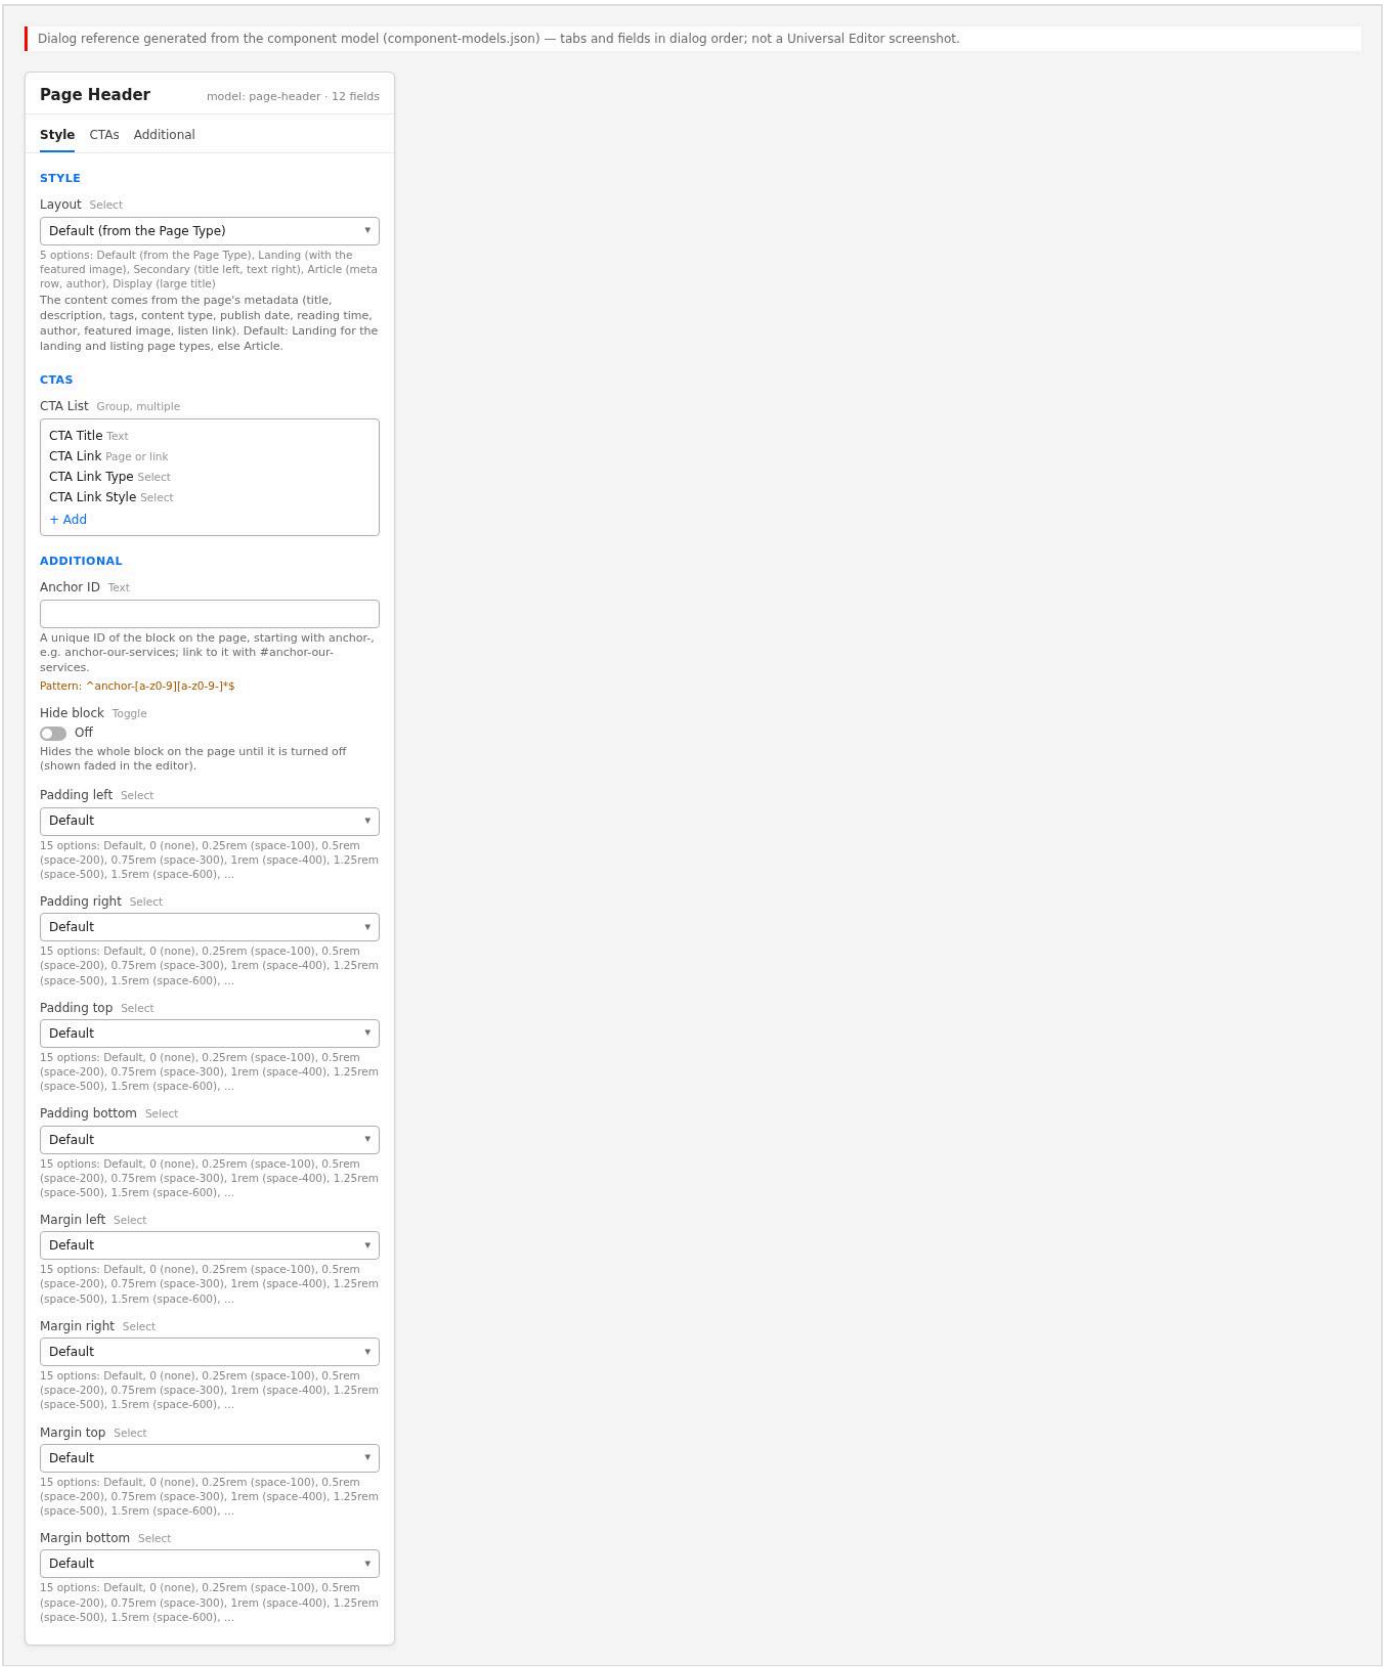


Figure: Properties panel — The Page Header properties with the Style tab (Layout select open), the CTAs tab with two CTA List items, and the Additional tab. (Dialog reference generated from the component model, not a Universal Editor screenshot; file screenshots/page-header-properties-panel.jpg) (handover screenshot; rendering at the time it was taken).

21. Known limitations

- Universal Editor dialogs were not captured: no author access in this program (see the access blockers).

22. Open items

- None.

23. Change history

Version	Date	Author	Change
1.0	13 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages