TCS CORPORATE WEBSITE

Embed — Authoring Guide

Role / audience	Authoring — Content authors, content managers, AEM authoring leads
Version	1.0
Status	Draft for review
Owner	Content Lead / AEM Authoring Lead (proposed)
Last validated	2026-11-13
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Embed — Authoring Guide
- Where to see it
- For Content Authors
- Authorable Fields
- Screenshot-Based Authoring Steps
- Variations
- Complete Authoring Example
- Content and Asset Guidelines
- Troubleshooting
- Screenshots
- Known limitations
- Open items
- Change history

Embed — Authoring Guide

Attribute	Value
Document ID	AUT-C-embed
Audience	Content authors, content managers, AEM authoring leads
Purpose	How to add, fill in and check the Embed component
Scope	—
Prerequisites	—
Owner	Content Lead / AEM Authoring Lead (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	13 November 2026
Last validated	13 November 2026
Source files	blocks/embed/README.md, blocks/embed/_embed.json
Related documents	—
Related AEM paths	—

1. Where to see it

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/embed
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/embed/embed

2. For Content Authors

1. **Add the block.** Select a Section, a Columns Container column or a Tabs Container tab in the content tree, choose Add (+) and pick **Embed**.
2. **Open its properties.** Select the block; the panel has the **Content** and **Additional** tabs.
3. **Enter the URI.** Paste the full https URL: a YouTube watch / `youtu.be` / `/shorts/` / `/live/` URL, a Vimeo URL, an X post URL, or a page that may be framed.
4. **Optional placeholder.** Select a 16:9 **Placeholder Image** and write its **Placeholder Image Alt Text** (it also names the Play button: "Play video: {alt text}").
5. **Put context before the block.** A Title and a short Text naming the content help every visitor (the iframe's own name is only "Content from {site}").
6. **Optional: Additional tab** (Anchor ID, Hide block, animation, spacing).
7. **Preview** at desktop, tablet and mobile widths; press Play with mouse and keyboard.
8. **Publish** the page (with the placeholder image).
9. **Validate the published output:** the image and Play button load; no provider request happens before Play (Network panel); the video plays or the post renders as a card.

Minimum required: URI (not required in the model, but without it nothing renders). **Recommended:** Placeholder Image with alt text for videos; a heading and text before the block. **Optional:** the Additional tab.

3. Authorable Fields

Embed (`embed`)

Model `embed`; template name "Embed" (the block class AEM renders).

Content tab — Embed

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Placeholder Image	`embed_placeholder`	reference	No	—	—	—	/content/dam/tcs-corp/dummy-pages/images/generative-ai.jpg
Placeholder Image Alt Text	`embed_placeholderAlt`	text	No	""	—	Delivered with `embed_placeholder` (field collapse).	Video: how enterprises scale AI with confidence
URI	`embed_uri`	text	No	—	—	—	https://www.youtube.com/watch?v=Xk3pQ7vT9mA

Additional tab — Embed

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Anchor ID	`classes_anchor`	text	No	—	regExp: ^anchor-[a-z0-9][a-z0-9-]*$; customErrorMsg: Start with anchor-, then lower-case letters, digits and hyphens.	A unique ID of the block on the page, starting with anchor-, e.g. anchor-our-services; link to it with #anchor-our-services. Delivered as a block class.	—
Hide block	`classes_hideblock`	boolean	No	`false`	on / off	Hides the whole block on the page until it is turned off (shown faded in the editor). Delivered as a block class.	—
Animation Type	`classes_animation`	select	No	""	None (""), Fade in (`motion-fade-in`), Fade up (`motion-fade-up`), Fade down (`motion-fade-down`), Fade left (`motion-fade-left`), Fade right (`motion-fade-right`), Slide up (`motion-slide-up`), Slide down (`motion-slide-down`), Slide left (`motion-slide-left`), Slide right (`motion-slide-right`), Scale in (`motion-scale-in`)	How the block's content appears; repeated items (cards, list items, accordion items, columns) appear one after another. None: shown as is. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	—
Motion Speed	`classes_animationspeed`	select	No	""	Medium (""), Fast (`motion-fast`), Slow (`motion-slow`)	How fast the animation runs: 0.3, 0.6 or 0.9 seconds. Shown when `classes_animation` is set and `classes_animation` is not empty. Delivered as a block class.	—
Animation Trigger	`classes_animationtrigger`	select	No	""	On Scroll / Viewport Entry (""), On Page Load (`motion-on-load`)	When the block's animations run. On Scroll: when the block comes into view (at once if it is in view when the page opens). On Page Load: as soon as the block is ready, wherever it is on the page. Shown when `classes_animation` is set and `classes_animation` is not empty. Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Padding left	classes_paddingleft	select	No	""	Default (""), 0 (none) (pl-0), 0.25rem (space-100) (pl-100), 0.5rem (space-200) (pl-200), 0.75rem (space-300) (pl-300), 1rem (space-400) (pl-400), 1.25rem (space-500) (pl-500), 1.5rem (space-600) (pl-600), 2rem (space-800) (pl-800), 2.5rem (space-1000) (pl-1000), 3rem (space-1200) (pl-1200), 4rem (space-1600) (pl-1600), 5rem (space-2000) (pl-2000), 6rem (space-2400) (pl-2400), 7.5rem (space-3000) (pl-3000)	Delivered as a block class.	—
Padding right	classes_paddingright	select	No	""	Default (""), 0 (none) (pr-0), 0.25rem (space-100) (pr-100), 0.5rem (space-200) (pr-200), 0.75rem (space-300) (pr-300), 1rem (space-400) (pr-400), 1.25rem (space-500) (pr-500), 1.5rem (space-600) (pr-600), 2rem (space-800) (pr-800), 2.5rem (space-1000) (pr-1000), 3rem (space-1200) (pr-1200), 4rem (space-1600) (pr-1600), 5rem (space-2000) (pr-2000), 6rem (space-2400) (pr-2400), 7.5rem (space-3000) (pr-3000)	Delivered as a block class.	—
Padding top	classes_paddingtop	select	No	""	Default (""), 0 (none) (pt-0), 0.25rem (space-100) (pt-100), 0.5rem (space-200) (pt-200), 0.75rem (space-300) (pt-300), 1rem (space-400) (pt-400), 1.25rem (space-500) (pt-500), 1.5rem (space-600) (pt-600), 2rem (space-800) (pt-800), 2.5rem (space-1000) (pt-1000), 3rem (space-1200) (pt-1200), 4rem (space-1600) (pt-1600), 5rem (space-2000) (pt-2000), 6rem (space-2400) (pt-2400), 7.5rem (space-3000) (pt-3000)	Delivered as a block class.	—
Padding bottom	classes_paddingbottom	select	No	""	Default (""), 0 (none) (pb-0), 0.25rem (space-100) (pb-100), 0.5rem (space-200) (pb-200), 0.75rem (space-300) (pb-300), 1rem (space-400) (pb-400), 1.25rem (space-500) (pb-500), 1.5rem (space-600) (pb-600), 2rem (space-800) (pb-800), 2.5rem (space-1000) (pb-1000), 3rem (space-1200) (pb-1200), 4rem (space-1600) (pb-1600), 5rem (space-2000) (pb-2000), 6rem (space-2400) (pb-2400), 7.5rem (space-3000) (pb-3000)	Delivered as a block class.	—
Margin left	classes_marginleft	select	No	""	Default (""), 0 (none) (ml-0), 0.25rem (space-100) (ml-100), 0.5rem (space-200) (ml-200), 0.75rem (space-300) (ml-300), 1rem (space-400) (ml-400), 1.25rem (space-500) (ml-500), 1.5rem (space-600) (ml-600), 2rem (space-800) (ml-800), 2.5rem (space-1000) (ml-1000), 3rem (space-1200) (ml-1200), 4rem (space-1600) (ml-1600), 5rem (space-2000) (ml-2000), 6rem (space-2400) (ml-2400), 7.5rem (space-3000) (ml-3000)	Delivered as a block class.	—
Margin right	classes_marginright	select	No	""	Default (""), 0 (none) (mr-0), 0.25rem (space-100) (mr-100), 0.5rem (space-200) (mr-200), 0.75rem (space-300) (mr-300), 1rem (space-400) (mr-400), 1.25rem (space-500) (mr-500), 1.5rem (space-600) (mr-600), 2rem (space-800) (mr-800), 2.5rem (space-1000) (mr-1000), 3rem (space-1200) (mr-1200), 4rem (space-1600) (mr-1600), 5rem (space-2000) (mr-2000), 6rem (space-2400) (mr-2400), 7.5rem (space-3000) (mr-3000)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Margin top	classes_margintop	select	No	""	Default (""), 0 (none) (mt-0), 0.25rem (space-100) (mt-100), 0.5rem (space-200) (mt-200), 0.75rem (space-300) (mt-300), 1rem (space-400) (mt-400), 1.25rem (space-500) (mt-500), 1.5rem (space-600) (mt-600), 2rem (space-800) (mt-800), 2.5rem (space-1000) (mt-1000), 3rem (space-1200) (mt-1200), 4rem (space-1600) (mt-1600), 5rem (space-2000) (mt-2000), 6rem (space-2400) (mt-2400), 7.5rem (space-3000) (mt-3000)	Delivered as a block class.	—
Margin bottom	classes_marginbottom	select	No	""	Default (""), 0 (none) (mb-0), 0.25rem (space-100) (mb-100), 0.5rem (space-200) (mb-200), 0.75rem (space-300) (mb-300), 1rem (space-400) (mb-400), 1.25rem (space-500) (mb-500), 1.5rem (space-600) (mb-600), 2rem (space-800) (mb-800), 2.5rem (space-1000) (mb-1000), 3rem (space-1200) (mb-1200), 4rem (space-1600) (mb-1600), 5rem (space-2000) (mb-2000), 6rem (space-2400) (mb-2400), 7.5rem (space-3000) (mb-3000)	Delivered as a block class.	—

What the tables don't show:

- **URI (`embed_uri`)** picks the handler: a URL containing `youtube.com` / `youtu.be` builds a YouTube frame, `vimeo.com` a Vimeo frame, a `twitter.com` / `x.com` host (with or without `www.`) an X post; anything else an iframe of the URL. The code reads the first link of the block, else the first `http(s)://` URL in its text.
- **Placeholder Image / Alt Text** (`embed_placeholder`, `embed_placeholderAlt`; the alt collapses into the image) switches the block to click-to-load: the image with a Play button; Play loads the embed with `autoplay=1` and `muted=1` for YouTube and Vimeo and moves focus into it. The alt text names the Play button ("Play video: {alt}"); without alt text the button is "Play".
- **Rendering result:** YouTube from `https://www.youtube-nocookie.com/embed/{id}` (`rel=0`, `enablejsapi=1`); Vimeo from `https://player.vimeo.com/video/{id}` with `dnt=1` (channel URLs and unlisted hashes supported); X posts as a `blockquote.twitter-tweet` with `x.com` rewritten to `twitter.com` and `https://platform.twitter.com/widgets.js` loaded; other URLs as an iframe with `allow="encrypted-media"` and fullscreen.
- **Accessibility impact:** every iframe is titled "Content from {host}" (placeholder `contentFrom`, host without `www.`); the placeholder alt text is the only per-item name.
- **Data-layer impact:** the Play button carries `data-cmp-interaction="play"`.
- **Legacy mapping:** none; the block reads the delivered link and picture wherever they are in the block, so the empty rows AEM delivers for the Content and Additional tabs don't matter.
- **Additional tab:** as on every block (AGENTS.md "Additional tab"); the block is centred with `margin: 0 auto`, which Margin left / right replace.

4. Screenshot-Based Authoring Steps

Authoring Step 1: Add the Embed and paste the URI

```
[Screenshot Placeholder]

File name:
embed-authoring-step-1.png

Purpose:
The section's Add (+) list with Embed, then the Content tab with the URI filled.
```

```
Annotations:
A = Add (+)
B = Embed in the list
C = URI
```

Values to Enter

Callout	Field	Value	Reason	Expected result
B	Component	Embed	Adds the block	An Embed in the content tree
C	URI	https://www.youtube.com/watch?v=Xk3pQ7vT9mA	The video to embed	The YouTube player appears when the block is in view

Author action: add the Embed, open its properties and paste the URL. **Expected preview:** a 16:9 rounded YouTube player, up to 56.25rem wide, centred. **Expected published result:** the same. **Business rules:** without a URL nothing renders. **Validation:** the player loads at 390, 768 and 1440 px. **Common mistakes:** a URL without `https://`, or a Vimeo URL without the numeric id.

Authoring Step 2: Add the placeholder image

```
[Screenshot Placeholder]

File name:
embed-authoring-step-2.png

Purpose:
The Placeholder Image and its alt text filled, and the image with the Play button on the canvas.

Annotations:
A = Placeholder Image
B = Placeholder Image Alt Text
C = Play button
```

Values to Enter

Call out	Field	Value	Reason	Expected result
A	Placeholder Image	/content/dam/tcs-corp/dummy-pages/images/generative-ai.jpg	Branded first view; nothing loads from YouTube before Play	The image fills a 16:9 area
B	Placeholder Image Alt Text	Video: how enterprises scale AI with confidence	Describes the image and names the Play button	Play is announced "Play video: Video: how enterprises scale AI with confidence"

Author action: select the image and write the alt text. **Expected preview:** the image with a round Play button. **Expected published result:** the same; Play loads and starts the video. **Business rules:** the image is cropped to 16:9 (`object-fit: cover`). **Validation:** Network panel shows no YouTube request before Play. **Common mistakes:** an image that isn't 16:9 is cropped badly; keep the subject centred. Starting the alt text with "Video:" repeats the button's "Play video:" prefix; describe the image instead.

Authoring Step 3: Name the content in the page

```
[Screenshot Placeholder]

File name:
embed-authoring-step-3.png
```

```
Purpose:
A Title and a Text directly before the Embed in the same section.

Annotations:
A = Title before the block
B = Text before the block
C = The Embed
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Title (component)	Watch: AI at enterprise scale	The iframe is only named "Content from youtube-nocookie.com"	A heading names the video for everyone

Author action: add a Title (and a Text) before the Embed. **Expected preview / published result:** the heading above the embed. **Validation:** a screen reader reads the heading before the frame. **Common mistakes:** relying on the frame name alone.

5. Variations

YouTube

- **Purpose:** public, embeddable YouTube videos. **Fields:** URI; optional placeholder.
- **Rendering:** `div.embed-frame > iframe` (16:9, rounded `--radius-l`), block classes `embed-youtube embed-is-loaded`; privacy-enhanced host always (no option).
- **Accessibility:** iframe title "Content from youtube-nocookie.com"; captions are the video's own.
- **Data layer:** player interactions aren't tracked; Play is a `cmp:click` (`play`).

```
[Screenshot Placeholder]

File name:
embed-youtube-mobile.png

Purpose:
A YouTube embed without placeholder at 390 px, filling the content width.

Annotations:
A = Player frame
```

Vimeo

- **Rendering:** `player.vimeo.com/video/{id}` with `dnt=1` (and `h` for unlisted videos); `embed-vimeo`. Otherwise as YouTube.

```
[Screenshot Placeholder]

File name:
embed-vimeo-desktop.png

Purpose:
A Vimeo embed at 1440 px.

Annotations:
A = Vimeo player frame
```

X (Twitter) post

- **Rendering:** `blockquote.twitter-tweet` with a link to the post (its address as text) until the X widget script replaces it; `embed-twitter`; the rendered post is centred. The post takes the widget's height (no 16:9 frame).
- **Accessibility / data layer:** a click on the fallback link is a `cmp:click` (`link`, `exit`); clicks inside the rendered widget aren't tracked.
- **Fallback:** if the widget never loads, the link stays.

Generic iframe

- **Purpose:** an approved page that allows framing. **Rendering:** a 16:9 `div.embed-frame` iframe of the URL (`allow="encrypted-media"`, fullscreen, lazy). No height or ratio option; no host allow-list. A site that forbids framing shows the browser's refusal in the frame.

Placeholder image with Play (click-to-load)

- **Purpose:** branded first view and no provider request until Play; recommended for videos.
- **Rendering:** `div.embed-placeholder` (picture + `button.embed-placeholder-play`); Play replaces it with the embed (with autoplay for YouTube / Vimeo) and focuses the iframe (or the X link).
- **Accessibility:** native `button`, named from the alt text; focus moves into the player.
- **Data layer:** `cmp:click` with `interaction play`.

6. Complete Authoring Example

Scenario: a keynote video with a branded placeholder on an insights page.

Field	Example value	Guidance
Title before the block	Watch: AI at enterprise scale	Names the video
Placeholder Image	/content/dam/tcs-corp/dummy-pages/images/generative-ai.jpg	16:9, subject centred
Placeholder Image Alt Text	Keynote speaker on stage presenting enterprise AI	Describes the image
URI	https://www.youtube.com/watch?v=Xk3pQ7vT9mA	Full https URL

Steps: add the Title, then the Embed; fill the placeholder, alt text and URI; preview; publish.

Expected output: the centred, rounded 16:9 image (up to 56.25rem wide) with the Play button; Play loads the privacy-enhanced YouTube player and moves focus into it.

Responsive: fluid width at every viewport; the 16:9 area scales.

Accessibility: Play named "Play video: Keynote speaker on stage presenting enterprise AI"; the heading names the content; captions come from YouTube.

Analytics / data layer: `tcs-corp/components/embed` (`embed-1`); Play pushes `cmp:click` with `interaction play`.

Personalization fallback: none.

Pre-publish checklist:

1. The URI is a full https URL of a public, embeddable item.
2. The placeholder image is 16:9 and published.
3. Alt text describes the image.
4. A heading before the block names the content.
5. Play works with mouse and keyboard.
6. No horizontal scrolling at 390 px.

7. Content and Asset Guidelines

- **Titles and descriptions:** put them in the page (Title / Text before the block); the block has no text fields.
- **Labels:** "Play", "Play video: {title}" and "Content from {source}" come from placeholders (`play`, `playVideoTitle`, `contentFrom`); keep `{title}` / `{source}` when translating.
- **Links:** full https URLs; the canonical provider URL.
- **Images and alt text:** a 16:9 image (cropped with `object-fit: cover` to the 56.25rem maximum width); alt text describing it.
- **Icons:** the Play icon is generated (`icons/play.svg`).
- **Tags and metadata:** none.
- **Min / max items:** one URL per block. No verified technical limit was identified.
- **Asset source:** the placeholder from AEM Assets; content from the providers.
- **Loading:** the embed loads when in view (no placeholder) or after Play; a placeholder image in the first section can be the LCP image (loaded eagerly by `waitForFirstImage`).
- **Missing-asset fallback:** no URL: nothing renders (the empty block still reserves a 16:9 area, see Known Limitations); an X widget that doesn't load leaves the post link.

8. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
Nothing renders	No URI	`{page}.plain.html`: look for the link or URL	Paste the full https URL	Embed appears
YouTube "Video unavailable"	Wrong id, private video, embedding disabled	Inspect the iframe `src`	Public, embeddable video URL	Player loads
Vimeo "does not exist"	URL without a numeric id	Inspect the iframe `src`	Use `vimeo.com/{id}`	Player loads
X post shows only a link	Widget script blocked, post protected or deleted	Network: `widgets.js`; open the post	Public post; allow the script	Card renders
Iframe "refused to connect"	Site forbids framing, or http	Console (X-Frame-Options / CSP)	Embeddable https URL, or a link instead	Page shows
Video starts with sound after Play	`muted=1` is passed to YouTube as well; browsers' autoplay rules apply	Inspect the `src` parameters	Expected; use Video for playback control	—
Placeholder cropped badly	Image not 16:9	Compare dimensions	16:9 rendition, subject centred	Image framed well

Evidence to collect (no secrets): page URL, `.plain.html` of the block, the iframe `src`, console errors (CSP, framing), Network entries of the provider requests, the block's data-layer entries.

9. Screenshots

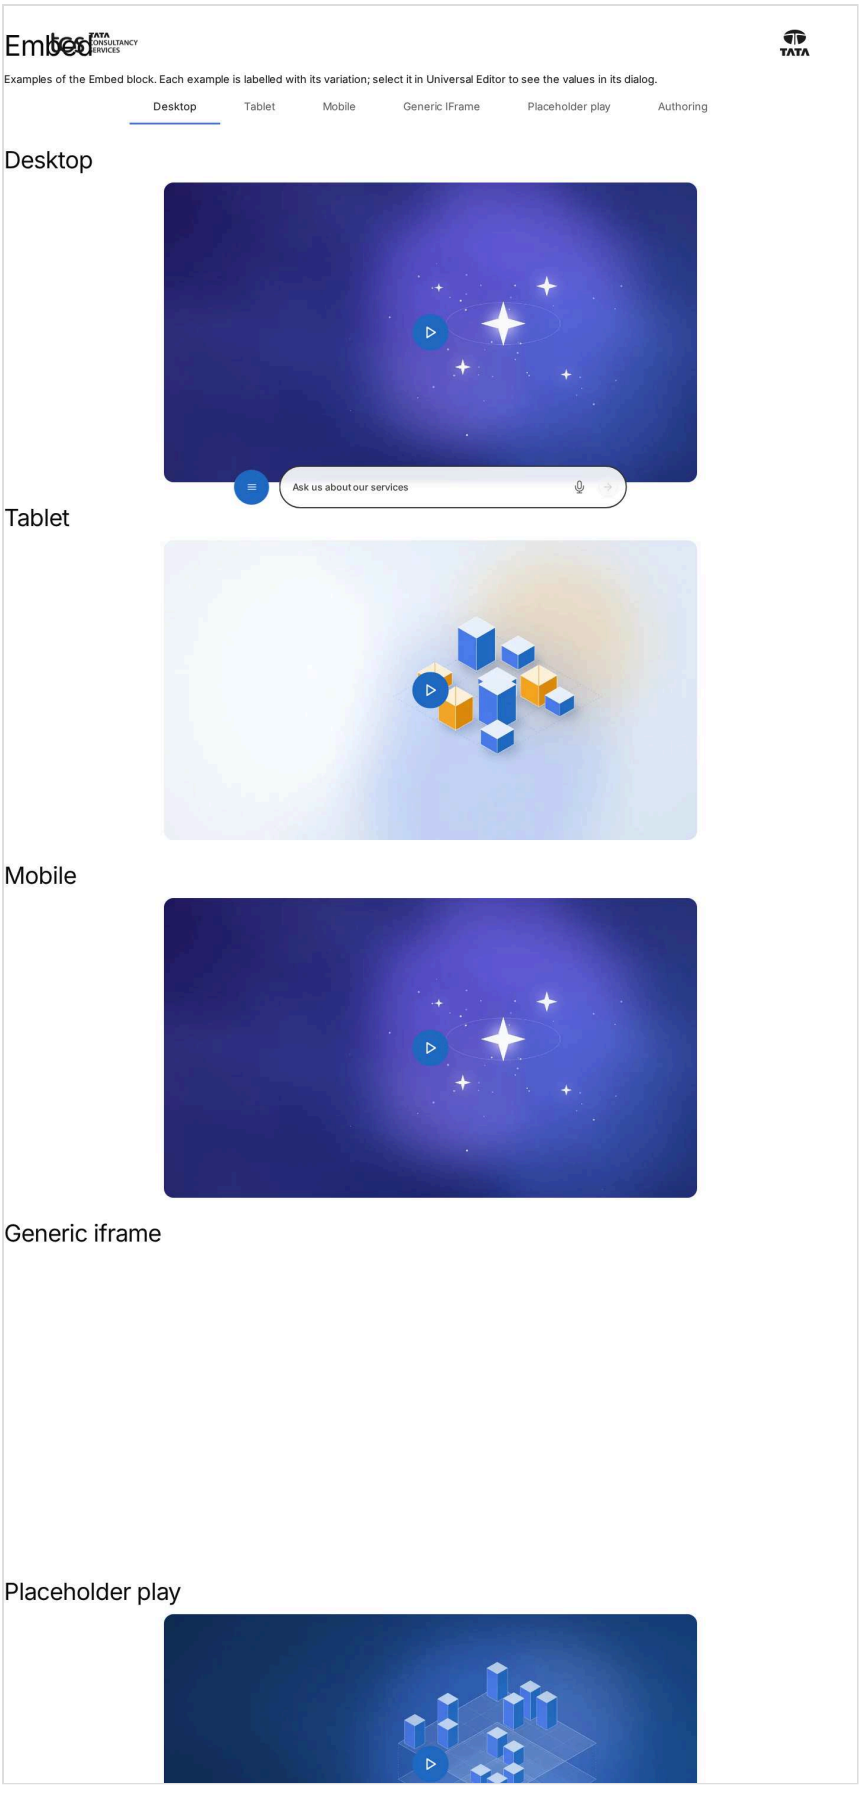


Figure: Embed as published (block library) — desktop 1440 × 900 (/design-block-master/en/block-library/embed/embed, captured 2026-11-08).

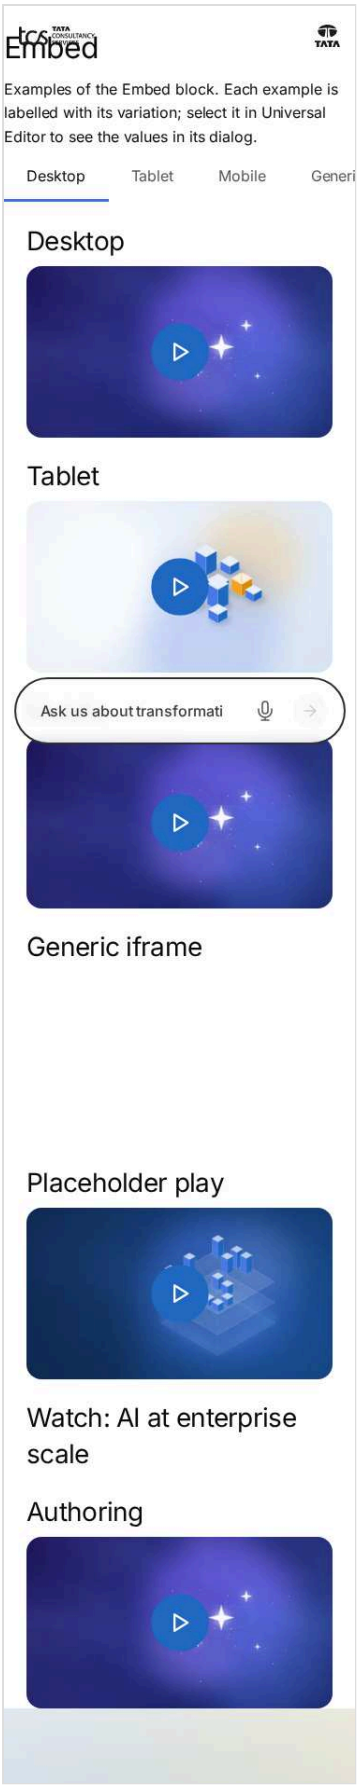


Figure: Embed as published (block library) — mobile 375 × 812 (/design-block-master/en/block-library/embed/embed, captured 2026-11-08).

> **Screenshot required**

> - Required screen: Embed dialog in Universal Editor (every tab, including Additional)
> - Required role/access: AEM Sites author with Universal Editor (content author)
> - Required navigation steps: AEM Sites console > /content/tcs-corp/language-masters/en > open a page in Universal Editor
> - Reason unavailable: No AEM author access in the documentation program (access blocker AB-01)
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

10. Known limitations

- Universal Editor screenshots are placeholders: no author access in this program.

11. Open items

- None.

12. Change history

Version	Date	Author	Change
1.0	13 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages