TCS CORPORATE WEBSITE

Modal — Authoring Guide

Role / audience	Authoring — Content authors, content managers, AEM authoring leads
Version	1.0
Status	Draft for review
Owner	Content Lead / AEM Authoring Lead (proposed)
Last validated	2026-11-13
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Modal — Authoring Guide
- Where to see it
- For Content Authors
- Authorable Fields
- Screenshot-Based Authoring Steps
- Variations
- Complete Authoring Example
- Content and Asset Guidelines
- Troubleshooting
- Screenshots
- Known limitations
- Open items
- Change history

Modal — Authoring Guide

Attribute	Value
Document ID	AUT-C-modal
Audience	Content authors, content managers, AEM authoring leads
Purpose	How to add, fill in and check the Modal component
Scope	—
Prerequisites	—
Owner	Content Lead / AEM Authoring Lead (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	13 November 2026
Last validated	13 November 2026
Source files	blocks/modal/README.md, blocks/modal/_modal.json
Related documents	—
Related AEM paths	—

1. Where to see it

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/auto-linked-modal
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/fragments
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/fragments/contact-form
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/fragments/privacy-notice
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/fragments/recognition
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/fragments/terms
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/modal-block
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/modal-long-content
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/modal/modal-with-a-form

2. For Content Authors

1. **Create the modal page** (a fragment page, e.g. under the locale's `modal/` or `references/` folder) and start it with a heading: the heading names the dialog.
2. **Publish the modal page.**
3. **Add the block** to the host page: section (or Columns Container column, or Tab) › Add › **Modal**.
4. **Open its properties.** Pick the page in **Modal Content** and enter the **Button Text** (a verb and an object, e.g. "View our awards").

5. **Additional tab** (optional): Anchor ID, Hide block, padding and margin apply to the button's block on the page, not to the dialog.
6. **Preview:** select the button (it works in Universal Editor preview too); check the dialog's content, scrolling and closing.
7. **Publish** the host page.
8. **Auto-linked alternative:** in any text or button, link to a page whose path contains `/modal/`: on the site, the link opens that page in a dialog.
9. **Validate** on the published site: the dialog opens, is named by its heading, closes with Escape and returns focus to the button.

Minimum required: Modal Content. Recommended: Button Text; a heading at the top of the modal page. Optional: the Additional tab.

3. Authorable Fields

Modal (`modal`)

Model `modal`; template name "Modal" (the block class AEM renders).

Content tab — Modal

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Modal Content	`link`	aem-content	No	—	—	A fragment page, e.g. under /modal/. Opens in a dialog.	/design-block-master/en/block-library/modal/fragments/contact-form
Button Text	`linkText`	text	No	—	—	Delivered with `link` (field collapse).	Contact our team

Additional tab — Modal

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Anchor ID	`classes_anchor`	text	No	—	regExp: ^anchor-[a-z0-9][a-z0-9-]*$; customErrorMsg: Start with anchor-, then lower-case letters, digits and hyphens.	A unique ID of the block on the page, starting with anchor-, e.g. anchor-our-services; link to it with #anchor-our-services. Delivered as a block class.	—
Hide block	`classes_hideblock`	boolean	No	`false`	on / off	Hides the whole block on the page until it is turned off (shown faded in the editor). Delivered as a block class.	—
Padding left	`classes_paddingleft`	select	No	""	Default (""), 0 (none) (`pl-0`), 0.25rem (space-100) (`pl-100`), 0.5rem (space-200) (`pl-200`), 0.75rem (space-300) (`pl-300`), 1rem (space-400) (`pl-400`), 1.25rem (space-500) (`pl-500`), 1.5rem (space-600) (`pl-600`), 2rem (space-800) (`pl-800`), 2.5rem (space-1000) (`pl-1000`), 3rem (space-1200) (`pl-1200`), 4rem (space-1600) (`pl-1600`), 5rem (space-2000) (`pl-2000`), 6rem (space-2400) (`pl-2400`), 7.5rem (space-3000) (`pl-3000`)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Padding right	classes_paddingright	select	No	""	Default (""), 0 (none) (pr-0), 0.25rem (space-100) (pr-100), 0.5rem (space-200) (pr-200), 0.75rem (space-300) (pr-300), 1rem (space-400) (pr-400), 1.25rem (space-500) (pr-500), 1.5rem (space-600) (pr-600), 2rem (space-800) (pr-800), 2.5rem (space-1000) (pr-1000), 3rem (space-1200) (pr-1200), 4rem (space-1600) (pr-1600), 5rem (space-2000) (pr-2000), 6rem (space-2400) (pr-2400), 7.5rem (space-3000) (pr-3000)	Delivered as a block class.	—
Padding top	classes_paddingtop	select	No	""	Default (""), 0 (none) (pt-0), 0.25rem (space-100) (pt-100), 0.5rem (space-200) (pt-200), 0.75rem (space-300) (pt-300), 1rem (space-400) (pt-400), 1.25rem (space-500) (pt-500), 1.5rem (space-600) (pt-600), 2rem (space-800) (pt-800), 2.5rem (space-1000) (pt-1000), 3rem (space-1200) (pt-1200), 4rem (space-1600) (pt-1600), 5rem (space-2000) (pt-2000), 6rem (space-2400) (pt-2400), 7.5rem (space-3000) (pt-3000)	Delivered as a block class.	—
Padding bottom	classes_paddingbottom	select	No	""	Default (""), 0 (none) (pb-0), 0.25rem (space-100) (pb-100), 0.5rem (space-200) (pb-200), 0.75rem (space-300) (pb-300), 1rem (space-400) (pb-400), 1.25rem (space-500) (pb-500), 1.5rem (space-600) (pb-600), 2rem (space-800) (pb-800), 2.5rem (space-1000) (pb-1000), 3rem (space-1200) (pb-1200), 4rem (space-1600) (pb-1600), 5rem (space-2000) (pb-2000), 6rem (space-2400) (pb-2400), 7.5rem (space-3000) (pb-3000)	Delivered as a block class.	—
Margin left	classes_marginleft	select	No	""	Default (""), 0 (none) (ml-0), 0.25rem (space-100) (ml-100), 0.5rem (space-200) (ml-200), 0.75rem (space-300) (ml-300), 1rem (space-400) (ml-400), 1.25rem (space-500) (ml-500), 1.5rem (space-600) (ml-600), 2rem (space-800) (ml-800), 2.5rem (space-1000) (ml-1000), 3rem (space-1200) (ml-1200), 4rem (space-1600) (ml-1600), 5rem (space-2000) (ml-2000), 6rem (space-2400) (ml-2400), 7.5rem (space-3000) (ml-3000)	Delivered as a block class.	—
Margin right	classes_marginright	select	No	""	Default (""), 0 (none) (mr-0), 0.25rem (space-100) (mr-100), 0.5rem (space-200) (mr-200), 0.75rem (space-300) (mr-300), 1rem (space-400) (mr-400), 1.25rem (space-500) (mr-500), 1.5rem (space-600) (mr-600), 2rem (space-800) (mr-800), 2.5rem (space-1000) (mr-1000), 3rem (space-1200) (mr-1200), 4rem (space-1600) (mr-1600), 5rem (space-2000) (mr-2000), 6rem (space-2400) (mr-2400), 7.5rem (space-3000) (mr-3000)	Delivered as a block class.	—
Margin top	classes_margintop	select	No	""	Default (""), 0 (none) (mt-0), 0.25rem (space-100) (mt-100), 0.5rem (space-200) (mt-200), 0.75rem (space-300) (mt-300), 1rem (space-400) (mt-400), 1.25rem (space-500) (mt-500), 1.5rem (space-600) (mt-600), 2rem (space-800) (mt-800), 2.5rem (space-1000) (mt-1000), 3rem (space-1200) (mt-1200), 4rem (space-1600) (mt-1600), 5rem (space-2000) (mt-2000), 6rem (space-2400) (mt-2400), 7.5rem (space-3000) (mt-3000)	Delivered as a block class.	—
Margin bottom	classes_marginbottom	select	No	""	Default (""), 0 (none) (mb-0), 0.25rem (space-100) (mb-100), 0.5rem (space-200) (mb-200), 0.75rem (space-300) (mb-300), 1rem (space-400) (mb-400), 1.25rem (space-500) (mb-500), 1.5rem (space-600) (mb-600), 2rem (space-800) (mb-800), 2.5rem (space-1000) (mb-1000), 3rem (space-1200) (mb-1200), 4rem (space-1600) (mb-1600), 5rem (space-2000) (mb-2000), 6rem (space-2400) (mb-2400), 7.5rem (space-3000) (mb-3000)	Delivered as a block class.	—

Notes:

- **Modal Content.** Delivered as one link with its Button Text (field collapse: `linkText` into `link`). Absolute URLs are reduced to their path; the path must start with `/` (not `//`); the page is fetched each time the dialog opens; a failed request opens nothing and shows no message.

- **Button Text.** The opener's label; empty or equal to the URL → "Open" (placeholder `open`). A link title different from the text and the URL is copied to the button's `title`.
- **Rendering result.** A `<button type="button" aria-haspopup="dialog">` styled as a primary button (`decorateButton`, view button, type primary); there is no style option. The link's editor instrumentation moves to the button, so it stays selectable.
- **No Modal Content.** The block is empty on the site; in Universal Editor edit mode it shows "Modal: choose the page it opens, and its button text." (placeholder `modalEmpty`).
- **Accessibility impact.** The dialog's name is the modal page's first heading (an id `modal-title-{n}` is added if it has none), else "Dialog" (placeholder `dialog`); the close button is named "Close" (`close`).
- **Data layer impact.** `cmp:show` / `cmp:hide` with a stable dialog id (see Data Layer and Analytics).
- **Legacy mapping.** None.
- **Additional tab.** As every block (AGENTS.md "Additional tab"), without animation fields; the Anchor ID is also the opener's data-layer id.

4. Screenshot-Based Authoring Steps

Authoring Step 1: Create the modal page

```
[Screenshot Placeholder]

File name:
modal-authoring-step-1.png

Purpose:
The modal page (recognition) in Universal Editor, starting with its heading.

Annotations:
A = Title "Awards and recognition"
B = Text with the list of awards
C = Button Block "More about us"
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Title	`Awards and recognition`	Names the dialog	`aria-labelledby` points to it
B	Text	Introduction and a bulleted list	Dialog content	Scrolls inside the dialog when long
C	Button Block	`More about us`	A next step	Link inside the dialog

Values from `block-library/modal/fragments/recognition`. Business rule: the page must be published. Common mistake: no heading (screen readers announce "Dialog" only).

Authoring Step 2: Add the Modal block

```
[Screenshot Placeholder]

File name:
modal-authoring-step-2.png

Purpose:
The host page section with the Add menu and Modal highlighted.

Annotations:
A = Section
B = Modal in the component list
```

Values to Enter

Callout	Field	Value	Reason	Expected result
B	Component	Modal	Opener button	Empty block with the editor hint

Expected preview: the hint until Modal Content is set.

Authoring Step 3: Modal Content and Button Text

```
[Screenshot Placeholder]

File name:
modal-authoring-step-3.png

Purpose:
The Modal properties, Content tab.

Annotations:
A = Modal Content
B = Button Text
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Modal Content	`/language-masters/en/block-library/modal/fragments/recognition`	The dialog's page	The dialog shows its content
B	Button Text	`View our awards`	Says what opens	Primary button "View our awards"

Business rule: an empty Button Text shows "Open". Validation: the button opens the dialog in preview. Common mistake: a Button Text that repeats the URL.

Authoring Step 4: Additional tab

```
[Screenshot Placeholder]

File name:
modal-authoring-step-4.png

Purpose:
The Additional tab with the Anchor ID filled in.

Annotations:
A = Anchor ID
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Anchor ID	`anchor-modal-awards` (library sample)	Jump target and stable analytics id	Button block `id`; dialog id `anchor-modal-awards-dialog` in the data layer

Common mistake: expecting the spacing fields to change the dialog (they apply to the button's block).

Authoring Step 5: Publish and validate

```
[Screenshot Placeholder]
```

```
File name:
modal-authoring-step-5.png

Purpose:
The published page with the dialog open over the dimmed page.

Annotations:
A = Opener button (behind the backdrop)
B = Dialog with its heading
C = Close button
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Publish	The modal page and the host page	Both are needed	The dialog opens on the live site

Validation: Escape closes and focus returns to the button. Common mistake: publishing only the host page (the button does nothing).

5. Variations

Modal block (button opener)

- **Purpose:** an explicit button opening the dialog.
- **Required:** Modal Content. **Optional:** Button Text, Additional tab.
- **Rendering:** `div.modal.block > button.button.primary[aria-haspopup=dialog]`; on click a new `div.modal.block` is appended to `main` with the `dialog`. A double click opens one dialog.
- **Desktop / tablet / mobile:** see Responsive Behavior.
- **Accessibility:** native modal dialog; focus returns to the button.
- **Data layer:** opener click, then `cmp:show` / `cmp:hide` on `{opener id}-dialog`.
- **Personalization / fallback:** none; a modal page that can't load opens nothing.

```
[Screenshot Placeholder]

File name:
modal-block-open-desktop.png

Purpose:
The awards dialog open from its button at 1440px.

Annotations:
A = Dialog
B = Close button
```

Auto-linked `/modal/` link

- **Purpose:** open a modal from any link (text, button, header or footer) without a Modal block.
- **Configuration:** a link whose URL path contains `/modal/`.
- **Rendering:** a document click listener (`autolinkModals`, started in the lazy phase) prevents the navigation and calls `openModal(href, { opener })`; links already handled (`defaultPrevented`) are skipped.
- **Data layer:** dialog id `modal-{path as class name}`.
- **Note:** in Universal Editor the editor navigates to clicked links; use a Modal block to open dialogs there.

```
[Screenshot Placeholder]

File name:
```

```
modal-auto-link-desktop.png

Purpose:
A dialog opened by an inline link to a /modal/ page.

Annotations:
A = Inline link
B = Dialog
```

Component dialog (`createModal`)

- **Purpose:** the same dialog for block features: the Video block's Play in a Pop-up passes its player to `createModal([wrapper])`.
- **Rendering:** no fragment request; the content is the caller's nodes; naming, closing and data layer as above (id `modal-{n}`, no stable id passed).

```
[Screenshot Placeholder]

File name:
modal-video-popup-desktop.png

Purpose:
A Video block playing in the dialog.

Annotations:
A = Video player in the dialog
B = Close button
```

Long content

- **Purpose:** terms or details longer than the screen (library `modal-long-content`).
- **Rendering:** the dialog is never taller than the visible area minus twice its gap; the content scrolls inside (`overflow-y: auto`, `overscroll-behavior: contain`); the close button stays at the top (sticky); the page is locked (`body.modal-open`).

```
[Screenshot Placeholder]

File name:
modal-long-content-mobile.png

Purpose:
The programme terms scrolled inside the dialog at 390px.

Annotations:
A = Sticky close button
B = Scrolled content
```

6. Complete Authoring Example

Scenario: a "Contact our team" dialog with a form on the Get in touch page.

Field	Example value	Guidance
Modal page	`/content/tcs-corp/us/en/modal/contact-form` (library `block-library/modal/fragments/contact-form`)	A heading first, then the Form Variations block
Modal Content	The modal page	Same locale
Button Text	`Contact our team`	Verb and object

Field	Example value	Guidance
Additional › Anchor ID	`anchor-g01b-modal` (library sample)	Stable analytics id

Steps: author and publish the modal page, add the Modal to the host page, fill in the fields, publish.

Expected output: a primary button; the dialog with the form opens over the page. Responsive: 1.5rem from the screen edges below 900px, at most 56.25rem wide from 900px. Accessibility: named by the form page's heading, Escape closes, focus back on the button. Analytics: `cmp:click` on `anchor-g01b-modal`, `cmp:show` / `cmp:hide` on `anchor-g01b-modal-dialog`, the form's own `cmp:submit`. Personalization fallback: none.

Pre-publish checklist:

- ☐ Modal page published, starting with a heading.
- ☐ Button Text filled in.
- ☐ No modal opened from inside a modal.
- ☐ Checked at 390px and 1440px, keyboard only.

7. Content and Asset Guidelines

- **Headings.** Start every modal page with a heading (it names the dialog).
- **Button Text.** A verb and an object ("View our awards", "Read the programme terms"); avoid "Open" and "Click here".
- **Content length.** Short and single-purpose; long content scrolls but belongs on a page.
- **Images.** The content area is at most 56.25rem minus its padding; images as their blocks define.
- **Tags and metadata.** Not used; give modal pages a clear title for authors.
- **Min / max items.** No verified technical limit was identified.
- **Loading.** Nothing is loaded until the dialog opens (the modal stylesheet, the fragment page); the page is fetched again at each opening.
- **Missing page.** Nothing opens.

8. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
The button does nothing	Modal page not published, wrong path, or not a site path	Network: `{path}.plain.html` status	Publish / correct Modal Content	Dialog opens
No button	Modal Content empty, or Hide block on	Properties panel	Choose the page; switch Hide block off	Button visible
Button says "Open"	Button Text empty or equal to the URL	Properties panel	Enter a descriptive text	Correct label
A link opens a dialog (or navigates) unexpectedly	Its path contains `/modal/` (auto-link), or clicked before the lazy phase / in the editor	Check the URL	Move pages out of `modal` folders; use a Modal block in the editor	Intended behaviour on `.aem.page`
Screen readers say "Dialog" only	Modal page without a heading	Inspect `aria-label`	Add a heading	`aria-labelledby` set
Content unstyled or blocks missing	A block of the modal page failed	Console `failed to load …`	Fix the content; escalate block errors	Renders as on its page
No `cmp:show` / `cmp:hide`	Dialog didn't open; Tags not configured	`adobeDataLayer.filter((e) => e.eventInfo?.interaction === 'dialog')`	Fix the opening; configure Tags later	Events present

Evidence to collect: host page URL, Modal Content value, network status of the modal page request, console errors, the data-layer entries. No cookies or tokens.

9. Screenshots

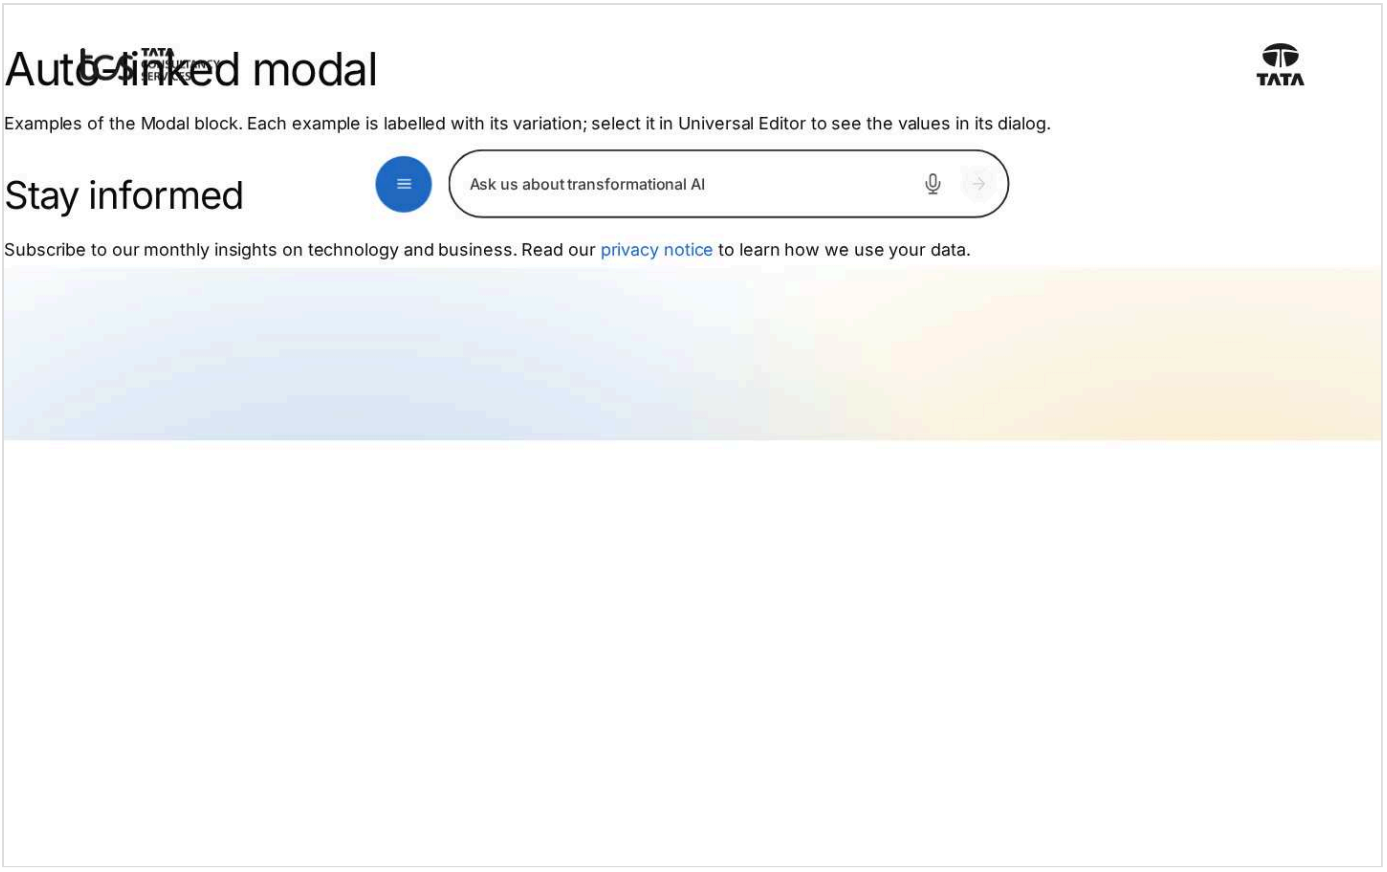


Figure: Modal as published (block library) — desktop 1440 × 900 (/design-block-master/en/block-library/modal/auto-linked-modal, captured 2026-11-08).

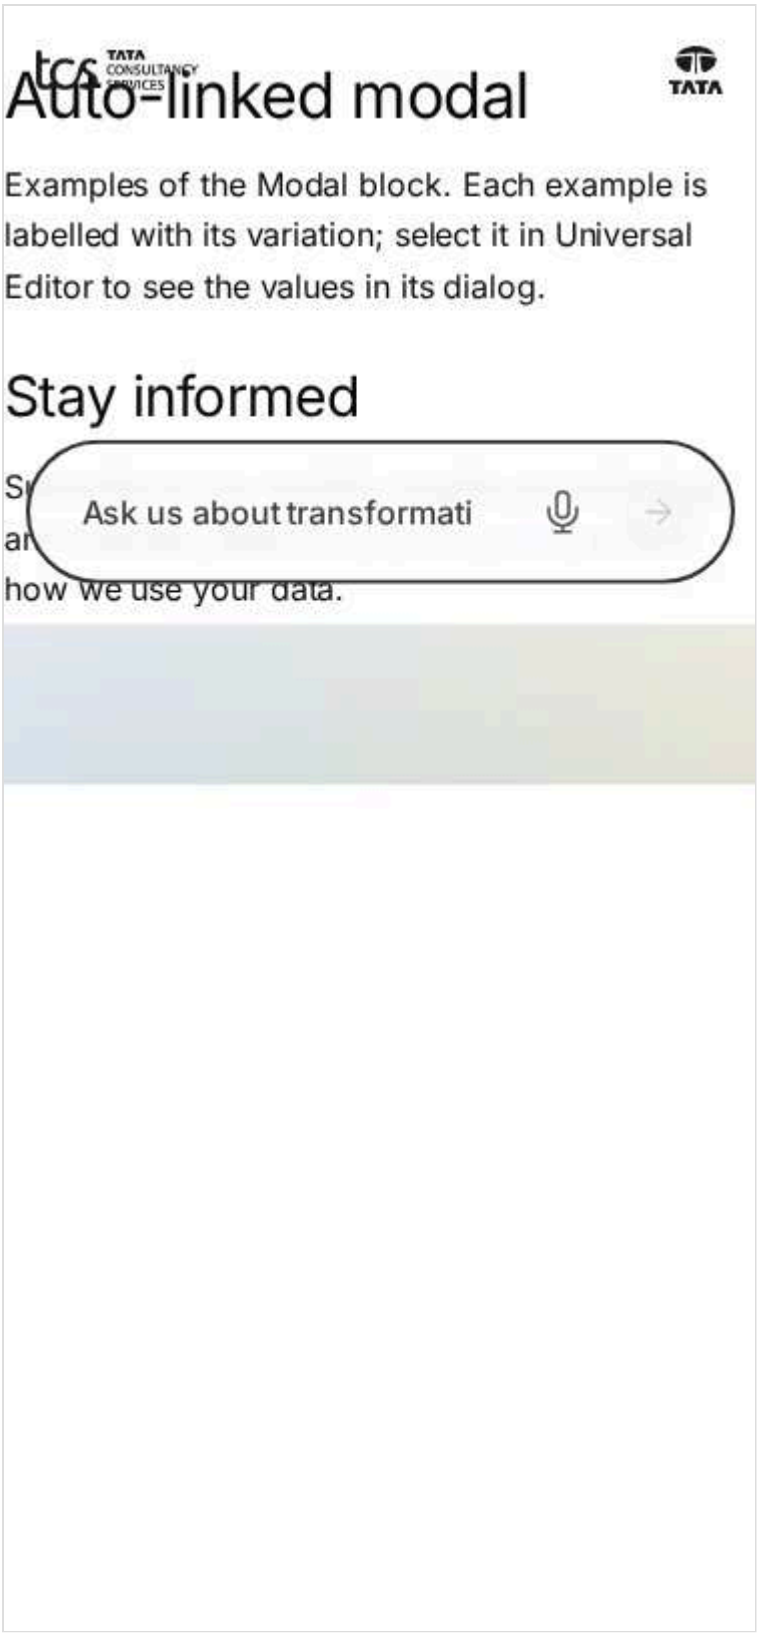


Figure: Modal as published (block library) — mobile 375 × 812 (/design-block-master/en/block-library/modal/auto-linked-modal, captured 2026-11-08).

> **Screenshot required**
>
> - Required screen: Modal dialog in Universal Editor (every tab, including Additional)
> - Required role/access: AEM Sites author with Universal Editor (content author)

> - Required navigation steps: AEM Sites console > /content/tcs-corp/language-masters/en > open a page in Universal Editor
> - Reason unavailable: No AEM author access in the documentation program (access blocker AB-01)
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

10. Known limitations

- Universal Editor screenshots are placeholders: no author access in this program.

11. Open items

- None.

12. Change history

Version	Date	Author	Change
1.0	13 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages