TCS CORPORATE WEBSITE

Quote — Authoring Guide

Role / audience	Authoring — Content authors, content managers, AEM authoring leads
Version	1.0
Status	Draft for review
Owner	Content Lead / AEM Authoring Lead (proposed)
Last validated	2026-11-13
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Quote — Authoring Guide
- Where to see it
- For Content Authors
- Authorable Fields
- Screenshot-Based Authoring Steps
- Variations
- Complete Authoring Example
- Content and Asset Guidelines
- Troubleshooting
- Screenshots
- Known limitations
- Open items
- Change history

Quote — Authoring Guide

Attribute	Value
Document ID	AUT-C-quote
Audience	Content authors, content managers, AEM authoring leads
Purpose	How to add, fill in and check the Quote component
Scope	—
Prerequisites	—
Owner	Content Lead / AEM Authoring Lead (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	13 November 2026
Last validated	13 November 2026
Source files	blocks/quote/README.md, blocks/quote/_quote.json
Related documents	—
Related AEM paths	—

1. Where to see it

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/quote
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/quote/quote-variations

2. For Content Authors

1. **Add the block.** In Universal Editor, select a Section, a Columns Container column or a Tabs Container. Choose Add (+) and pick **Quote**.
2. **Open its properties.** Select the block in the canvas or the content tree to open the properties panel. It has two tabs: Content and Additional.
3. **Enter content.** On the Content tab, fill in Eyebrow, Title, Quote and Quote Author. Put the name on the first line of Quote Author, then the designation and organisation. Don't type quotation marks: the block adds them.
4. **Add the image.** Select a portrait in Image, then write Image Alt Text, or leave it empty if the image is decorative.
5. **Choose the variation.** Set Image Position (Desktop) to Right or Left, Image Position (Mobile) to Top or Bottom, and BG Color to Default or Grey.
6. **Child items:** the Quote has none. Each Quote holds one statement.
7. **Preview.** Switch Universal Editor to Preview, then check the page at desktop width (900px and wider) and at a mobile width.
8. **Publish.** Publish the page together with the image (referenced assets in the Publish dialog).
9. **Validate.** On the published page, check the quote marks, the overlap, the alt text (browser inspector) and the heading level.

Minimum content: a Quote or a Quote Author (otherwise there is no card). Recommended: Title, Quote, Quote Author, Image and Image Alt Text. Optional: Eyebrow, BG Color, and the image positions (Right / Top by default).

3. Authorable Fields

Quote (`quote`)

Model `quote`; template name "Quote" (the block class AEM renders); key-value block (one row per property).

Stored on a new component (definition template): `titleType` = `"h2"`, `imagePosition` = `"right"`, `imagePositionMobile` = `"top"`.

Content tab — Quote

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Eyebrow	`eyebrow`	text	No	—	—	—	Client voice
Title	`title`	text	No	—	—	—	What our clients say
Title Type	`titleType`	select	No	`h2`	H1 (`h1`), H2 (`h2`), H3 (`h3`), H4 (`h4`), H5 (`h5`), H6 (`h6`)	Delivered with `title` (field collapse).	h2
Quote	`quote`	richtext	No	`""`	—	—	—
Quote Author	`author`	richtext	No	`""`	—	Name on the first line, then designation and organisation.	—
Image	`image`	reference	No	—	—	—	/content/dam/tcs-corp/block-library/images/tall-sample.jpg
Image Alt Text	`imageAlt`	text	No	—	—	Leave empty if the image is decorative. Delivered with `image` (field collapse).	Portrait of Anita Rao
Image Position (Desktop)	`imagePosition`	select	No	`right`	Right (`right`), Left (`left`)	Side of the image on desktop (900px and wider); the quote overlaps it.	left
Image Position (Mobile)	`imagePositionMobile`	select	No	`top`	Top (`top`), Bottom (`bottom`)	Image above or below the quote on mobile and tablet (narrower than 900px).	bottom
BG Color	`bgColor`	select	No	`""`	Default (`""`), Grey (`grey`)	—	grey

Additional tab — Quote

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Anchor ID	`classes_anchor`	text	No	—	regExp: ^anchor-[a-z0-9][a-z0-9-]*$; customErrorMsg: Start with anchor-, then lower-case letters, digits and hyphens.	A unique ID of the block on the page, starting with anchor-, e.g. anchor-our-services; link to it with #anchor-our-services. Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Hide block	classes_hideblock	boolean	No	false	on / off	Hides the whole block on the page until it is turned off (shown faded in the editor). Delivered as a block class.	—
Animation Type	classes_animation	select	No	""	None (""), Fade in (motion-fade-in), Fade up (motion-fade-up), Fade down (motion-fade-down), Fade left (motion-fade-left), Fade right (motion-fade-right), Slide up (motion-slide-up), Slide down (motion-slide-down), Slide left (motion-slide-left), Slide right (motion-slide-right), Scale in (motion-scale-in)	How the block's content appears; repeated items (cards, list items, accordion items, columns) appear one after another. None: shown as is. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	motion-fade-in
Motion Speed	classes_animationspeed	select	No	""	Medium (""), Fast (motion-fast), Slow (motion-slow)	How fast the block's animations run (Animation Type 0.3 / 0.6 / 0.9 s; the Background animation takes 1.5 times as long). Shown when (classes_animation is set and classes_animation is not empty) or (classes_bganimation is set and classes_bganimation is not empty). Delivered as a block class.	—
Animation Trigger	classes_animationtrigger	select	No	""	On Scroll / Viewport Entry (""), On Page Load (motion-on-load)	When the block's animations run. On Scroll: when the block comes into view (at once if it is in view when the page opens). On Page Load: as soon as the block is ready, wherever it is on the page. Shown when (classes_animation is set and classes_animation is not empty) or (classes_bganimation is set and classes_bganimation is not empty). Delivered as a block class.	—
Background animation	classes_bganimation	select	No	""	None (""), Fade in (bg-motion-fade-in), Reveal from the centre (bg-motion-reveal), Wipe left to right (bg-motion-wipe-right), Wipe right to left (bg-motion-wipe-left), Wipe bottom to top (bg-motion-wipe-up), Scale reveal (bg-motion-scale)	How the block's background (its colour, image or overlay as set in the block) appears. It doesn't animate the content: see Animation Type. Motion Speed and Animation Trigger apply to it too. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	bg-motion-fade-in
Padding left	classes_paddingleft	select	No	""	Default (""), 0 (none) (pl-0), 0.25rem (space-100) (pl-100), 0.5rem (space-200) (pl-200), 0.75rem (space-300) (pl-300), 1rem (space-400) (pl-400), 1.25rem (space-500) (pl-500), 1.5rem (space-600) (pl-600), 2rem (space-800) (pl-800), 2.5rem (space-1000) (pl-1000), 3rem (space-1200) (pl-1200), 4rem (space-1600) (pl-1600), 5rem (space-2000) (pl-2000), 6rem (space-2400) (pl-2400), 7.5rem (space-3000) (pl-3000)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Padding right	classes_paddingright	select	No	""	Default (""), 0 (none) (pr-0), 0.25rem (space-100) (pr-100), 0.5rem (space-200) (pr-200), 0.75rem (space-300) (pr-300), 1rem (space-400) (pr-400), 1.25rem (space-500) (pr-500), 1.5rem (space-600) (pr-600), 2rem (space-800) (pr-800), 2.5rem (space-1000) (pr-1000), 3rem (space-1200) (pr-1200), 4rem (space-1600) (pr-1600), 5rem (space-2000) (pr-2000), 6rem (space-2400) (pr-2400), 7.5rem (space-3000) (pr-3000)	Delivered as a block class.	—
Padding top	classes_paddingtop	select	No	""	Default (""), 0 (none) (pt-0), 0.25rem (space-100) (pt-100), 0.5rem (space-200) (pt-200), 0.75rem (space-300) (pt-300), 1rem (space-400) (pt-400), 1.25rem (space-500) (pt-500), 1.5rem (space-600) (pt-600), 2rem (space-800) (pt-800), 2.5rem (space-1000) (pt-1000), 3rem (space-1200) (pt-1200), 4rem (space-1600) (pt-1600), 5rem (space-2000) (pt-2000), 6rem (space-2400) (pt-2400), 7.5rem (space-3000) (pt-3000)	Delivered as a block class.	—
Padding bottom	classes_paddingbottom	select	No	""	Default (""), 0 (none) (pb-0), 0.25rem (space-100) (pb-100), 0.5rem (space-200) (pb-200), 0.75rem (space-300) (pb-300), 1rem (space-400) (pb-400), 1.25rem (space-500) (pb-500), 1.5rem (space-600) (pb-600), 2rem (space-800) (pb-800), 2.5rem (space-1000) (pb-1000), 3rem (space-1200) (pb-1200), 4rem (space-1600) (pb-1600), 5rem (space-2000) (pb-2000), 6rem (space-2400) (pb-2400), 7.5rem (space-3000) (pb-3000)	Delivered as a block class.	—
Margin left	classes_marginleft	select	No	""	Default (""), 0 (none) (ml-0), 0.25rem (space-100) (ml-100), 0.5rem (space-200) (ml-200), 0.75rem (space-300) (ml-300), 1rem (space-400) (ml-400), 1.25rem (space-500) (ml-500), 1.5rem (space-600) (ml-600), 2rem (space-800) (ml-800), 2.5rem (space-1000) (ml-1000), 3rem (space-1200) (ml-1200), 4rem (space-1600) (ml-1600), 5rem (space-2000) (ml-2000), 6rem (space-2400) (ml-2400), 7.5rem (space-3000) (ml-3000)	Delivered as a block class.	—
Margin right	classes_marginright	select	No	""	Default (""), 0 (none) (mr-0), 0.25rem (space-100) (mr-100), 0.5rem (space-200) (mr-200), 0.75rem (space-300) (mr-300), 1rem (space-400) (mr-400), 1.25rem (space-500) (mr-500), 1.5rem (space-600) (mr-600), 2rem (space-800) (mr-800), 2.5rem (space-1000) (mr-1000), 3rem (space-1200) (mr-1200), 4rem (space-1600) (mr-1600), 5rem (space-2000) (mr-2000), 6rem (space-2400) (mr-2400), 7.5rem (space-3000) (mr-3000)	Delivered as a block class.	—
Margin top	classes_margintop	select	No	""	Default (""), 0 (none) (mt-0), 0.25rem (space-100) (mt-100), 0.5rem (space-200) (mt-200), 0.75rem (space-300) (mt-300), 1rem (space-400) (mt-400), 1.25rem (space-500) (mt-500), 1.5rem (space-600) (mt-600), 2rem (space-800) (mt-800), 2.5rem (space-1000) (mt-1000), 3rem (space-1200) (mt-1200), 4rem (space-1600) (mt-1600), 5rem (space-2000) (mt-2000), 6rem (space-2400) (mt-2400), 7.5rem (space-3000) (mt-3000)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Margin bottom	classes_marginbottom	select	No	""	Default (""), 0 (none) (mb-0), 0.25rem (space-100) (mb-100), 0.5rem (space-200) (mb-200), 0.75rem (space-300) (mb-300), 1rem (space-400) (mb-400), 1.25rem (space-500) (mb-500), 1.5rem (space-600) (mb-600), 2rem (space-800) (mb-800), 2.5rem (space-1000) (mb-1000), 3rem (space-1200) (mb-1200), 4rem (space-1600) (mb-1600), 5rem (space-2000) (mb-2000), 6rem (space-2400) (mb-2400), 7.5rem (space-3000) (mb-3000)	Delivered as a block class.	—

Notes on the significant fields (see the tables above for labels, values and defaults):

- **Title / Title Type:** the title renders as a heading at the Title Type level. Without a Title Type, it uses a heading level found in the authored title, else H2 (`buildHeading`). The heading becomes the block's `dc:title` in the data layer.
- **Quote:** renders as a `<blockquote>`. **Quote Author** renders as the `<figcaption>`, and both sit in a `<figure>`. The quotation marks are CSS content with empty alternative text, so screen readers don't read them.
- **Image / Image Alt Text:** the picture comes from the image cell. Image Alt Text replaces its alt, and an image without alt text gets `alt=""` (decorative). Without a picture, the block doesn't get `quote-has-media`, so there is no overlap.
- **Image Position (Desktop):** Left adds `image-left` and only takes effect from 900px. **Image Position (Mobile):** Bottom adds `image-bottom` and only takes effect below 900px. A missing or unknown value means Right / Top.
- **BG Color:** Grey adds `bg-grey`: a grey block and card. The padding (2.5rem / 1.5rem, 7.5rem / 5rem from 900px; see Responsive Behavior) is the same for every background, so the eyebrow and title line up on white and grey Quotes alike; BG Color sets only the colour.
- **Legacy mapping:** the select values are also read from block classes (`optionOf`), so a `grey`, `left` or `bottom` class has the same effect as the field. The Style field was removed in handover 2.27; the block doesn't read it.
- **Additional tab:** Anchor ID, Hide block, the animations and Padding / Margin, as described in AGENTS.md "Additional tab". Background animation applies to the block's background colour (white by default, grey with BG Color Grey). The Additional tab's padding classes override the block's padding.

4. Screenshot-Based Authoring Steps

Authoring Step 1: Add the Quote

```
[Screenshot Placeholder]

File name:
quote-authoring-step-1.png

Purpose:
The section's Add (+) menu with Quote selected.

Annotations:
A = Section in the content tree
B = Add (+)
C = Quote
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	(content tree)	Select the section	The Quote is allowed in sections	The section is selected
B	Add (+)	Quote	Adds the block	An empty Quote appears; nothing renders yet

Author action: select the section, choose Add (+) and pick Quote. Expected preview: an empty block (it renders nothing until it has content). Expected published result: nothing until content is added. Business rule: one statement per Quote. Validation: the Quote node appears in the content tree. Common mistake: looking for the block in a Teaser or a List; it is only offered in sections, Columns Container columns and Tabs Containers.

Authoring Step 2: Eyebrow and title

```
[Screenshot Placeholder]

File name:
quote-authoring-step-2.png

Purpose:
The Content tab with Eyebrow, Title and Title Type filled in.

Annotations:
A = Eyebrow
B = Title
C = Title Type
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Eyebrow	Client voice	Context above the title	Grey semibold label
B	Title	What our clients say	Section heading	Brand-blue heading
C	Title Type	H2	Fits under the page's H1	An <h2>

Author action: type the eyebrow and title, and keep Title Type H2 unless the page outline needs another level. Expected preview: the eyebrow and title above the body. Expected published result: the same, with the title as a real heading. Business rule: use one H1 per page. Validation: inspect the heading level. Common mistake: choosing H1 for a quote in the middle of a page; change it to H2 or H3.

Authoring Step 3: The quote and its author

```
[Screenshot Placeholder]

File name:
quote-authoring-step-3.png

Purpose:
The Quote and Quote Author rich text fields filled in.

Annotations:
A = Quote
B = Quote Author (two lines)
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Quote	Working with TCS, we moved our core banking platform to the cloud in eighteen months and opened new digital services for millions of customers.	The statement	The text inside large blue quote marks
B	Quote Author	Anita Rao (line 1), Chief Digital Officer, Example Bank (line 2)	Attribution	Two lines below the quote

Author action: type the quote without quotation marks, then the author on two lines (two paragraphs). Expected preview: the card with the opening and closing marks. Expected published result: a `<blockquote>` and a `<figcaption>` in a `<figure>`. Business rule: keep the wording approved by the person quoted. Validation: only the large blue marks are visible. Common mistake: typing quotation marks, which shows them twice; remove them.

Authoring Step 4: Image and positions

```
[Screenshot Placeholder]

File name:
quote-authoring-step-4.png

Purpose:
Image, Image Alt Text, Image Position (Desktop) and Image Position (Mobile) set.

Annotations:
A = Image
B = Image Alt Text
C = Image Position (Desktop)
D = Image Position (Mobile)
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Image	/content/dam/tcs-corp/block-library/images/tall-sample.jpg	The portrait the card overlaps	The block gets `quote-has-media`
B	Image Alt Text	Portrait of Anita Rao	Describes the image	The image's alt
C	Image Position (Desktop)	Left	Mirror the layout	Image on the left from 900px
D	Image Position (Mobile)	Bottom	Lead with the quote on small screens	Image below the card below 900px

Author action: select the portrait, write the alt text, and choose the positions. Expected preview: at 900px and wider, the image is on the chosen side and the card overlaps it; below 900px, the image is above or below the card. Expected published result: the same; the image must be published with the page. Business rule: use a portrait image with the face in the upper-middle area (4:5 on mobile, 622:869 on desktop, cropped). Validation: check at 375px, 768px and 1440px. Common mistake: expecting Left to apply on a tablet; it only applies from 900px.

Authoring Step 5: BG Color and publishing

```
[Screenshot Placeholder]

File name:
quote-authoring-step-5.png

Purpose:
```

```
BG Color Grey selected and the Publish dialog listing the page and its image.

Annotations:
A = BG Color
B = Publish dialog with the referenced image
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	BG Color	Grey	Set the quote apart from the page	Grey block and card
B	Publish	Page and referenced assets	The image must be live too	The published page shows the portrait

Author action: choose Grey, preview, then publish the page with its references. Expected preview: a grey panel. Expected published result: the grey Quote with the portrait. Business rule: Default or Grey only. Validation: open the published page and check the image loads. Common mistake: publishing the page without the image, so the card renders without the portrait.

5. Variations

Default (image right, image top on mobile)

- **Purpose:** the standard overlap layout. **When to use:** most quotes with a portrait. **When not to use:** without a portrait (see Text only).
- **Fields:** Quote or Quote Author (required for the card), Image (for the overlap); Eyebrow, Title, Image Alt Text are optional. **Dialog configuration:** none beyond the defaults (Right / Top).
- **Rendering:** desktop (900px and wider): a 498 : 204 : 418 grid, up to 70rem wide; the card spans the first two columns and the image the last two, so they overlap. Tablet and mobile: the image first, at 4:5, and the card overlapping its bottom edge by 3rem, inset 1rem.
- **Accessibility:** reading order header, card, image (the image is placed first visually below 900px by CSS order only). **Data layer:** the block entry only. **Personalization and fallback:** none; the authored content renders.

```
[Screenshot Placeholder]

File name:
quote-default-tablet.png

Purpose:
The default Quote at 768px: image first, card overlapping its bottom edge.

Annotations:
A = Header
B = Image
C = Card
```

Image Left (desktop)

- **Purpose:** a mirrored layout, for example to alternate with a neighbouring block. **Configuration:** Image Position (Desktop) Left (class `image-left`).
- **Rendering:** from 900px the grid is 418 : 204 : 498, with the image on the left and the card overlapping its right edge. Below 900px it is the same as Default.
- **Accessibility, data layer, personalization:** as Default.

```
[Screenshot Placeholder]

File name:
```

```
quote-image-left-mobile.png

Purpose:
Image Position (Desktop) Left at 375px: the same stacked layout as Default.

Annotations:
A = Image
B = Card
```

Image Bottom (mobile and tablet)

- **Purpose:** lead with the quote on small screens. **Configuration:** Image Position (Mobile) Bottom (class `image-bottom`).
- **Rendering:** below 900px the image moves below the card, and the card overlaps its top edge by 3rem. From 900px it has no effect.
- **Accessibility, data layer, personalization:** as Default.

```
[Screenshot Placeholder]

File name:
quote-image-bottom-tablet.png

Purpose:
Image Position (Mobile) Bottom at 768px: the card first, the image below it.

Annotations:
A = Card
B = Image
```

Grey background

- **Purpose:** set the quote apart from white content. **Configuration:** BG Color Grey (class `bg-grey`).
- **Rendering:** the block and the card are grey (`--color-bg-secondary`), with the block's padding (2.5rem / 1.5rem, 7.5rem / 5rem from 900px, as on white).
- **Accessibility:** the text keeps the default text tokens. **Data layer, personalization:** as Default.

```
[Screenshot Placeholder]

File name:
quote-grey-background-tablet.png

Purpose:
BG Color Grey at 768px.

Annotations:
A = Grey padding
B = Card
```

Text only (no image)

- **Purpose:** a pull quote without a portrait. **Configuration:** leave Image empty.
- **Rendering:** no `quote-has-media`; the card stands alone, centred in the 70rem body from 900px, with the same quote marks.
- **Accessibility, data layer, personalization:** as Default.

```
[Screenshot Placeholder]

File name:
quote-text-only-tablet.png
```

```
Purpose:
A Quote without an image at 768px.

Annotations:
A = Card without overlap
```

6. Complete Authoring Example

Scenario: a client quote on an English case study page.

Field	Example value	Guidance
Eyebrow	Client voice	A few words of context
Title	What our clients say	Short and descriptive
Title Type	H2	Fits under the page's H1
Quote	Working with TCS, we moved our core banking platform to the cloud in eighteen months and opened new digital services for millions of customers.	No typed quotation marks
Quote Author	Anita Rao / Chief Digital Officer, Example Bank (two lines)	Name first
Image	/content/dam/tcs-corp/block-library/images/tall-sample.jpg	Portrait
Image Alt Text	Portrait of Anita Rao	Identifies the person
Image Position (Desktop)	Right	Default
Image Position (Mobile)	Top	Default
BG Color	Default	White

Steps: add the Quote to the section, fill in the Content tab as above, preview at 1440px and 375px, then publish the page with the image.

- **Expected output:** the eyebrow and H2 above a white card with blue quote marks, which overlaps the portrait on the right.
- **Responsive:** from 900px, the overlap grid; below it, the image on top and the card overlapping its bottom edge.
- **Accessibility:** an `<h2>`, then a `<figure>` with `<blockquote>` and `<figcaption>`, and an image with alt text.
- **Analytics / data layer:** a `tcs-corp/components/quote` entry with `dc:title` "What our clients say".
- **Personalization fallback:** none; this content is what every visitor sees.

Pre-publish checklist: no typed quotation marks; the author name is spelled as approved; the alt text is set (or deliberately empty); the image is published; the heading level fits the page; checked at desktop and mobile widths.

7. Content and Asset Guidelines

- **Eyebrow:** a few words of context (for example "Client voice"). **Title:** a short, descriptive heading.
- **Quote:** the approved statement only, without quotation marks. **Quote Author:** the name on the first line, then the designation and organisation.
- **Links / CTAs:** the block has no CTA field. A link in the rich text is rendered by the page's content decorators: a standalone link in its own paragraph becomes a button (`decorators/content-buttons-decorator.js`).

- **Images and alt text:** use portrait images. They are cropped with `object-fit: cover` to 4:5 below 900px and to 622:869 from 900px. Alt text identifies the person; leave it empty only if the image adds nothing.
- **Icons, tags and metadata:** none.
- **Limits:** no verified technical limit was identified for text length; the block holds one quote.
- **Asset source:** AEM Assets. **Loading:** the block keeps the delivered picture (lazy by default). In the first section, the page loader makes the first image eager (`waitForFirstImage`).
- **Missing asset:** without a picture, the card renders without the image and without the overlap.

8. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
The card doesn't overlap the image	No picture in Image (empty or broken reference)	Inspect the block: no `quote-has-media`, no `.quote-media`	Select the image again and publish it with the page	The block has `quote-has-media`
Image Position has no effect	Checked at the wrong width (Left from 900px, Bottom below 900px), or no image	Check the classes `image-left` / `image-bottom` and the viewport width	Resize past / below 900px; set an image	The image moves at the right widths
Double quotation marks	Marks typed in the Quote	Read the Quote rich text	Remove the typed marks	Only the blue marks remain
The face is cut off	4:5 / 622:869 cover crop	Compare the image's proportions	Use a portrait with the face in the upper-middle area	Check at 375 / 768 / 1440px
The block is empty	No Quote, Quote Author, Title, Eyebrow or Image	Inspect the rows in the editor	Fill in the content	The card renders
Wrong heading level	Title Type	Inspect the title element	Set Title Type	The expected h1–h6

Evidence to collect: the page URL (preview or live), viewport width, browser, a screenshot, and the block's outer HTML from the inspector. Don't include credentials or author session data.

9. Screenshots

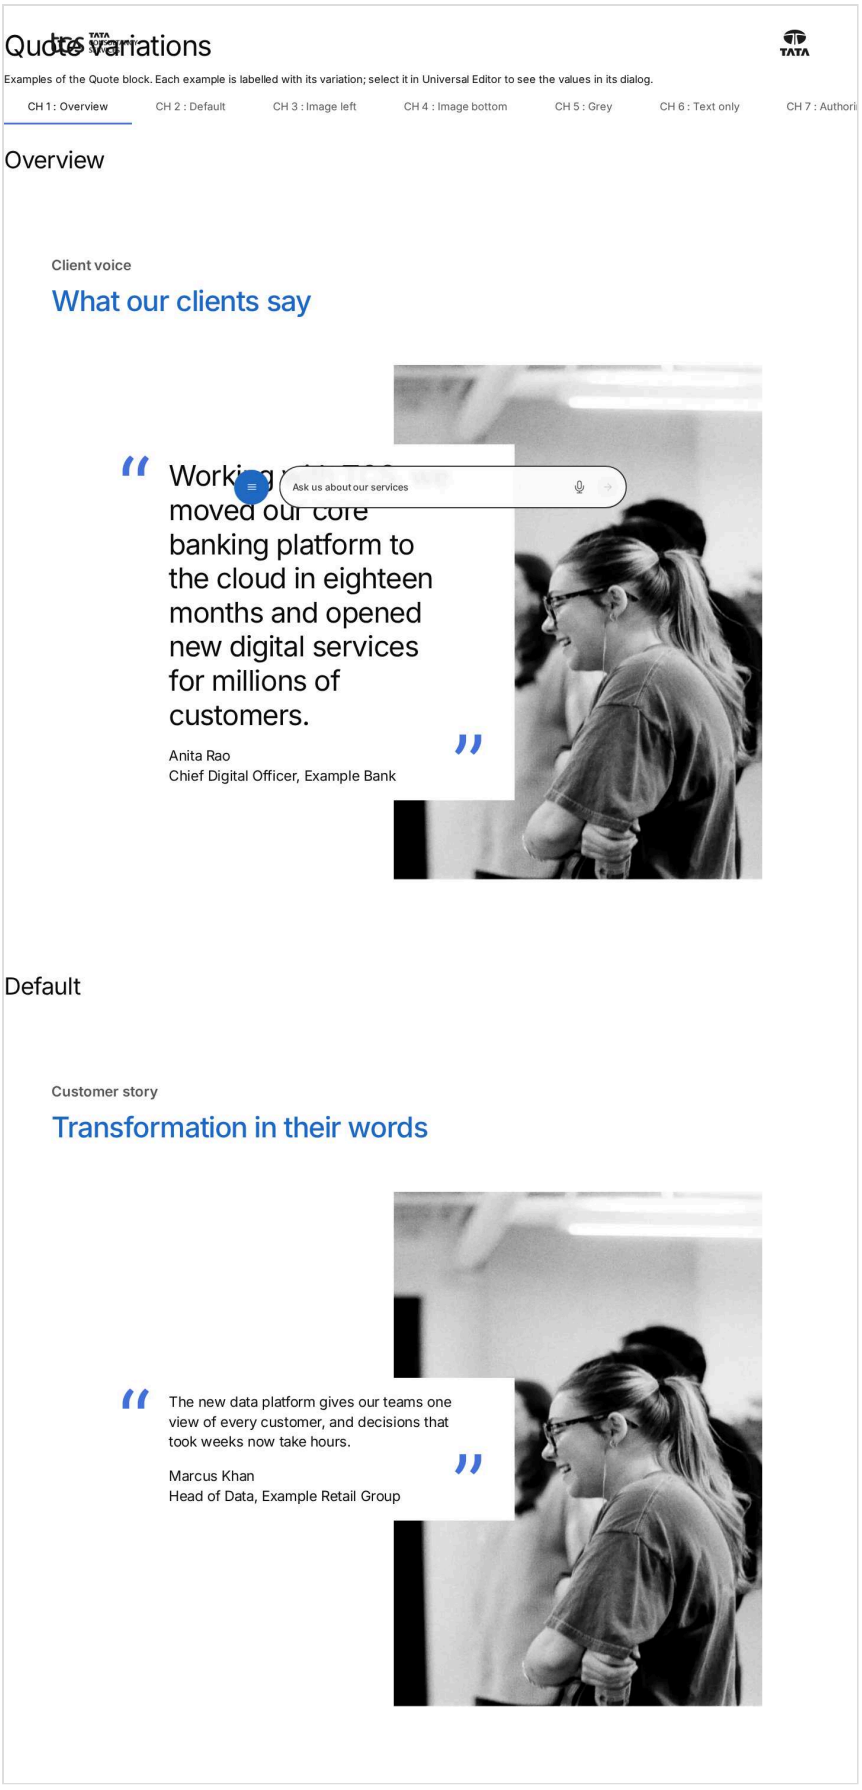


Figure: Quote as published (block library) — desktop 1440 × 900 (/design-block-master/en/block-library/quote/quote-variations, captured 2026-11-08).

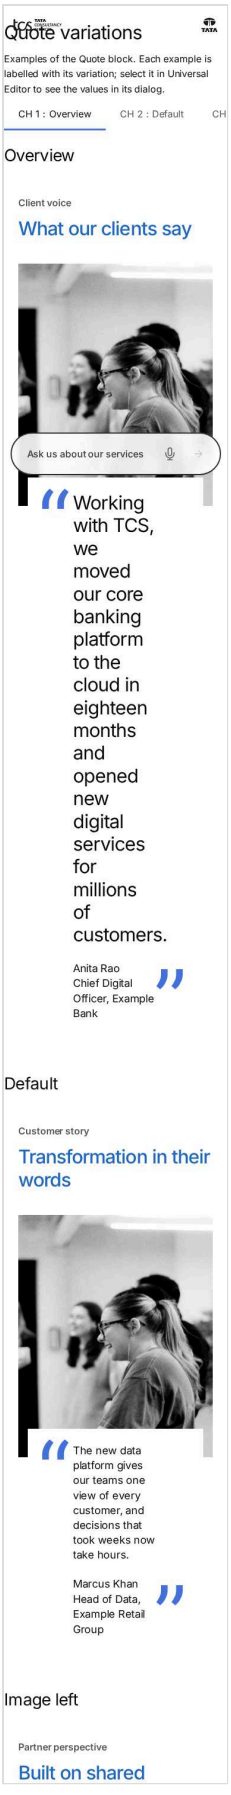


Figure: Quote as published (block library) — mobile 375 × 812 (/design-block-master/en/block-library/quote/quote-variations, captured 2026-11-08).

> **Screenshot required**

> - Required screen: Quote dialog in Universal Editor (every tab, including Additional)
> - Required role/access: AEM Sites author with Universal Editor (content author)
> - Required navigation steps: AEM Sites console > /content/tcs-corp/language-masters/en > open a page in Universal Editor
> - Reason unavailable: No AEM author access in the documentation program (access blocker AB-01)
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

10. Known limitations

- Universal Editor screenshots are placeholders: no author access in this program.

11. Open items

- None.

12. Change history

Version	Date	Author	Change
1.0	13 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages