TCS CORPORATE WEBSITE

Button Block — Developer Guide

Role / audience	Development — Developers, technical leads, block owners, AI coding agents
Version	1.0
Status	Draft for review
Owner	Technical Lead / Block Owner (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Button Block — Developer Guide
- Summary
- Overview
- Source files
- Components, models and filters
- Fields
- Dependencies
- For Developers
- Extending the Block
- Responsive Behavior
- Accessibility
- Data Layer and Analytics
- Performance Considerations
- Security and Privacy
- For Architects
- Troubleshooting
- Known limitations of the block
- Change history of the block
- Reference pages
- Coverage of the required topics
- Screenshots
- Known limitations
- Open items
- Change history

Button Block — Developer Guide

Attribute	Value
Document ID	DEV-B-button-block
Audience	Developers, technical leads, block owners, AI coding agents
Purpose	How the Button block is built: files, model, structure, behaviour, variations, tests and limitations
Scope	blocks/button-block/ and its components button-block
Prerequisites	—
Owner	Technical Lead / Block Owner (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	2026-11-08 (model, files, imports from the code; reference pages from the live site)
Source files	blocks/button-block/README.md, blocks/button-block/_button-block.json, blocks/button-block/button-block.css, blocks/button-block/button-block.js
Related documents	Variations, Test coverage, Authoring guide
Related AEM paths	—

1. Summary

Attribute	Value
Block	Button
Folder	`blocks/button-block`
Type	Independent
Category	content
Status	Active
Purpose	A link styled as a button, icon button or link button
Variations (summary)	View (button, icon, link), Type (primary, secondary, tertiary), icon, alignment
Children	—
Code size	99 lines of JS and CSS

2. Overview

Business purpose. A consistent, accessible call to action in page content, with the view, type, icon and alignment chosen in a dialog instead of bold / italic formatting.

Why a block. AEM's built-in Button component (`core/franklin/components/button/v1/button`, now "Button (basic)") delivers only its link, Text, Title and Primary / Secondary (as bold / italic): View, Icon, Alignment and Tertiary never reach the page, so changing them in its dialog changed nothing (finding F-100). A block delivers every field, so all options work and update as they are changed in the dialog.

User experience. A pill button with a trailing arrow (Button view), a round icon-only button (Icon view) or an underlined text link with a chevron (Link view), placed left, centred or right in its section or column.

Templates / page types. Any page type.

Data source. The block's own properties; the icons are files in `/icons`.

Related blocks. Text (an inline link in a sentence); Hero, Teaser, Page Header, List and Cards (their own CTA fields, decorated by the same button decorator); Conversation Canvas (its own Button items, model `conversation-canvas-button`); Columns Container.

When to use. A standalone call to action in a section, column or tab.

When not to use. A link inside a sentence (use Text); CTAs that belong to a block with its own CTA fields; navigation menus (the navigation page).

Realistic use cases.

- "Contact us" as the primary action of a section.
- "Explore services" (secondary) next to a primary button.
- A search icon button.
- "View all insights" as a text link.

3. Source files

File	Link
`README.md`	GitHub
`_button-block.json`	GitHub
`button-block.css`	GitHub
`button-block.js`	GitHub

4. Components, models and filters

Component	Title	Resource type	Template name	Model	Children allowed
`button-block`	Button	`core/franklin/components/block/v1/block`	Button Block	`button-block`	—

5. Fields

The Additional tab fields (anchor, hide, padding, margin, animation) are common to the blocks and described in the content modeling guide.

5.1 Button (`button-block`)

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Content	Link	`link`	aem-content	No	—	—	—
Content	Text	`linkText`	text	No	—	—	—
Content	Title	`linkTitle`	text	No	—	—	—
Style	View	`buttonView`	select	No	`button`	3 options	—
Style	Type	`buttonVariant`	select	No	`primary`	3 options	Conditional

Tab	Label	Property	Type	Required in model	Default	Options	Visibility
Style	Icon	`buttonIcon`	select	No	`arrow-right`	4 options	Conditional
Style	Alignment	`buttonAlignment`	select	No	`left`	3 options	—
Style	Text Decoration	`textDecoration`	select	No	`none`	5 options	—

"Required in model" is the model's `required` flag; whether a field is required in practice is stated in the authoring guide where it is known.

6. Dependencies

Import
`../../decorators/button-decorator.js`
`../../utils/buttons.js`
`../../utils/environment.js`
`../../utils/links.js`
`../../utils/placeholders.js`
`../../utils/properties.js`

7. For Developers

```
blocks/button-block/
├── README.md
├── _button-block.json
├── button-block.css
└── button-block.js
```

Decorator/Utility	Purpose	Execution or dependency point
`decorators/button-decorator.js`	`decorateButton` (option `newTabHint`: a link opening a new tab says so), `createButton`, `setButtonDisabled`, `setButtonAlignment`, `removeButtonDecoration`	`button-block.js`: { decorateButton, setButtonAlignment }
`utils/buttons.js`	`BUTTON_VIEWS`, `BUTTON_TYPES`, `BUTTON_ALIGNMENTS`, `pick`, `readButtonOptions`	`button-block.js`: { BUTTON_ALIGNMENTS, BUTTON_TYPES, BUTTON_VIEWS, pick, }
`utils/environment.js`	`prefersReducedMotion`, `scrollBehavior`, `isEditing`, `isInEditor`, `isAuthor` (the page is rendered by AEM author, which has no query index)	`button-block.js`: { isEditing }
`utils/links.js`	`NEW_WINDOW`, `linkOf`, `linkPathsOf` (the paths of a page property, one or many), `readLinkItems` (CTA lists with Link Type and the items' other select values), `readLinkRows` (the same from link item rows, e.g. Hero CT	`button-block.js`: { linkOf }
`utils/placeholders.js`	`getPlaceholders`, `loadPlaceholders`, `fillPlaceholder` (UI text from the locale's placeholders, with English fallbacks)	`button-block.js`: { getPlaceholders }
`utils/properties.js`	`readProperties`, `textOf`, `isOn`, `isOnByDefault` (a toggle that defaults to on), `optionOf`, `normalizeKey`, `textSource` (key-value block properties)	`button-block.js`: { readProperties, textOf }

JavaScript (`button-block.js`). `readButtonBlock(block)` (exported) reads the key-value rows (`readProperties`): `link` (`linkOf`; Text and Title collapsed into it), `buttonview`, `buttonvariant`, `buttonicon`, `buttonalignment`, normalised with `pick` and the lists of `utils/buttons.js` (defaults button, primary, `arrow-right` for the Icon view, left). `decorate` renders one `p.button-wrapper` with `setButtonAlignment`, removes the link's classes (the

content buttons decorator already decorated it in `decorateMain`) and calls `decorateButton(link, { view, type, icon })`. Without a link the block is emptied; in Universal Editor edit mode (`isEditing`) it shows `p.button-block-empty` with the placeholder `buttonBlockEmpty`.

CSS (`button-block.css`). Only the paragraph margin of a lone button and the editor hint; the button styles are global (`styles/styles.css`: `a.button`, `.primary`, `.secondary`, `.tertiary`, `.icon-button`, `a.link-button`, `p.button-wrapper`, `.button-align-*`).

Input DOM. Key-value rows `link | <a href title>Text</a>`, `buttonView | …`, `buttonVariant | …`, `buttonIcon | …`, `buttonAlignment | …`; the Additional tab as block classes.

Rendered DOM contract. `.button-block > p.button-wrapper.button-align-{alignment} > a.button.{type}` (`.icon-button` with `aria-label`, `title`, `--icon-url` and a hidden `span`) or `a.link-button`.

Template name. "Button Block" (class `button-block`): a `button` block class would match the `.button` link selectors. AEM renders a block with the class of its template name, so the template name must name the block folder (block-names.test.mjs checks this for every block).

Events and async behavior. `getPlaceholders` only for the editor hint; no listeners of its own. Universal Editor re-renders the block on every change (`scripts/editor-support.js`).

Error handling. No link: empty block (hint in the editor); unknown values: defaults.

8. Extending the Block

1. **A new icon:** add the SVG to `/icons` and an option to `buttonIcon` in `_button-block.json`.
2. **A new view or type:** extend `BUTTON_VIEWS` / `BUTTON_TYPES` in `utils/buttons.js`, style it in `styles/styles.css` and add the option; it applies to every button of the site.
3. **A new field:** add it to `_button-block.json` with a name that doesn't end in Text, Title, Type, Alt or MimeType (or it collapses into the link), read it in `readButtonBlock` with a default; `npm run build:json`, `npm run lint`.
4. **Accessibility / data layer:** keep the Text as the accessible name; describe new controls with `data-cmp-interaction`.
5. **Tests:** `readButtonBlock` and `pick` are pure enough for a Node test in `test/`.
6. **Library and docs:** update the block library, this README, `npm run build:docs`; `npm run build:modules` after changing imports.

9. Responsive Behavior

Neither `button-block.css` nor the global button styles use media queries.

Viewport	Layout	Image behavior	Interaction behavior
All viewports	One paragraph aligned left, center or right; buttons 3.125rem high, icon buttons 2.75rem	Icons as CSS masks	Same hover and focus states; long labels clipped at the container width

10. Accessibility

- **Semantics:** a real `a href` in a paragraph.
- **Keyboard and focus:** Tab reaches it, Enter follows it; the global `a:focus-visible` outline (2px `--color-border-brand`).
- **Accessible names:** the Text; for the Icon view `aria-label` = the Text (else the Title, else the icon name with spaces).
- **Link purpose:** the label should describe the destination.

- **Contrast:** the button types and the dark-section theme contract (`styles/styles.css`: on Dark and Dark green sections buttons are inverted, Primary white).
- **Reduced motion:** the Additional tab animation doesn't play.
- **Reflow:** labels don't wrap; long labels are clipped at narrow widths (see Known Limitations).
- **Empty state:** editor-only hint; nothing on the page.

Author responsibilities: descriptive Text, always a Text for icon buttons, one primary per section.

Developer responsibilities: keep every button going through `decorateButton`, names from the Text, focus styles global.

Key	Expected behavior
Tab	Moves focus to the button
Enter	Follows the link

11. Data Layer and Analytics

`decorators/data-layer-decorator.js` adds the block as `tcs-corp/components/button-block`, id = Anchor ID else `button-block-{n}`. The block adds no `data-cmp-*` attributes.

Trigger	Data-layer event	Required properties	Analytics behavior
Block decorated	component state	`@type`, `parentId`	One entry per Button
Click	`cmp:click`	`interaction` `link`, `dc:title` (label or `aria-label`), `xdm:linkURL`, `xdm:linkType` (`other`, `exit`, `download`), `breakpoint`	CTA tracking, attributed to the block

The intended path is Adobe Client Data Layer, then Adobe Data Collection (Tags), the AEP Web SDK, the Edge Network and Analytics / CJA, but Tags and the Web SDK aren't configured yet (blocked: measurement plan); no consent mechanism is implemented.

12. Performance Considerations


- Decorated with its section; no network requests except the placeholders in the editor.
- No images; icons are small SVG masks (one request per icon, cached).
- No listeners or observers of its own.

13. Security and Privacy

- The link is the authored one (AEM maps internal paths); no HTML strings are built; no query strings or personal data are added.

14. For Architects

- **Role:** the authorable CTA of default-content areas, built on the shared button decorator.
- **Content model:** key-value block (Content / Style / Additional).
- **Dependencies:** `decorators/button-decorator.js`, `utils/buttons.js`, `utils/links.js`, `utils/properties.js`, `utils/environment.js`, `utils/placeholders.js`.
- **Data layer / Web SDK / Target:** generic click tracking; no Web SDK or Target code.
- **Consent / identity / security:** no personal data; the link is the authored one.
- **Caching / performance:** part of the page HTML; icons cached by the CDN.

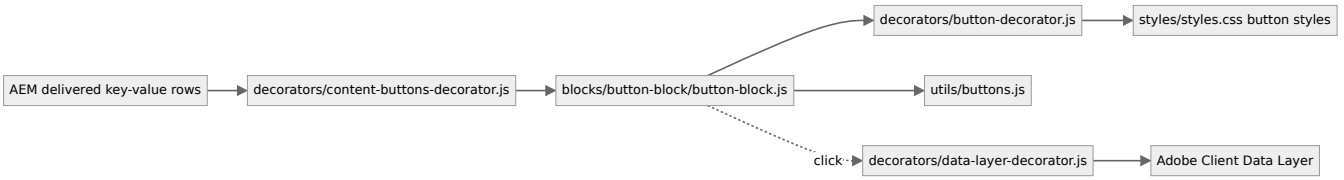

15. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
Nothing on the page	No Link	Editor shows the hint	Set the Link	Button renders
Options have no effect	It's a built-in Button ("Button (basic)") authored before	Content tree component name	Replace it with a Button block	Options apply
Icon view shows no icon	Icon value unknown	Inspect `--icon-url`	Choose an Icon	Icon visible
Label clipped on mobile	Labels never wrap	390 px preview	Shorten the label	Fits
External link opens in the same tab	No new-tab option	Inspect `target`	Accept, or use a block with a new-tab option	—
No click in the data layer	Tested in edit mode, or `data-analytics="off"` ancestor	`adobeDataLayer` on preview	Test on preview / live	`cmp:click` appears

Evidence to collect (no secrets): page URL, `.plain.html` of the block, the rendered link's classes and attributes, the data-layer entry.

16. Known limitations of the block

Limitation	Impact	Workaround	Planned correction
No open-in-new-tab option	External links open in the same tab	Accept, or another block's CTA	Not recorded (external link policy: owner product owner)
No disabled state for authors	—	—	Not recorded
Four icons	Limited icon set	Request an icon	Not recorded
Labels never wrap	Long labels clipped on mobile	Short labels	Not recorded
Alignment not per breakpoint	Same alignment everywhere	—	Not recorded
Built-in Buttons authored before keep only Primary / Secondary	Other options need a Button block	Content migration	Content action

17. Change history of the block

Version	Change	Source	Date
Not recorded	README generated from verified implementation and approved handover documentation	Repository review	Not recorded
Handover 2.26	Button block introduced: the built-in Button delivered only its link and Primary / Secondary (F-100); the Button authors add is now a block whose every option is delivered	docs/handover revision history	19 October 2026

Version	Change	Source	Date
Handover 2.28	The built-in Button no longer offered; library buttons migrated to Button blocks (package 1.0.8, F-101)	docs/handover revision history	20 October 2026
Handover 2.29	Re-audit: outdated dialog guidance corrected (R-D-16)	docs/handover revision history; docs/audit/REAUDIT-2026-10-20.md	20 October 2026

18. Reference pages

Kind	Page	Live URL
Curated design page	/design-block-master/en/curated-design-pages/forms/media-form	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/curated-design-pages/forms/media-form
Curated design page	/design-block-master/en/curated-design-pages/what-we-do	https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/curated-design-pages/what-we-do

19. Coverage of the required topics

Topic	Where
Purpose	Overview
Source files	generated: Files
Model, definition, filters, children	generated: Components
Dependencies	generated: Dependencies
Authored input / rendered output / DOM transformation	For Developers
Configuration fields, defaults, required fields	generated: Fields
Variations	BUTTON-BLOCK-VARIATIONS.md
Responsive behaviour	Responsive Behavior
Accessibility and keyboard	Accessibility
Analytics / data layer	Data Layer and Analytics
Performance	Performance Considerations
Security	Security and Privacy
Extending	Extending the Block
Known limitations	Known Limitations
Troubleshooting	Troubleshooting
Tests	BUTTON-BLOCK-TEST-COVERAGE.md
SEO behaviour	Not recorded
Caching considerations	Not recorded (Edge Delivery default caching; no block-specific rule)
Ownership	Technical Lead / Block Owner (proposed)

20. Screenshots

> **Screenshot required**
>
> - Required screen: Button on its block library page

- Required role/access: none (published page)
- Required navigation steps: Open https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/button-block
- Reason unavailable: No block library page of this block was found under /design-block-master/en/block-library
- Owner: Content Lead / AEM Authoring Lead (proposed)
- Target completion date: To be confirmed

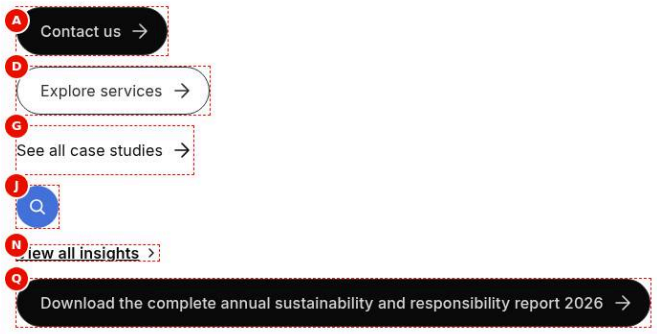


Figure: Desktop rendering — Six buttons at 1440 px, stacked left aligned in their own paragraphs (not a row): primary 'Contact us', secondary 'Explore services', tertiary 'See all case studies', a blue circular search icon button, the link view 'View all insights' with a chevron and a primary pill with the long download label. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-desktop-view.jpg) (handover screenshot; rendering at the time it was taken).

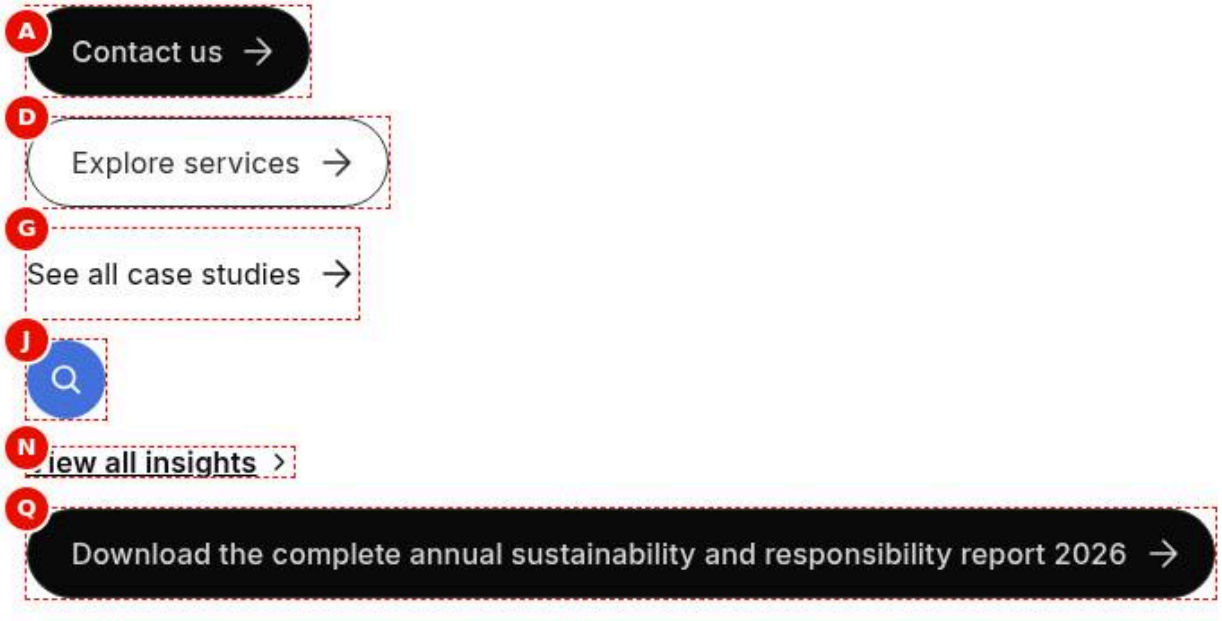


Figure: Tablet rendering — The same six stacked buttons at 768 px at identical sizes; the long label 'Download the complete annual sustainability and responsibility report 2026' still fits on one line. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-tablet-view.jpg) (handover screenshot; rendering at the time it was taken).

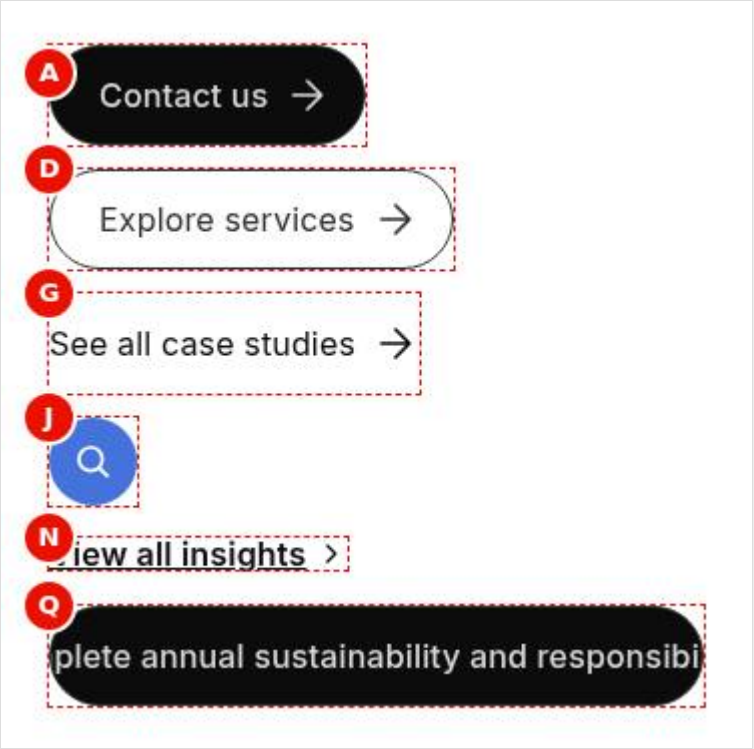


Figure: Mobile rendering — The same six stacked buttons at 375 px at identical sizes; the primary pill with the long download label is clipped at the content edge. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-mobile-view.jpg) (handover screenshot; rendering at the time it was taken).

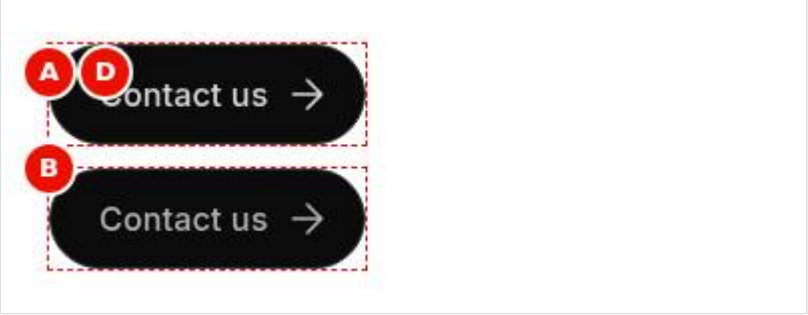


Figure: Primary button — At 402 px, two black primary pills 'Contact us' with arrows, stacked; the lower one, under the pointer, has its label and arrow in slate-400. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-primary.jpg) (handover screenshot; rendering at the time it was taken).



Figure: Secondary button — At 402 px, two outlined secondary pills 'Explore services', stacked; the lower one, under the pointer, has a white fill with brand blue border and label. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-secondary.jpg) (handover screenshot; rendering at the time it was taken).



Figure: Tertiary button — At 402 px, two tertiary calls to action 'See all case studies' with arrows and no container, stacked; the lower one, under the pointer, is brand blue with the arrow closer. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-tertiary.jpg) (handover screenshot; rendering at the time it was taken).

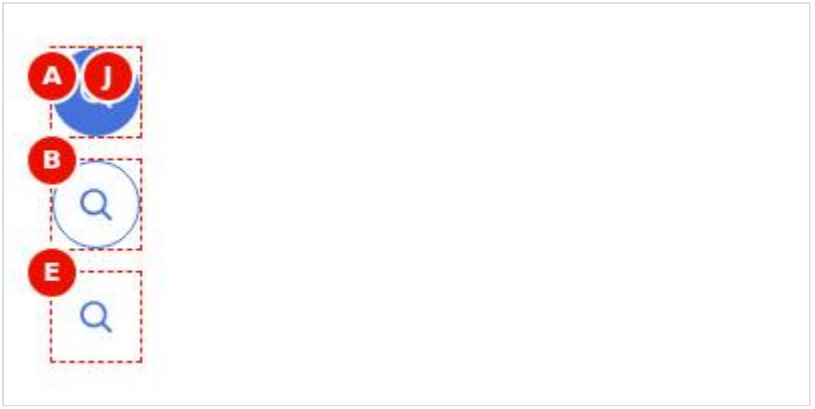


Figure: Icon button — At 402 px, three 2.75rem circular search icon buttons stacked: primary filled blue with a white icon, secondary with a blue outline and icon, tertiary a blue icon only. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-icon.jpg) (handover screenshot; rendering at the time it was taken).



Figure: Link view — At 402 px, two underlined semibold 'View all insights' links with chevrons, stacked; the lower one, under the pointer, is brand blue. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-link.jpg) (handover screenshot; rendering at the time it was taken).




Figure: Centre-aligned button — At 1440 px, the black primary pill 'Contact us' with its arrow, centred horizontally in the section content area. (Sample content on the preview; callout letters as in the Field Entry Table; file screenshots/button-align-center.jpg) (handover screenshot; rendering at the time it was taken).




Figure: Right-aligned button — At 1440 px, the outlined secondary pill 'Explore services' with its arrow, aligned to the right edge of the content area. (Sample content on the preview; callout letters as in the Field

Entry Table; file screenshots/button-align-right.jpg) (handover screenshot; rendering at the time it was taken).



Figure: Button on the Universal Editor canvas — The centred primary pill 'Contact us' in editor mode at 1440 px (an annotated preview, not a Universal Editor screenshot); A marks the button label and C its paragraph (Alignment). B (Views, Type) is not marked. (Annotated preview in editor mode with sample content; letters as in the annotations list, not a Universal Editor screenshot; file screenshots/button-authoring-view.jpg) (handover screenshot; rendering at the time it was taken).

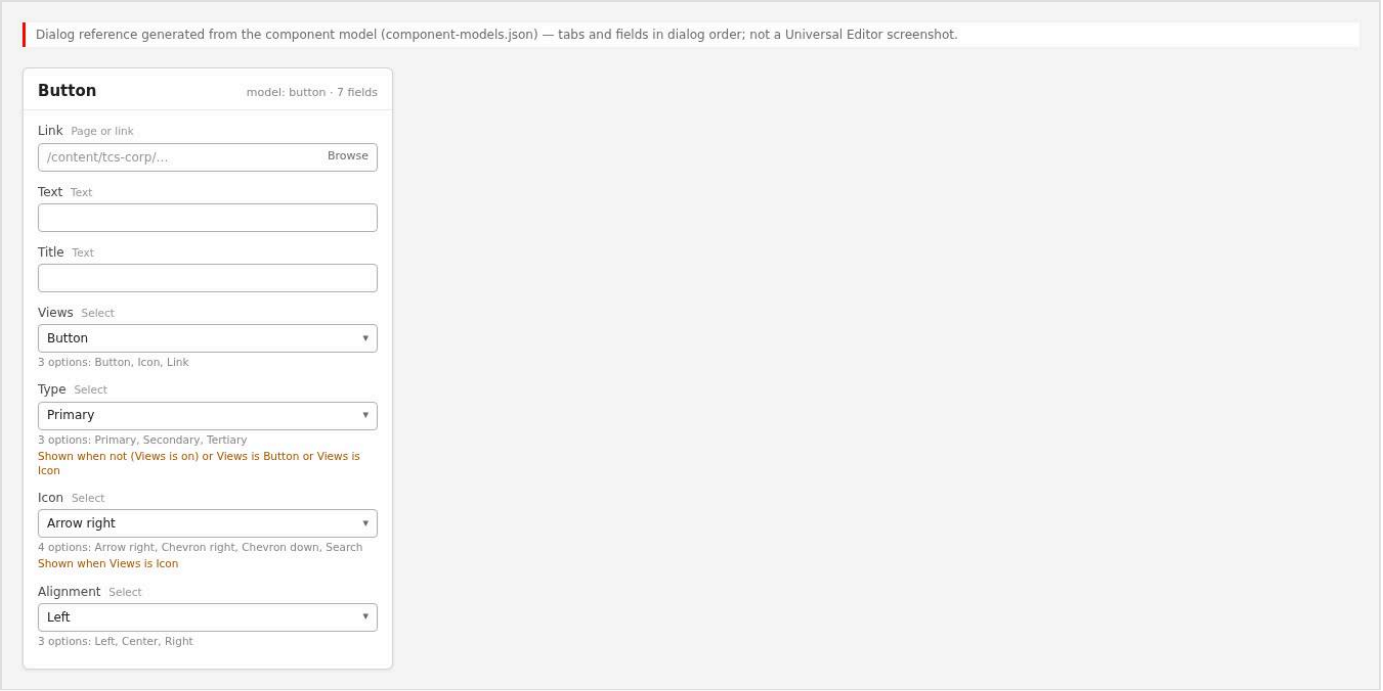


Figure: Button properties panel — The Properties panel with Link, Text, Title, Views, Type, Icon (visible because Views is Icon) and Alignment. (Dialog reference generated from the component model, not a Universal Editor screenshot; file screenshots/button-properties-panel.jpg) (handover screenshot; rendering at the time it was taken).

21. Known limitations

- Universal Editor dialogs were not captured: no author access in this program (see the access blockers).

22. Open items

- None.

23. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages