TCS CORPORATE WEBSITE

Conversation Canvas — Authoring Guide

Role / audience	Authoring — Content authors, content managers, AEM authoring leads
Version	1.0
Status	Draft for review
Owner	Content Lead / AEM Authoring Lead (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Conversation Canvas — Authoring Guide
- Where to see it
- For Content Authors
- Authorable Fields
- Screenshot-Based Authoring Steps
- Variations
- Complete Authoring Example
- Content and Asset Guidelines
- Troubleshooting
- Screenshots
- Known limitations
- Open items
- Change history

Conversation Canvas — Authoring Guide

Attribute	Value
Document ID	AUT-C-conversation-canvas
Audience	Content authors, content managers, AEM authoring leads
Purpose	How to add, fill in and check the Conversation Canvas component
Scope	—
Prerequisites	—
Owner	Content Lead / AEM Authoring Lead (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	8 November 2026
Source files	blocks/conversation-canvas/README.md, blocks/conversation-canvas/_conversation-canvas.json
Related documents	—
Related AEM paths	—

1. Where to see it

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/conversation-canvas
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/conversation-canvas/conversation-canvas
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/conversation-canvas/docked
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/conversation-canvas/floating
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/conversation-canvas/footer-canvas
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/conversation-canvas/journey-and-actions

2. For Content Authors

1. **Add the block.** In Universal Editor select a Section (or a Columns Container column) and choose Add > Conversation Canvas. For the header Canvas add it to a section of the Navigation page; for the footer Canvas add it to the page referenced by the Footer's Conversation Canvas Page (e.g. `references/footer-conversation-canvas`).
2. **Open its properties.** Select the block; the dialog has the tabs Content and Additional.
3. **Choose the style.** Canvas Style Default, Secondary or Primary (sticky). Primary renders only the floating dock: intro, background and buttons aren't shown.
4. **Enter the content.** Icon (and Icon Alt Text only if the icon carries meaning), Eyebrow, Title, Title Type, Text, BG Background Image; Menu root path and Menu depth (1 to 3) for the site menu; the Search bar fields: water mark (the placeholder and the field's label), audio icon and its alt text, button icon type, hover text (the submit button's name) and Search page.
5. **Set the journey.** Default and Secondary: Floating journey Floats and docks (default) or Stays in place, and Quick actions Auto, Pills or Buttons; Primary (always floating) instead shows Navigation

style and BG Style (the dialog shows only the fields of the chosen Canvas Style).
6. **Add quick actions.** Select the block in the content tree and Add > Conversation Canvas Button; set Link, Text, Views (Button, Icon, Link), Type and Icon. Reorder them by dragging in the content tree.
7. **Preview** on aem.page (the query index isn't available in the editor, so the menu shows "No pages found" there), scroll the page to check floating and docking.
8. **Publish** the page (and the nav or footer canvas page when you changed those), then **validate**: the menu lists the pages, a search opens the Search page with `?q=` and the row floats and docks as expected.

Minimum required: none technically; recommended: Title, Search bar water mark, Search bar button icon type hover text ("Submit"), Search page and a Menu root path in the same locale. **Optional:** icon, eyebrow, text, background image, quick actions, the Additional tab.

3. Authorable Fields

Conversation Canvas (`conversation-canvas`)

Model `conversation-canvas`; template name "Conversation Canvas" (the block class AEM renders); key-value block (one row per property); children: `conversation-canvas-button`.

Content tab — Conversation Canvas

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Canvas Style	`classes`	select	No	""	Default (""), Primary (sticky) (`primary`), Secondary (`secondary`)	Default: the ask-us panel (title, text, search row, quick actions). Primary (sticky): only a search and site navigation dock, floating at the bottom of the window from the top of the page to the footer. Secondary: the topic exploration panel (Default with the glows reversed and suggestion filters a script can fill).	secondary
Floating journey	`classes_journey`	select	No	""	Floats and docks (""), Stays in place (`nofloat`)	Default and Secondary. Floats and docks: the search row stays in place, floats once scrolled past and lands on the next Canvas, until the footer Canvas. Stays in place: the row never floats; a floating row lands on it while it is on screen. The footer Canvas never floats; Primary always floats. Shown when `classes` is not `primary`. Delivered as a block class.	nofloat
Quick actions	`classes_actions`	select	No	""	Auto (""), Pills (`action-pills`), Buttons (`action-buttons`)	How the button items look. Auto: pills in page sections, buttons in the footer (Figma). Pills: filter-tag pills without arrows. Buttons: as each item is authored (view and type). Shown when `classes` is not `primary`. Delivered as a block class.	action-pills
BG Style	`bgStyle`	select	No	`default`	Default (`default`), Dark (Primary) (`dark`)	Shown when `classes` is `primary`.	default
BG Background Image	`backgroundImage`	reference	No	—	—	—	/content/dam/tcs-corp/home/home-hero-background.jpg

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Icon	`icon`	reference	No	—	—	—	/content/dam/tcs-corp/block-library/icons/chat-icon.svg
Icon Alt Text	`iconAlt`	text	No	—	—	Delivered with `icon` (field collapse).	—
Eyebrow	`eyebrow`	text	No	—	—	—	Ask TCS
Title	`title`	text	No	—	—	—	Let’s shape what’s next, together
Title Type	`titleSize`	select	No	""	Default (""), Bigger Title (`bigger`), Medium Title (`medium`)	—	bigger
Text	`text`	richtext	No	""	—	—	—
Menu	`menu`	container	No	—	—	—	—
Menu › Menu root path	`menuRootPath`	aem-content	No	—	—	—	/design-block-master/en/dummy-pages
Menu › Menu depth	`menuDepth`	number	No	1	—	—	2
Navigation style	`classes_navstyle`	select	No	""	Pills (""), Text links (`text-links`)	Primary (sticky): the site navigation as pills or as text links (Figma “No Pill”). Shown when `classes` is `primary`. Delivered as a block class.	text-links
Search bar	`searchBar`	container	No	—	—	—	—
Search bar › Search bar water mark	`searchPlaceholder`	text	No	—	—	—	Ask us a question
Search bar › Search bar audio icon	`searchAudioIcon`	reference	No	—	—	—	/content/dam/tcs-corp/block-library/icons/audio-icon.svg

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Search bar › Search bar audio icon alt text	`searchAudioIconAlt`	text	No	—	—	—	Search by voice
Search bar › Search bar button icon type	`searchButtonStyle`	select	No	`primary`	Primary (`primary`), Secondary (`secondary`), Tertiary (`tertiary`)	—	primary
Search bar › Search bar button icon type hover text	`searchButtonLabel`	text	No	—	—	—	Search
Search bar › Search page	`searchPage`	aem-content	No	—	—	The page that shows search results (opened with ?q=the query). Without it, and without a search integration, visitors are told search isn’t available.	—

Additional tab — Conversation Canvas

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Anchor ID	`classes_anchor`	text	No	—	regExp: ^anchor-[a-z0-9][a-z0-9-]*$; customErrorMsg: Start with anchor-, then lower-case letters, digits and hyphens.	A unique ID of the block on the page, starting with anchor-, e.g. anchor-our-services; link to it with #anchor-our-services. Delivered as a block class.	—
Hide block	`classes_hideblock`	boolean	No	`false`	on / off	Hides the whole block on the page until it is turned off (shown faded in the editor). Delivered as a block class.	—
Animation Type	`classes_animation`	select	No	""	None (""), Fade in (`motion-fade-in`), Fade up (`motion-fade-up`), Fade down (`motion-fade-down`), Fade left (`motion-fade-left`), Fade right (`motion-fade-right`), Slide up (`motion-slide-up`), Slide down (`motion-slide-down`), Slide left (`motion-slide-left`), Slide right (`motion-slide-right`), Scale in (`motion-scale-in`)	How the block's content appears; repeated items (cards, list items, accordion items, columns) appear one after another. None: shown as is. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	motion-fade-in
Motion Speed	`classes_animationspeed`	select	No	""	Medium (""), Fast (`motion-fast`), Slow (`motion-slow`)	How fast the block's animations run (Animation Type 0.3 / 0.6 / 0.9 s; the Background animation takes 1.5 times as long). Shown when (`classes_animation` is set and `classes_animation` is not empty) or (`classes_bganimation` is set and `classes_bganimation` is not empty). Delivered as a block class.	motion-slow

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Animation Trigger	classes_animationtrigger	select	No	""	On Scroll / Viewport Entry (""), On Page Load (motion-on-load)	When the block's animations run. On Scroll: when the block comes into view (at once if it is in view when the page opens). On Page Load: as soon as the block is ready, wherever it is on the page. Shown when (classes_animation is set and classes_animation is not empty) or (classes_bganimation is set and classes_bganimation is not empty). Delivered as a block class.	—
Background animation	classes_bganimation	select	No	""	None (""), Fade in (bg-motion-fade-in), Reveal from the centre (bg-motion-reveal), Wipe left to right (bg-motion-wipe-right), Wipe right to left (bg-motion-wipe-left), Wipe bottom to top (bg-motion-wipe-up), Scale reveal (bg-motion-scale)	How the block's background (its colour, image or overlay as set in the block) appears. It doesn't animate the content: see Animation Type. Motion Speed and Animation Trigger apply to it too. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	bg-motion-reveal
Padding left	classes_paddingleft	select	No	""	Default (""), 0 (none) (pl-0), 0.25rem (space-100) (pl-100), 0.5rem (space-200) (pl-200), 0.75rem (space-300) (pl-300), 1rem (space-400) (pl-400), 1.25rem (space-500) (pl-500), 1.5rem (space-600) (pl-600), 2rem (space-800) (pl-800), 2.5rem (space-1000) (pl-1000), 3rem (space-1200) (pl-1200), 4rem (space-1600) (pl-1600), 5rem (space-2000) (pl-2000), 6rem (space-2400) (pl-2400), 7.5rem (space-3000) (pl-3000)	Delivered as a block class.	—
Padding right	classes_paddingright	select	No	""	Default (""), 0 (none) (pr-0), 0.25rem (space-100) (pr-100), 0.5rem (space-200) (pr-200), 0.75rem (space-300) (pr-300), 1rem (space-400) (pr-400), 1.25rem (space-500) (pr-500), 1.5rem (space-600) (pr-600), 2rem (space-800) (pr-800), 2.5rem (space-1000) (pr-1000), 3rem (space-1200) (pr-1200), 4rem (space-1600) (pr-1600), 5rem (space-2000) (pr-2000), 6rem (space-2400) (pr-2400), 7.5rem (space-3000) (pr-3000)	Delivered as a block class.	—
Padding top	classes_paddingtop	select	No	""	Default (""), 0 (none) (pt-0), 0.25rem (space-100) (pt-100), 0.5rem (space-200) (pt-200), 0.75rem (space-300) (pt-300), 1rem (space-400) (pt-400), 1.25rem (space-500) (pt-500), 1.5rem (space-600) (pt-600), 2rem (space-800) (pt-800), 2.5rem (space-1000) (pt-1000), 3rem (space-1200) (pt-1200), 4rem (space-1600) (pt-1600), 5rem (space-2000) (pt-2000), 6rem (space-2400) (pt-2400), 7.5rem (space-3000) (pt-3000)	Delivered as a block class.	—
Padding bottom	classes_paddingbottom	select	No	""	Default (""), 0 (none) (pb-0), 0.25rem (space-100) (pb-100), 0.5rem (space-200) (pb-200), 0.75rem (space-300) (pb-300), 1rem (space-400) (pb-400), 1.25rem (space-500) (pb-500), 1.5rem (space-600) (pb-600), 2rem (space-800) (pb-800), 2.5rem (space-1000) (pb-1000), 3rem (space-1200) (pb-1200), 4rem (space-1600) (pb-1600), 5rem (space-2000) (pb-2000), 6rem (space-2400) (pb-2400), 7.5rem (space-3000) (pb-3000)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Margin left	`classes_marginleft`	select	No	""	Default (""), 0 (none) (`ml-0`), 0.25rem (space-100) (`ml-100`), 0.5rem (space-200) (`ml-200`), 0.75rem (space-300) (`ml-300`), 1rem (space-400) (`ml-400`), 1.25rem (space-500) (`ml-500`), 1.5rem (space-600) (`ml-600`), 2rem (space-800) (`ml-800`), 2.5rem (space-1000) (`ml-1000`), 3rem (space-1200) (`ml-1200`), 4rem (space-1600) (`ml-1600`), 5rem (space-2000) (`ml-2000`), 6rem (space-2400) (`ml-2400`), 7.5rem (space-3000) (`ml-3000`)	Delivered as a block class.	—
Margin right	`classes_marginright`	select	No	""	Default (""), 0 (none) (`mr-0`), 0.25rem (space-100) (`mr-100`), 0.5rem (space-200) (`mr-200`), 0.75rem (space-300) (`mr-300`), 1rem (space-400) (`mr-400`), 1.25rem (space-500) (`mr-500`), 1.5rem (space-600) (`mr-600`), 2rem (space-800) (`mr-800`), 2.5rem (space-1000) (`mr-1000`), 3rem (space-1200) (`mr-1200`), 4rem (space-1600) (`mr-1600`), 5rem (space-2000) (`mr-2000`), 6rem (space-2400) (`mr-2400`), 7.5rem (space-3000) (`mr-3000`)	Delivered as a block class.	—
Margin top	`classes_margintop`	select	No	""	Default (""), 0 (none) (`mt-0`), 0.25rem (space-100) (`mt-100`), 0.5rem (space-200) (`mt-200`), 0.75rem (space-300) (`mt-300`), 1rem (space-400) (`mt-400`), 1.25rem (space-500) (`mt-500`), 1.5rem (space-600) (`mt-600`), 2rem (space-800) (`mt-800`), 2.5rem (space-1000) (`mt-1000`), 3rem (space-1200) (`mt-1200`), 4rem (space-1600) (`mt-1600`), 5rem (space-2000) (`mt-2000`), 6rem (space-2400) (`mt-2400`), 7.5rem (space-3000) (`mt-3000`)	Delivered as a block class.	—
Margin bottom	`classes_marginbottom`	select	No	""	Default (""), 0 (none) (`mb-0`), 0.25rem (space-100) (`mb-100`), 0.5rem (space-200) (`mb-200`), 0.75rem (space-300) (`mb-300`), 1rem (space-400) (`mb-400`), 1.25rem (space-500) (`mb-500`), 1.5rem (space-600) (`mb-600`), 2rem (space-800) (`mb-800`), 2.5rem (space-1000) (`mb-1000`), 3rem (space-1200) (`mb-1200`), 4rem (space-1600) (`mb-1600`), 5rem (space-2000) (`mb-2000`), 6rem (space-2400) (`mb-2400`), 7.5rem (space-3000) (`mb-3000`)	Delivered as a block class.	—

Conversation Canvas Button (`conversation-canvas-button`)

Model `conversation-canvas-button`; template name "Conversation Canvas Button" (the block class AEM renders).

Fields — Conversation Canvas Button

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Link	`link`	aem-content	No	—	—	—	—
Text	`linkText`	text	No	—	—	Delivered with `link` (field collapse).	—
Title	`linkTitle`	text	No	—	—	Delivered with `link` (field collapse).	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Views	buttonView	select	No	button	Button (button), Icon (icon), Link (link)	—	—
Type	buttonVariant	select	No	primary	Primary (primary), Secondary (secondary), Tertiary (tertiary)	Shown when buttonView is off or empty or buttonView is button or buttonView is icon.	—
Icon	buttonIcon	select	No	—	Arrow right (arrow-right), Chevron right (chevron-right), Chevron down (chevron-down), Search (search)	Shown when buttonView is icon.	—

Notes the tables can't show:

Field	Values	Effect
Canvas Style	Default / Primary (sticky) / Secondary	The variation (block class primary / secondary)
Floating journey (classes_journey, Default and Secondary only)	Floats and docks (default) / Stays in place (nofloat)	Stays in place: a stop of the journey whose own row never floats; a floating row lands on it while it's on screen (the previous row floats on after it). decorative (no longer offered) is read as Stays in place. Primary always floats
Quick actions (classes_actions)	Auto (default) / Pills (action-pills) / Buttons (action-buttons)	How the button items look. Auto: pills in page sections (main), buttons elsewhere (footer, header). Pills: filter-tag pills without arrows. Buttons: as each item is authored (view and type)
BG Style	Default / Dark (Primary)	Adds conversation-canvas-bg-{value}; only the Primary dock has Dark styles
Navigation style (classes_navstyle)	Pills / Text links	Primary dock navigation only

- **Title** always renders as an H2 (h2.conversation-canvas-title); Title Type only changes its size (Bigger: 2.75rem / 4rem / 6rem below 600px / from 600px / from 1200px; Medium: 1.75rem / 2rem / 2.5rem; Default: 2.5rem / 3.125rem / 4rem).
- **Icon Alt Text** and **Search bar audio icon alt text** collapse into their images (field collapse); the block reads the image's alt (and a separate row when present). The audio alt text names the voice button (fallback placeholder searchByVoice); the audio icon itself is decorative.
- **Search bar water mark** is the input's placeholder and its visually hidden label (fallback searchPlaceholder, "Ask us a question").
- **Search bar button icon type hover text** is the submit button's accessible name and tooltip (fallback submit, "Submit").
- **Search page**: a search opens it with ?q= and the query, unless a page integration handles the conversation-canvas:search event; without either, a status for screen readers says "Search isn’t available yet."
- **Menu root path** is converted to the published path; empty gives the locale root (e.g. /de-de). **Menu depth** 1 to 3 levels below the root.
- **Quick actions** (Conversation Canvas Button items): Views and Type come from the item (buttonView, buttonVariant), else from the link formatting, defaults Button / Primary; Title is dropped when equal to the text.
- **Data layer impact:** filter tags supplied by script carry data-cmp-interaction="filter" and data-cmp-value; see Data Layer and Analytics.
- **Legacy mapping:** button items authored with the former shared button model are read from their link and option cells (any cell value that is a known view or type; an unknown value is the icon). If no row has a known key, single-cell rows are read as properties in model order (Canvas Style and the collapsed alt texts excluded).

- **Additional tab:** Anchor ID, Hide block, the animations and spacing behave as described in AGENTS.md ("Additional tab", "Animation and skeletons"); Hide block and spacing apply only in `main`, not to header or footer Canvases. The content animation moves `.conversation-canvas-content` (intro, search row, buttons); the Background animation reveals the base colour, the brand glows (`::before`: Default blue left / yellow right, Secondary the reverse) or the BG Background Image, read from the block, never redefined (`decorators/motion-decorator.js`, `docs/animation/README.md`).

4. Screenshot-Based Authoring Steps

Authoring Step 1: Add a Default Canvas

```
[Screenshot Placeholder]

File name:
conversation-canvas-authoring-step-1.png

Purpose:
The Content tab with Canvas Style Default and the intro fields filled in.

Annotations:
A = Canvas Style
B = Icon
C = Eyebrow
D = Title
E = Title Type
F = Text
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Canvas Style	Default	In-page panel	White panel with blue / yellow glows
B	Icon	/content/dam/tcs-corp/block-library/icons/chat-icon.svg	Visual cue	2.5rem icon above the eyebrow
C	Eyebrow	Ask TCS	Context	Small brand-coloured text
D	Title	How can we help you today?	The question	H2
E	Title Type	Default	Standard size	4rem from 1200px
F	Text	Ask about our services, industries and insights, or browse the site from the menu.	Guidance	Centred text below the title

Author action: Section > Add > Conversation Canvas, fill the Content tab. **Expected preview:** the centred intro and a search row. **Expected published result:** the same. **Business rule:** the page H1 stays elsewhere (Page Header). **Validation:** the heading order of the page stays logical. **Common mistake:** Canvas Style Primary when an in-page panel is wanted: Primary renders only the dock.

Authoring Step 2: Configure the menu and search bar

```
[Screenshot Placeholder]

File name:
conversation-canvas-authoring-step-2.png

Purpose:
```

```
The Menu and Search bar groups of the Content tab.

Annotations:
A = Menu root path
B = Menu depth
C = Search bar water mark
D = Search bar button icon type
E = Search bar button icon type hover text
F = Search page
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Menu root path	/language-masters/en/dummy-pages	Section of the site	Menu lists its child pages
B	Menu depth	2	Two levels	Nested list in the menu
C	Search bar water mark	Ask us a question	Invitation and label	Placeholder and hidden label
D	Search bar button icon type	Primary	Filled arrow	Brand-blue round arrow button
E	Search bar button icon type hover text	Submit	Accessible name	Tooltip and name "Submit"
F	Search page	The site's search results page	Somewhere to go	Search opens it with ?q=

Author action: fill the groups and save. **Expected preview:** on aem.page the menu button opens the list of pages; in Universal Editor it shows "No pages found". **Expected published result:** a query opens the Search page. **Business rule:** Menu root path in the same locale as the page. **Validation:** open the menu, submit a query. **Common mistake:** a test word in the hover text (it becomes the button's name): enter "Submit".

Authoring Step 3: Add quick actions

```
[Screenshot Placeholder]

File name:
conversation-canvas-authoring-step-3.png

Purpose:
The content tree with two Conversation Canvas Button items and the item dialog.

Annotations:
A = Link
B = Text
C = Views
D = Type
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Link	/content/tcs-corp/language-masters/en/dummy-pages/contact	Destination	Link to the contact page
B	Text	Contact us	Visible text	Button text

Callout	Field	Value	Reason	Expected result
C	Views	Button	Button look	A button (pill in page sections with Quick actions Auto)
D	Type	Primary	Main action	Primary style when shown as a button

Author action: select the block in the content tree > Add > Conversation Canvas Button (twice; the second: Explore services, Secondary). **Expected preview:** the quick actions below the search row. **Expected published result:** in a page section with Quick actions Auto they render as pills; set Quick actions to Buttons to keep the authored button styles. **Business rule:** one to three actions. **Validation:** each link opens its page. **Common mistake:** expecting button styles in a page section: Auto shows pills there.

Authoring Step 4: Set the floating journey

```
[Screenshot Placeholder]

File name:
conversation-canvas-authoring-step-4.png

Purpose:
The Floating journey and Quick actions selects.

Annotations:
A = Floating journey
B = Quick actions
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Floating journey	Floats and docks	Default journey	Row floats once passed, lands on the next Canvas
A	Floating journey (second Canvas of the page)	Stays in place	A stop that shouldn't float itself	The previous row floats on after it
B	Quick actions	Pills	Figma filter-tag look	Pills without arrows

Author action: set the values on each Canvas of the page. **Expected preview:** on aem.page scroll down: one floating row, landing on each Canvas, stopping at the footer Canvas. **Business rule:** authors never set offsets, z-index or thresholds; roles come from placement. **Validation:** `document.documentElement.dataset.canvasJourneyState` shows the state. **Common mistake:** every Canvas set to Docks only: nothing floats (state `hidden`).

Authoring Step 5: Footer and header Canvases

```
[Screenshot Placeholder]

File name:
conversation-canvas-authoring-step-5.png

Purpose:
The Footer block's Conversation Canvas Page field, and a Navigation page section holding a Canvas.

Annotations:
A = Conversation Canvas Page
B = Nav page section with the Canvas
```

Values to Enter

Call out	Field	Value	Reason	Expected result
A	Conversation Canvas Page (Footer)	references/footer-conversation-canvas	Final stop of the journey	The footer Canvas; nothing floats below it
B	A section of the Navigation page	A Conversation Canvas	Header Canvas	Row on the bottom of the first screen, fixed at the bottom of the window as soon as the page scrolls

Author action: set the footer reference; add a section with a Canvas to the Navigation page (a TCS Header block in the same section stays the logo bar); publish both pages. **Expected published result:** the journey starts at the header Canvas and ends at the footer Canvas. **Validation:** scroll to the bottom: state `footer-docked`. **Common mistake:** the footer canvas page not published: the floating row stops above the footer instead.

5. Variations

Verified from the repository, the published content and Figma *New Screens from New DS*. Only these are implemented.

Variation	Figma	Context	Configuration	Floating / docked
Default	Hero (4082:120388), Intelligent Personalisation Block (251:41883), Footer (2496:91965)	Page body, header, footer	Canvas Style Default	Search row docks in place, floats once passed
Secondary	— (repository)	Page body	Canvas Style Secondary	As Default; filter tags by script
Section Canvas	Intelligent Personalisation Block (251:41883), tablet 2313:52736	Page body (Default / Secondary)	—	From 600px at least 50rem (800px) high, content centred, 1.5rem gutters; from 1200px 10rem / 5rem (160px / 80px) padding; edge to edge in a Full Width section (no rounded corners); search row 37.9375rem (607px)
Quick actions	Filter tag (state-5-pills, 251:41883); Footer CTA buttons (2496:91965)	Page body / footer	Quick actions (`classes_actions`)	Auto: pills in page sections (0.75rem 2rem padding, 1px `--color-border-default`, 1.125rem medium, no arrow, 0.75rem apart, at most 56.25rem wide), buttons in the footer
Floating search row	Floating menu (4308:42483): 59px menu button, 2px #494c4d outline, 60% white pill; 607×72 desktop, 463×72 tablet	Any Default / Secondary	—	The floating presentation of the owner row: 28.9375rem (463px) wide below 1200px, 37.9375rem (607px) from 1200px, never wider than the window minus 1.5rem gutters; it changes width as it floats and lands on tablet
Primary — Pills	Full menu (1124:26210, 1124:26244)	Page body	Canvas Style Primary (sticky), Navigation style Pills	Whole dock floats; docks give way to Canvases in place. From 900px: the 33.125rem (530px) search pill alone (40% white, light outline, light placeholder); first level as pills (0.75rem 2rem, medium), the levels below as text items with the open one filled, their row starting with the menu button (back to the first level; a back arrow deeper down)
Primary — Text links	Full menu – No Pill (1734:31279)	As Primary	Navigation style Text links	Text items; current / open item as filled pill
Primary — Dark	L1 Media & Investors (1734:38272)	As Primary	BG Style Dark (Primary) + Text links	Black fade, `--black-400` pill with `--grey-300` outline, light items

Variation	Figma	Context	Configuration	Floating / docked
Title Bigger / Medium, background image, icon, eyebrow, buttons	Hero, Intelligent Personalisation Block	Default / Secondary	Title Type, BG Background Image, Icon, Eyebrow, Button items	Title Bigger 6rem (96px) from 1200px

Default

Purpose: the standard ask-us panel. Use for heroes and sections; don't use for data capture. Required: nothing; recommended: Title, Search bar fields. Dialog: Canvas Style Default. Rendering: white panel (`--color-bg-default`), 1.25rem corners, blue glow left / yellow right, centred content, search row, quick actions. Site menu (Default and Secondary, desktop; Figma Full menu 1124:26210 / 1124:26244): the menu button (a blue close button while open) opens the pages below the Menu root path as a row below the search row, the page behind in a grey fade the size of the window (40% black at the top, `--color-bg-secondary` from 55% down; Figma 1124:26244); the menu button is the Figma Circle Menu (4308:42483): a 59px `--color-bg-brand` circle with a white menu icon, in place and floating. Items (Figma 1124:27046 Nav-Items): the first level as Filter tag pills (1px `--color-border-neutral-secondary` #767676, 12px 32px, medium `--color-text-neutral`), the levels below as white pills (1px `--color-border-default`, 8px 24px); in the pills only a page with child pages has an arrow (a chevron); in the panel every row has one (Figma List Container 1124:26250), on a page with child pages it is the button opening them; the open item is a filled blue pill. A page with child pages shows them, while the pointer is on it, in a panel above the row in place of the search row (Figma List Container 1124:26250: 14 / 20px rows 49px apart, an arrow at the right of every row, a Black/300 divider below every row but the last; 25.5938rem, or two columns filled top to bottom, 2.5rem apart and 51.1875rem wide, for more than six pages; 1.25rem padding); its chevron button opens it too (keyboard, touch). A link's text opens its page. In the panel, the arrow of a page with child pages opens its level: the row shows that level's pages as text items, starting with a menu button back to the first level (a back arrow below the second level), the page as a filled blue pill with a chevron and its child pages in the panel; hovering another item shows its child pages. Escape closes the panel, then the menu; a click outside (anywhere but the search row and the menu: page, header, beside the pills) or focus leaving the search row closes it; closing (any way, also scrolling) resets it to the first level with no panel open, so the search row shows again and it reopens at the first level. While open, the search row moves up when the row below wouldn't fit in the window (e.g. the header Canvas or a floating row at its bottom), placed when it opens and on resize; scrolling closes it (it doesn't follow a moving row, no flicker). The menu button and its menu show from 1200px only (on tablet and mobile the site navigation is the header's menu button, `blocks/tcs-header`). The menu's display, size, margin and padding are its own, also inside `<header>` (the header Canvas), where the header's `header nav` rules would otherwise size it. While the header's tablet / mobile menu is open, the header Canvas is hidden (the menu covers the page, whose Canvases are inert; nothing floats) and shows again in its place, with its search text, when the menu closes. Desktop / tablet / mobile: see Responsive Behavior. Accessibility: H2 title, search landmark, labelled controls. Data layer: `cmp:click`, `cmp:search`. Personalization: none; the authored panel renders.

```
[Screenshot Placeholder]

File name:
conversation-canvas-default-mobile.png

Purpose:
The Default Canvas at 375 px: the 2.5rem title, the menu button beside a narrow search pill, buttons
below.

Annotations:
A = Title
B = Search row
C = Quick actions
```

Secondary

Purpose: a topic exploration panel. Dialog: Canvas Style Secondary. Rendering: as Default with the glows reversed (yellow left, blue right), a 2.5rem gap in the intro, and an empty, hidden filter list (`ul.conversation-canvas-filters`, `aria-label` "Suggestions") that a script fills with `setConversationCanvasFilters(block, tags)`. Without a script no filters show. Personalization fallback: no filter tags.

```
[Screenshot Placeholder]

File name:
conversation-canvas-secondary-tablet.png

Purpose:
The Secondary Canvas at 768 px with script-supplied filter tags (one active).

Annotations:
A = Filter tags
B = Active tag
```

Primary (sticky)

Purpose: a persistent search and section navigation dock. Use at most one per page, on long pages. Dialog: Canvas Style Primary (sticky); options Navigation style (Pills / Text links), BG Style (Default / Dark), Menu root path and depth. Rendering: only `.conversation-canvas-dock`, fixed at the bottom; hidden (`inert`, transparent) while another Canvas is docked or the header menu is open; below 900px only the 17.5rem search pill; from 900px the menu button, navigation and sub-page panel over a white (or black, Dark) fade. Navigation views: the root's sections on the menu root (or when the page isn't in the tree); a page's sub-pages when it has some (pills with their own sub-pages open a panel; six or more items in two balanced columns); on a page without sub-pages its suggestions (the page's tag labels, or `setConversationCanvasSuggestions(block, suggestions)`), else its parent's sub-pages. Clicking a suggestion fills the field (surrounding quotes removed) and submits. Titles drop the text after "|". Personalization fallback: tag labels or the parent's sub-pages.

```
[Screenshot Placeholder]

File name:
conversation-canvas-primary-suggestions-desktop.png

Purpose:
The Primary dock on a page without sub-pages: the back button and suggestion pills from the page's tags.

Annotations:
A = Back / menu button
B = Suggestion pills
```

Floating journey: the three behaviours

The Canvas options give three behaviours, each with its own use: **Primary (sticky)** (Canvas Style): the dock floats at the bottom of the window from the top of the page to the footer (site search and navigation on long pages). **Floats and docks** (Floating journey, the default for Default and Secondary): the row stays in place, floats once scrolled past and lands on the next Canvas, until the footer Canvas. **Stays in place** (`nofloat`): the row never floats; a floating row lands on it while it's on screen, so there's never a second row over it. The former Docks only is Stays in place; the former Decorative (a Canvas outside the journey, which the floating row passed over, showing two rows) is read as Stays in place too; Floating journey isn't offered for Primary, which always floats (Docks only on a Primary used to hide the dock for good). **Hidden Canvases aren't active.** A Canvas with Hide block, or one that isn't shown (a hidden tab or section), never floats and nothing docks on it, wherever it is: in the page, in the header (nav page) or the footer (the footer's Canvas page), and a Primary dock; one that was active lets go (no floating row, `data-canvas-role` or

reserved space left) and the journey runs on the active Canvases only. Hide block hides the Canvas in the header and footer too (`styles/styles.css` hides blocks in `main` only); in Universal Editor edit mode it stays visible, faded, and isn't active either. Examples: a hidden section Canvas: the header row floats on past it; a hidden header Canvas: nothing floats until the next Canvas, which floats from there; a hidden footer Canvas: the floating row floats to the end of the page, lifted above the footer.

One row in use. While a row floats it is the only Canvas row in use: its menu button, search field, voice and submit work, and every other Canvas row is a placeholder (`inert`: it can't be clicked, focused or read out), e.g. the next Canvas's row, hidden while the floating row comes up to it (`.conversation-canvas-approaching`), which a click used to show again next to the floating row. With no row floating (the header Canvas docked on the first screen, a section or the footer Canvas docked) every Canvas row is in use on its own. A row in use (focus in it, e.g. while typing in a docked row) stays docked while it's on screen (`focused` in `canvas-journey.js`), so it doesn't turn into a placeholder under the user's hands. An open site menu closes when its row starts or stops floating. In Universal Editor edit mode no row is made inert (authors select them). The Canvas content around a row (title, text, Quick actions) is page content and always stays in use.

Placement: header, section and footer Canvas

Roles come from placement (`data-canvas-role` on the block): a Canvas in `<header>` (a nav page section, hosted in `header .nav-canvas`), or the first Canvas when it is in the page's first section (the hero), is **header**; the last Canvas in `<footer>` is **footer** (the final stop; other Canvases in the footer are sections); the rest are **section**; Primary has no role (`dock`). The header Canvas sits on the bottom of the first screen and floats as soon as scrolling would carry it up; a hero shorter than the window makes it float from the start.

6. Complete Authoring Example

Scenario: the Overview Canvas of the block library (`block-library/conversation-canvas/conversation-canvas`).

Field	Example value	Guidance
Canvas Style	Default	In-page panel
BG Style	Default	Glows
Icon	/content/dam/tcs-corp/block-library/icons/chat-icon.svg	Decorative: no alt text
Eyebrow	Ask TCS	Short
Title	How can we help you today?	One question
Text	Ask about our services, industries and insights, or browse the site from the menu.	One sentence
Menu root path	/content/tcs-corp/language-masters/en/dummy-pages	Same locale
Menu depth	2	1 to 3
Search bar water mark	Ask us a question	Also the field's label
Search bar button icon type	Primary	Filled arrow
Search bar button icon type hover text	Submit	Button name
Search page	The search results page	Without it search isn't available
Button 1	Contact us, Button, Primary	Main action
Button 2	Explore services, Button, Secondary	Second action

Steps: add the block, fill the fields, add two Conversation Canvas Buttons, publish. Expected output: the centred panel with icon, eyebrow, H2, text, the search row and two quick actions (pills in a page section with Quick actions Auto). Responsive: the title shrinks to 3.125rem below 1200px and 2.5rem below 600px; the row floats once scrolled past. Accessibility: search landmark, labelled menu button, Escape closes the

menu. Analytics: component entry, `cmp:click` on the actions and the menu, `cmp:search` with the redacted term. Personalization fallback: the authored panel. Pre-publish checklist: menu root in the same locale; hover text not a test value; Search page set; one Primary at most; the footer canvas page published; tested on aem.page by scrolling the whole page.

7. Content and Asset Guidelines

- **Titles, eyebrows, text:** one question as the H2; eyebrow a short context label; one or two sentences of text.
- **Search bar texts:** an inviting water mark (it is also the label); a meaningful hover text (it is the submit button's name).
- **Quick actions:** clear verbs ("Contact us", "Explore services"); one primary action.
- **Links:** quick action links and the Search page are authored; menu and dock links come from the query index (concise page titles; text after "|" is dropped in the dock only).
- **Images and alt text:** the background image is decorative (`alt=""`, `object-fit: cover`, no fixed aspect ratio; keep the subject centred); the icon renders at 2.5rem (`--icon-size-l`), the audio icon at 1.5rem (`--icon-size-s`); SVG preferred. Leave Icon Alt Text empty for decorative icons.
- **Tags and metadata:** Primary suggestions come from the page's tags, labelled from the locale's taxonomy (labels derived from tag IDs when untranslated).
- **Min / max items:** Menu depth 1 to 3 (dialog). No other verified technical limit was identified.
- **Asset source and loading:** DAM references; a picture delivered by AEM is used as delivered, an image built from a URL is an optimized picture (site media) or a lazy `<img>`. Missing image: the glows show instead of a background; no icon renders without an icon.


8. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
A search does nothing visible	No Search page and no integration	Check the Search page field; listen for `conversation-canvas:search` in the console	Set the Search page or connect an integration	A query opens results
The menu shows "No pages found"	Viewed in Universal Editor, root in another locale, pages not indexed, a parent page missing from the index	Open `/query-index.json` on aem.page and look for the root's child paths	Test on aem.page; fix the root; publish the missing pages	The menu lists the pages
The Primary dock never appears	Hide block on (a hidden Primary isn't active), or a Canvas in place on screen	Inspect the dock for `conversation-canvas-floating` and the journey state	Set Floats and docks; check other Canvases	The dock floats after scrolling
Nothing floats after the last section Canvas (state `hidden`)	That Canvas is Stays in place and no earlier Canvas may float	Check Floating journey of each Canvas	Set Floats and docks on one Canvas	State `floating-after-section`
The floating row stops above the footer	No footer Canvas (Conversation Canvas Page empty or unpublished)	Check the Footer block and the referenced page	Reference and publish the footer canvas page	State `footer-docked` at the bottom
The submit tooltip shows a test word	Hover text holds a test value	Open the Canvas (or the footer canvas page)	Enter "Submit" or clear it; publish	Tooltip and name read "Submit"
Dock pills on the wrong level	The page is deeper than Menu depth or outside the root	Compare the URL with root and depth	Increase the depth (max 3) or change the root	Expected view

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
No microphone button	Browser without the Web Speech API	Check `window.SpeechRecognition` and `window.webkitSpeechRecognition` in the console	None needed	Button appears in a supporting browser

Evidence to collect (without secrets): the page URL on aem.page, `document.documentElement.dataset.canvasJourneyState` while reproducing, `data-canvas-role` of each Canvas, the Network entries for `/query-index.json` and the sheets (status only), console errors, the viewport size.

9. Screenshots

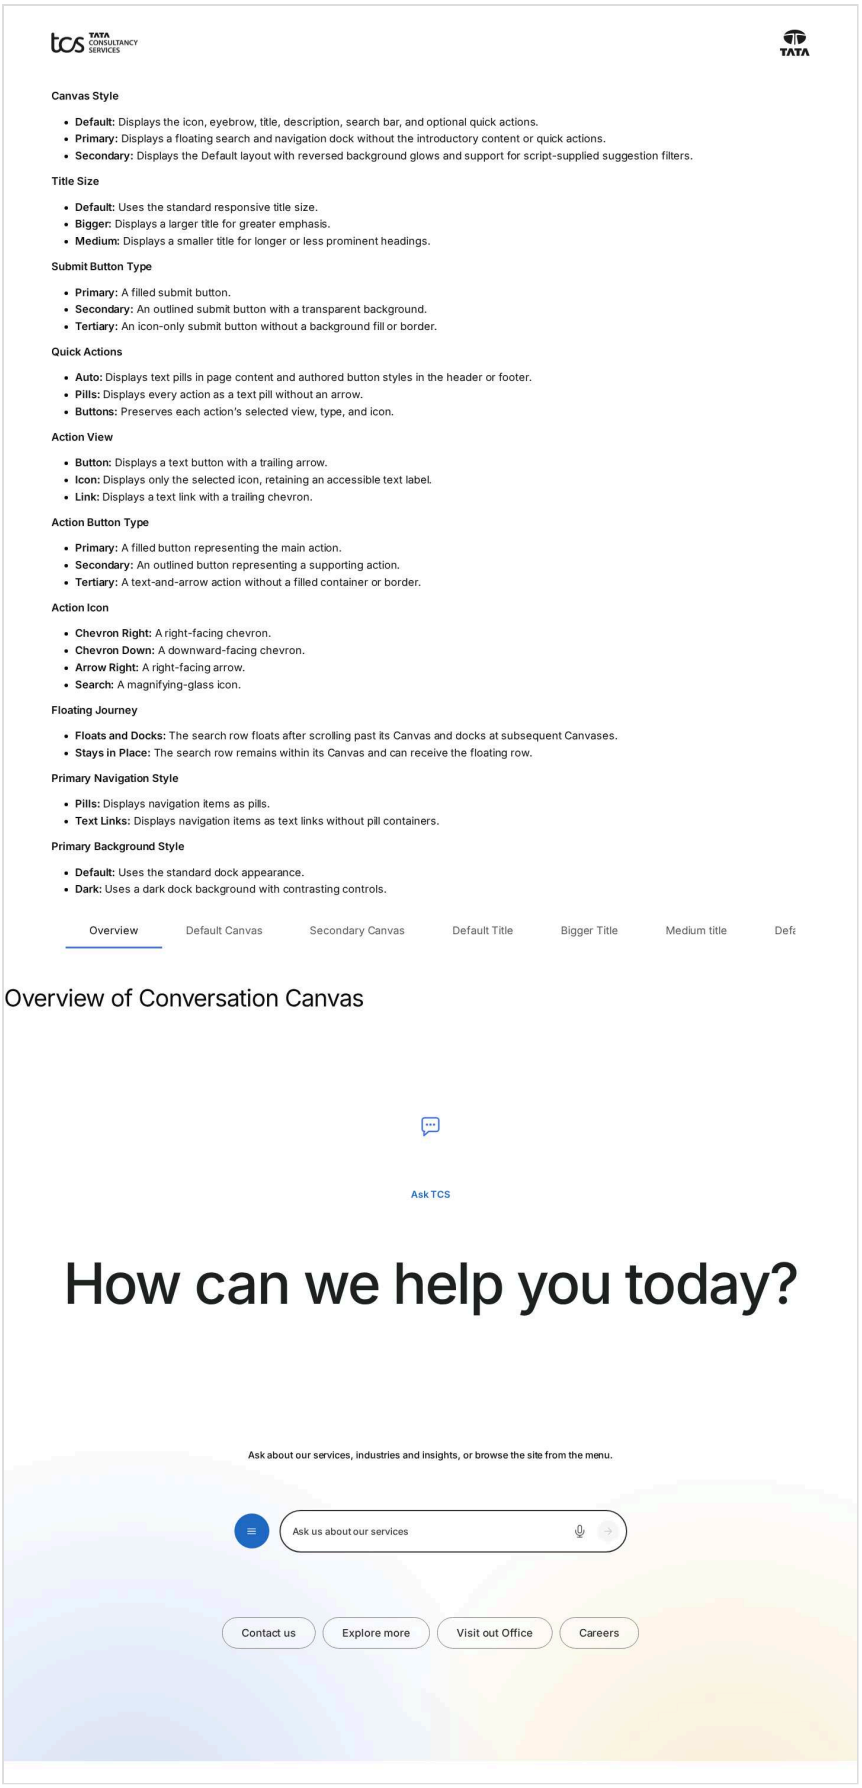

Overview of Conversation Canvas

Figure: Conversation Canvas as published (block library) — desktop 1440 × 900 (/design-block-master/en/block-library/conversation-canvas/conversation-canvas, captured 2026-11-08).

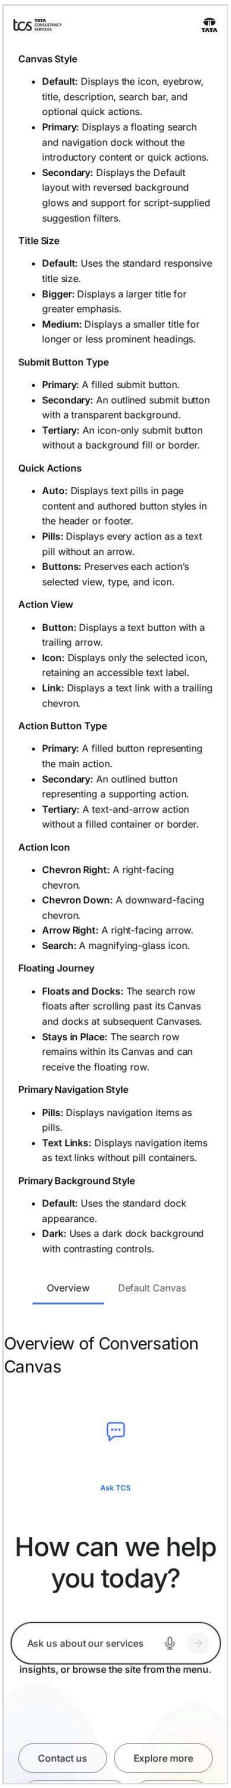


Figure: Conversation Canvas as published (block library) — mobile 375 × 812 (/design-block-master/en/block-library/conversation-canvas/conversation-canvas, captured 2026-11-08).

> **Screenshot required**

> - Required screen: Conversation Canvas dialog in Universal Editor (every tab, including Additional)
> - Required role/access: AEM Sites author with Universal Editor (content author)
> - Required navigation steps: AEM Sites console > /content/tcs-corp/language-masters/en > open a page in Universal Editor
> - Reason unavailable: No AEM author access in the documentation program (access blocker AB-01)
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

10. Known limitations

- Universal Editor screenshots are placeholders: no author access in this program.

11. Open items

- None.

12. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages