TCS CORPORATE WEBSITE

Interactive Dashboard — Authoring Guide

Role / audience	Authoring — Content authors, content managers, AEM authoring leads
Version	1.0
Status	Draft for review
Owner	Content Lead / AEM Authoring Lead (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Interactive Dashboard — Authoring Guide
- Where to see it
- For Content Authors
- Authorable Fields
- Screenshot-Based Authoring Steps
- Variations
- Complete Authoring Example
- Content and Asset Guidelines
- Troubleshooting
- Screenshots
- Known limitations
- Open items
- Change history

Interactive Dashboard — Authoring Guide

Attribute	Value
Document ID	AUT-C-interactive-dashboard
Audience	Content authors, content managers, AEM authoring leads
Purpose	How to add, fill in and check the Interactive Dashboard component
Scope	—
Prerequisites	—
Owner	Content Lead / AEM Authoring Lead (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	8 November 2026
Source files	blocks/interactive-dashboard/README.md, blocks/interactive-dashboard/_interactive-dashboard.json
Related documents	—
Related AEM paths	—

1. Where to see it

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/interactive-dashboard
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/interactive-dashboard/interactive-dashboard

2. For Content Authors

1. **Adding the block:** not possible; the Interactive Dashboard is in no component filter.
2. **An existing instance:** select it in the content tree (or on the canvas in edit mode); its properties have only the **Additional** tab.
3. **Content:** the block has no content fields; anything placed in it is discarded.
4. **Preview:** in Preview mode and on the site the block is not shown.
5. **Publish:** don't publish pages that rely on it; delete the block (or the empty section) before publishing, or turn on Hide block.
6. **Validate:** on the preview host the page shows no gap where the block was.

Minimum required / recommended / optional: not applicable.

3. Authorable Fields

Interactive Dashboard (`interactive-dashboard`)

Model `interactive-dashboard`; template name "Interactive Dashboard" (the block class AEM renders).

Additional tab — Interactive Dashboard

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Anchor ID	`classes_anchor`	text	No	—	regExp: ^anchor-[a-z0-9][a-z0-9-]*$; customErrorMsg: Start with anchor-, then lower-case letters, digits and hyphens.	A unique ID of the block on the page, starting with anchor-, e.g. anchor-our-services; link to it with #anchor-our-services. Delivered as a block class.	—
Hide block	`classes_hideblock`	boolean	No	false	on / off	Hides the whole block on the page until it is turned off (shown faded in the editor). Delivered as a block class.	—
AnimationType	`classes_animation`	select	No	""	None (""), Fade in (`motion-fade-in`), Fade up (`motion-fade-up`), Fade down (`motion-fade-down`), Fade left (`motion-fade-left`), Fade right (`motion-fade-right`), Slide up (`motion-slide-up`), Slide down (`motion-slide-down`), Slide left (`motion-slide-left`), Slide right (`motion-slide-right`), Scale in (`motion-scale-in`)	How the block's content appears; repeated items (cards, list items, accordion items, columns) appear one after another. None: shown as is. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	—
MotionSpeed	`classes_animationspeed`	select	No	""	Medium (""), Fast (`motion-fast`), Slow (`motion-slow`)	How fast the animation runs: 0.3, 0.6 or 0.9 seconds. Shown when `classes_animation` is set and `classes_animation` is not empty. Delivered as a block class.	—
AnimationTrigger	`classes_animationtrigger`	select	No	""	On Scroll / Viewport Entry (""), On Page Load (`motion-on-load`)	When the block's animations run. On Scroll: when the block comes into view (at once if it is in view when the page opens). On Page Load: as soon as the block is ready, wherever it is on the page. Shown when `classes_animation` is set and `classes_animation` is not empty. Delivered as a block class.	—
Padding left	`classes_paddingleft`	select	No	""	Default (""), 0 (none) (`pl-0`), 0.25rem (space-100) (`pl-100`), 0.5rem (space-200) (`pl-200`), 0.75rem (space-300) (`pl-300`), 1rem (space-400) (`pl-400`), 1.25rem (space-500) (`pl-500`), 1.5rem (space-600) (`pl-600`), 2rem (space-800) (`pl-800`), 2.5rem (space-1000) (`pl-1000`), 3rem (space-1200) (`pl-1200`), 4rem (space-1600) (`pl-1600`), 5rem (space-2000) (`pl-2000`), 6rem (space-2400) (`pl-2400`), 7.5rem (space-3000) (`pl-3000`)	Delivered as a block class.	—
Padding right	`classes_paddingright`	select	No	""	Default (""), 0 (none) (`pr-0`), 0.25rem (space-100) (`pr-100`), 0.5rem (space-200) (`pr-200`), 0.75rem (space-300) (`pr-300`), 1rem (space-400) (`pr-400`), 1.25rem (space-500) (`pr-500`), 1.5rem (space-600) (`pr-600`), 2rem (space-800) (`pr-800`), 2.5rem (space-1000) (`pr-1000`), 3rem (space-1200) (`pr-1200`), 4rem (space-1600) (`pr-1600`), 5rem (space-2000) (`pr-2000`), 6rem (space-2400) (`pr-2400`), 7.5rem (space-3000) (`pr-3000`)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Padding top	classes_paddingtop	select	No	""	Default (""), 0 (none) (pt-0), 0.25rem (space-100) (pt-100), 0.5rem (space-200) (pt-200), 0.75rem (space-300) (pt-300), 1rem (space-400) (pt-400), 1.25rem (space-500) (pt-500), 1.5rem (space-600) (pt-600), 2rem (space-800) (pt-800), 2.5rem (space-1000) (pt-1000), 3rem (space-1200) (pt-1200), 4rem (space-1600) (pt-1600), 5rem (space-2000) (pt-2000), 6rem (space-2400) (pt-2400), 7.5rem (space-3000) (pt-3000)	Delivered as a block class.	—
Padding bottom	classes_paddingbottom	select	No	""	Default (""), 0 (none) (pb-0), 0.25rem (space-100) (pb-100), 0.5rem (space-200) (pb-200), 0.75rem (space-300) (pb-300), 1rem (space-400) (pb-400), 1.25rem (space-500) (pb-500), 1.5rem (space-600) (pb-600), 2rem (space-800) (pb-800), 2.5rem (space-1000) (pb-1000), 3rem (space-1200) (pb-1200), 4rem (space-1600) (pb-1600), 5rem (space-2000) (pb-2000), 6rem (space-2400) (pb-2400), 7.5rem (space-3000) (pb-3000)	Delivered as a block class.	—
Margin left	classes_marginleft	select	No	""	Default (""), 0 (none) (ml-0), 0.25rem (space-100) (ml-100), 0.5rem (space-200) (ml-200), 0.75rem (space-300) (ml-300), 1rem (space-400) (ml-400), 1.25rem (space-500) (ml-500), 1.5rem (space-600) (ml-600), 2rem (space-800) (ml-800), 2.5rem (space-1000) (ml-1000), 3rem (space-1200) (ml-1200), 4rem (space-1600) (ml-1600), 5rem (space-2000) (ml-2000), 6rem (space-2400) (ml-2400), 7.5rem (space-3000) (ml-3000)	Delivered as a block class.	—
Margin right	classes_marginright	select	No	""	Default (""), 0 (none) (mr-0), 0.25rem (space-100) (mr-100), 0.5rem (space-200) (mr-200), 0.75rem (space-300) (mr-300), 1rem (space-400) (mr-400), 1.25rem (space-500) (mr-500), 1.5rem (space-600) (mr-600), 2rem (space-800) (mr-800), 2.5rem (space-1000) (mr-1000), 3rem (space-1200) (mr-1200), 4rem (space-1600) (mr-1600), 5rem (space-2000) (mr-2000), 6rem (space-2400) (mr-2400), 7.5rem (space-3000) (mr-3000)	Delivered as a block class.	—
Margin top	classes_margintop	select	No	""	Default (""), 0 (none) (mt-0), 0.25rem (space-100) (mt-100), 0.5rem (space-200) (mt-200), 0.75rem (space-300) (mt-300), 1rem (space-400) (mt-400), 1.25rem (space-500) (mt-500), 1.5rem (space-600) (mt-600), 2rem (space-800) (mt-800), 2.5rem (space-1000) (mt-1000), 3rem (space-1200) (mt-1200), 4rem (space-1600) (mt-1600), 5rem (space-2000) (mt-2000), 6rem (space-2400) (mt-2400), 7.5rem (space-3000) (mt-3000)	Delivered as a block class.	—
Margin bottom	classes_marginbottom	select	No	""	Default (""), 0 (none) (mb-0), 0.25rem (space-100) (mb-100), 0.5rem (space-200) (mb-200), 0.75rem (space-300) (mb-300), 1rem (space-400) (mb-400), 1.25rem (space-500) (mb-500), 1.5rem (space-600) (mb-600), 2rem (space-800) (mb-800), 2.5rem (space-1000) (mb-1000), 3rem (space-1200) (mb-1200), 4rem (space-1600) (mb-1600), 5rem (space-2000) (mb-2000), 6rem (space-2400) (mb-2400), 7.5rem (space-3000) (mb-3000)	Delivered as a block class.	—

What the table doesn't show:

- The model has only the Additional tab (AGENTS.md "Additional tab"); its values arrive as block classes. Anchor ID becomes the block's id, but links to it don't scroll (the block isn't displayed). Hide block hides the block's wrapper too (outside edit mode). Animation fields have no visible effect (nothing is shown).
- **Rendering result:** none on the site; the editor box.
- **Accessibility / data-layer impact:** see the sections below.
- **Legacy mapping:** none.

4. Screenshot-Based Authoring Steps

Authoring Step 1: Find an existing instance

```
[Screenshot Placeholder]

File name:
interactive-dashboard-authoring-step-1.png

Purpose:
The content tree with the Interactive Dashboard selected and the placeholder box on the canvas.

Annotations:
A = The block in the content tree
B = The placeholder box
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	(selection)	Interactive Dashboard	Locate the placeholder	The box is highlighted

Author action: select the block in the content tree. **Expected preview:** nothing. **Expected published result:** nothing. **Business rules:** the block can't be added again once deleted. **Validation:** switch to Preview: the box disappears. **Common mistakes:** looking for it in Preview mode.

Authoring Step 2: Remove it before publishing

```
[Screenshot Placeholder]

File name:
interactive-dashboard-authoring-step-2.png

Purpose:
The delete action on the selected block in the content tree.

Annotations:
A = Delete
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	(action)	Delete	Nothing should depend on a placeholder	The block is gone from the page

Author action: delete the block (and the section if it is now empty). **Expected result:** no gap on the preview host. **Common mistakes:** leaving an empty section with its own spacing.

Authoring Step 3: Hide it instead

```
[Screenshot Placeholder]

File name:
interactive-dashboard-authoring-step-3.png

Purpose:
The Additional tab with Hide block on.

Annotations:
A = Hide block
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Hide block	On	Keep the position in a draft without a gap	The block and its wrapper are hidden outside edit mode

Validation: preview host shows no gap. **Common mistakes:** linking to its Anchor ID.

5. Variations

Editor placeholder (Universal Editor edit mode)

- **Rendering:** the emptied block with `data-placeholder="Interactive Dashboard"`; under `html.adobe-ue-edit` it is a grid at least 10rem tall with a 2px dashed `--color-border-secondary` border, `--radius-l` corners and the centred text "Interactive Dashboard (placeholder)" (CSS `::before`, fixed English).
- **Accessibility / data layer / personalization:** editor only; not applicable.

Published and preview rendering (empty)

- **Rendering:** `.interactive-dashboard:empty { display: none }`: nothing at any viewport.

6. Complete Authoring Example

Scenario: a draft annual report page holding the placeholder between two text sections, cleaned up before publishing.

Field	Example value	Guidance
Anchor ID	(empty)	Don't link to the placeholder
Hide block	On	Or delete the block

Steps: select the block, turn on Hide block (or delete it), preview, publish.

Expected output: the two text sections follow each other without a gap.

Responsive / accessibility: nothing rendered at any viewport; nothing announced.

Analytics / data layer: the block still has a component entry while it is on the page.

Personalization fallback: none.

Pre-publish checklist:

1. No live page relies on the dashboard.
2. No link points to its Anchor ID.
3. No empty gap on the preview host.

7. Content and Asset Guidelines

Not applicable: no titles, descriptions, links, images, icons, tags or metadata. No verified technical limit was identified. Anything authored inside the block is discarded.

8. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
Nothing on the published page	By design	Inspect: empty `div.interactive-dashboard`	Remove the block; use Table, Cards or Embed	Intended content shows
Not offered in Add (+)	Not in any filter (by design)	`component-filters.json`	None until it is implemented	—
Box not visible in the editor	Preview mode	Editor mode toggle	Switch to edit mode or use the content tree	Box appears
Empty gap on the page	The section keeps its spacing	Inspect the section	Delete the block / section, or Hide block	No gap
Anchor link doesn't scroll	Target is `display: none`	Check the id	Remove the link	—
Data layer lists the component	Every block is tracked	`window.adobeDataLayer`	Remove the block, or ignore the type	—

Evidence to collect: page URL and the block's markup (no secrets involved).

9. Screenshots

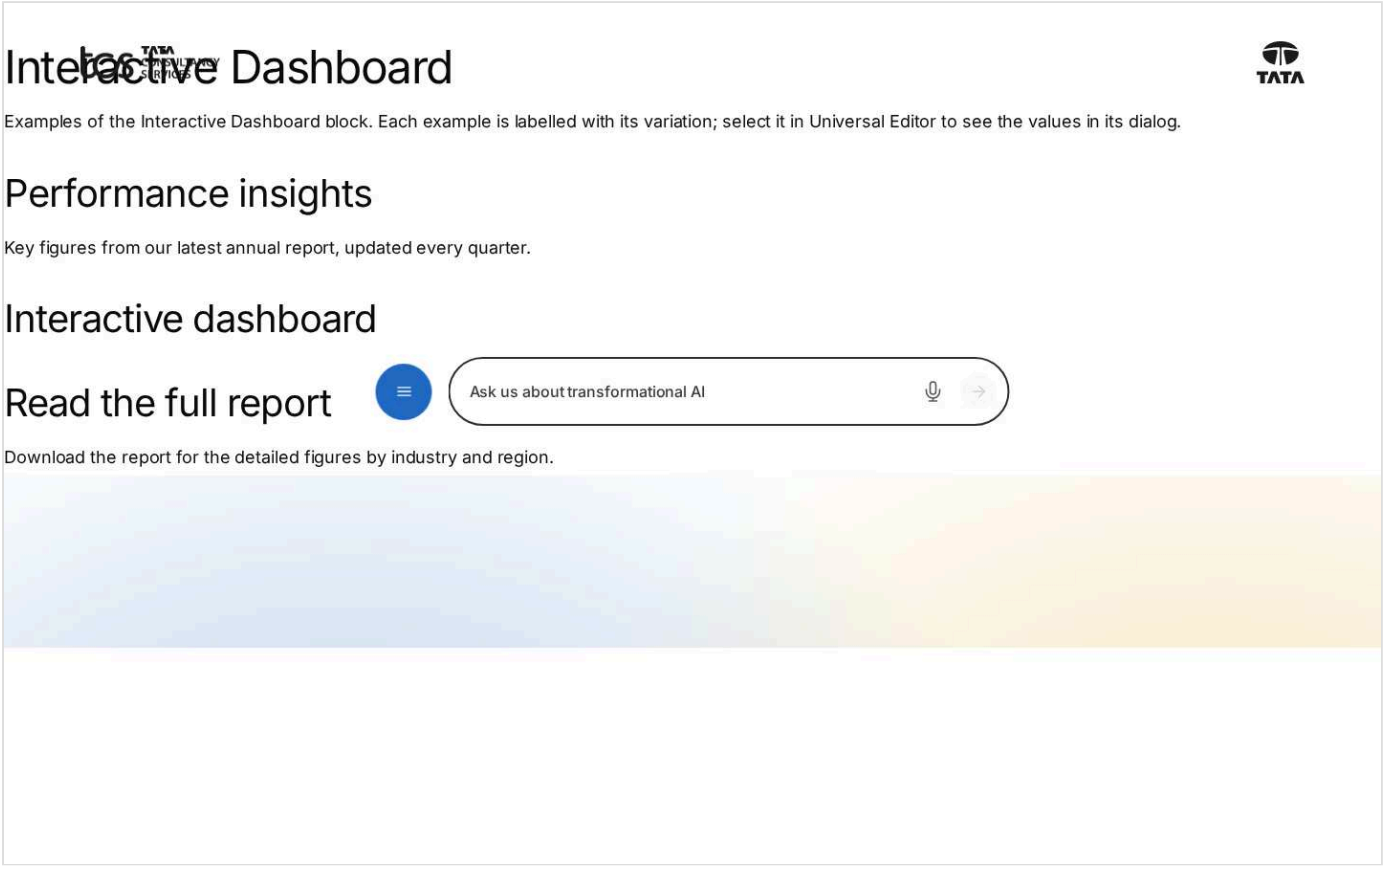


Figure: Interactive Dashboard as published (block library) — desktop 1440 × 900 (/design-block-master/en/block-library/interactive-dashboard/interactive-dashboard, captured 2026-11-08).

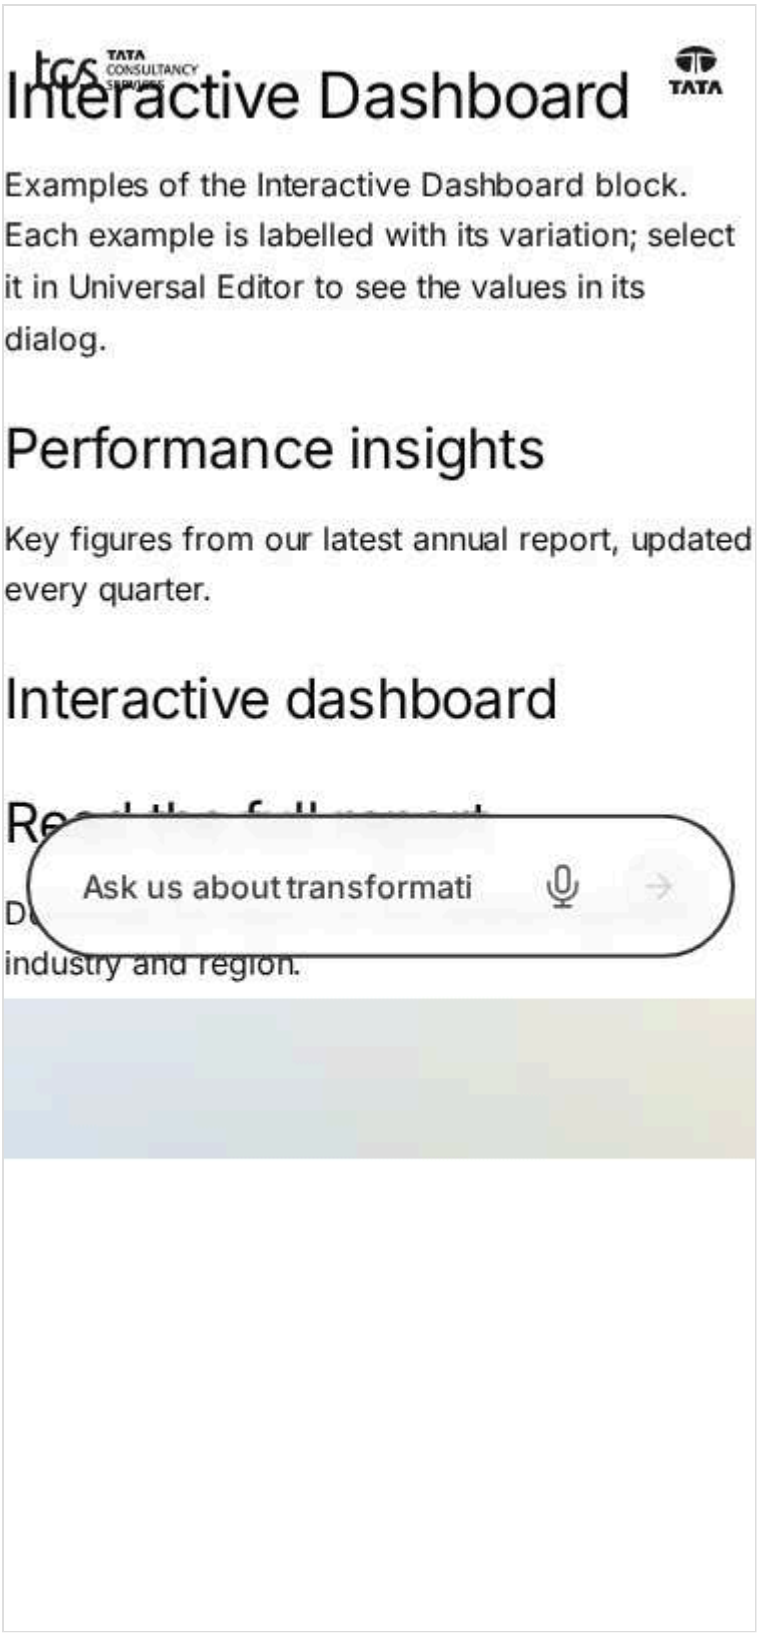


Figure: Interactive Dashboard as published (block library) — mobile 375 × 812 (/design-block-master/en/block-library/interactive-dashboard/interactive-dashboard, captured 2026-11-08).

> **Screenshot required**
>
> - Required screen: Interactive Dashboard dialog in Universal Editor (every tab, including Additional)
> - Required role/access: AEM Sites author with Universal Editor (content author)

> - Required navigation steps: AEM Sites console > /content/tcs-corp/language-masters/en > open a page in Universal Editor
> - Reason unavailable: No AEM author access in the documentation program (access blocker AB-01)
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

10. Known limitations

- Universal Editor screenshots are placeholders: no author access in this program.

11. Open items

- None.

12. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages