TCS CORPORATE WEBSITE

Testimonial — Authoring Guide

Role / audience	Authoring — Content authors, content managers, AEM authoring leads
Version	1.0
Status	Draft for review
Owner	Content Lead / AEM Authoring Lead (proposed)
Last validated	2026-11-08
Documents	1
Classification	INTERNAL — classification to be confirmed

Generated from the Markdown sources of docs/handover (branch migrated-page-content-edam); do not edit this PDF.

Contents

Testimonial — Authoring Guide
- Where to see it
- For Content Authors
- Authorable Fields
- Screenshot-Based Authoring Steps
- Variations
- Complete Authoring Example
- Content and Asset Guidelines
- Troubleshooting
- Screenshots
- Known limitations
- Open items
- Change history

Testimonial — Authoring Guide

Attribute	Value
Document ID	AUT-C-testimonial
Audience	Content authors, content managers, AEM authoring leads
Purpose	How to add, fill in and check the Testimonial component
Scope	—
Prerequisites	—
Owner	Content Lead / AEM Authoring Lead (proposed)
Approver	Product Owner (to be confirmed)
Version	1.0
Status	Draft for review
Last updated	8 November 2026
Last validated	8 November 2026
Source files	blocks/testimonial/README.md, blocks/testimonial/_testimonial.json
Related documents	—
Related AEM paths	—

1. Where to see it

- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/testimonial
- https://main--tcs-corp--sradha-tcs.aem.live/design-block-master/en/block-library/testimonial/testimonial-variations

2. For Content Authors

1. **Add the block.** In Universal Editor, select a Section, a Columns Container column or a Tabs Container. Choose Add (+) and pick **Testimonial**.
2. **Open its properties.** Select the block. The properties panel has three tabs: Content, Style and Additional.
3. **Enter content.** On the Content tab, fill in Eyebrow, Title (and Title Type), Description (the quote), Author, Author Image (with alt text) and Designation & Location.
4. **Select options.** On the Style tab, choose BG Color (Default or Grey), and use Hide Eyebrow, Hide Title, Show Description and Hide Author Details to hide parts without deleting them.
5. **Add stats.** Select the Testimonial in the content tree, choose Add (+) and pick **Stat**. Fill in Stats Title and Stats Value. Add one Stat per result, and drag the Stat nodes in the content tree to reorder them.
6. **Preview.** Switch to Preview and check desktop and mobile widths.
7. **Publish.** Publish the page with the author image.
8. **Validate.** On the published page, check the quote, the author row, the stats, and the heading level (inspector).

Minimum content: a Description, or an Eyebrow, Author or Stat (otherwise only the title renders). Recommended: Title, Description, Author, Designation & Location, and two to four Stats. Optional: Eyebrow, Author Image, BG Color.

3. Authorable Fields

Testimonial (`testimonial`)

Model `testimonial`; template name "Testimonial" (the block class AEM renders); key-value block (one row per property); children: `testimonial-stat`.

Stored on a new component (definition template): `titleType` = `"h2"`, `showDescription` = `true`.

Content tab — Testimonial

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Eyebrow	`eyebrow`	text	No	—	—	—	Client testimonial
Title	`title`	text	No	—	—	—	What our clients say
Title Type	`titleType`	select	No	h2	H1 (h1), H2 (h2), H3 (h3), H4 (h4), H5 (h5), H6 (h6)	Delivered with `title` (field collapse).	h2
Description	`description`	richtext	No	""	—	The testimonial quote.	—
Author	`authorName`	text	No	—	—	The person’s name, e.g. Ranil Boteju.	Anita Rao
Author Image	`authorImage`	reference	No	—	—	—	/content/dam/tcs-corp/block-library/images/avatar-sample-1.svg
Author Image Alt Text	`authorImageAlt`	text	No	—	—	Leave empty if the name is next to the image. Delivered with `authorImage` (field collapse).	—
Designation & Location	`designationLocation`	richtext	No	""	—	e.g. Chief Data & Analytics Officer, Lloyds Banking Group, London.	—
Stats	`stats`	container (multiple)	No	—	—	Stats authored before Stat items. Add stats to the testimonial with Add (Stat) instead.	—
Stats › Stats Title	`statLabel`	richtext	No	""	—	—	—
Stats › Stats Value	`statValue`	richtext	No	""	—	A single line, e.g. 40%.	—

Style tab — Testimonial

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
BG Color	`bgColor`	select	No	""	Default (""), Grey (`grey`), Navy (`navy`)	—	grey
Hide Eyebrow	`hideEyebrow`	boolean	No	`false`	on / off	—	true
Hide Title	`titleHidden`	boolean	No	`false`	on / off	The title stays available to screen readers.	true
Show Description	`showDescription`	boolean	No	`true`	on / off	—	true

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Hide Author Details	`hideAuthor`	boolean	No	`false`	on / off	Hides the author, author image and designation & location	true

Additional tab — Testimonial

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Anchor ID	`classes_anchor`	text	No	—	regExp: ^anchor-[a-z0-9][a-z0-9-]*$; customErrorMsg: Start with anchor-, then lower-case letters, digits and hyphens.	A unique ID of the block on the page, starting with anchor-, e.g. anchor-our-services; link to it with #anchor-our-services. Delivered as a block class.	—
Hide block	`classes_hideblock`	boolean	No	`false`	on / off	Hides the whole block on the page until it is turned off (shown faded in the editor). Delivered as a block class.	—
Animation Type	`classes_animation`	select	No	""	None (""), Fade in (`motion-fade-in`), Fade up (`motion-fade-up`), Fade down (`motion-fade-down`), Fade left (`motion-fade-left`), Fade right (`motion-fade-right`), Slide up (`motion-slide-up`), Slide down (`motion-slide-down`), Slide left (`motion-slide-left`), Slide right (`motion-slide-right`), Scale in (`motion-scale-in`)	How the block's content appears; repeated items (cards, list items, accordion items, columns) appear one after another. None: shown as is. Not played in the editor or when the visitor prefers reduced motion. Delivered as a block class.	motion-fade-up
Motion Speed	`classes_animationspeed`	select	No	""	Medium (""), Fast (`motion-fast`), Slow (`motion-slow`)	How fast the block's animations run (Animation Type 0.3 / 0.6 / 0.9 s; the Background animation takes 1.5 times as long). Shown when (`classes_animation` is set and `classes_animation` is not empty) or (`classes_bganimation` is set and `classes_bganimation` is not empty). Delivered as a block class.	—
Animation Trigger	`classes_animationtrigger`	select	No	""	On Scroll / Viewport Entry (""), On Page Load (`motion-on-load`)	When the block's animations run. On Scroll: when the block comes into view (at once if it is in view when the page opens). On Page Load: as soon as the block is ready, wherever it is on the page. Shown when (`classes_animation` is set and `classes_animation` is not empty) or (`classes_bganimation` is set and `classes_bganimation` is not empty). Delivered as a block class.	—
Background animation	`classes_bganimation`	select	No	""	None (""), Fade in (`bg-motion-fade-in`), Reveal from the centre (`bg-motion-reveal`), Wipe left to right (`bg-motion-wipe-right`), Wipe right to left (`bg-motion-wipe-left`), Wipe bottom to top (`bg-motion-wipe-up`), Scale reveal (`bg-motion-scale`)	How the block's background (its colour, image or overlay as set in the block) appears. It doesn't animate the content: see Animation Type. Motion Speed and Animation Trigger apply to it too. Not played in the editor or when the visitor prefers reduced motion. Shown when `bgColor` is `grey`. Delivered as a block class.	bg-motion-wipe-up

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Padding left	classes_paddingleft	select	No	""	Default (""), 0 (none) (pl-0), 0.25rem (space-100) (pl-100), 0.5rem (space-200) (pl-200), 0.75rem (space-300) (pl-300), 1rem (space-400) (pl-400), 1.25rem (space-500) (pl-500), 1.5rem (space-600) (pl-600), 2rem (space-800) (pl-800), 2.5rem (space-1000) (pl-1000), 3rem (space-1200) (pl-1200), 4rem (space-1600) (pl-1600), 5rem (space-2000) (pl-2000), 6rem (space-2400) (pl-2400), 7.5rem (space-3000) (pl-3000)	Delivered as a block class.	—
Padding right	classes_paddingright	select	No	""	Default (""), 0 (none) (pr-0), 0.25rem (space-100) (pr-100), 0.5rem (space-200) (pr-200), 0.75rem (space-300) (pr-300), 1rem (space-400) (pr-400), 1.25rem (space-500) (pr-500), 1.5rem (space-600) (pr-600), 2rem (space-800) (pr-800), 2.5rem (space-1000) (pr-1000), 3rem (space-1200) (pr-1200), 4rem (space-1600) (pr-1600), 5rem (space-2000) (pr-2000), 6rem (space-2400) (pr-2400), 7.5rem (space-3000) (pr-3000)	Delivered as a block class.	—
Padding top	classes_paddingtop	select	No	""	Default (""), 0 (none) (pt-0), 0.25rem (space-100) (pt-100), 0.5rem (space-200) (pt-200), 0.75rem (space-300) (pt-300), 1rem (space-400) (pt-400), 1.25rem (space-500) (pt-500), 1.5rem (space-600) (pt-600), 2rem (space-800) (pt-800), 2.5rem (space-1000) (pt-1000), 3rem (space-1200) (pt-1200), 4rem (space-1600) (pt-1600), 5rem (space-2000) (pt-2000), 6rem (space-2400) (pt-2400), 7.5rem (space-3000) (pt-3000)	Delivered as a block class.	—
Padding bottom	classes_paddingbottom	select	No	""	Default (""), 0 (none) (pb-0), 0.25rem (space-100) (pb-100), 0.5rem (space-200) (pb-200), 0.75rem (space-300) (pb-300), 1rem (space-400) (pb-400), 1.25rem (space-500) (pb-500), 1.5rem (space-600) (pb-600), 2rem (space-800) (pb-800), 2.5rem (space-1000) (pb-1000), 3rem (space-1200) (pb-1200), 4rem (space-1600) (pb-1600), 5rem (space-2000) (pb-2000), 6rem (space-2400) (pb-2400), 7.5rem (space-3000) (pb-3000)	Delivered as a block class.	—
Margin left	classes_marginleft	select	No	""	Default (""), 0 (none) (ml-0), 0.25rem (space-100) (ml-100), 0.5rem (space-200) (ml-200), 0.75rem (space-300) (ml-300), 1rem (space-400) (ml-400), 1.25rem (space-500) (ml-500), 1.5rem (space-600) (ml-600), 2rem (space-800) (ml-800), 2.5rem (space-1000) (ml-1000), 3rem (space-1200) (ml-1200), 4rem (space-1600) (ml-1600), 5rem (space-2000) (ml-2000), 6rem (space-2400) (ml-2400), 7.5rem (space-3000) (ml-3000)	Delivered as a block class.	—
Margin right	classes_marginright	select	No	""	Default (""), 0 (none) (mr-0), 0.25rem (space-100) (mr-100), 0.5rem (space-200) (mr-200), 0.75rem (space-300) (mr-300), 1rem (space-400) (mr-400), 1.25rem (space-500) (mr-500), 1.5rem (space-600) (mr-600), 2rem (space-800) (mr-800), 2.5rem (space-1000) (mr-1000), 3rem (space-1200) (mr-1200), 4rem (space-1600) (mr-1600), 5rem (space-2000) (mr-2000), 6rem (space-2400) (mr-2400), 7.5rem (space-3000) (mr-3000)	Delivered as a block class.	—

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Margin top	`classes_margintop`	select	No	""	Default (""), 0 (none) (`mt-0`), 0.25rem (space-100) (`mt-100`), 0.5rem (space-200) (`mt-200`), 0.75rem (space-300) (`mt-300`), 1rem (space-400) (`mt-400`), 1.25rem (space-500) (`mt-500`), 1.5rem (space-600) (`mt-600`), 2rem (space-800) (`mt-800`), 2.5rem (space-1000) (`mt-1000`), 3rem (space-1200) (`mt-1200`), 4rem (space-1600) (`mt-1600`), 5rem (space-2000) (`mt-2000`), 6rem (space-2400) (`mt-2400`), 7.5rem (space-3000) (`mt-3000`)	Delivered as a block class.	—
Margin bottom	`classes_marginbottom`	select	No	""	Default (""), 0 (none) (`mb-0`), 0.25rem (space-100) (`mb-100`), 0.5rem (space-200) (`mb-200`), 0.75rem (space-300) (`mb-300`), 1rem (space-400) (`mb-400`), 1.25rem (space-500) (`mb-500`), 1.5rem (space-600) (`mb-600`), 2rem (space-800) (`mb-800`), 2.5rem (space-1000) (`mb-1000`), 3rem (space-1200) (`mb-1200`), 4rem (space-1600) (`mb-1600`), 5rem (space-2000) (`mb-2000`), 6rem (space-2400) (`mb-2400`), 7.5rem (space-3000) (`mb-3000`)	Delivered as a block class.	—

Stat (`testimonial-stat`)

Model `testimonial-stat`; template name "Stat" (the block class AEM renders).

Stat tab — Stat

Field label	Property	Type	Required	Default	Allowed values	Author guidance	Example
Stats Title	`statLabel`	richtext	No	""	—	—	—
Stats Value	`statValue`	richtext	No	""	—	A single line, e.g. 40%.	—

Notes on the significant fields:

- **Title / Title Type:** a heading at the Title Type level (else a heading level found in the title, else H2). **Hide Title** keeps it in the HTML, visually hidden (`hideVisually`), so screen readers and the data layer's `dc:title` still get it.
- **Description:** the quote, rendered as a `<blockquote>` in a `<figure>`. **Show Description** is on unless it is explicitly off: a missing value shows the description (`isOnByDefault`).
- **Author, Author Image, Designation & Location:** rendered in the `<figcaption>`. The image is a 3rem round photo; Author Image Alt Text replaces its alt, else `alt=""`. Leave the alt text empty when the name is next to the photo. **Hide Author Details** leaves out the whole caption.
- **Hide Eyebrow:** leaves out the eyebrow.
- **BG Color:** Grey adds `bg-grey`: a grey panel with its own padding (see Responsive Behavior).
- **Stat items:** in each Stat, Stats Value is the large value and Stats Title the label above it. A Stat without a value isn't rendered (in the editor it is a placeholder).
- **Legacy mapping:** the **Stats** multifield (stats authored before Stat items) is still read: each item is a run of elements between `<hr>`s, or a list item. The last element is the value, the ones before it the title. These stats render before the Stat items. The BG Color value is also read from a `grey` block class (`optionOf`). The Style field was removed in handover 2.27.
- **Additional tab:** see AGENTS.md "Additional tab". Background animation is shown only when BG Color is Grey (the default block has no background of its own).

4. Screenshot-Based Authoring Steps

Authoring Step 1: Add the Testimonial and the title

```
[Screenshot Placeholder]

File name:
testimonial-authoring-step-1.png

Purpose:
The Testimonial added to a section, with Title and Title Type filled in.

Annotations:
A = Testimonial in the content tree
B = Title
C = Title Type
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Add (+)	Testimonial	Adds the block	A Testimonial node
B	Title	What our clients say	Section title	Left-aligned heading
C	Title Type	H2	Fits under the page's H1	An <h2>

Author action: add the block and type the title. Expected preview: the heading. Expected published result: the same. Business rule: one H1 per page. Validation: inspect the heading level. Common mistake: using H1 in the middle of a page.

Authoring Step 2: The quote

```
[Screenshot Placeholder]

File name:
testimonial-authoring-step-2.png

Purpose:
Eyebrow and Description filled in.

Annotations:
A = Eyebrow
B = Description
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Eyebrow	Client testimonial	Context	Centred label
B	Description	TCS became an extension of our own team.	The testimonial quote	Large brand-blue text

Author action: type the eyebrow and the quote. Expected preview: both centred. Expected published result: a `<blockquote>`. Business rule: keep the approved wording. Validation: the quote shows; if not, check Show Description on the Style tab. Common mistake: turning Show Description off and expecting the quote to show.

Authoring Step 3: The author

```
[Screenshot Placeholder]

File name:
```

```
testimonial-authoring-step-3.png

Purpose:
Author, Author Image, Author Image Alt Text and Designation & Location filled in.

Annotations:
A = Author
B = Author Image
C = Designation & Location
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Author	Anita Rao	The person's name only	Name in the author row
B	Author Image	/content/dam/tcs-corp/block-library/images/avatar-sample-1.svg	Round photo	A 3rem round image
C	Designation & Location	Chief Digital Officer, Example Bank, London	Role, organisation, city	Line below the name

Author action: fill in the author fields; leave Author Image Alt Text empty because the name is next to the photo. Expected preview: the centred author row. Expected published result: the same, in a `<figcaption>`. Business rule: don't repeat the name in Designation & Location. Validation: the name appears once. Common mistake: a landscape photo, which is cropped to a circle.

Authoring Step 4: Stats

```
[Screenshot Placeholder]

File name:
testimonial-authoring-step-4.png

Purpose:
Two Stat items added with Add (+) under the Testimonial, one open in the properties panel.

Annotations:
A = Add (+) on the Testimonial
B = Stat nodes
C = Stats Title
D = Stats Value
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	Add (+)	Stat	One item per result	A Stat node
C	Stats Title	Faster time to market	What the number measures	Grey label
D	Stats Value	40%	The number, one line	Large brand-blue value

Author action: add a Stat, fill in both fields, and repeat for each result. Expected preview: the stats in columns under a divider. Expected published result: a `<dl>` with a `<dt>` and `<dd>` per stat. Business rule: Stats Value is a single line. Validation: each value sits below its title. Common mistake: leaving Stats Value empty: the Stat isn't shown (a placeholder in the editor).

Authoring Step 5: Style options and publishing

```
[Screenshot Placeholder]

File name:
testimonial-authoring-step-5.png

Purpose:
The Style tab with BG Color Grey, and the Publish dialog.

Annotations:
A = BG Color
B = Show / hide toggles
C = Publish dialog
```

Values to Enter

Callout	Field	Value	Reason	Expected result
A	BG Color	Grey	Set the block apart	Grey panel with padding
B	Hide Eyebrow / Hide Title / Show Description / Hide Author Details	Off / Off / On / Off	Show every part	Every part renders
C	Publish	Page and referenced assets	The author image must be live	Published with the photo

Author action: set the options, preview, publish. Expected result: as configured. Business rule: hidden parts keep their content. Validation: check the published page. Common mistake: publishing without the image.

5. Variations

Default

- **Purpose:** a client testimonial. **Fields:** Description (recommended), Author, Designation & Location; Title, Eyebrow and Author Image are optional. **Dialog:** defaults.
- **Rendering:** title, then the centred figure; no stats without Stat items. Desktop and mobile share the layout; the type and gaps are larger from 900px.
- **Accessibility:** `<figure>` / `<blockquote>` / `<figcaption>`. **Data layer:** the block entry only. **Personalization and fallback:** none.

```
[Screenshot Placeholder]

File name:
testimonial-default-mobile.png

Purpose:
The default Testimonial at 375px.

Annotations:
A = Title
B = Quote
C = Author
```

Grey background

- **Purpose:** set the testimonial apart. **Configuration:** BG Color Grey (`bg-grey`).
- **Rendering:** a grey panel (`--color-bg-secondary`), with padding 2.5rem / 1.5rem, and 7.5rem / 5rem from 900px. Background animation becomes available.
- **Accessibility, data layer, personalization:** as Default.

```
[Screenshot Placeholder]

File name:
testimonial-grey-background-tablet.png

Purpose:
BG Color Grey at 768px.

Annotations:
A = Grey padding
B = Stats
```

Author with photo / author text only

- **Purpose:** with or without a photo. **Configuration:** Author Image set or empty.
- **Rendering:** the 3rem round photo beside the name and details, wrapping and centred; without a photo, only the text lines.
- **Accessibility:** the photo is decorative unless Author Image Alt Text is set.

```
[Screenshot Placeholder]

File name:
testimonial-author-photo-mobile.png

Purpose:
The author row with a photo at 375px.

Annotations:
A = Round photo
B = Name and designation
```

With stats

- **Purpose:** quantified results. **Configuration:** Stat items (or the Stats multifield authored before them).
- **Rendering:** a grid of columns at least 10rem wide (wrapping automatically), up to 70rem wide, under a 1px divider; each stat has its title above its value.
- **Accessibility:** a description list (`<dl>`, `<dt>`, `<dd>`).

```
[Screenshot Placeholder]

File name:
testimonial-with-stats-mobile.png

Purpose:
Four stats at 375px, one per row.

Annotations:
A = Divider
B = Stat title
C = Stat value
```

Hide Eyebrow, Hide Title, Show Description off, Hide Author Details

- **Purpose:** hide parts without deleting them (for example a stats-only band, or while an approval is pending). **Configuration:** the Style tab toggles.
- **Rendering:** Hide Eyebrow, Show Description off and Hide Author Details leave their part out. Hide Title keeps the heading visually hidden. Without an eyebrow, description and author, the figure is left out.

- **Accessibility:** a hidden title still names the section for screen readers.

```
[Screenshot Placeholder]

File name:
testimonial-hide-title-mobile.png

Purpose:
Hide Title on at 375px: no visible title, the heading still in the HTML.

Annotations:
A = Eyebrow (first visible element)
```

6. Complete Authoring Example

Scenario: a case study page shows the client's statement and its results.

Field	Example value	Guidance
Eyebrow	Case study results	Context
Title	Measurable outcomes	Section title, H2
Description	Moving to a cloud-native platform with TCS changed how fast we deliver.	Approved wording
Author	Sara Lee	Name only
Designation & Location	Chief Information Officer, Example Insurance, Amsterdam	Role, organisation, city
Author Image	/content/dam/tcs-corp/block-library/images/avatar-sample-1.svg	Square headshot
BG Color	Default	
Stat 1	Faster time to market / 40%	Stats Title / Stats Value
Stat 2	Lower operating cost / 25%	
Stat 3	Applications migrated / 1,200+	

Steps: add the Testimonial, fill in the Content tab, add three Stat items, preview, publish with the image.

- **Expected output:** the title, the centred quote and author, and three stats under the divider.
- **Responsive:** the stats wrap to fewer columns on narrow screens.
- **Accessibility:** a heading, a figure with a blockquote and figcaption, and a description list.
- **Analytics:** a `tcs-corp/components/testimonial` entry with `dc:title` "Measurable outcomes".
- **Personalization fallback:** none; the authored content renders.

Pre-publish checklist: the quote is approved; the name appears once; the stats have values; the image is published; checked at mobile and desktop widths.

7. Content and Asset Guidelines

- **Title:** short. **Eyebrow:** a few words. **Description:** the approved quote (the block adds no quotation marks of its own).
- **Author:** the name only. **Designation & Location:** role, organisation and city on one or two lines.
- **Stats:** Stats Value a single line (for example 40%); Stats Title a short label. No verified technical limit on the number of stats was identified; the columns wrap automatically.
- **CTAs / links:** no CTA field. A standalone link in the rich text becomes a button (`decorators/content-buttons-decorator.js`).
- **Images and alt text:** a square headshot, cropped to a 3rem circle (`object-fit: cover`). Leave the alt text empty when the name is next to the photo.
- **Tags and metadata:** none.

- **Asset source:** AEM Assets. **Loading:** the delivered picture, lazy by default; eager only as the first image of the first section (`waitForFirstImage`).
- **Missing asset:** the author row renders without the photo.

8. Troubleshooting

Symptom	Likely cause	Diagnostic steps	Resolution	Verification
The quote doesn't appear	Show Description off, or the Description is empty	Check the Style tab and the Description	Turn Show Description on; fill in the Description	The `<blockquote>` renders
A stat is missing	Its Stats Value is empty	Look for the placeholder in the editor	Fill in Stats Value	The stat renders
Value and title swapped (legacy stats)	In the multifield, the last element of an item is always the value	Read the item's paragraphs	Re-enter the stat as a Stat item	Title above value
The author row is missing	Hide Author Details on, or no author fields	Check the Style tab	Turn it off; fill in the fields	The figcaption renders
The title isn't visible	Hide Title on	Inspect: `visually-hidden` on the heading	Turn Hide Title off	The heading shows
The name appears twice	The name was typed in Designation & Location too	Read both fields	Keep the name in Author only	One name

Evidence to collect: the page URL, viewport, browser, a screenshot, and the block's outer HTML. No credentials or session data.

9. Screenshots

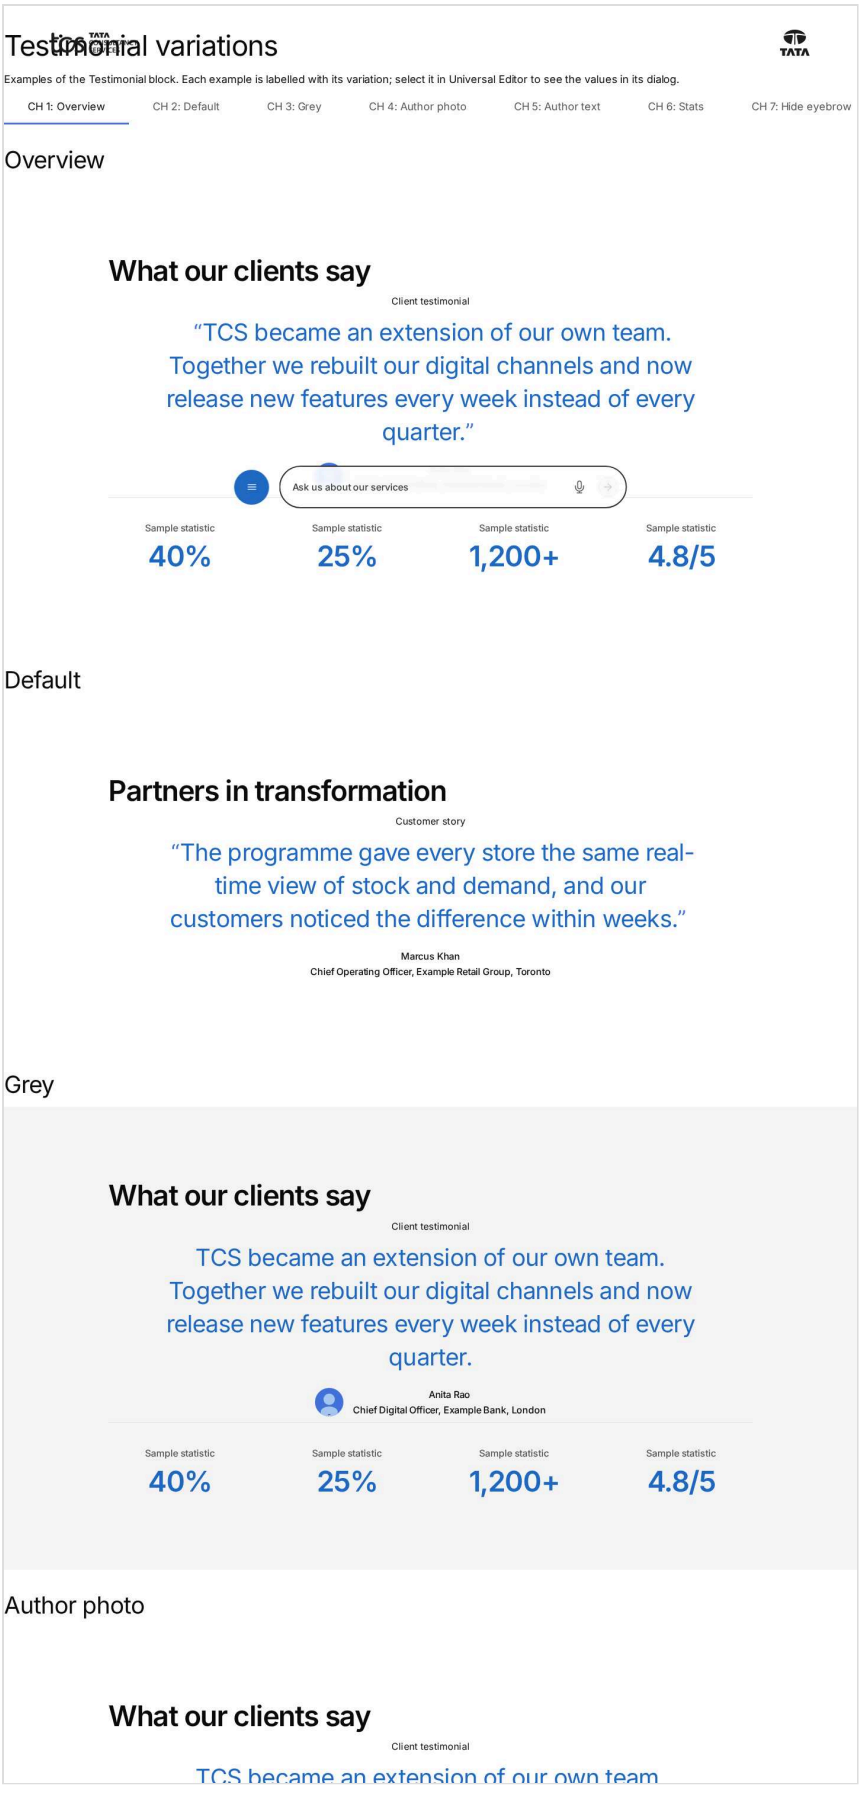


Figure: Testimonial as published (block library) — desktop 1440 × 900 (/design-block-master/en/block-library/testimonial/testimonial-variations, captured 2026-11-08).

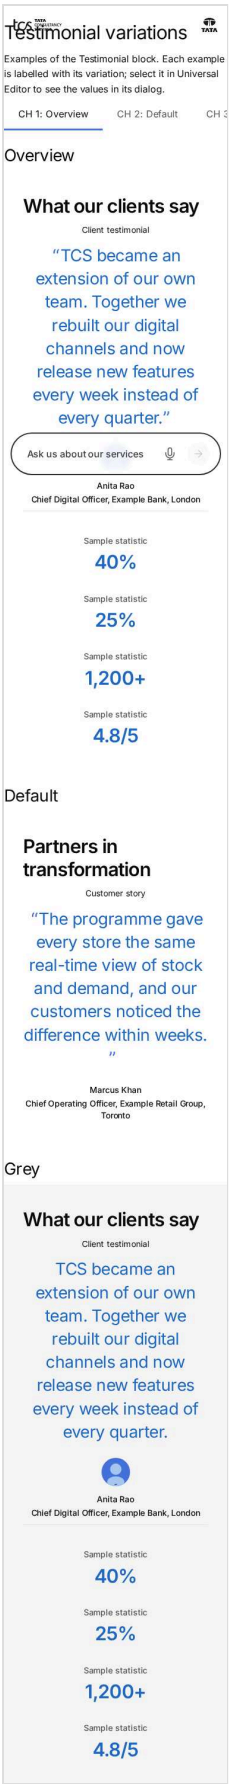


Figure: Testimonial as published (block library) — mobile 375 × 812 (/design-block-master/en/block-library/testimonial/testimonial-variations, captured 2026-11-08).

> **Screenshot required**

> - Required screen: Testimonial dialog in Universal Editor (every tab, including Additional)
> - Required role/access: AEM Sites author with Universal Editor (content author)
> - Required navigation steps: AEM Sites console > /content/tcs-corp/language-masters/en > open a page in Universal Editor
> - Reason unavailable: No AEM author access in the documentation program (access blocker AB-01)
> - Owner: Content Lead / AEM Authoring Lead (proposed)
> - Target completion date: To be confirmed

10. Known limitations

- Universal Editor screenshots are placeholders: no author access in this program.

11. Open items

- None.

12. Change history

Version	Date	Author	Change
1.0	8 November 2026	Delivery team (documentation program)	First version of the role-specific documentation (master documentation prompt), generated from the repository and the published reference pages