

Principal Component Analysis (PCA) & t -distributed Stochastic Neighbor Embedding (t -SNE)

INTELLIGENT SYSTEMS

ESCUELA POLITÉCNICA DE INGENIERÍA DE GIJÓN



Universidad de Oviedo

Sandra Ranilla-Cortina

ranillasandra@uniovi.es

Principal Component Analysis

Principal Component Analysis

Principal Component Analysis, or **PCA**, is a dimensionality reduction machine learning method, used to simplify a large data set into a smaller set of **principal components**, which capture the most variability with minimal loss of information:

- Reduces data complexity
- Reduces noise and improves interpretability
- Enhances visualization in fewer dimensions.

This technique can be used for:

- Image compression
- **Feature extraction** in *Machine Learning*
- Genomic data analysis.

Principal Component Analysis

PCA can be broken down into five steps:

- i) Standardize the data → Normalize variables to ensure same scale
- ii) Compute the **covariance matrix** → Identify correlations
- iii) Calculate **eigenvectors** and **eigenvalues** → Eigenvectors define principal component directions; eigenvalues measure their importance
- iv) Select principal components → Choose the most significant components based on eigenvalues
- v) Recast the data → Project the original data onto the new principal component axes.

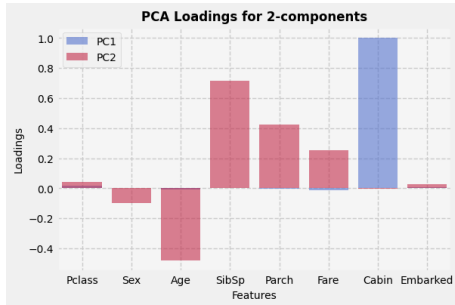


Figure 1: PCA for Titanic dataset

t-distributed Stochastic Neighbor Embedding

t-distributed Stochastic Neighbor Embedding

t-distributed Stochastic Neighbor Embedding, or ***t*-SNE**, is a non-linear dimensionality reduction technique primarily used for **visualizing high-dimensional data** in a lower-dimensional space (typically 2D or 3D). Unlike **PCA**, which focuses on global structure, t-SNE preserves local relationships between data points:

- Captures non-linear relationships
- Preserves local structures in data
- Enhances cluster visualization.

This technique is commonly used for:

- High-dimensional data visualization
- **Clustering analysis** in *Machine Learning*
- Exploring word embeddings and genomic data.

t -distributed Stochastic Neighbor Embedding

t -SNE operates in the following steps:

- i) Compute **pairwise similarities** in high-dimensional space $\rightarrow$ Use *Gaussian* probability distributions
- ii) Map data points to lower-dimensional space $\rightarrow$ Convert similarities into *Student's t -distributions*
- iii) Optimize positioning $\rightarrow$ Use **gradient descent** to minimize *Kullback-Leibler* divergence
- iv) Preserve local structures $\rightarrow$ Nearby points in high-dimensional space remain close in low-dimensional space.

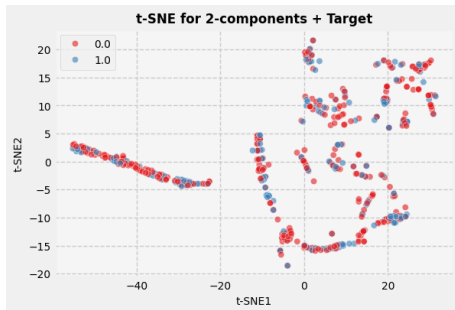


Figure 2: t -SNE for Titanic dataset

References

- [1] DEISENROTH, M. P., FAISAL, A. A., AND ONG, C. S. *Mathematics for machine learning*. Cambridge University Press, 2020.
- [2] GÉRON, A. *Hands-on machine learning with Scikit-Learn, Keras, and TensorFlow: Concepts, tools, and techniques to build intelligent systems*. O'Reilly Media, Inc., 2022.
- [3] JOHNSON, R. A., AND WICHERN, D. W. *Applied multivariate statistical analysis*. 2002.
- [4] LÓPEZ DE PRADO, M. *Advances in Financial Machine Learning*. John Wiley & Sons, 2018.
- [5] RASCHKA, S., AND MIRJALILI, V. *Python machine learning: Machine learning and deep learning with Python, , scikit-learn, and TensorFlow 2*. Packt publishing ltd, 2019.
- [6] SRIVASTAVA, M. S. *Methods of multivariate statistics*. John Wiley & Sons, 2002.