

Last updated: 13 Oct 2021

# Selenium Java Training - Session 10 - Java (Part 8) - Interfaces and Exception Handling

## Java (Part 8) - Interfaces and Exception Handling

### Interfaces

The purpose of an interface is to just to declare all the functionalities required before actually implementing them.

- Interfaces looks similar to Classes and are extensions of abstract classes
- Create an interface say 'Bank' in Eclipse IDE and create variables & methods inside it as shown [here](#)
- Variables in the interfaces are of static and final type
- In abstract classes, we can have both methods (i.e. implemented and non-implemented), where as in interfaces, we cannot implement any methods.
- Classes use **implements** keyword to implement any interface - Demonstrate [here](#)
- Classes implementing an interface can have their own specific methods apart from methods which are acquired from an interface - Demonstrate [here](#)
- Objects cannot be created for an interface - Demonstrate
- Object can be created for the Classes which are implementing the interfaces, for accessing interface defined methods and class specific methods - Demonstrate
- Follow the below steps to provide the access the interface specific methods and not to access the class specific methods
  - Create an object for the Class which is implementing the interface
  - Assign the object of the class to the interface reference variable
  - Using the interface reference variables, we can now access only the methods which are declared in the interface - Demonstrate [here](#)

### Exception Handling

Exception is nothing but an error which is occurred during runtime i.e. during program execution

- If an exception has occurred during program execution at any step, the steps which are after the exception wont be executed - Demonstrate [here](#)

### try catch blocks

- We can handle the exceptions using the **try catch** blocks
  - Handling the exceptions is known as Exception Handling
  - Syntax: View [here](#)

Explain the flow of try catch block with [example](#)


• [Demonstrate ArithmeticException](#) in try catch block - View [here](#)

• [Demonstrate ArrayIndexOutOfBoundsException](#) in a program having code to handle the exception using try catch block - View [here](#)

[Save Copy to Evernote](#)

• In the above Syntax image, 'Exception' is the Class name and 'e' is the object reference which can catch the exception (i.e. object) thrown from try block


## Exceptions Hierarchy

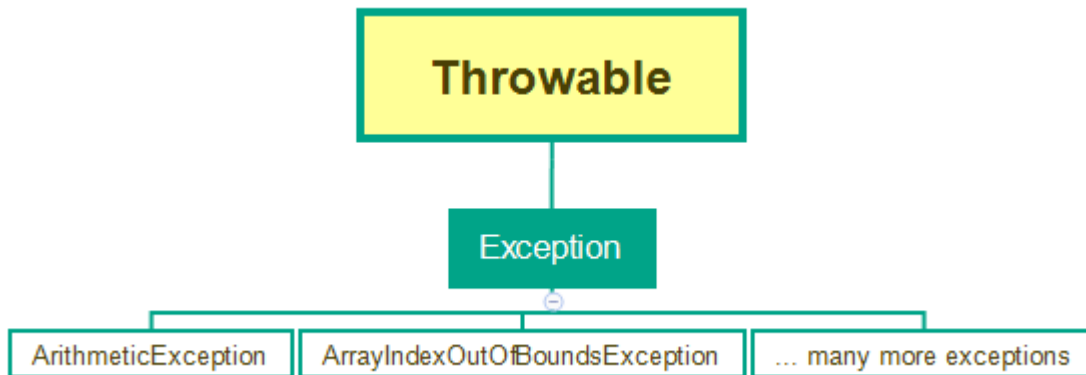

- Demonstrate ArithmeticException and handle it using 'ArithmeticException' class in catch block - Demonstrate [here](#)
- Demonstrate ArrayIndexOutOfBoundsException and handle it using 'ArrayIndexOutOfBoundsException' class in catch block - Demonstrate [here](#)
- Exception class is the parent class of all the Exception Classes like ArithmeticException and ArrayIndexOutOfBoundsException classes and can handle them
- Throwable class is the grant parent class of all the Exception Classes like ArithmeticException and ArrayIndexOutOfBoundsException classes and can handle them

## Exception Types

- Exceptions can be categorized as below:

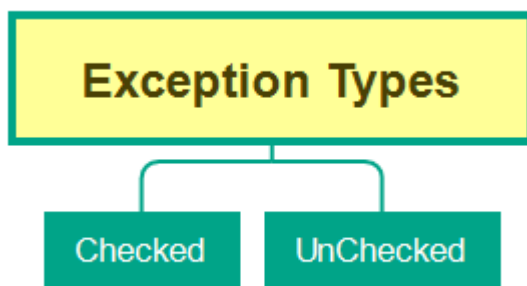

- Unchecked exceptions are the exceptions that are not checked by compiler and will occur only during execution - [Demonstrate AirthmeticException](#)
- Checked Exceptions are the exceptions that are checked by the compiler - [Demonstrate FileNotFoundExcpetion](#)

.....

- Handling Checked Exceptions using try .. catch block
- Ignoring Checked Exceptions using throws keyword

[Save Copy to Evernote](#)

By,  
Arun Motoori

Save Copy to Evernote

Terms of Service

Privacy Policy

Report Spam