




Switch

Physical

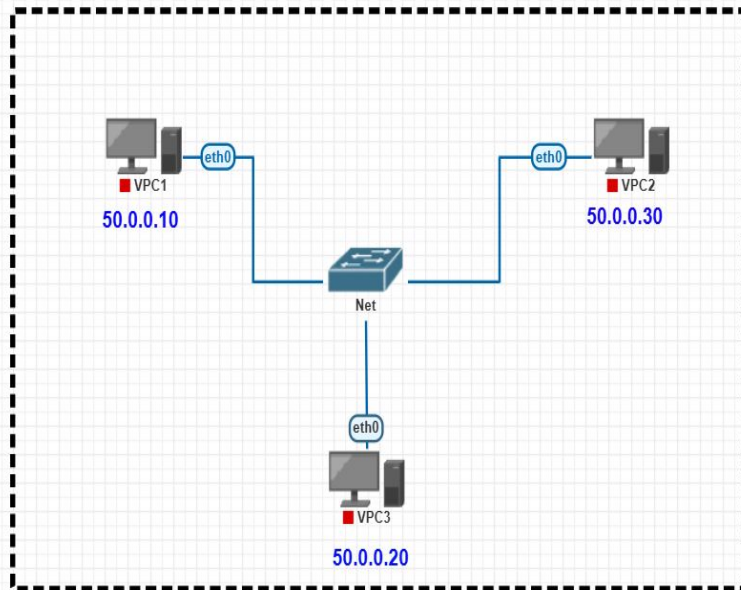

01 : 00 : 00

START



VPC1

VPC1> IP 50.0.0.10 255.0.0.0

Bad command: "IP 50.0.0.10 255.0.0.0". Use ? for help.

VPC1> ip 50.0.0.10 255.0.0.0

Checking for duplicate address...

VPC1 : 50.0.0.10 255.0.0.0


VPC1> showip

Bad command: "showip". Use ? for help.

VPC1> show ip

NAME : VPC1[1]
IP/MASK : 50.0.0.10/8
GATEWAY : 255.0.0.0
DNS :
MAC : 00:50:79:66:68:b6
LPORT : 20000
RHOST:PORT : 127.0.0.1:30000
MTU : 1500

VPC1> █



VPC2



For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

```
VPC2> ip 50.0.0.20 255.0.0.0
Checking for duplicate address...
VPC2 : 50.0.0.20 255.0.0.0
```

```
VPC2> show ip
```

```
NAME           : VPC2[1]
IP/MASK         : 50.0.0.20/8
GATEWAY         : 255.0.0.0
DNS             :
MAC             : 00:50:79:66:68:b7
LPORT          : 20000
RHOST:PORT      : 127.0.0.1:30000
MTU             : 1500
```

```
VPC2> 
```



VPC3

For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

```
VPC3> ip 50.0.0.30 255.0.0.0
Checking for duplicate address...
VPC3 : 50.0.0.30 255.0.0.0
```

```
VPC3> show ip
```

```
NAME       : VPC3[1]
IP/MASK     : 50.0.0.30/8
GATEWAY     : 255.0.0.0
DNS         :
MAC         : 00:50:79:66:68:e8
LPORT      : 20000
RHOST:PORT  : 127.0.0.1:30000
MTU         : 1500
```

```
VPC3> 
```



VPC1

```
VPC1> showip
Bad command: "showip". Use ? for help.
```

```
VPC1> show ip
```

```
NAME           : VPC1[1]
IP/MASK         : 50.0.0.10/8
GATEWAY         : 255.0.0.0
DNS             :
MAC            : 00:50:79:66:68:b6
LPORT          : 20000
RHOST:PORT     : 127.0.0.1:30000
MTU            : 1500
```

```
VPC1> ping 50.0.0.20
```

```
84 bytes from 50.0.0.20 icmp_seq=1 ttl=64 time=0.263 ms
84 bytes from 50.0.0.20 icmp_seq=2 ttl=64 time=0.282 ms
84 bytes from 50.0.0.20 icmp_seq=3 ttl=64 time=0.283 ms
84 bytes from 50.0.0.20 icmp_seq=4 ttl=64 time=0.262 ms
84 bytes from 50.0.0.20 icmp_seq=5 ttl=64 time=0.255 ms
```

```
VPC1> █
```



VPC1

RHOST:PORT : 127.0.0.1:30000

MTU : 1500

VPC1> ping 50.0.0.20

84 bytes from 50.0.0.20 icmp_seq=1 ttl=64 time=0.263 ms

84 bytes from 50.0.0.20 icmp_seq=2 ttl=64 time=0.282 ms

84 bytes from 50.0.0.20 icmp_seq=3 ttl=64 time=0.283 ms

84 bytes from 50.0.0.20 icmp_seq=4 ttl=64 time=0.262 ms

84 bytes from 50.0.0.20 icmp_seq=5 ttl=64 time=0.255 ms

VPC1> ping 50.0.0.30

host (50.0.0.24) not reachable

VPC1> ping 50.0.0.30

84 bytes from 50.0.0.30 icmp_seq=1 ttl=64 time=0.170 ms

84 bytes from 50.0.0.30 icmp_seq=2 ttl=64 time=0.258 ms

84 bytes from 50.0.0.30 icmp_seq=3 ttl=64 time=0.274 ms

84 bytes from 50.0.0.30 icmp_seq=4 ttl=64 time=0.233 ms

84 bytes from 50.0.0.30 icmp_seq=5 ttl=64 time=0.161 ms

VPC1>

```
VPC2> ip 50.0.0.20 255.0.0.0
Checking for duplicate address...
VPC2 : 50.0.0.20 255.0.0.0
```


```
VPC2> show ip
```

```
NAME           : VPC2[1]
IP/MASK         : 50.0.0.20/8
GATEWAY        : 255.0.0.0
DNS            :
MAC            : 00:50:79:66:68:b7
LPORT          : 20000
RHOST:PORT     : 127.0.0.1:30000
MTU            : 1500
```

```
VPC2> ping 50.0.0.10
```

```
84 bytes from 50.0.0.10 icmp_seq=1 ttl=64 time=0.288 ms
84 bytes from 50.0.0.10 icmp_seq=2 ttl=64 time=0.256 ms
84 bytes from 50.0.0.10 icmp_seq=3 ttl=64 time=0.222 ms
84 bytes from 50.0.0.10 icmp_seq=4 ttl=64 time=0.180 ms
84 bytes from 50.0.0.10 icmp_seq=5 ttl=64 time=0.163 ms
```

```
VPC2> 
```



VPC2

GATEWAY : 255.0.0.0

DNS :

MAC : 00:50:79:66:68:b7

LPORT : 20000

RHOST:PORT : 127.0.0.1:30000

MTU : 1500

VPC2> ping 50.0.0.10

84 bytes from 50.0.0.10 icmp_seq=1 ttl=64 time=0.288 ms

84 bytes from 50.0.0.10 icmp_seq=2 ttl=64 time=0.256 ms

84 bytes from 50.0.0.10 icmp_seq=3 ttl=64 time=0.222 ms

84 bytes from 50.0.0.10 icmp_seq=4 ttl=64 time=0.180 ms

84 bytes from 50.0.0.10 icmp_seq=5 ttl=64 time=0.163 ms

VPC2> ping 50.0.0.30

84 bytes from 50.0.0.30 icmp_seq=1 ttl=64 time=0.144 ms


84 bytes from 50.0.0.30 icmp_seq=2 ttl=64 time=0.220 ms

84 bytes from 50.0.0.30 icmp_seq=3 ttl=64 time=0.180 ms

84 bytes from 50.0.0.30 icmp_seq=4 ttl=64 time=0.353 ms

84 bytes from 50.0.0.30 icmp_seq=5 ttl=64 time=0.311 ms

VPC2> █



VPC3



```
VPC3> ip 50.0.0.30 255.0.0.0
Checking for duplicate address...
VPC3 : 50.0.0.30 255.0.0.0
```

```
VPC3> show ip
```

```
NAME           : VPC3[1]
IP/MASK         : 50.0.0.30/8
GATEWAY        : 255.0.0.0
DNS            :
MAC            : 00:50:79:66:68:e8
LPORT          : 20000
RHOST:PORT     : 127.0.0.1:30000
MTU            : 1500
```

```
VPC3> ping 50.0.0.10
```

```
84 bytes from 50.0.0.10 icmp_seq=1 ttl=64 time=0.214 ms
84 bytes from 50.0.0.10 icmp_seq=2 ttl=64 time=0.170 ms
84 bytes from 50.0.0.10 icmp_seq=3 ttl=64 time=0.282 ms
84 bytes from 50.0.0.10 icmp_seq=4 ttl=64 time=0.376 ms
84 bytes from 50.0.0.10 icmp_seq=5 ttl=64 time=0.242 ms
```

```
VPC3> 
```

```
84 bytes from 50.0.0.10 icmp_seq=1 ttl=64 time=0.214 ms
84 bytes from 50.0.0.10 icmp_seq=2 ttl=64 time=0.170 ms
84 bytes from 50.0.0.10 icmp_seq=3 ttl=64 time=0.282 ms
84 bytes from 50.0.0.10 icmp_seq=4 ttl=64 time=0.376 ms
84 bytes from 50.0.0.10 icmp_seq=5 ttl=64 time=0.242 ms
```

```
VPC3> ping 50.0.0.30
```

```
50.0.0.30 icmp_seq=1 ttl=64 time=0.001 ms
50.0.0.30 icmp_seq=2 ttl=64 time=0.001 ms
50.0.0.30 icmp_seq=3 ttl=64 time=0.001 ms
50.0.0.30 icmp_seq=4 ttl=64 time=0.001 ms
50.0.0.30 icmp_seq=5 ttl=64 time=0.001 ms
```

```
VPC3> ping 50.0.0.20
```

```
84 bytes from 50.0.0.20 icmp_seq=1 ttl=64 time=0.242 ms
84 bytes from 50.0.0.20 icmp_seq=2 ttl=64 time=0.253 ms
84 bytes from 50.0.0.20 icmp_seq=3 ttl=64 time=0.253 ms
84 bytes from 50.0.0.20 icmp_seq=4 ttl=64 time=0.358 ms
84 bytes from 50.0.0.20 icmp_seq=5 ttl=64 time=0.299 ms
```

```
VPC3> █
```

