Task 1: Familiarize with Google Cloud Networking.
Services: Compute Engine and VPC

Create a custom VPC with 1 subnet.
Enable private Google access for the subnet.
Verify connectivity by creating a VM in the subnet and testing external connectivity.

Step 1: I created a custom vpc network with subnet of 10.0.0.0/18 with google private access on

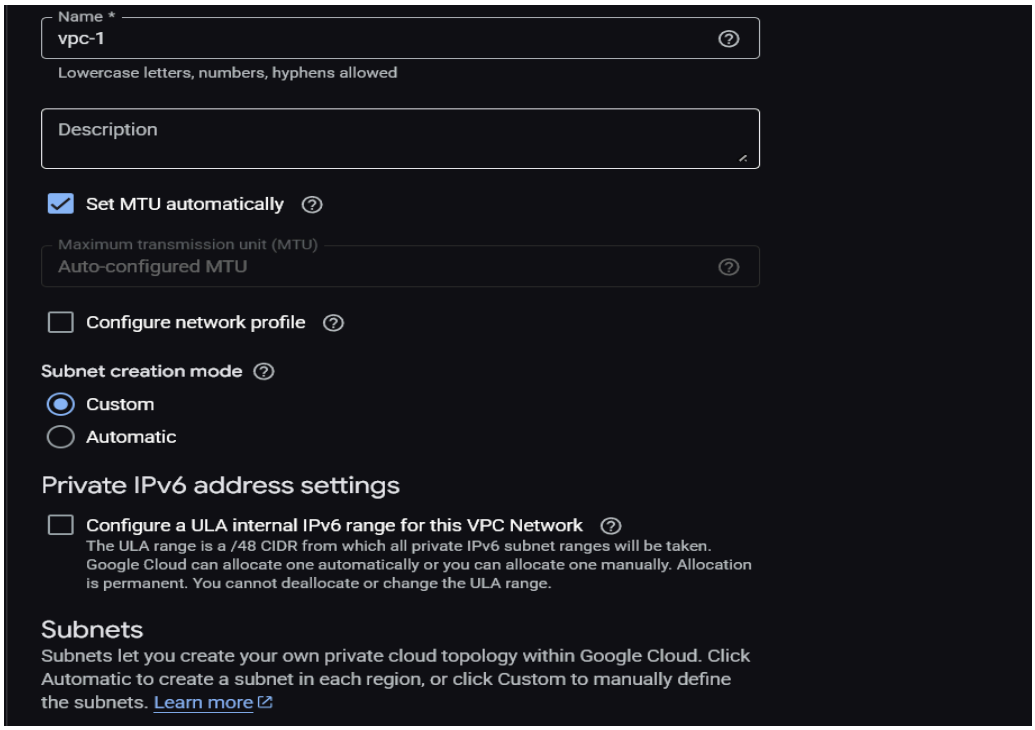

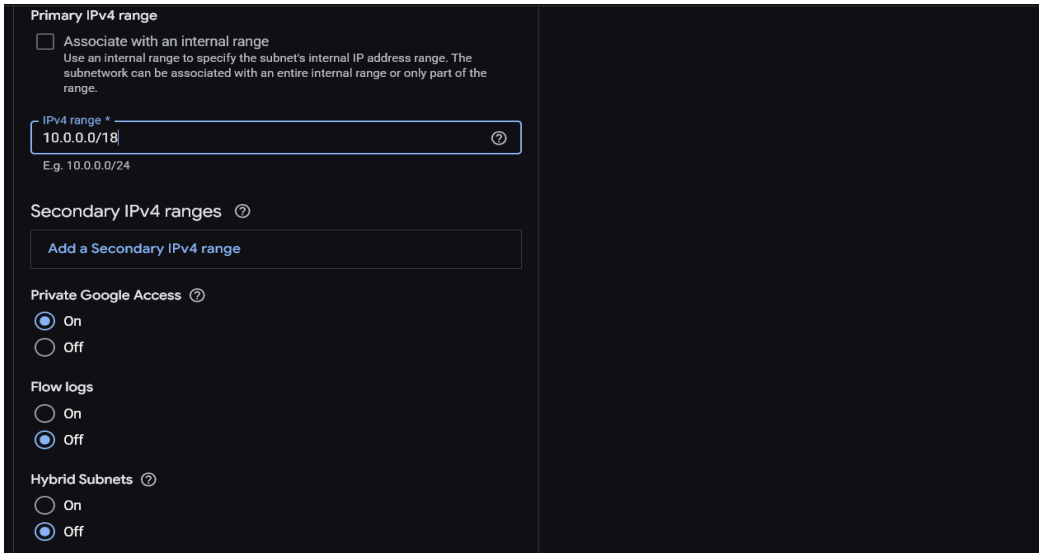

Step 2 : I created a VM with the subnet that I created above.

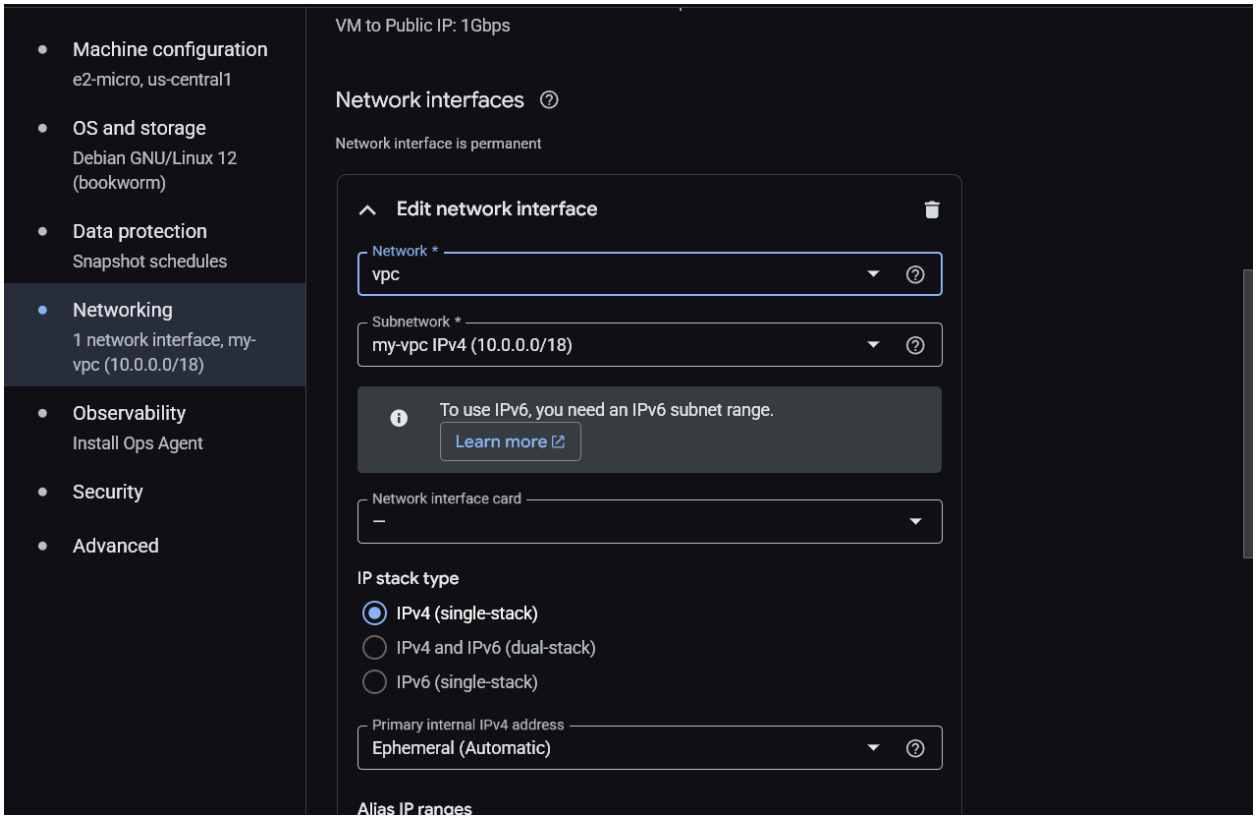

Step 3 : To check the connectivity I booted up vm by using ssh .

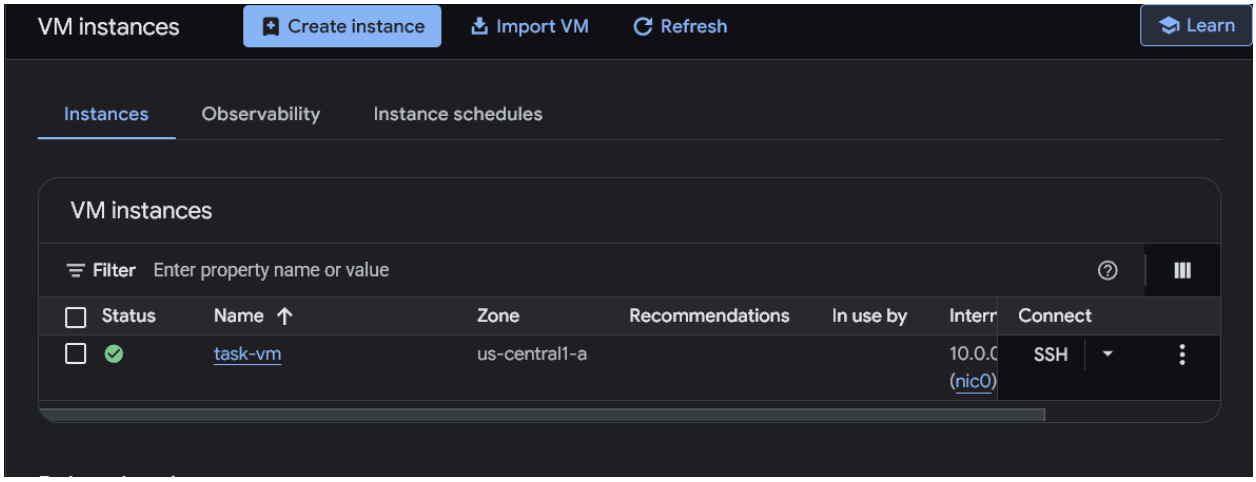

Step 4 : I used the ping command to ping google ip address 8.8.8.8 to verify the external connection and got the data.

```
Linux task-vm 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.162-1 (2026-02-08) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
ab19912161@task-vm:~$ ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=118 time=0.901 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=118 time=0.338 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=118 time=0.672 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=118 time=0.418 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=118 time=0.352 ms
64 bytes from 8.8.8.8: icmp_seq=6 ttl=118 time=0.389 ms
64 bytes from 8.8.8.8: icmp_seq=7 ttl=118 time=0.556 ms
64 bytes from 8.8.8.8: icmp_seq=8 ttl=118 time=0.422 ms
64 bytes from 8.8.8.8: icmp_seq=9 ttl=118 time=0.404 ms
^X64 bytes from 8.8.8.8: icmp_seq=10 ttl=118 time=0.340 ms
64 bytes from 8.8.8.8: icmp_seq=11 ttl=118 time=0.569 ms
^C
--- 8.8.8.8 ping statistics ---
11 packets transmitted, 11 received, 0% packet loss, time 10219ms
rtt min/avg/max/mdev = 0.338/0.487/0.901/0.166 ms
ab19912161@task-vm:~$
```