

10. Implement transformation-based tagging using a set of transformation rules, apply a simple rule to tag words using python.

Code

```
sentence = input("Enter a sentence: ")

words = sentence.split()

tags = []

for word in words:

    tag = "NN"

    if word.endswith("ing"):

        tag = "VBG"

    elif word.endswith("ed"):

        tag = "VBD"

    tags.append((word, tag))


print(tags)
```

Sample Input

playing jumped boy

Sample Output

```
[('playing', 'VBG'),
 ('jumped', 'VBD'),
 ('boy', 'NN')]
```

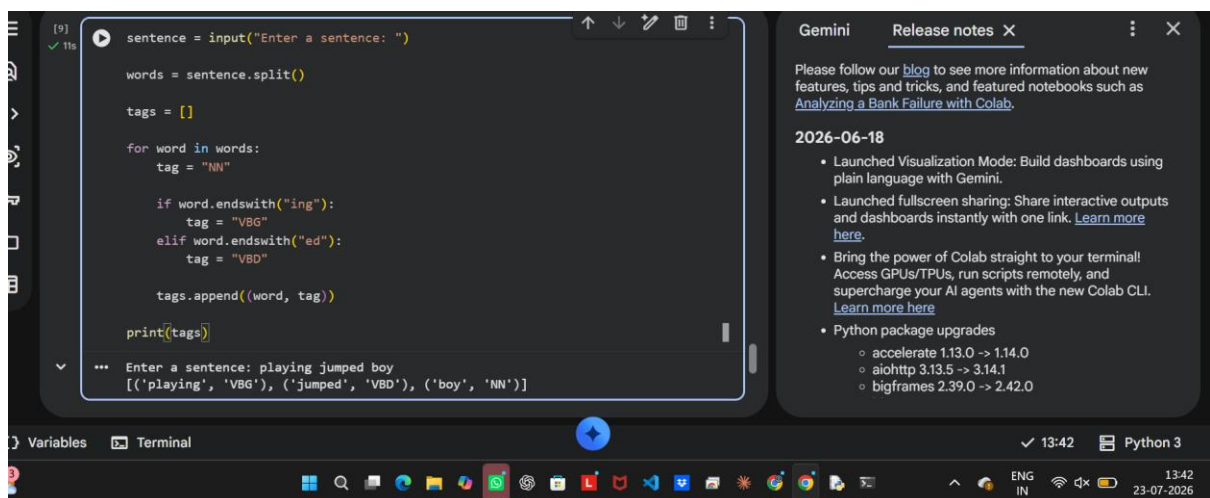

The screenshot shows a Jupyter Notebook environment. The main code cell contains the following Python code:

```
sentence = input("Enter a sentence: ")

words = sentence.split()

tags = []

for word in words:

    tag = "NN"

    if word.endswith("ing"):

        tag = "VBG"

    elif word.endswith("ed"):

        tag = "VBD"

    tags.append((word, tag))

print(tags)
```

The output of the code is displayed below the code cell:

```
Enter a sentence: playing jumped boy
[('playing', 'VBG'), ('jumped', 'VBD'), ('boy', 'NN')]
```

On the right side of the notebook, there is a 'Release notes' panel for Gemini, dated 2026-06-18, listing several updates and improvements.