

7. Write program using the NLTK library to perform part-of-speech tagging on a text.

Code

```
import nltk

from nltk.tokenize import word_tokenize

nltk.download('punkt')

nltk.download('averaged_perceptron_tagger_eng')

text = input("Enter a sentence: ")

words = word_tokenize(text)


print(nltk.pos_tag(words))
```

Sample Input

The cat is sleeping.

Sample Output

```
[('The', 'DT'), ('cat', 'NN'), ('is', 'VBZ'),
 ('sleeping', 'VBG'), ('.', '.')]
```

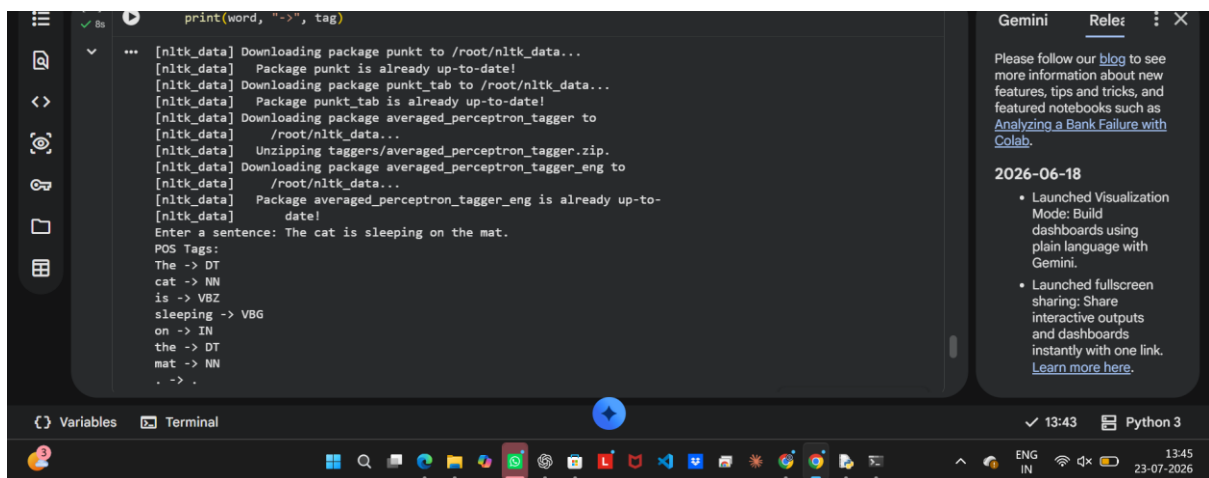

```
print(word, "->", tag)

... [nltk_data] Downloading package punkt to /root/nltk_data...
[nltk_data] Package punkt is already up-to-date!
[nltk_data] Downloading package punkt_tab to /root/nltk_data...
[nltk_data] Package punkt_tab is already up-to-date!
[nltk_data] Downloading package averaged_perceptron_tagger to
[nltk_data] /root/nltk_data...
[nltk_data] Unzipping taggers/averaged_perceptron_tagger.zip.
[nltk_data] Downloading package averaged_perceptron_tagger_eng to
[nltk_data] /root/nltk_data...
[nltk_data] Package averaged_perceptron_tagger_eng is already up-to-
[nltk_data] date!
Enter a sentence: The cat is sleeping on the mat.
POS Tags:
The -> DT
cat -> NN
is -> VBZ
sleeping -> VBG
on -> IN
the -> DT
mat -> NN
. -> .
```

Gemini Release

Please follow our [blog](#) to see more information about new features, tips and tricks, and featured notebooks such as [Analyzing a Bank Failure with Colab](#).

2026-06-18

- Launched Visualization Mode: Build dashboards using plain language with Gemini.
- Launched fullscreen sharing: Share interactive outputs and dashboards instantly with one link. [Learn more here.](#)

Variables Terminal

13:43 Python 3

ENG IN 13:45 23-07-2026