


GIT

2. Git-HOL


Step 1: Go to your Git project

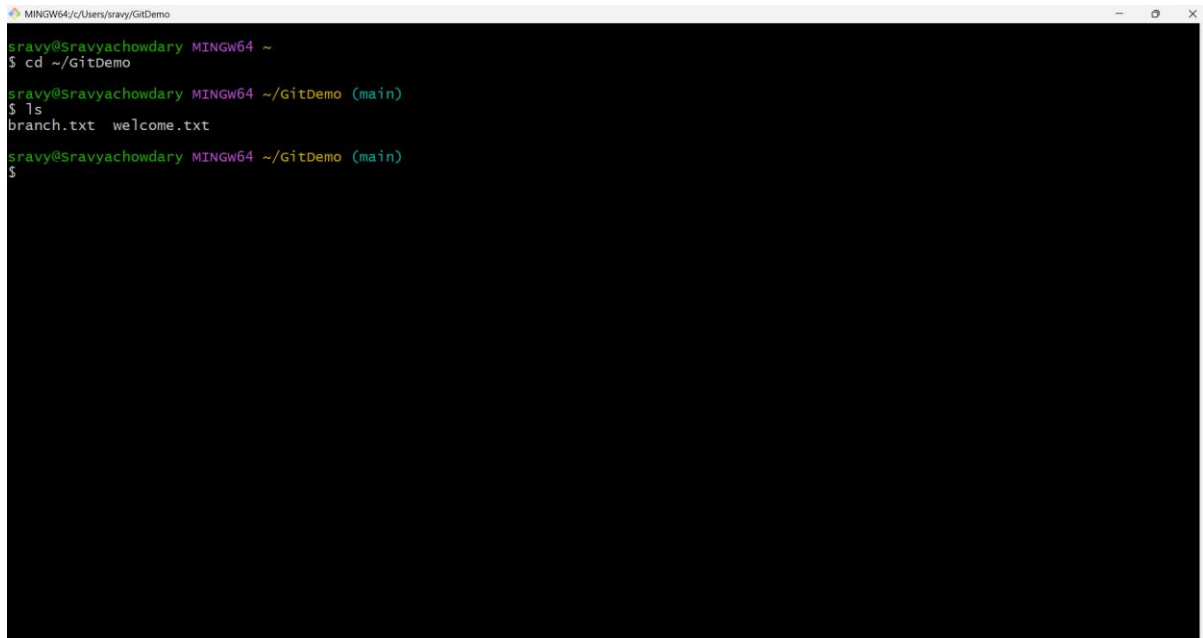

A terminal window titled 'MINGW64/c:/Users/sravy/GitDemo' showing the following commands and output:

```
sravy@Sravyachowdary MINGW64 ~  
$ cd ~/GitDemo  
  
sravy@Sravyachowdary MINGW64 ~/GitDemo (main)  
$ ls  
branch.txt  welcome.txt  
  
sravy@Sravyachowdary MINGW64 ~/GitDemo (main)  
$
```

Step 2: Create a .log file

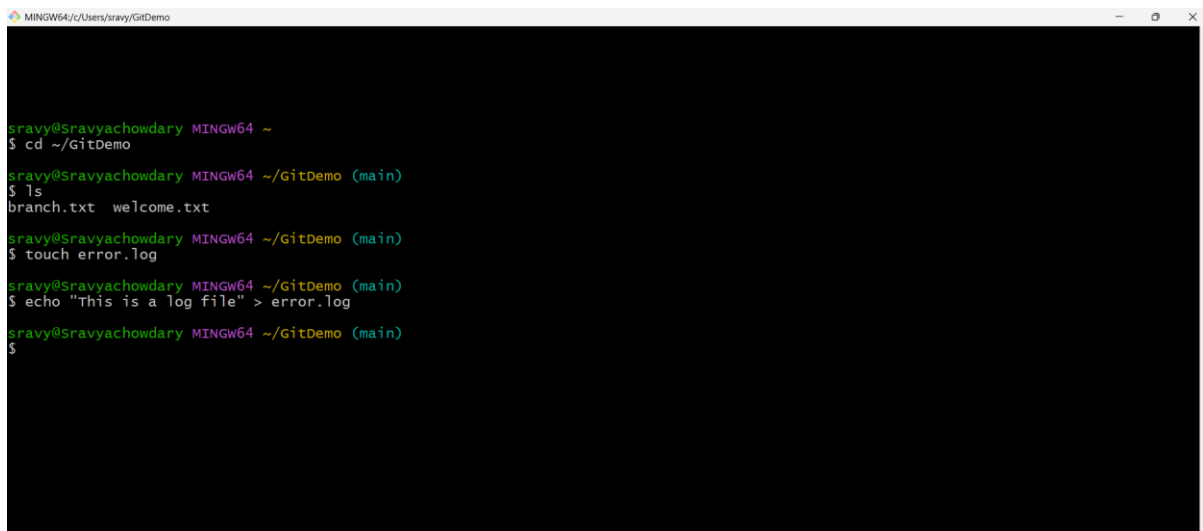


A terminal window titled 'MINGW64/c:/Users/sravy/GitDemo' showing the following commands and output:

```
sravy@Sravyachowdary MINGW64 ~  
$ cd ~/GitDemo  
  
sravy@Sravyachowdary MINGW64 ~/GitDemo (main)  
$ ls  
branch.txt  welcome.txt  
  
sravy@Sravyachowdary MINGW64 ~/GitDemo (main)  
$ touch error.log  
  
sravy@Sravyachowdary MINGW64 ~/GitDemo (main)  
$ echo "This is a log file" > error.log  
  
sravy@Sravyachowdary MINGW64 ~/GitDemo (main)  
$
```

COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE

Step 3: Create a log folder

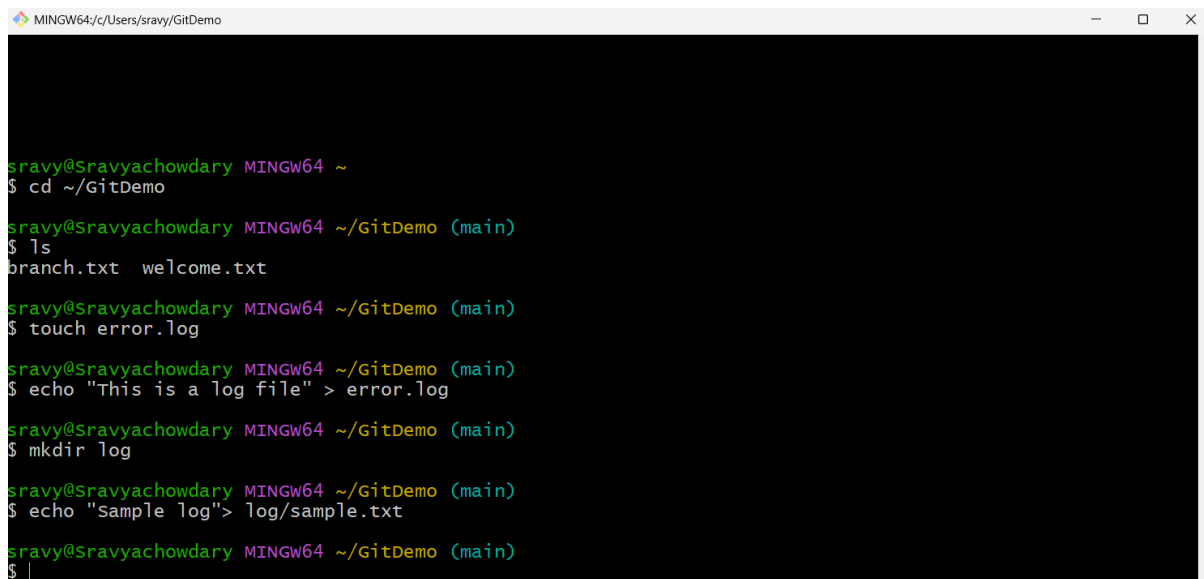

```
MINGW64/c/Users/sravy/GitDemo
sravy@Sravyachowdary MINGW64 ~
$ cd ~/GitDemo

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ ls
branch.txt  welcome.txt

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ touch error.log


sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ echo "This is a log file" > error.log

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ mkdir log

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ echo "Sample log"> log/sample.txt

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$
```

Step 4: Open the .gitignore file

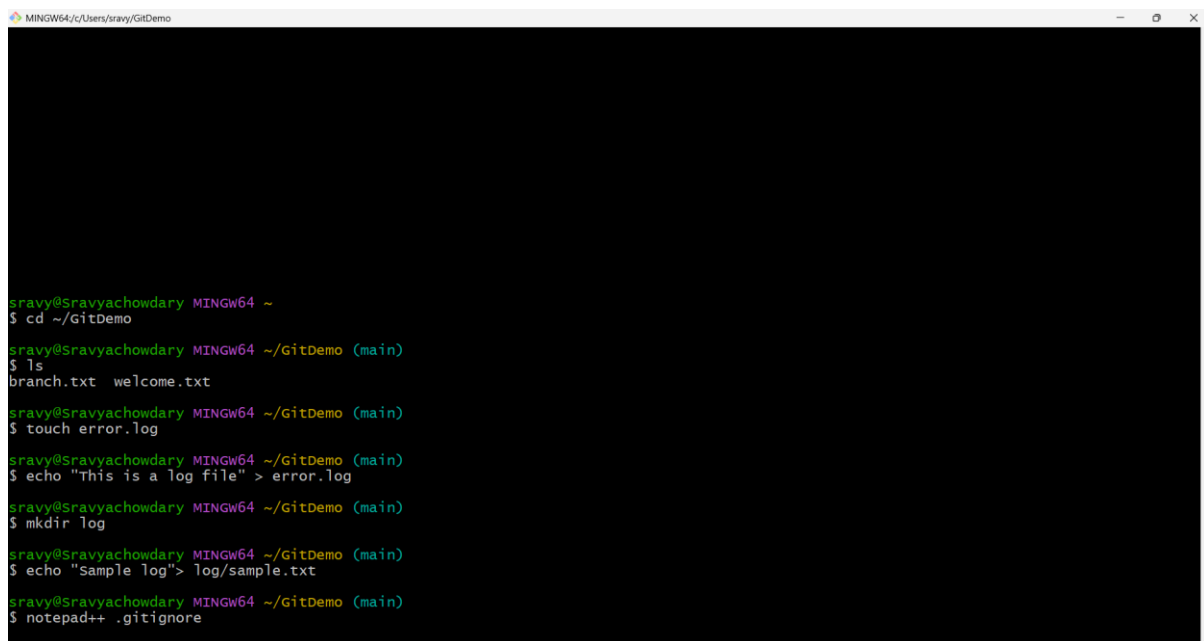

```
MINGW64/c/Users/sravy/GitDemo
sravy@Sravyachowdary MINGW64 ~
$ cd ~/GitDemo

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ ls
branch.txt  welcome.txt

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ touch error.log


sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ echo "This is a log file" > error.log

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ mkdir log

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ echo "Sample log"> log/sample.txt

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ notepad++ .gitignore
```


Step 5: Add these lines

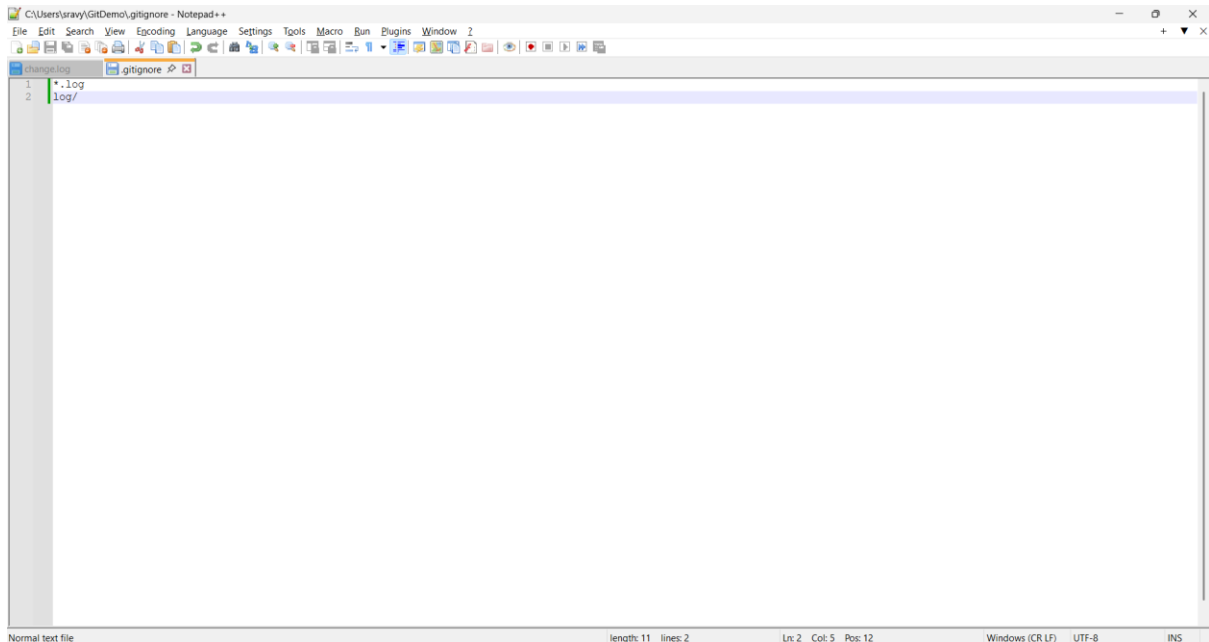

A screenshot of a Notepad++ window titled 'C:\Users\srapy\GitDemo\gitignore - Notepad++'. The window shows a file named '.gitignore' with two lines of text: '.log' on line 1 and 'log/' on line 2. The status bar at the bottom indicates 'Normal text file', 'len: 11', 'lines: 2', 'Ln: 2', 'Col: 5', 'Pos: 12', 'Windows (CR LF)', 'UTF-8', and 'INS'.

```
1 .log
2 log/
```

Step 6: Check Git status

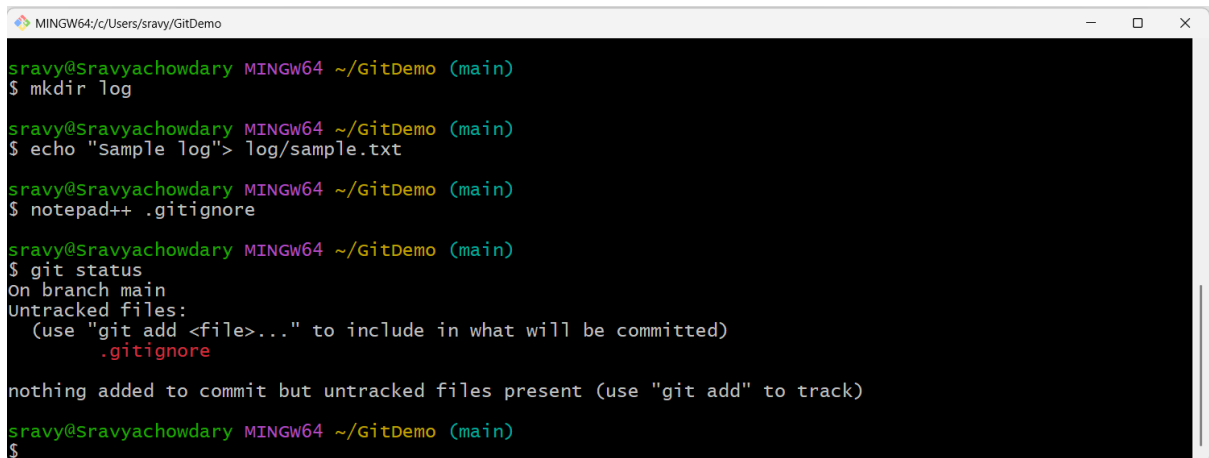

A screenshot of a terminal window titled 'MINGW64/c/Users/srapy/GitDemo'. The terminal shows the following commands and output:

```
srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$ mkdir log

srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$ echo "Sample log"> log/sample.txt


srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$ notepad++ .gitignore

srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$ git status
On branch main
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore

nothing added to commit but untracked files present (use "git add" to track)

srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$
```

Step 7: Add the .gitignore

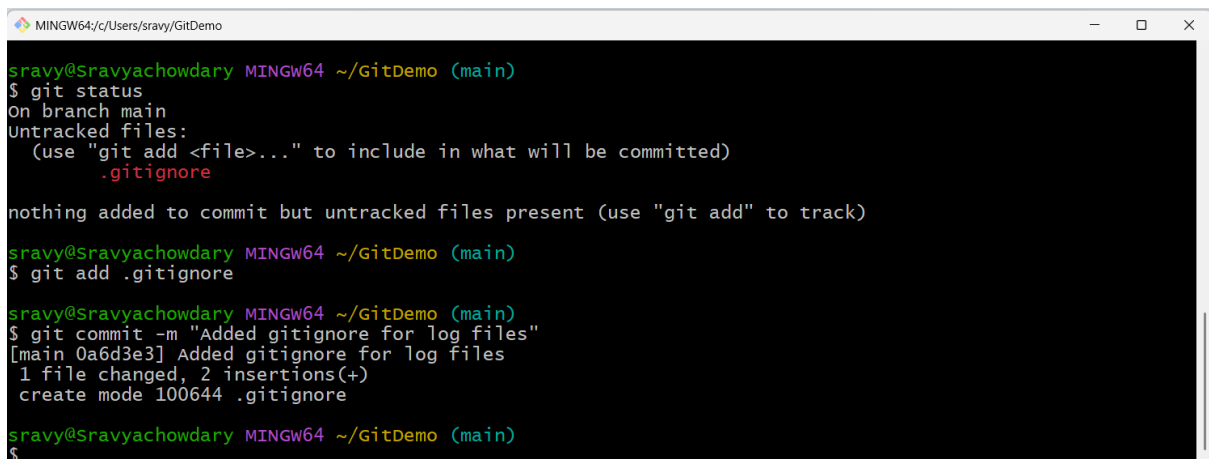

A screenshot of a terminal window titled 'MINGW64/c/Users/srapy/GitDemo'. The terminal shows the following commands and output:

```
srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$ git status
On branch main
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore

nothing added to commit but untracked files present (use "git add" to track)

srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$ git add .gitignore

srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$ git commit -m "Added gitignore for log files"
[main 0a6d3e3] Added gitignore for log files
 1 file changed, 2 insertions(+)
 create mode 100644 .gitignore

srapy@srapyachowdary MINGW64 ~/GitDemo (main)
$
```

COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE

Step 8: Push to GitLab


```
MINGW64/c/Users/sravy/GitDemo
1 file changed, 93 insertions(+)
create mode 100644 README.md

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ git push -u origin main
Enumerating objects: 12, done.
Counting objects: 100% (12/12), done.
Delta compression using up to 12 threads
Compressing objects: 100% (7/7), done.
Writing objects: 100% (11/11), 1.07 kiB | 157.00 kiB/s, done.
Total 11 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
To https://gitlab.com/sravyakilaru68/gitdemo.git
   3e344be..d7ca269  main -> main
branch 'main' set up to track 'origin/main'.

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$ git push origin main
Everything up-to-date

sravy@Sravyachowdary MINGW64 ~/GitDemo (main)
$
```

Project Folder Structure (GitDemo)

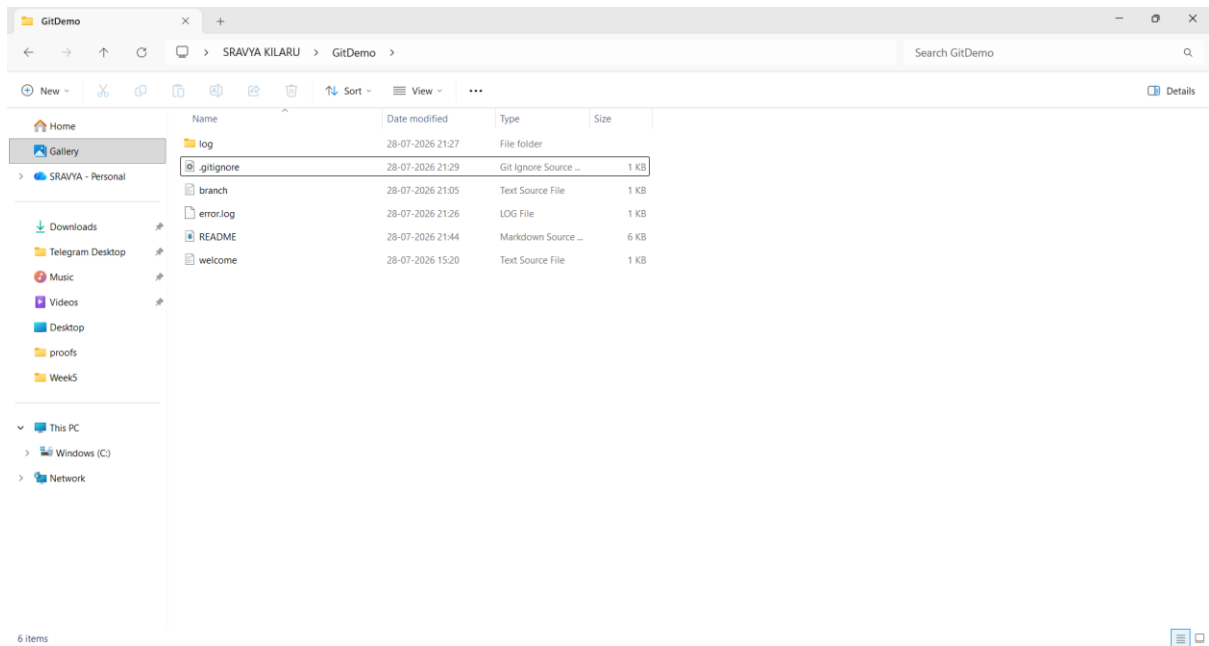

COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE

.gitignore File Configuration

