



Microservices with Spring Boot 3 and Spring Cloud

Creating Microservices for account and loan


Step 1: Create Account Microservice Using Spring Initializr

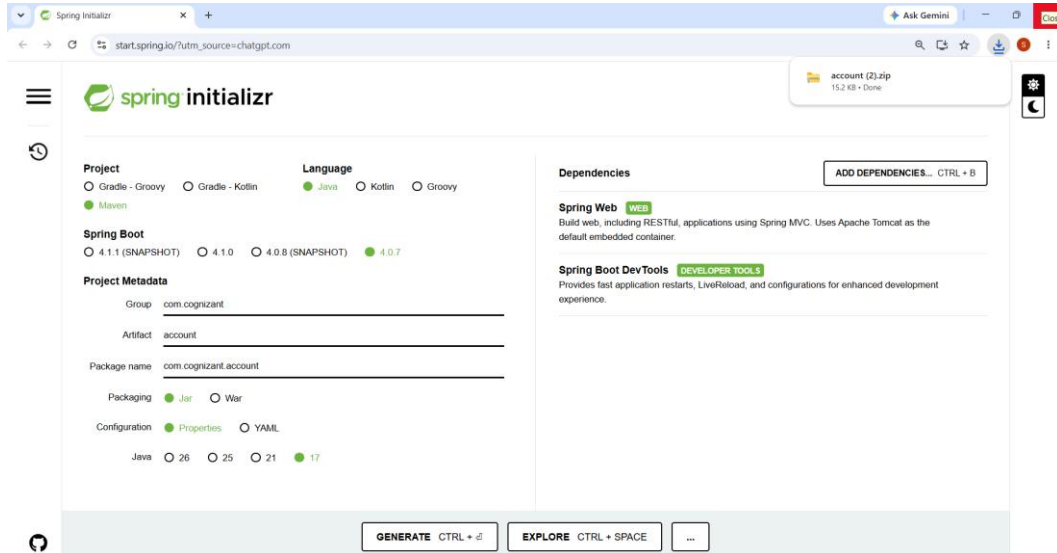

Step 2: Extracting the Account Microservice Project

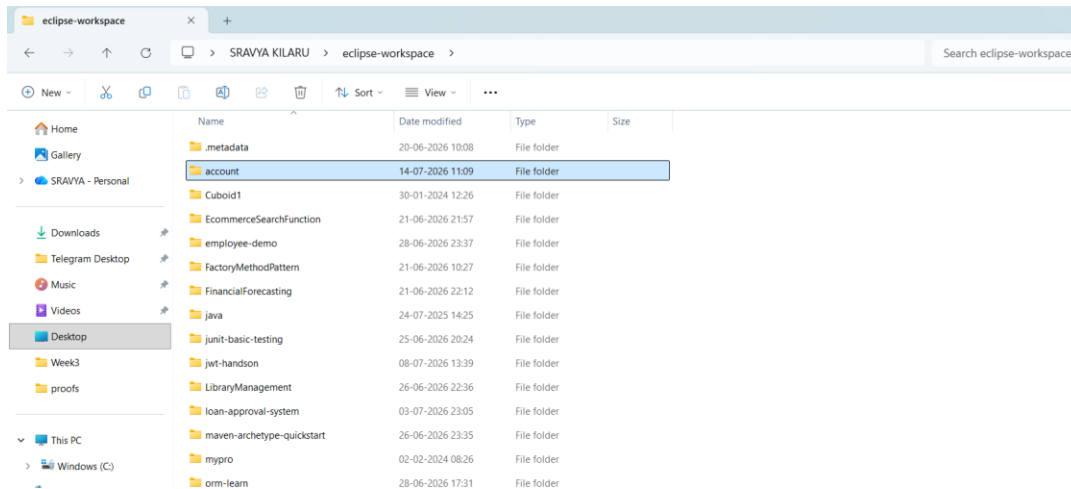


Step 3: Importing Account Microservice into Eclipse IDE

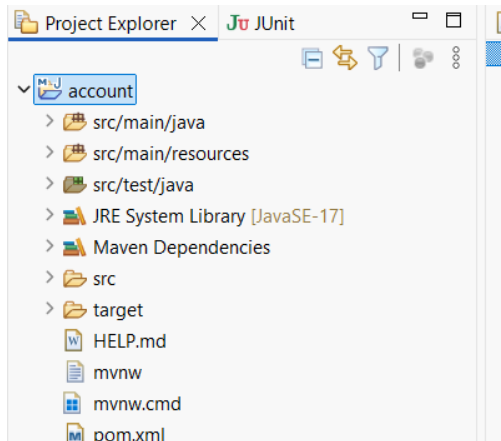


COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE


Step 4: Account Microservice – Spring Boot Main Application Class

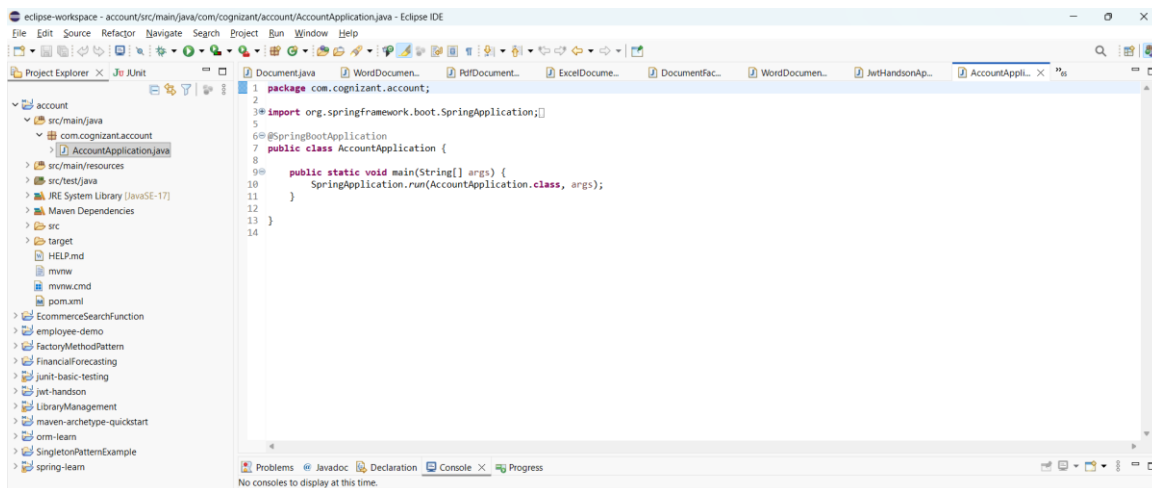

Step 5: Creating Account Model Class

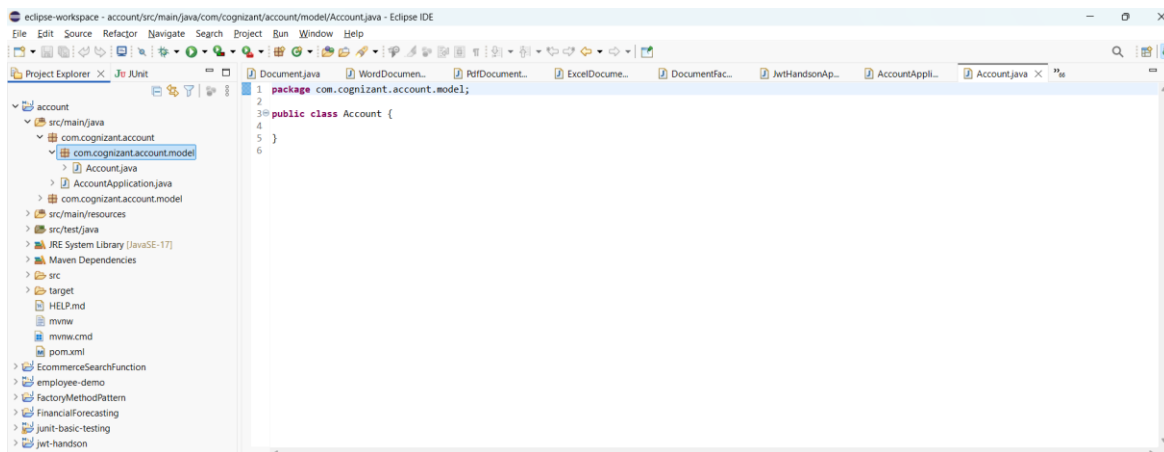


Step 6: Account Model Implementation

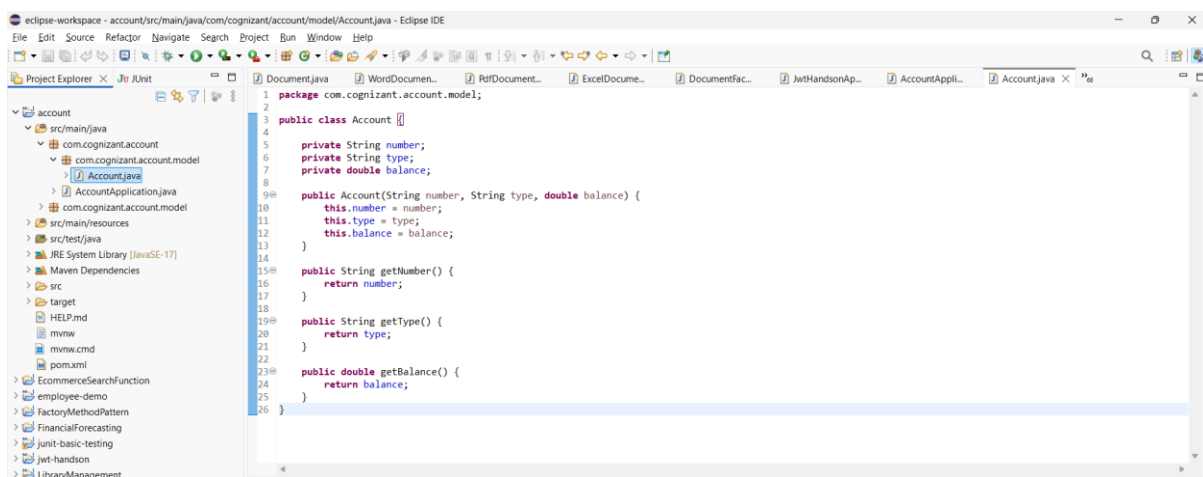


COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE

Step 7: Account Controller Implementation

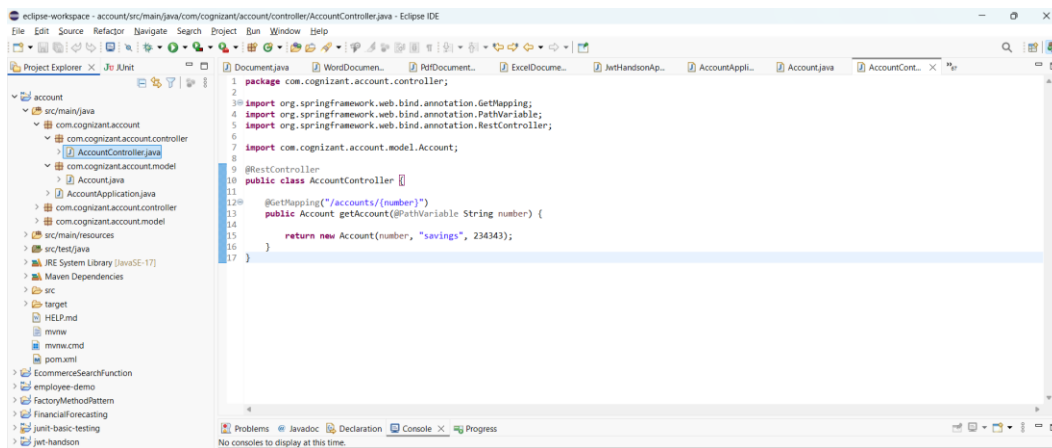

Step 8: Running the Account Microservice Application

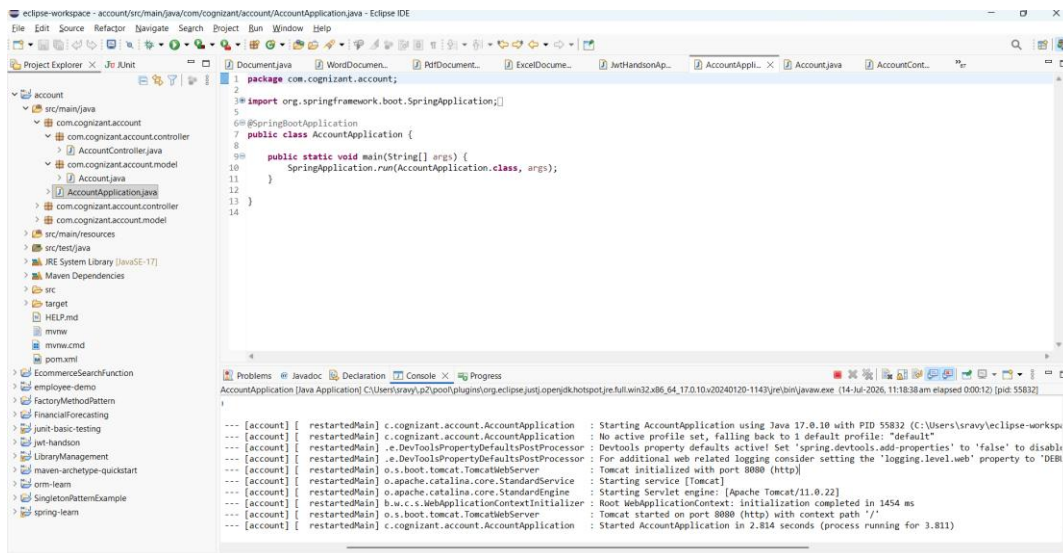


Step 9: Testing the Account Microservice in Browser




COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE


Step 10: Creating the Loan Microservice Using Spring Initializr

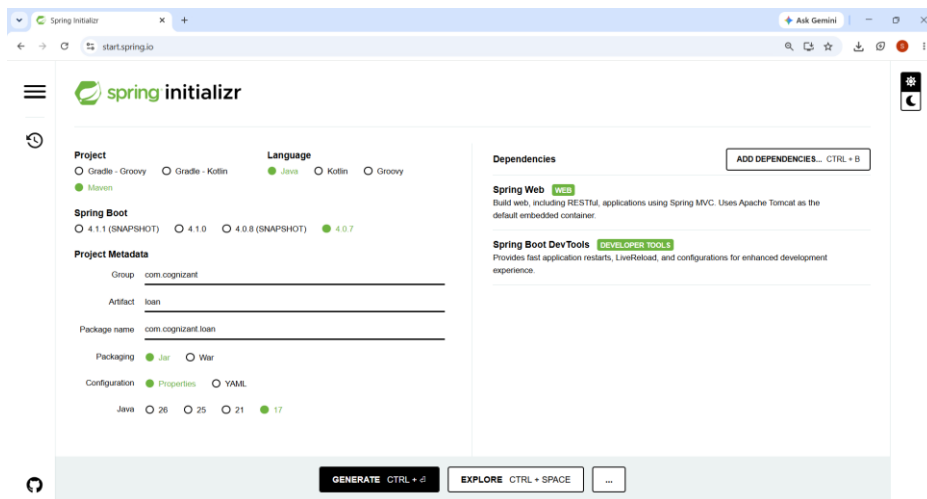


Step 11: Extracting the Loan Microservice Project to Eclipse Workspace

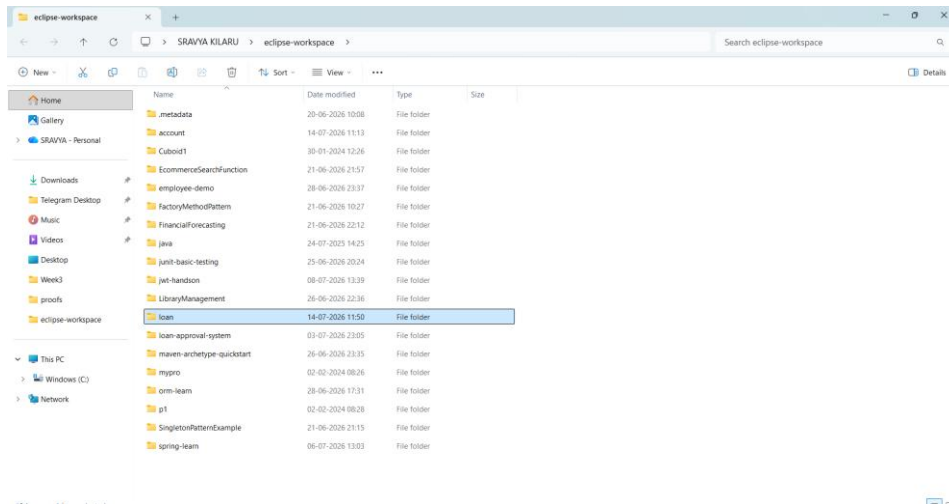


Step 12: Importing the Loan Microservice as a Maven Project in Eclipse

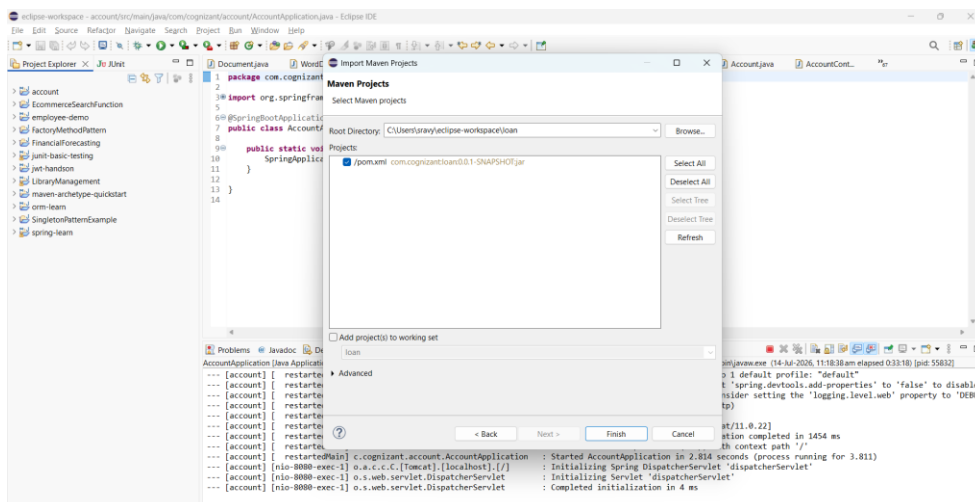


Step 13: Loan Model Implementation

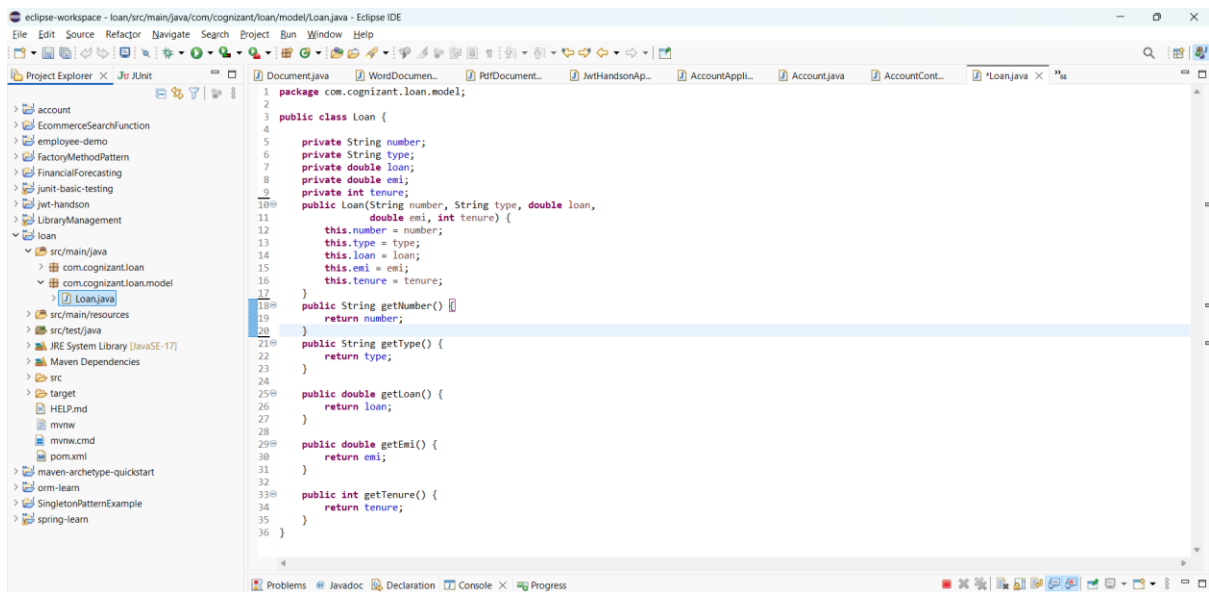


Step 14: Loan Controller Implementation

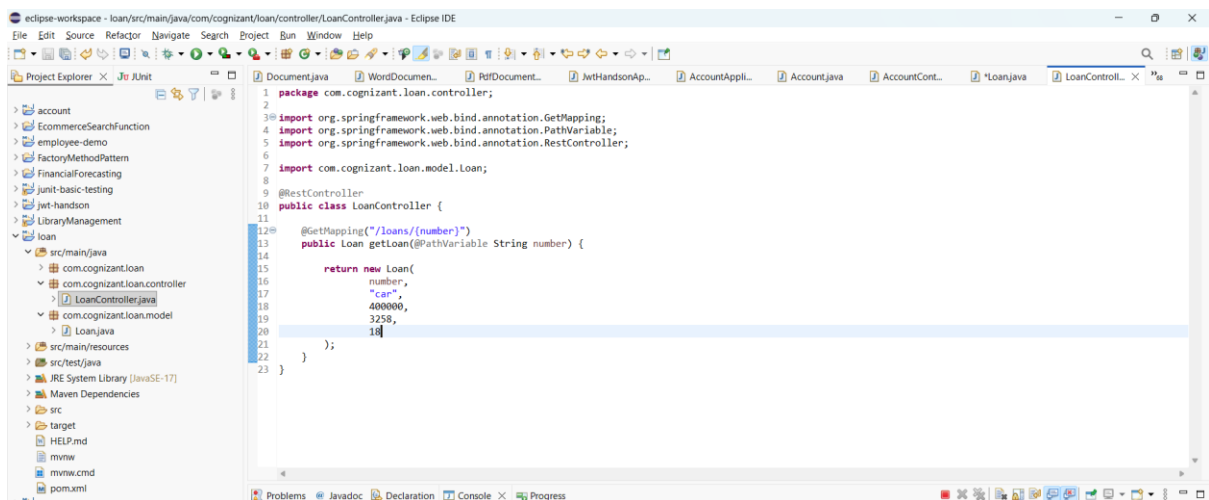

Step 15: Configuring Loan Microservice Port to 8081

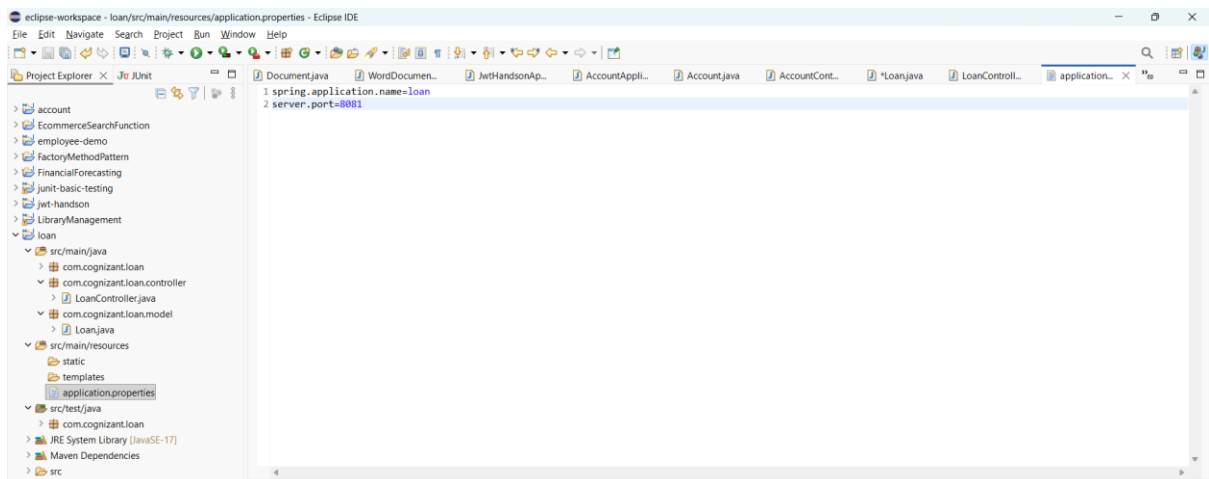

Step 16: Running the Loan Microservice Application on Port 8081

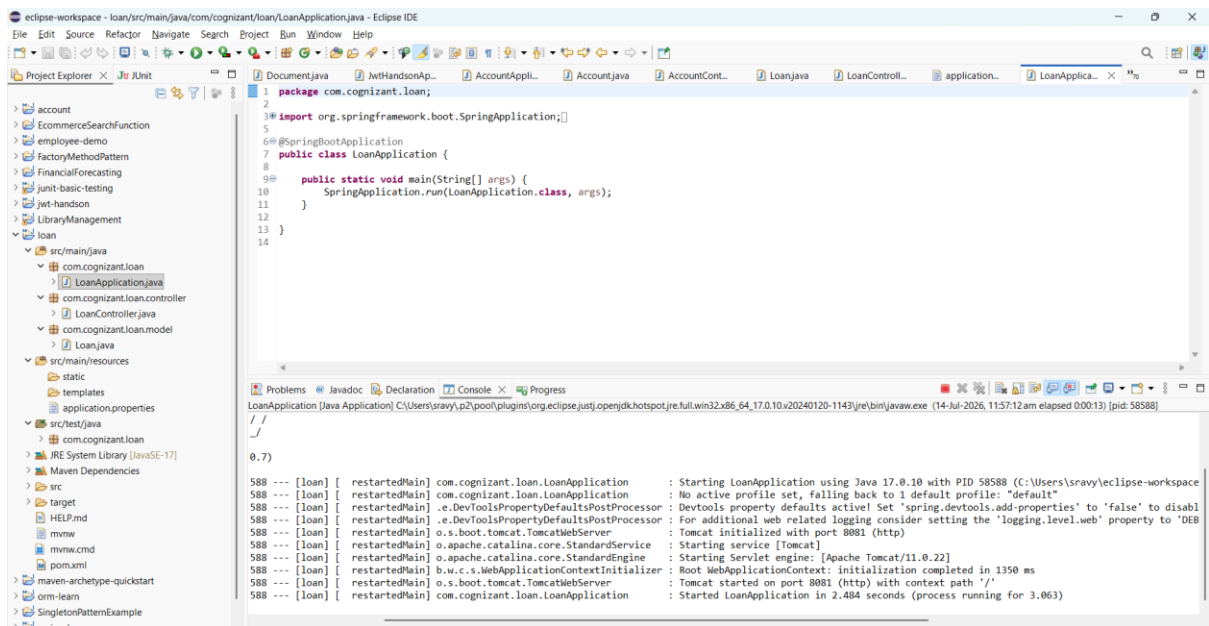

The screenshot shows the Eclipse IDE with the `LoanApplication.java` file open. The code is as follows:

```
1 package com.cognizant.loan;
2
3 import org.springframework.boot.SpringApplication;
4
5 @SpringBootApplication
6 public class LoanApplication {
7
8     public static void main(String[] args) {
9         SpringApplication.run(LoanApplication.class, args);
10    }
11 }
12
13
14
```

The console output shows the application starting successfully on port 8081:

```
LoanApplication [Java Application] C:\Users\sravj\p2\pool\plugins\org.eclipse.justi.openjdk.hotspot.jre.full.win32.x86_64_17.0.10.v20240120-1143\jre\bin\javaw.exe (14-Jul-2026, 11:57:12 am elapsed 0:00:13) [pid: 58588]
0.7)
588 --- [loan] [ restartedMain] com.cognizant.loan.LoanApplication : Starting LoanApplication using Java 17.0.10 with PID 58588 (C:\Users\sravj\workspace
588 --- [loan] [ restartedMain] com.cognizant.loan.LoanApplication : No active profile set, falling back to 1 default profile: "default"
588 --- [loan] [ restartedMain] .e.DevtoolsPropertyDefaultsPostProcessor : Devtools property defaults active! Set 'spring.devtools.add-properties' to 'false' to disabl
588 --- [loan] [ restartedMain] .e.DevtoolsPropertyDefaultsPostProcessor : For additional web related logging consider setting the 'logging.level.web' property to 'DEB
588 --- [loan] [ restartedMain] o.s.boot.tomcat.TomcatWebServer : Tomcat initialized with port 8081 (http)
588 --- [loan] [ restartedMain] o.s.boot.tomcat.TomcatWebServer : Starting service [Tomcat]
588 --- [loan] [ restartedMain] o.apache.catalina.core.StandardEngine : Starting Servlet engine: [Apache Tomcat/11.0.22]
588 --- [loan] [ restartedMain] b.w.c.s.WebApplicationContextInitializer : Root WebApplicationContext: initialization completed in 1350 ms
588 --- [loan] [ restartedMain] o.s.boot.tomcat.TomcatWebServer : Tomcat started on port 8081 (http) with context path '/'
588 --- [loan] [ restartedMain] com.cognizant.loan.LoanApplication : Started LoanApplication in 2.484 seconds (process running for 3.063)
```

Step 17: Testing the Loan Microservice in Browser on Port 8081



The screenshot shows a web browser with the URL `localhost:8081/loans/H009879872342`. The response is a JSON object:

```
{ "number": "H009879872342", "type": "car", "loan": 400000.0, "emi": 3258.0, "tenure": 18 }
```