



React

13 ReactJS-HOL

Step 1: Creating the Blogger React Application

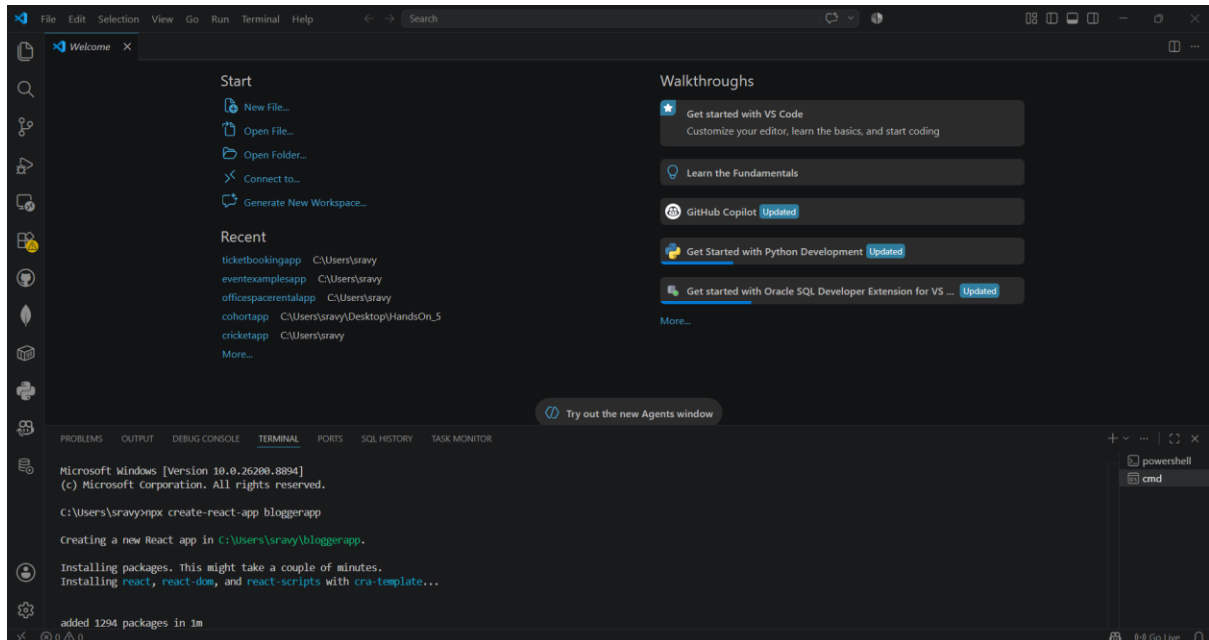


Step 2: Opening the Blogger Project in Visual Studio Code

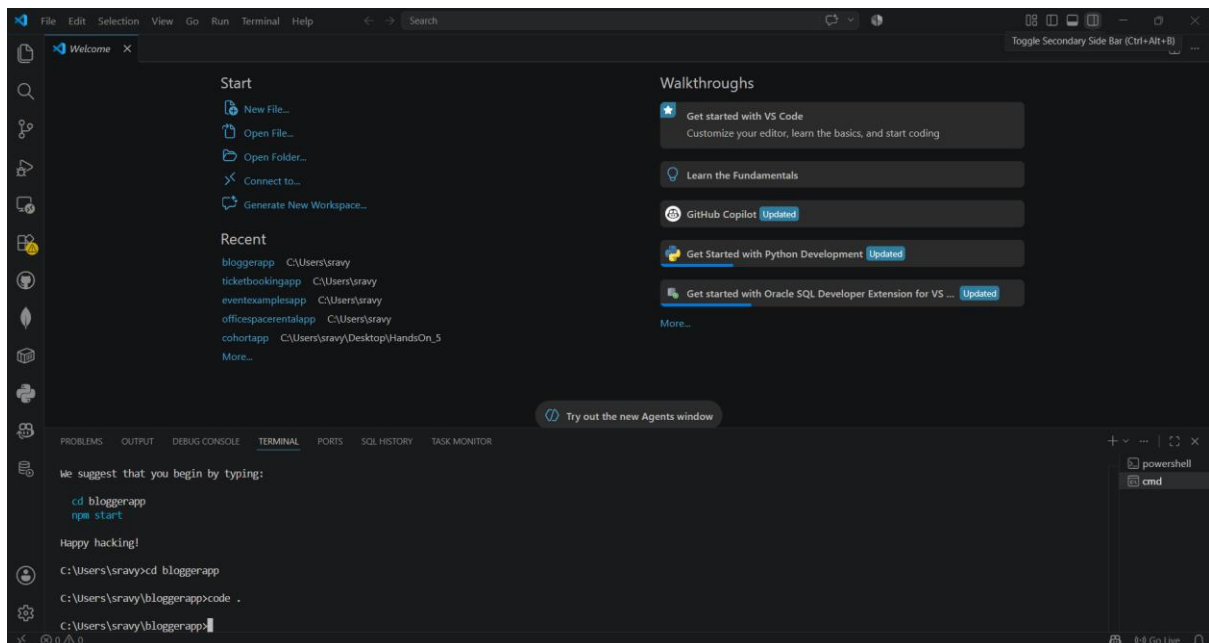


COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE

Step 3: Creating the Components for the Blogger Application

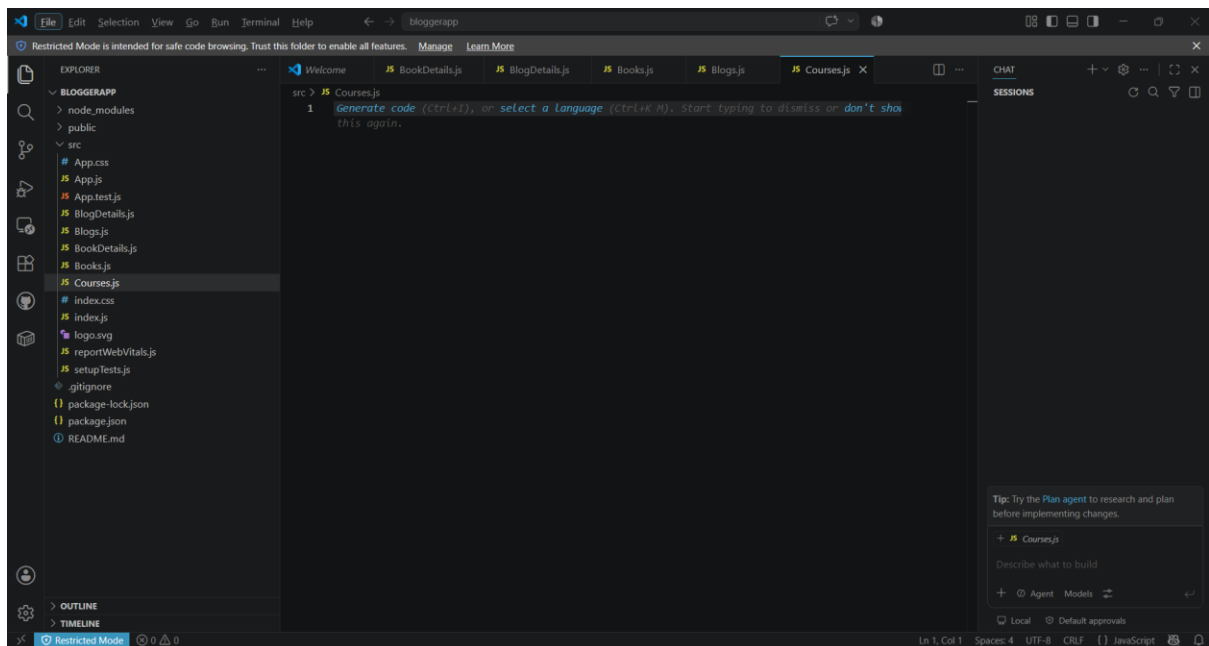


Step 4: Creating the Books Data Component

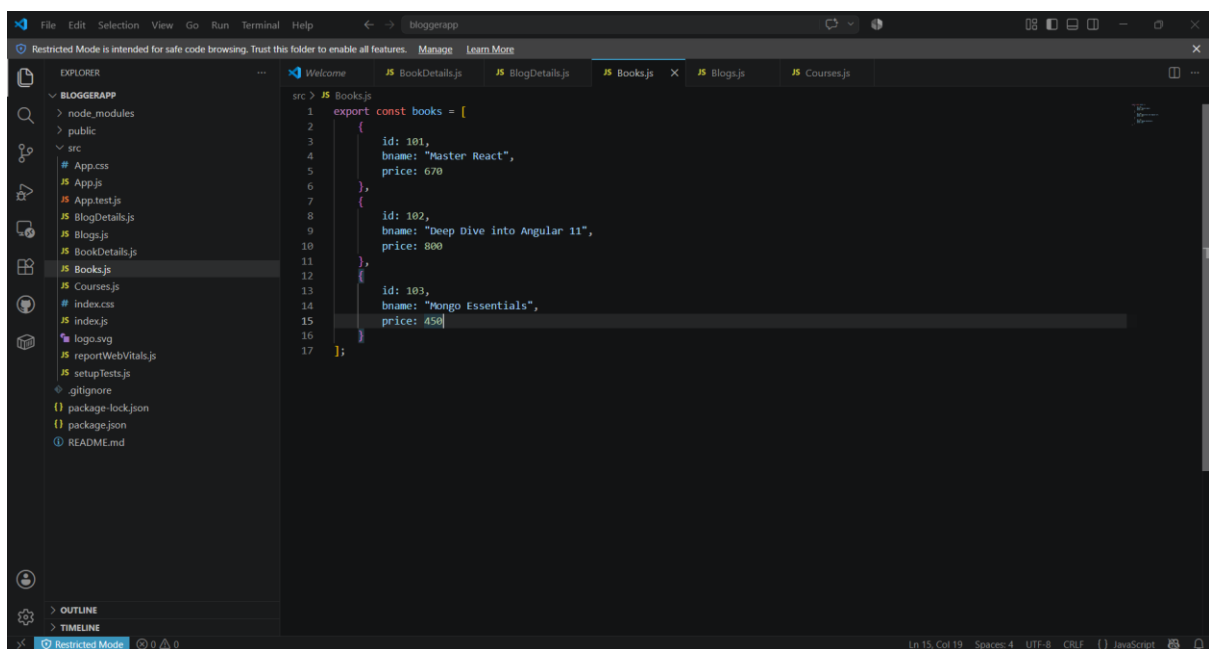

COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE


Step 5: Creating the Blog Data Component

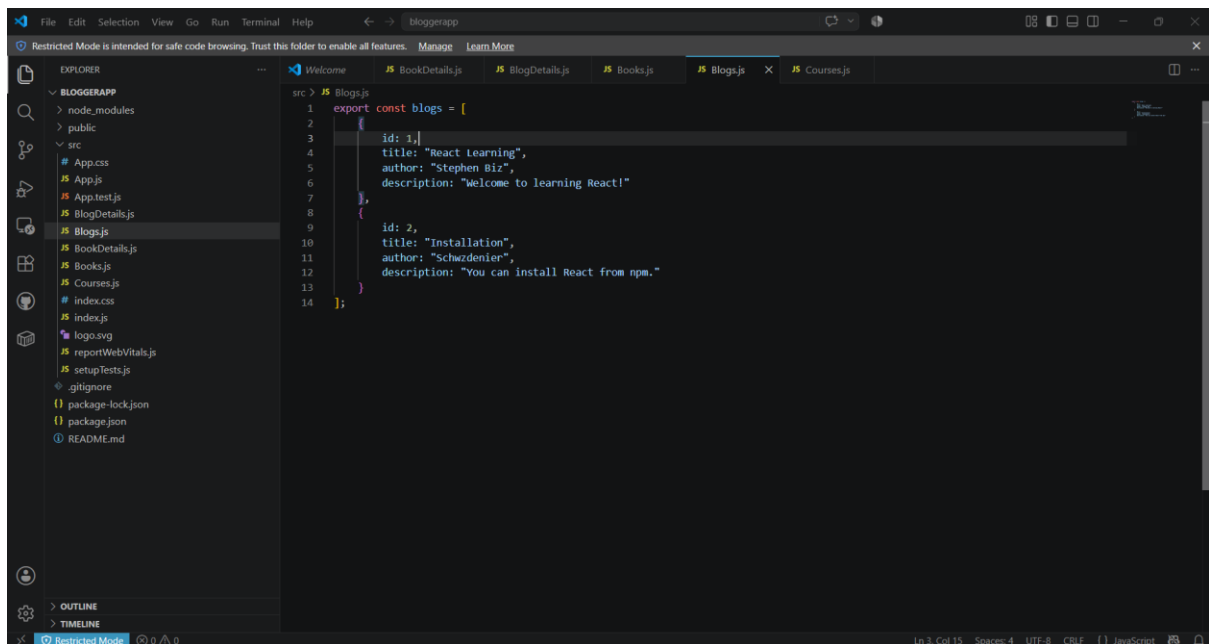

The screenshot shows the Visual Studio Code editor with the 'BloggerApp' project open. The Explorer sidebar on the left shows the file structure, with 'BlogDetails.js' selected under the 'src' directory. The main editor window displays the code for 'BlogDetails.js', which defines a constant array 'blogs' with two blog entries. The status bar at the bottom indicates 'Ln 3, Col 15', 'Spaces: 4', 'UTF-8', 'CRLF', and 'JavaScript'.

```
1 export const blogs = [
2   {
3     id: 1,
4     title: "React Learning",
5     author: "Stephen Biz",
6     description: "Welcome to learning React!"
7   },
8   {
9     id: 2,
10    title: "Installation",
11    author: "Schwzdenier",
12    description: "You can install React from npm."
13  }
14 ];
```

Step 6: Creating the Course Data Component

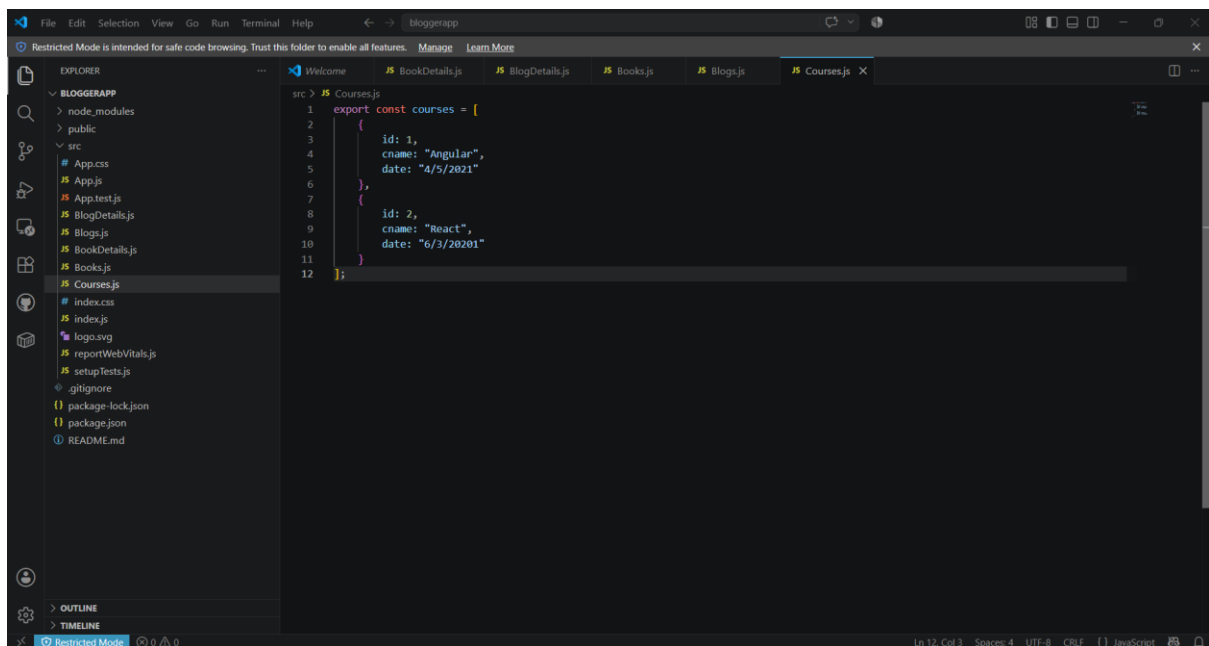


The screenshot shows the Visual Studio Code editor with the 'BloggerApp' project open. The Explorer sidebar on the left shows the file structure, with 'Courses.js' selected under the 'src' directory. The main editor window displays the code for 'Courses.js', which defines a constant array 'courses' with two course entries. The status bar at the bottom indicates 'Ln 12, Col 3', 'Spaces: 4', 'UTF-8', 'CRLF', and 'JavaScript'.

```
1 export const courses = [
2   {
3     id: 1,
4     cname: "Angular",
5     date: "4/5/2021"
6   },
7   {
8     id: 2,
9     cname: "React",
10    date: "6/3/20201"
11  }
12 ];
```

COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE


Step 7: Implementing the Book Details Component

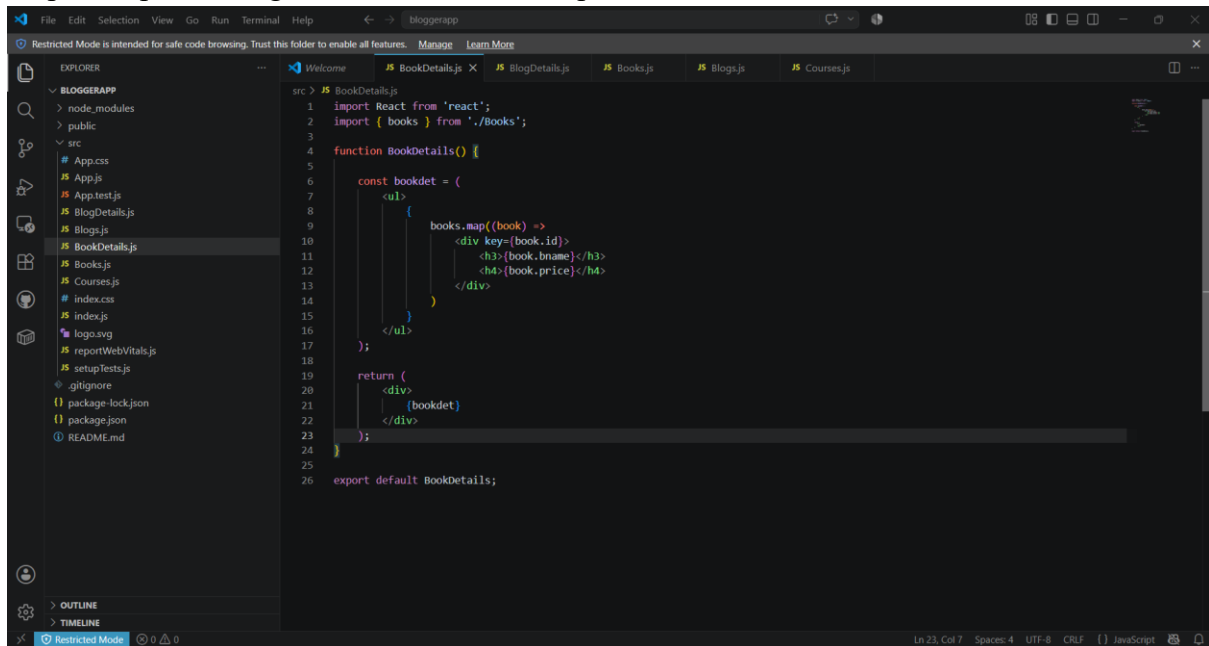

The screenshot shows the Visual Studio Code editor with the 'BookDetails.js' file open. The file explorer on the left shows the project structure for 'BLOGGERAPP'. The code in 'BookDetails.js' is as follows:

```
1 import React from 'react';
2 import { books } from './Books';
3
4 function BookDetails() {
5
6     const bookdet = (
7         <ul>
8             {
9                 books.map((book) =>
10                     <div key={book.id}>
11                         <h3>{book.bname}</h3>
12                         <h4>{book.price}</h4>
13                     </div>
14                 )
15             }
16         </ul>
17     );
18
19     return (
20         <div>
21             {bookdet}
22         </div>
23     );
24 }
25
26 export default BookDetails;
```

Step 8: Implementing the Blog Details Component

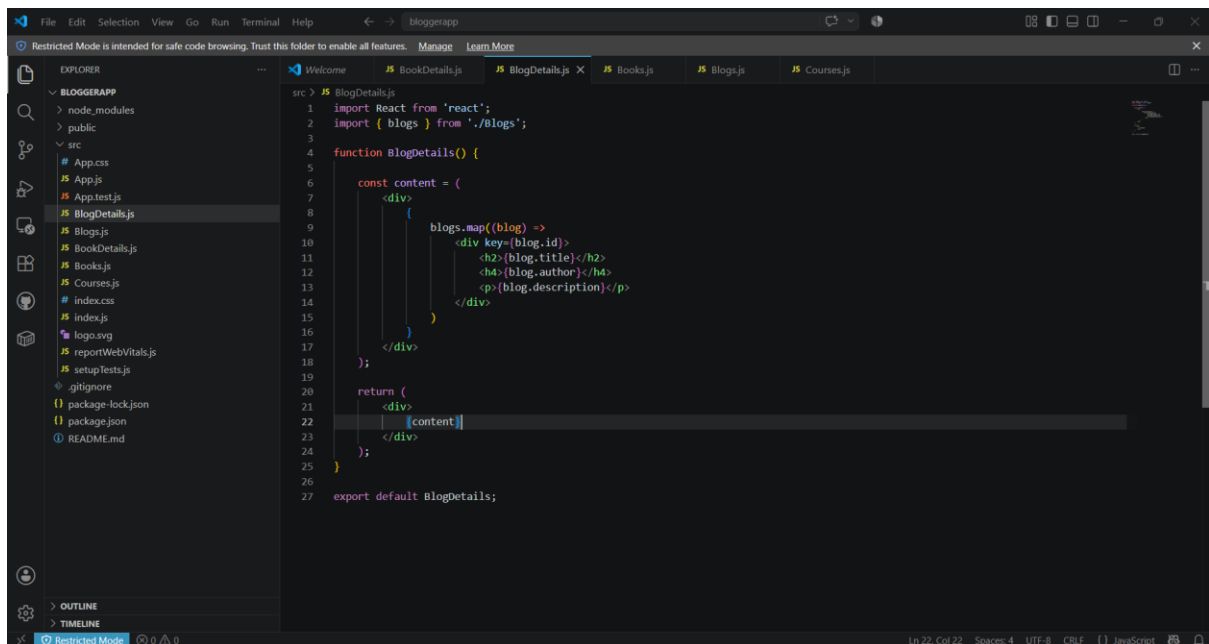


The screenshot shows the Visual Studio Code editor with the 'BlogDetails.js' file open. The file explorer on the left shows the project structure for 'BLOGGERAPP'. The code in 'BlogDetails.js' is as follows:

```
1 import React from 'react';
2 import { blogs } from './Blogs';
3
4 function BlogDetails() {
5
6     const content = (
7         <div>
8             {
9                 blogs.map((blog) =>
10                     <div key={blog.id}>
11                         <h2>{blog.title}</h2>
12                         <h4>{blog.author}</h4>
13                         <p>{blog.description}</p>
14                     </div>
15                 )
16             }
17         </div>
18     );
19
20     return (
21         <div>
22             {content}
23         </div>
24     );
25 }
26
27 export default BlogDetails;
```

COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE


Step 9: Implementing the Course Details Component

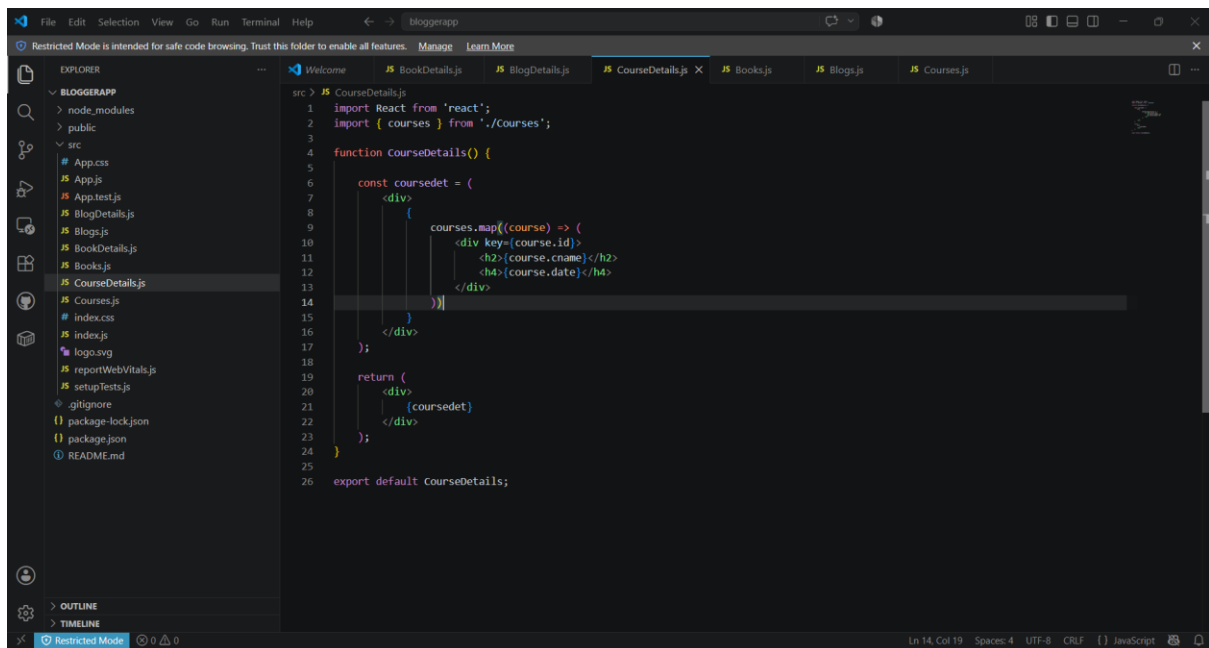

The screenshot shows the Visual Studio Code editor with the 'bloggerapp' project open. The Explorer sidebar on the left shows the file structure, with 'CourseDetails.js' selected under the 'src' directory. The main editor window displays the code for 'CourseDetails.js'. The code imports 'React' and 'courses' from './Courses', and defines a 'CourseDetails' function that returns a JSX element. The JSX element consists of a 'div' containing a 'div' with a 'map' function that iterates over 'courses' and renders 'h2' and 'h4' tags for each course's 'cname' and 'date' respectively. The status bar at the bottom indicates 'Ln 14, Col 19', 'Spaces: 4', 'UTF-8', 'CRLF', and 'JavaScript'.

```
src > JS CourseDetails.js
1  import React from 'react';
2  import { courses } from './Courses';
3
4  function CourseDetails() {
5
6      const coursedet = (
7          <div>
8              {
9                  courses.map((course) => (
10                     <div key={course.id}>
11                         <h2>{course.cname}</h2>
12                         <h4>{course.date}</h4>
13                     </div>
14                 )
15             }
16         </div>
17     );
18
19     return (
20         <div>
21             {coursedet}
22         </div>
23     );
24
25     export default CourseDetails;
26
```


Step 10: Adding CSS Styles for the Blogger Application

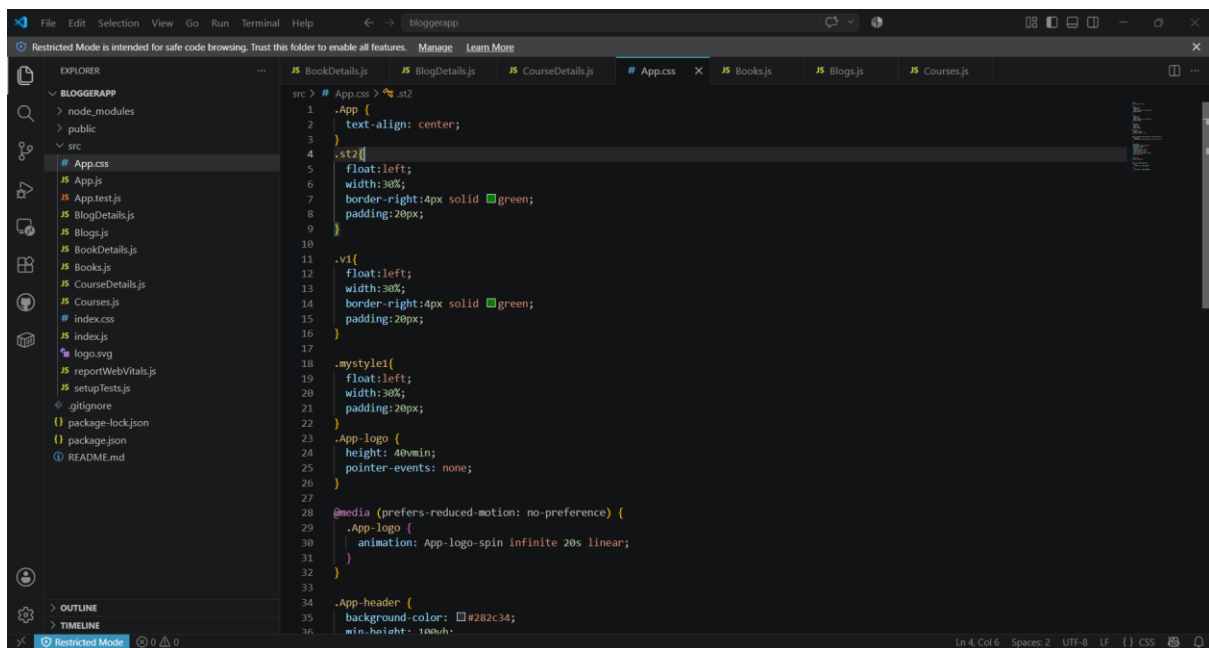


The screenshot shows the Visual Studio Code editor with the 'bloggerapp' project open. The Explorer sidebar on the left shows the file structure, with 'App.css' selected under the 'src' directory. The main editor window displays the code for 'App.css'. The code defines several CSS classes: '.App' with 'text-align: center;', '.st2' with 'float: left;', 'width: 30%;', 'border-right: 4px solid green;', and 'padding: 20px;'; '.v1' with 'float: left;', 'width: 30%;', 'border-right: 4px solid green;', and 'padding: 20px;'; '.mystyle1' with 'float: left;', 'width: 30%;', and 'padding: 20px;'; '.App-logo' with 'height: 40vmin;', 'pointer-events: none;'; and a media query '@media (prefers-reduced-motion: no-preference)' that animates '.App-logo' with 'animation: App-logo-spin infinite 20s linear;'. The status bar at the bottom indicates 'Ln 4, Col 6', 'Spaces: 2', 'UTF-8', 'LF', and 'CSS'.

```
src > # App.css > st2
1  .App {
2      text-align: center;
3  }
4
5  .st2 {
6      float: left;
7      width: 30%;
8      border-right: 4px solid green;
9      padding: 20px;
10 }
11
12 .v1 {
13     float: left;
14     width: 30%;
15     border-right: 4px solid green;
16     padding: 20px;
17 }
18
19 .mystyle1 {
20     float: left;
21     width: 30%;
22     padding: 20px;
23 }
24
25 .App-logo {
26     height: 40vmin;
27     pointer-events: none;
28 }
29
30 @media (prefers-reduced-motion: no-preference) {
31     .App-logo {
32         animation: App-logo-spin infinite 20s linear;
33     }
34 }
35
36 .App-header {
37     background-color: #282c34;
38     min-height: 100px;
39 }
```

COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE

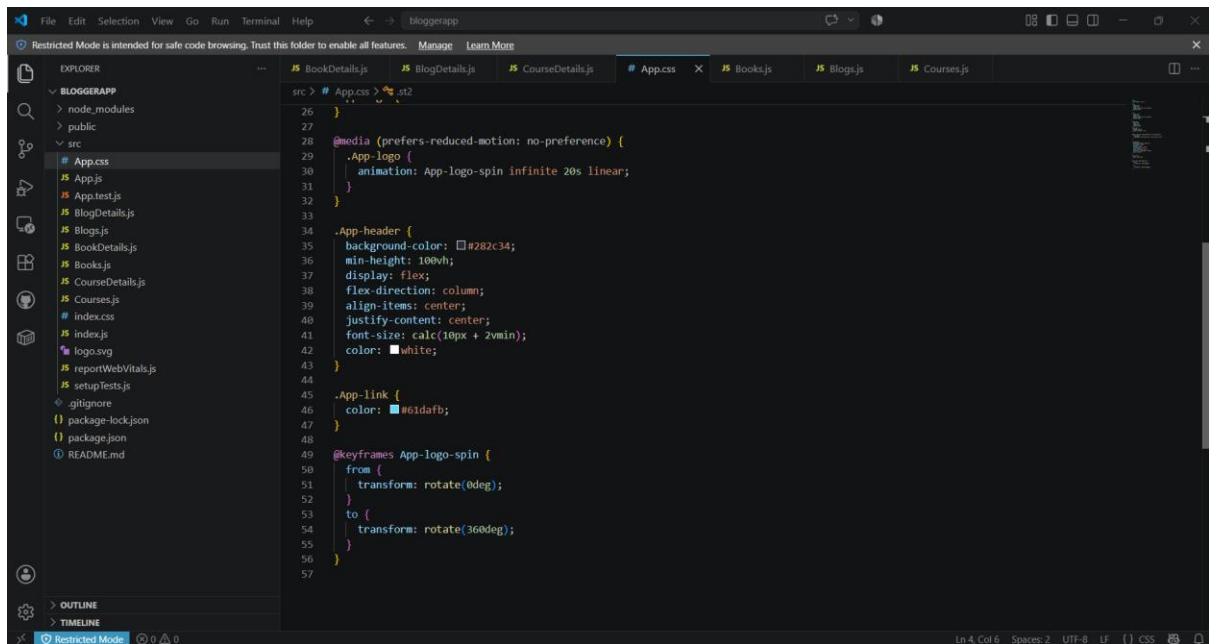


Step 11: Integrating All Components in App.js

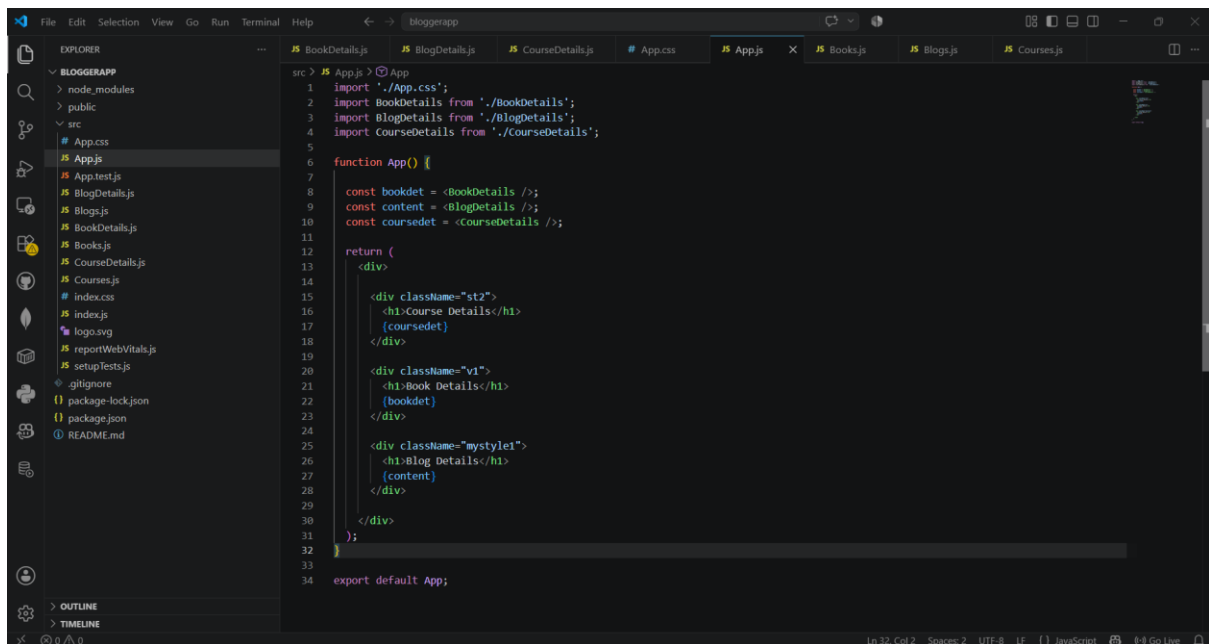

COGNIZANT DIGITAL NURTURE 5.0 – JAVA FSE

Step 12: Displaying the Final Blogger Application Output

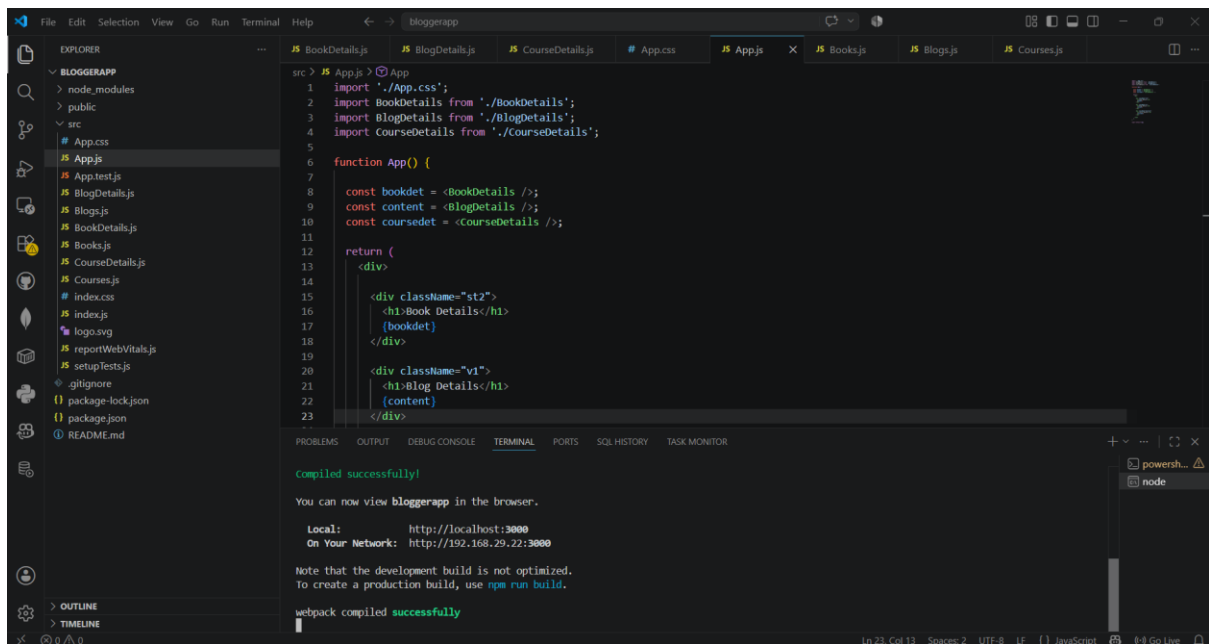

The screenshot shows the Visual Studio Code editor with the 'App.js' file open. The code defines an 'App' function that returns a JSX element with three sections: 'Book Details', 'Blog Details', and 'Course Details'. The terminal at the bottom shows the following output:

```
Compiled successfully!

You can now view bloggerapp in the browser.

Local:      http://localhost:3000
On Your Network:  http://192.168.29.22:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

Step 13: Displaying the Final Blogger Application Output

