```
  GNU nano 7.2
#include <stdio.h>
#include <unistd.h>
#include <signal.h>

volatile sig_atomic_t received = 0;

void handler(int sig) {
    received = sig;
}

int main() {
    struct sigaction sa = {0};
    sa.sa_handler = handler;
    sigemptyset(&sa.sa_mask);

    if (sigaction(SIGUSR1, &sa, NULL) == -1) {
        perror("sigaction");
        return 1;
    }

    printf("PID: %d\n", getpid());
    printf("Waiting for SIGUSR1...\n");

    while (!received)
        pause();

    printf("Signal received: %d\n", (int)received);
    return 0;
}
```

```
 GNU nano 7.2
#include <stdio.h>
#include <unistd.h>
#include <signal.h>

volatile sig_atomic_t interrupted = 0;

void handler(int sig) {
    interrupted = 1;
}

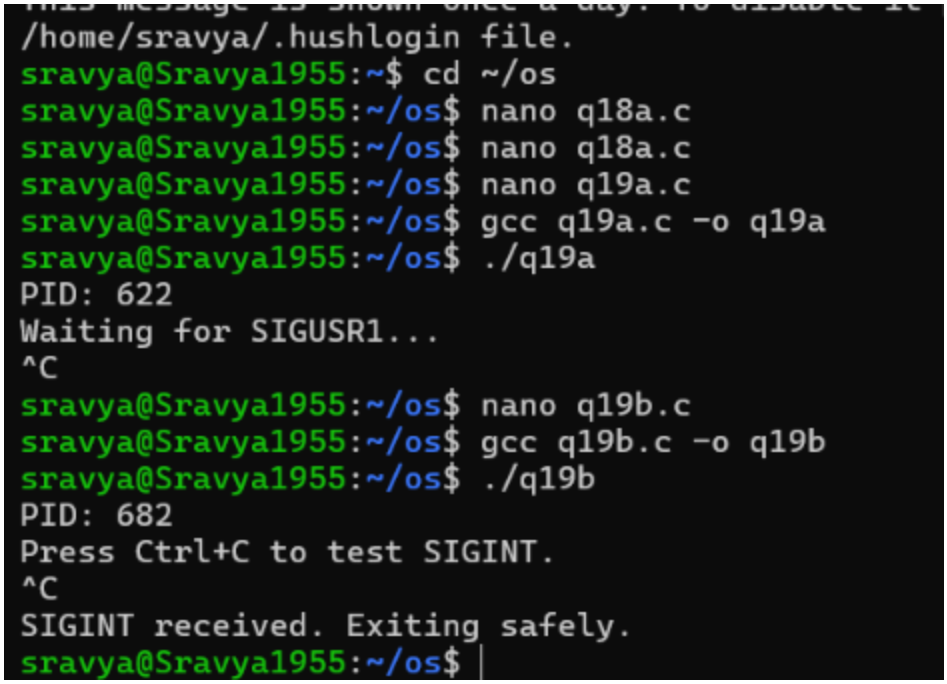
int main() {
    struct sigaction sa = {0};
    sa.sa_handler = handler;
    sigemptyset(&sa.sa_mask);

    if (sigaction(SIGINT, &sa, NULL) == -1) {
        perror("sigaction");
        return 1;
    }

    printf("PID: %d\n", getpid());
    printf("Press Ctrl+C to test SIGINT.\n");

    while (!interrupted)
        pause();

    printf("\nSIGINT received. Exiting safely.\n");
    return 0;
}
```


/home/sravya/.hushlogin file.
sravya@Sravya1955:~$ cd ~/os
sravya@Sravya1955:~/os$ nano q18a.c
sravya@Sravya1955:~/os$ nano q18a.c
sravya@Sravya1955:~/os$ nano q19a.c
sravya@Sravya1955:~/os$ gcc q19a.c -o q19a
sravya@Sravya1955:~/os$ ./q19a
PID: 622
Waiting for SIGUSR1...
^C
sravya@Sravya1955:~/os$ nano q19b.c
sravya@Sravya1955:~/os$ gcc q19b.c -o q19b
sravya@Sravya1955:~/os$ ./q19b
PID: 682
Press Ctrl+C to test SIGINT.
^C
SIGINT received. Exiting safely.
sravya@Sravya1955:~/os$