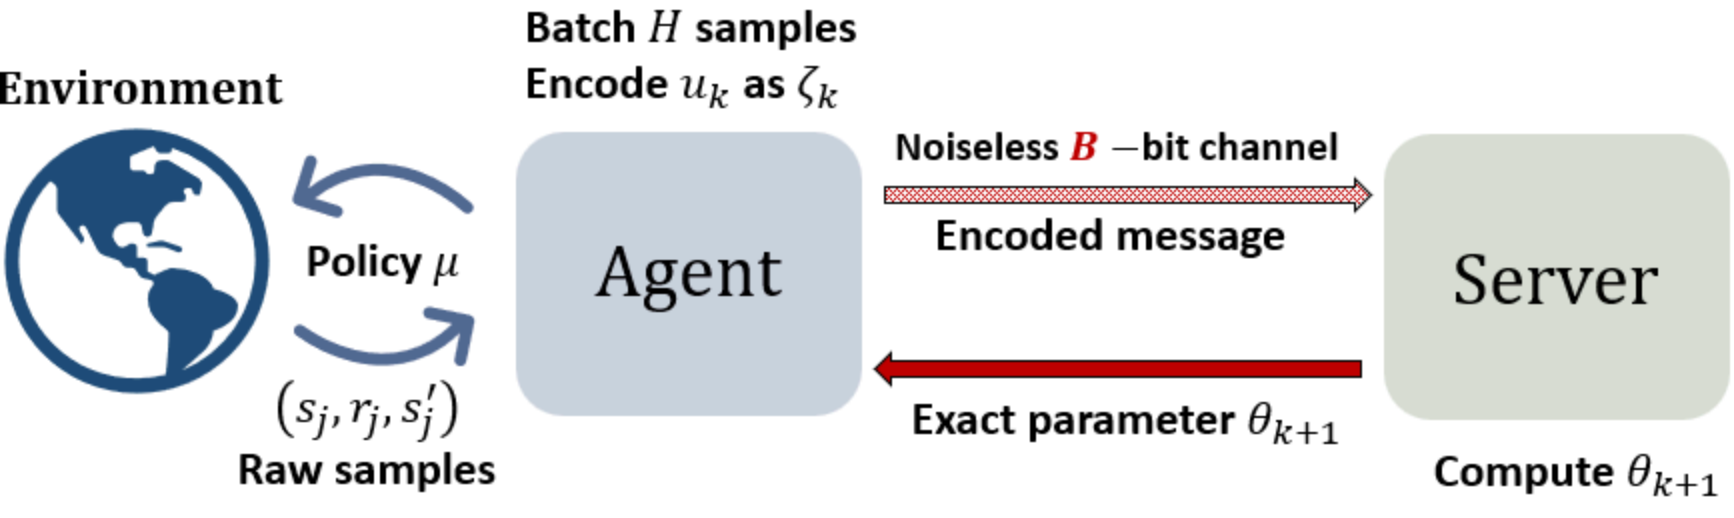
Environment
Batch H samples
Encode u_k as ζ_k
Policy μ
(s_j, r_j, s_j')
Raw samples
Agent
Noiseless B −bit channel
Encoded message
Exact parameter θ_{k+1}
Server
Compute θ_{k+1}