

Configured S3 Bucket Using s3fs on a Linux System

created an s3 bucket-s3bkps

Created IAM user for accessing the s3-

AWS Credentials

access key

AKIA6FBUAJF27HRFEPGD

secret key

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

---->>created user --spot1,spot2,spot3,spot4

___--->>created a group --s3users

----->>add the users to the group s3users

mounted the s3 using the S3FS -----

s3fs s3bkps ~/s3bucket -o allow_other,uid=1000,gid=\$(getent group s3users | cut -d: -f3)

add it in the fstab---

s3fs#s3bkps /home/user/s3bucket fuse _netdev,allow_other,uid=1000,gid=\$(getent group s3users | cut -d: -f3) 0 0

Mount point

s3fs 16E 0 16E 0% /home/user/s3bucket

The mount point is accessible by the 4 user in /home/user/s3bucket

```
Activities Terminal Jul 15 23:02 100 %
root@user-HP-Laptop-15q-ds0xxx: /home/spot1
root@user-HP-Laptop-15q-ds0xxx: /home/user
root@user-HP-Laptop-15q-ds0xxx:~# su - spot1
$ sudo su
[sudo] password for spot1:
root@user-HP-Laptop-15q-ds0xxx:/home/spot1# df -h

```

Filesystem	Size	Used	Avail	Use%	Mounted on
tmpfs	374M	2.0M	372M	1%	/run
/dev/sda3	199G	16G	88G	16%	/
tmpfs	1.9G	3.5M	1.9G	1%	/dev/shm
tmpfs	5.0M	4.0K	5.0M	1%	/run/lock
efivarfs	16E	0	-5.1K	0%	/sys/firmware/efi/efivars
/dev/sda2	512M	6.1M	506M	2%	/boot/efi
s3fs	16E	0	16E	0%	/home/user/s3bucket
tmpfs	374M	6.8M	368M	2%	/run/user/1000

```
root@user-HP-Laptop-15q-ds0xxx:/home/spot1#
```

Activities Terminal Jul 15 23:14 100 %

root@user-HP-Laptop-15q-ds0xxx: /home/user/s3bucket


root@user-HP-Laptop-15q-ds0xxx: /home/user

root@user-HP-Laptop-15q-ds0xxx: /home/user/s3bucket

```
GNU nano 6.2 /etc/fstab
# /etc/fstab: static file system information.
#
# Use 'blkid' to print the universally unique identifier for a
# device; this may be used with UUID= as a more robust way to name devices
# that works even if disks are added and removed. See fstab(5).
#
# <file system> <mount point> <type> <options> <dump> <pass>
# / was on /dev/sda3 during installation
UUID=adccf5f1-05c1-4fcb-9ff5-f84c19f3f322 / ext4 errors=remount-ro 0 1
# /boot/efi was on /dev/sda2 during installation
UUID=8491-6D0B /boot/efi vfat umask=0077 0 1
/swapfile none swap sw 0 0
#s3fs#s3bkps /home/user/s3bucket fuse netdev,allow_other,uid=1000,gid=$(getent group s3users | cut -d: -f3) 0 0
s3fs#s3bkps /home/user/s3bucket fuse netdev,passwd_file=/root/.passwd-s3fs,allow_other 0 0
```

Read 14 lines

^G Help	^O Write Out	^W Where Is	^K Cut	^T Execute	^C Location	M-U Undo	M-A Set Mark	M-T To Bracket
^X Exit	^R Read File	^A Replace	^U Paste	^J Justify	^_ Go To Line	M-E Redo	M-C Copy	^Q Where Was

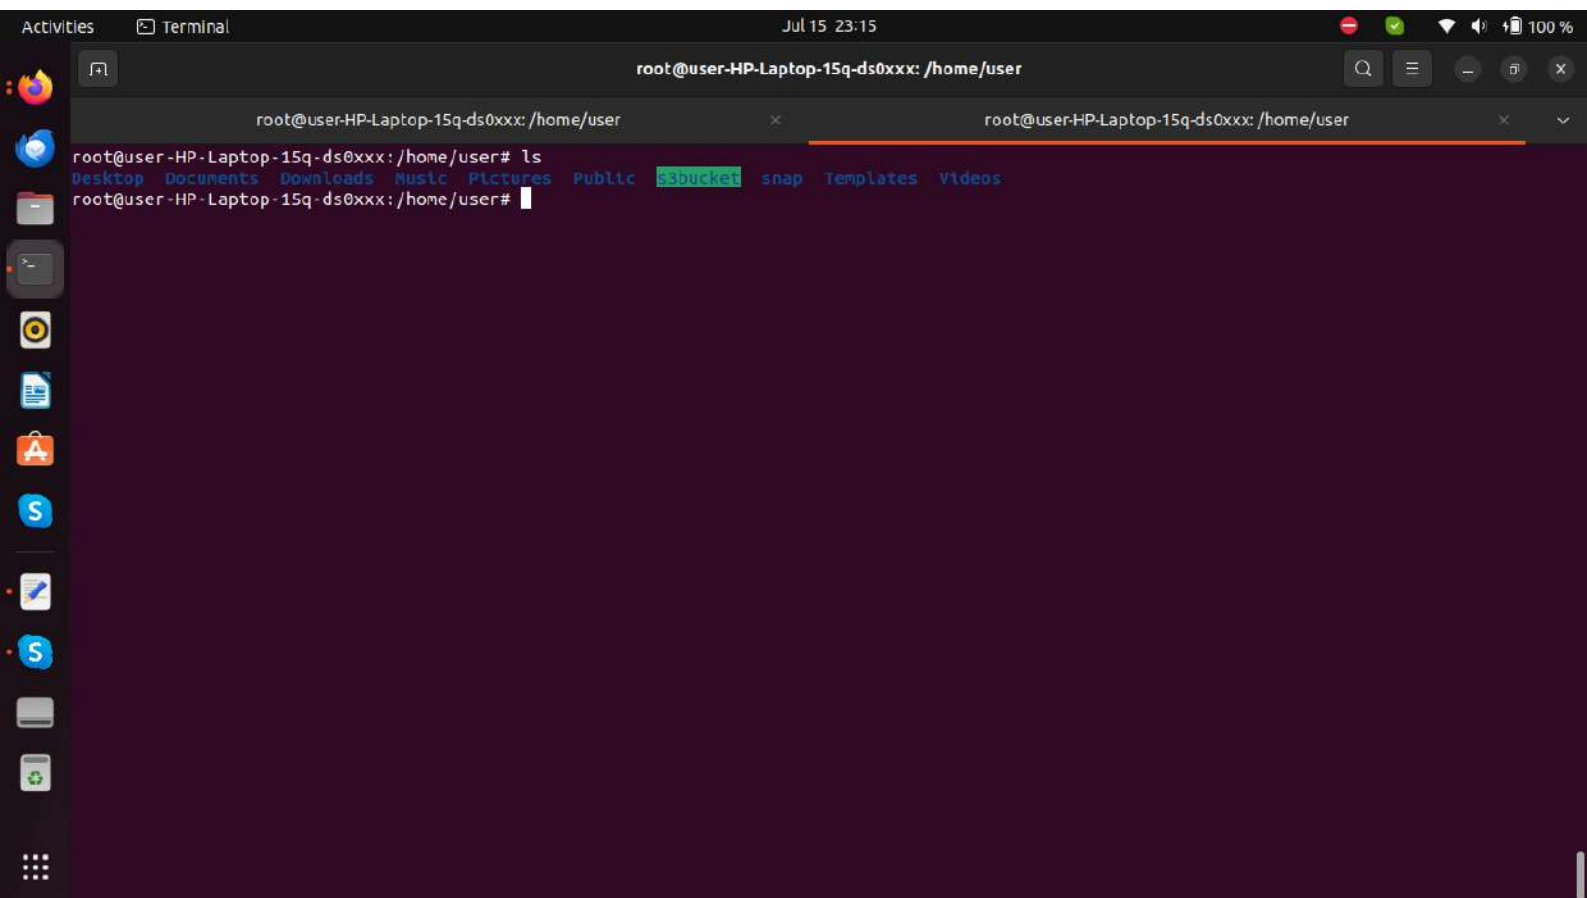

ActivitiesTerminalJul 15 23:23root@user-HP-Laptop-15q-ds0xxx: ~

root@user-HP-Laptop-15q-ds0xxx: /home/userroot@user-HP-Laptop-15q-ds0xxx: /home/userroot@user-HP-Laptop-15q-ds0xxx: ~

user@user-HP-Laptop-15q-ds0xxx:~\$ sudo -i
[sudo] password for user:
root@user-HP-Laptop-15q-ds0xxx:~# getent group s3users
s3users:x:1006:spot1,spot2,spot3,spot4
root@user-HP-Laptop-15q-ds0xxx:~# df -h
Filesystem Size Used Avail Use% Mounted on
tmpfs 374M 2.0M 372M 1% /run
/dev/sda3 109G 16G 88G 16% /
tmpfs 1.9G 3.5M 1.9G 1% /dev/shm
tmpfs 5.0M 4.0K 5.0M 1% /run/lock
efivarfs 16E 0 -5.1K 0% /sys/firmware/efi/eflvars
/dev/sda2 512M 6.1M 506M 2% /boot/efi
s3fs 16E 0 16E 0% /home/user/s3bucket
tmpfs 374M 6.8M 368M 2% /run/user/1000
root@user-HP-Laptop-15q-ds0xxx:~#

Activities Terminal Jul 15 22:37 100 %

root@user-HP-Laptop-15q-ds0xxx: ~

root@user-HP-Laptop-15q-ds0xxx: /home/spot1

root@user-HP-Laptop-15q-ds0xxx:~# df -h

Filesystem	Size	Used	Avail	Use%	Mounted on
tmpfs	374M	1.9M	373M	1%	/run
/dev/sda3	109G	16G	88G	16%	/
tmpfs	1.9G	3.5M	1.9G	1%	/dev/shm
tmpfs	5.0M	4.0K	5.0M	1%	/run/lock
efivarfs	16E	0	-5.1K	0%	/sys/firmware/efi/efivars
/dev/sda2	512M	6.1M	506M	2%	/boot/efi
s3fs	16E	0	16E	0%	/home/user/s3bucket
tmpfs	374M	6.8M	368M	2%	/run/user/1000

root@user-HP-Laptop-15q-ds0xxx:~#