

WEBTECH LAB SHEET-4

Branch/ Class: B.Tech

Date: 11-03-2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE



Student name: JAI SHREE



Reg. no.: 23BCE7973



2. Use MongoDB to implement the following DB operations for a Zoo



1. Create a database called 'animal' and *write* a MongoDB query to select database as 'animal'.
2. Write a MongoDB query to display all the databases.
3. Create a collection called 'wild_animals'.(use capping) and Create a collection called 'domestic_animals'.
4. Add 5 wild_animal details to the collection named 'wild_animals'. Each document consists of following fields as animal_name, nature (harm or harmless), favorite_foods (meat, rabbits, deer etc) as array, care_taker_name, life span (in years), timestamp (when the animal registered at the Zoo) and expenses.
5. Add 5 domestic-animal details to the collection named 'domestic_animals'. Each document consists of following fields as animal_name, gender (male or female), favorite_foods (meat, rabbits, deer etc) as array, animal_petname, life span (in years), timestamp (when the animal registered at the Zoo) and expenses.
6. Write a MongoDB query to display all documents available in wild_animals and domestic_animals.
7. Write a MongoDB query to display only animal name and expenses in all the collection of the database
8. Write a MongoDB query to display domestic_animals whose life is a particular year
9. Write a MongoDB query to display wild_animals available under a particular care_taker
10. Write a MongoDB query to display animal name, favorite_foods and expenses details whose lifespan is more than 5 years.

— 🔍 +

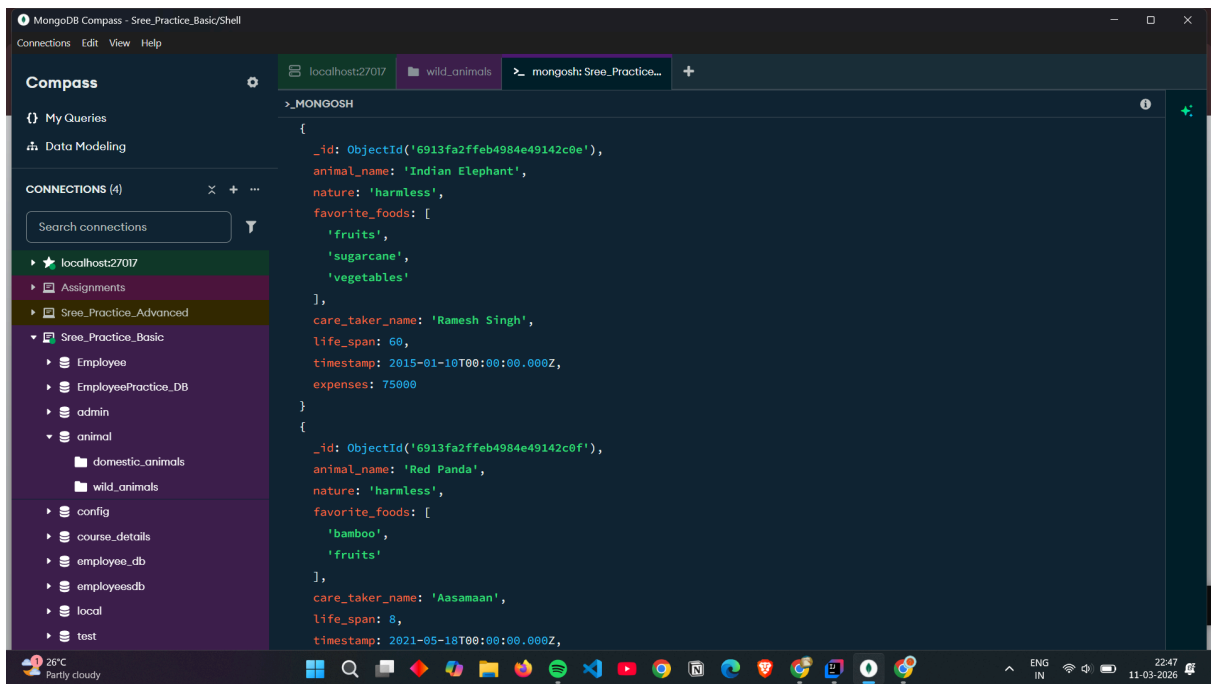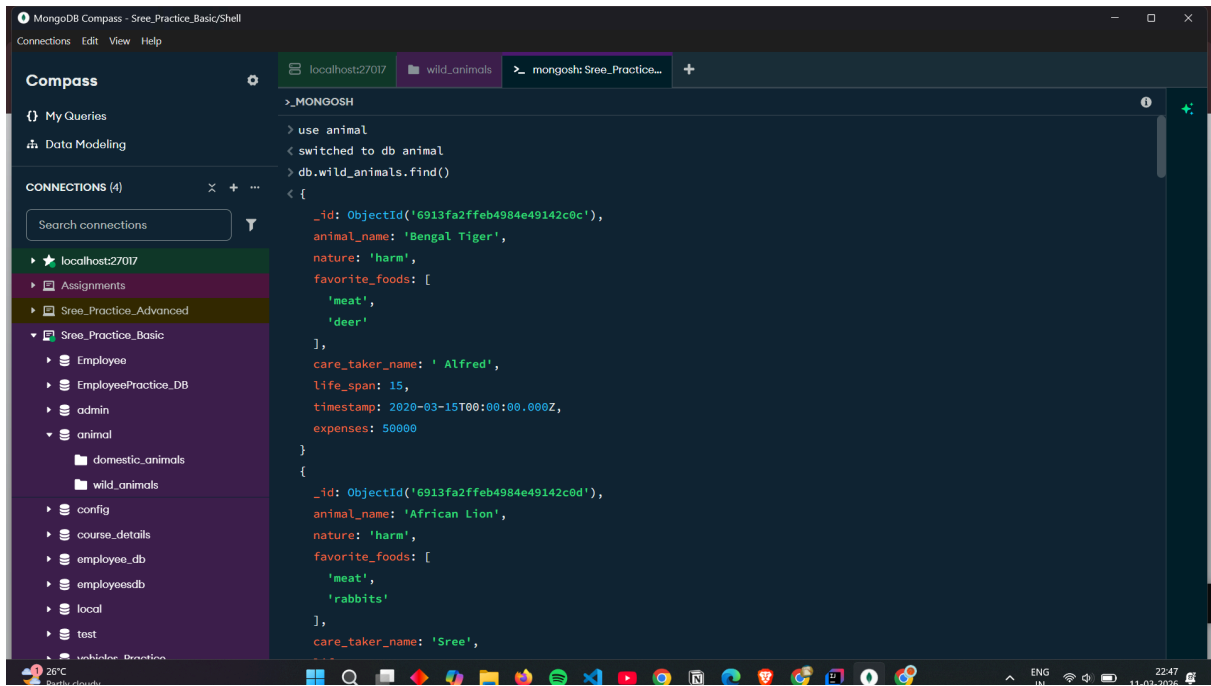

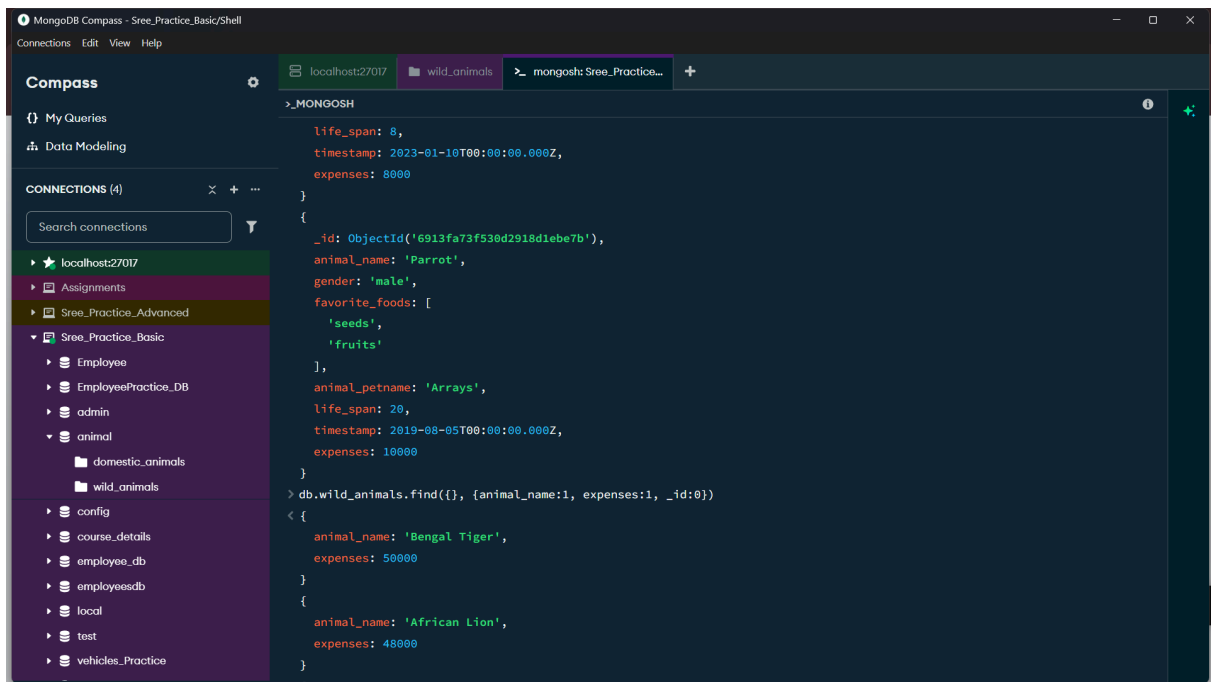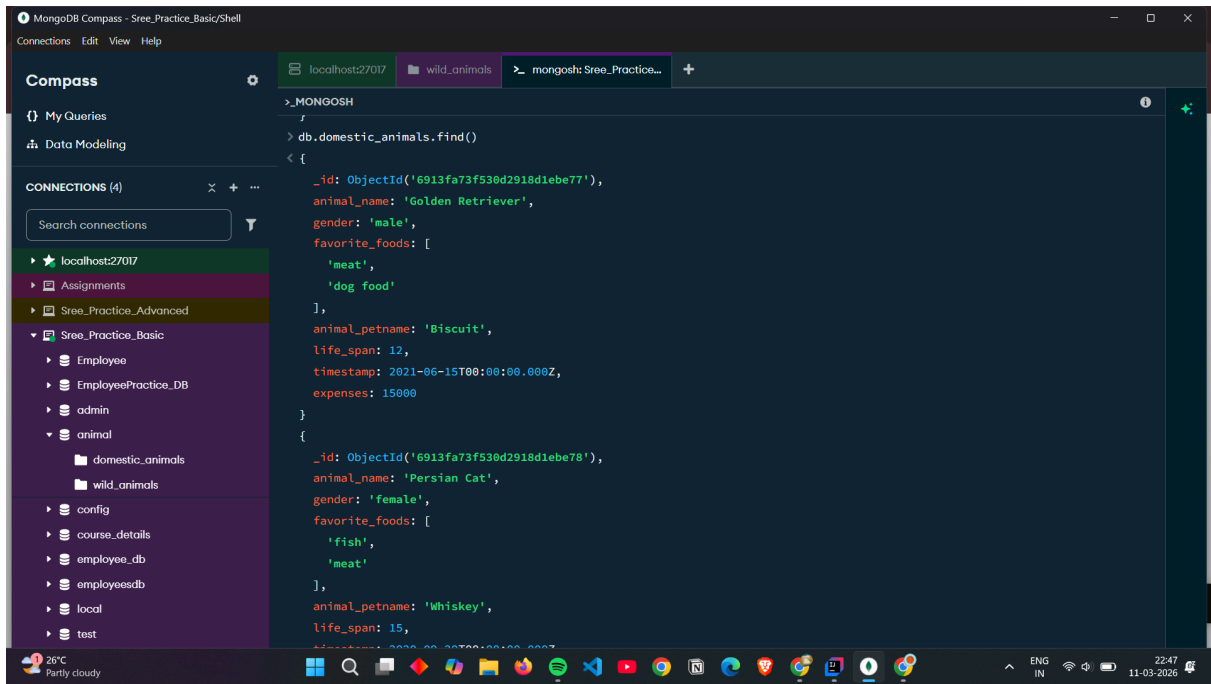

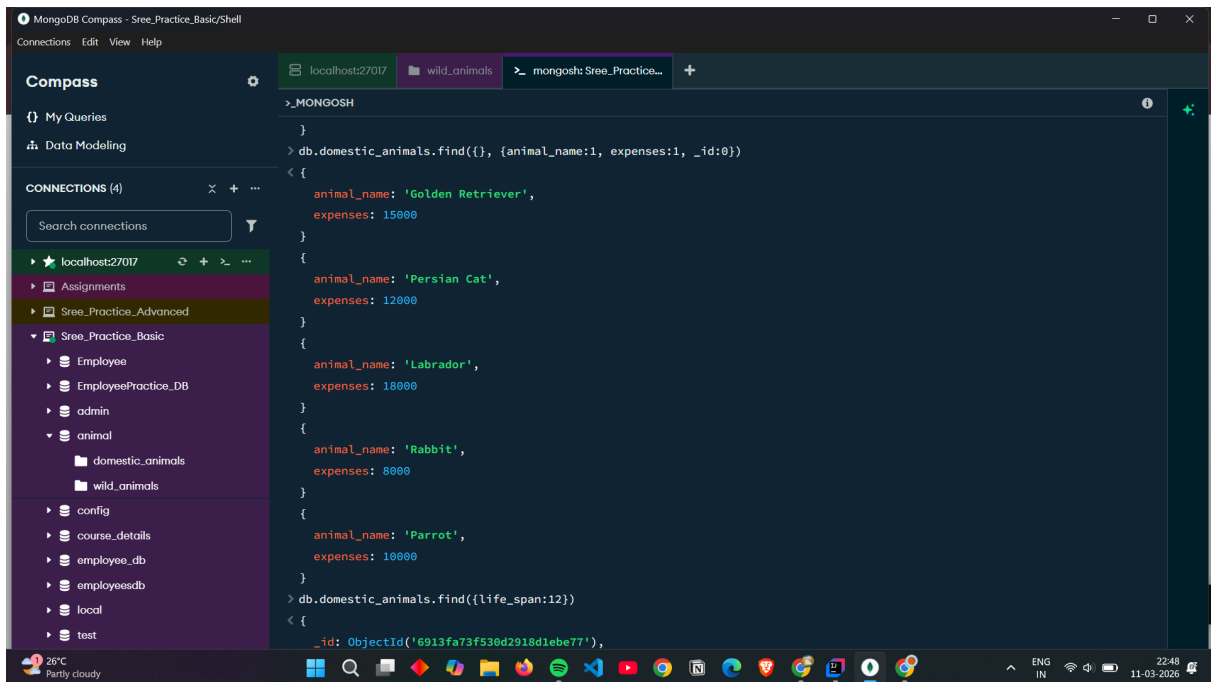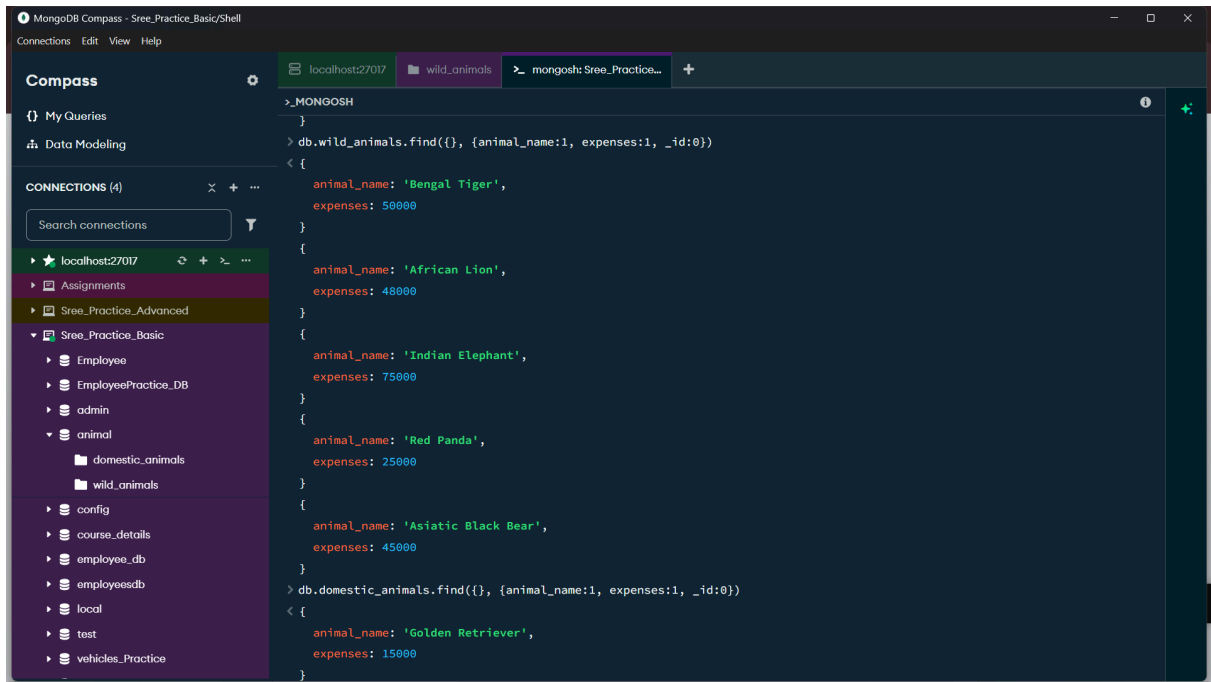

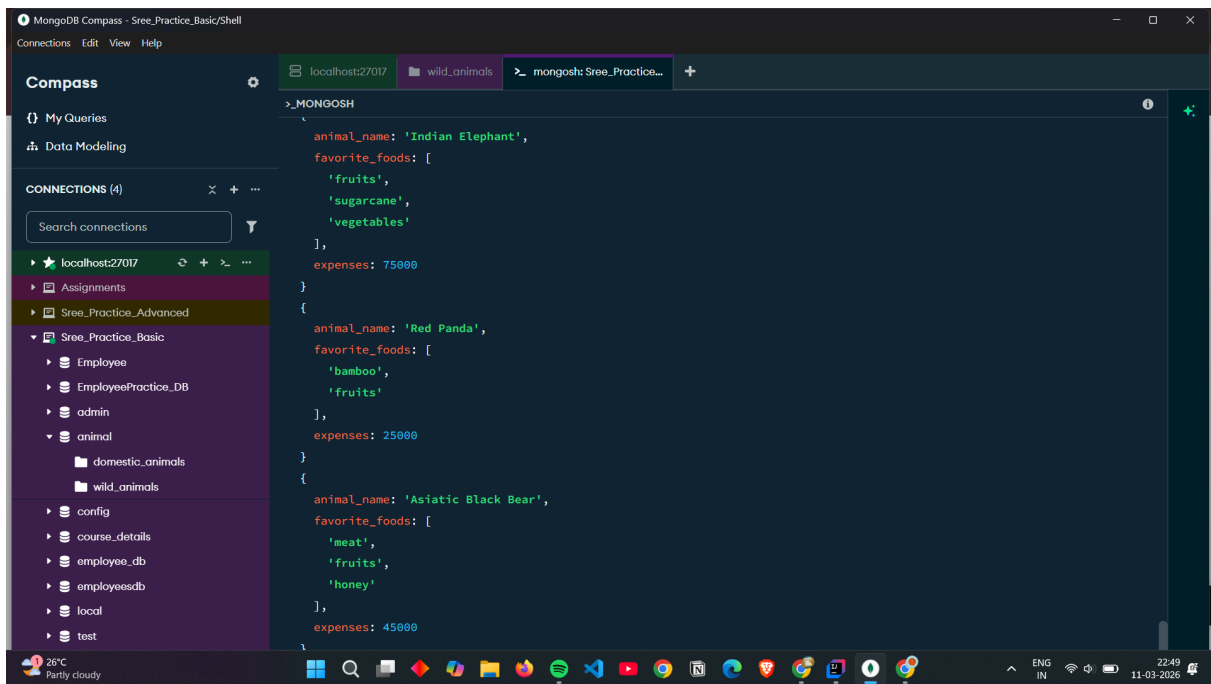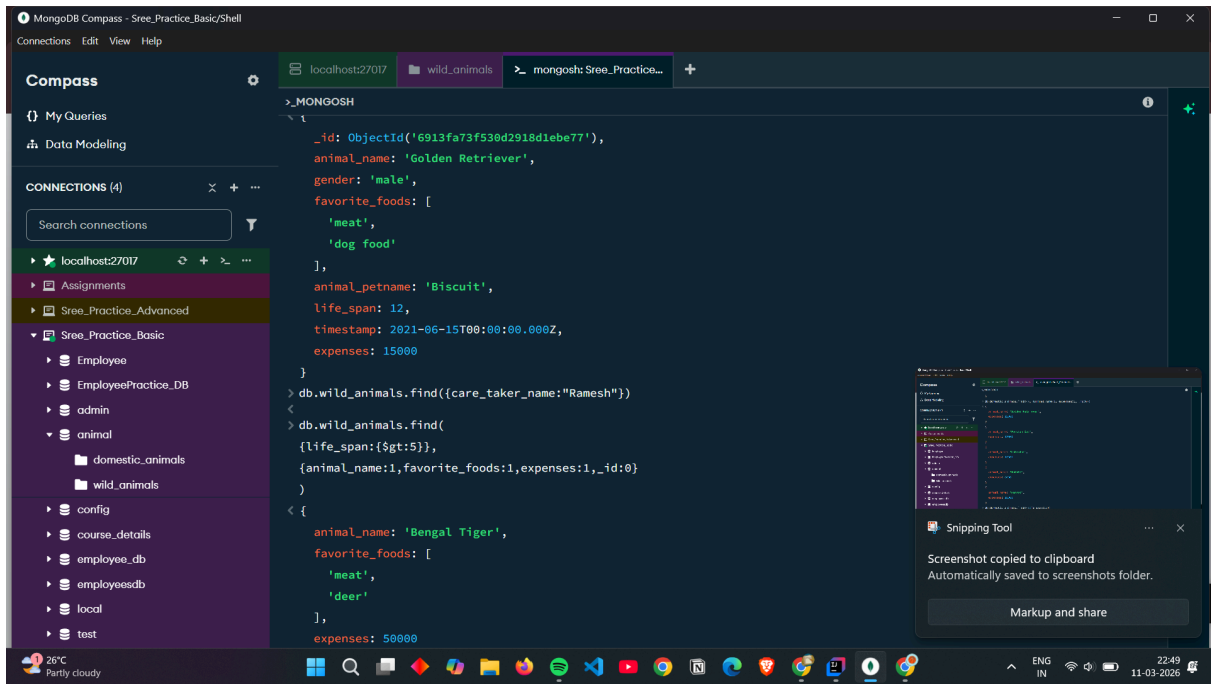

1. Use MongoDB to implement the following DB operations

1. Create a database called 'vehicles' and *write* a MongoDB query to select database as "vehicles".
2. Write a MongoDB query to display all the databases.
3. Create a collection called 'two_wheelers'. (use capping) and Create a collection called 'four_wheelers'.
4. Add 5 two-wheeler details to the collection named 'two_wheelers'. Each document consists of following fields as bike_name, model (gear or gearless), category (100cc, 125cc, 150cc, 200cc), colors_available (red, black, blue, sport red etc) as array, manufacturer, performance (out of 10), timestamp (date and year release) and price.
5. Add 5 four-wheeler details to the collection named 'four_wheelers'. Each document consists of following fields as vehicle_name, model (commercial or own), category (car, lorry, bus, mini truck, heavy truck, containers), variants (vxi, zxi, petrol, diesel etc) as array, manufacturer, performance (out of 10), timestamp (date and year release) and price.
6. Write a MongoDB query to display all documents available in two_wheelers and four_wheelers.
7. Write a MongoDB query to display only vehicle name and price in all the collection of the database
8. Write a MongoDB query to display two_wheelers from a particular company
9. Write a MongoDB query to display four_wheelers available in diesel variants
10. Write a MongoDB query to display vehicles name, category and manufacturer details whose rating is more than 5.

