

Day 11:

Task 1: String Operations

Write a method that takes two strings, concatenates them, reverses the result, and then extracts the middle substring of the given length. Ensure your method handles edge cases, such as an empty string or a substring length larger than the concatenated string.

```
package com.dsassignment.day11;

public class StringOperations {

    public static String extractMiddleSubstring(String
str1, String str2, int length) {
        if (str1 == null || str2 == null || length <= 0)
        {
            return "";
        }

        String concatenated = str1 + str2;

        StringBuilder reversed = new
StringBuilder(concatenated).reverse();

        int middleIndex = reversed.length() / 2;

        // Ensure the length of the substring is within
the bounds
        int start = Math.max(0, middleIndex - length /
2);
        int end = Math.min(reversed.length(), start +
length);

        String middleSubstring =
reversed.substring(start, end);

        return middleSubstring;
    }


    public static void main(String[] args) {
        System.out.println("Extracting Middle Substring:
" + extractMiddleSubstring("hello", "world", 3));
    }
}
```

```

        System.out.println("Extracting Middle Substring:
" + extractMiddleSubstring("hello", "world", 10));
    }
}

```

Output:

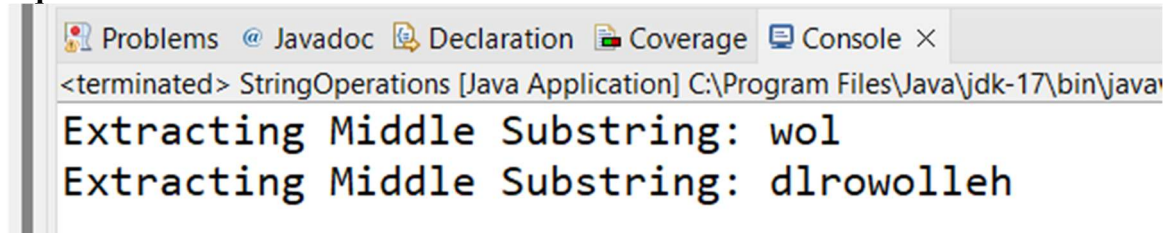

The screenshot shows a Java IDE window with a console tab. The console output is as follows:

```

<terminated> StringOperations [Java Application] C:\Program Files\Java\jdk-17\bin\java
Extracting Middle Substring: wol
Extracting Middle Substring: dlrowolleh

```

Task 2: Naive Pattern Search

Implement the naive pattern searching algorithm to find all occurrences of a pattern within a given text string. Count the number of comparisons made during the search to evaluate the efficiency of the algorithm.

```

package com.dsassignment.day11;

public class NaivePatternSearching {

    public static void main(String[] args) {
        String text = "I Love Cats";
        String pattern = "Cats";
        search(text, pattern);
    }

    private static void search(String text, String
pattern) {
        int strleng = text.length();
        int patleng = pattern.length();

        for(int i=0;i<=strleng-patleng;i++)
        {
            int j;
            for(j=0;j<patleng;j++) {
                if(text.charAt(i+j) !=
pattern.charAt(j))
                {
                    break;


```

```

        }
    }
    if(j==patleng)
    {
        System.out.println("pattern found at
index "+ i);
    }
}
}
}
}

```

Output:

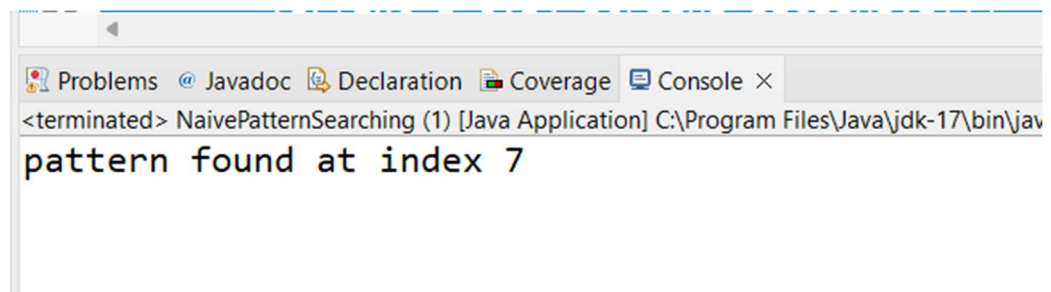

Task 3: Implementing the KMP Algorithm

Code the Knuth-Morris-Pratt (KMP) algorithm in java for pattern searching which pre-processes the pattern to reduce the number of comparisons. Explain how this pre-processing improves the search time compared to the naive approach.

```

package com.dsassignment.day11;

public class KMPPatternSearching {
    public static void main(String[] args) {
        String text = "AABAACAADAABAABA";
        String pattern = "AABA";

        System.out.println("\nKMP Pattern Searching:");
        searchKMP(text, pattern);
    }

    private static void searchKMP(String text, String
pattern) {
        int n = text.length();
    }
}

```

```

    int m = pattern.length();

    int lps[] = new int[m];
    computeLPSArray(pattern, m, lps);

    int i = 0;
    int j = 0;
    while (i < n) {
        if (pattern.charAt(j) == text.charAt(i)) {
            i++;
            j++;
        }
        if (j == m) {
            System.out.println("Pattern found at
index " + (i - j));
            j = lps[j - 1];
        }

        else if (i < n && pattern.charAt(j) !=
text.charAt(i)) {

            if (j != 0)
                j = lps[j - 1];
            else
                i = i + 1;
        }
    }
}

private static void computeLPSArray(String pattern,
int m, int[] lps) {

    int len = 0;
    int i = 1;
    lps[0] = 0;

    while (i < m) {
        if (pattern.charAt(i) ==
pattern.charAt(len)) {
            len++;
            lps[i] = len;
            i++;
        }
    }
}

```

```
KMP Pattern Searching:
Pattern found at index 0
Pattern found at index 9
Pattern found at index 12
```

3)Efficient Pattern Matching: By leveraging the pre-processed LPS array, the KMP algorithm ensures that each character in the text is compared with at most once against the characters of the pattern. This significantly reduces the number of comparisons required, especially for patterns with repetitive substrings or patterns containing a long prefix that is also a suffix. As a result, the KMP algorithm achieves a linear time complexity $O(n + m)$,

where n is the length of the text and m is the length of the pattern, making it much more efficient than the naive approach, which has a time complexity of $O(n * m)$.

Task 4: Rabin-Karp Substring Search *(Yet to be completed in Class)*

Implement the Rabin-Karp algorithm for substring search using a rolling hash. Discuss the impact of hash collisions on the algorithm's performance and how to handle them.

Task 5: Boyer-Moore Algorithm Application *(Yet to be completed in Class)*

Use the Boyer-Moore algorithm to write a function that finds the last occurrence of a substring in a given string and returns its index. Explain why this algorithm can outperform others in certain scenarios.