

CSA0562: DATABASE MANAGEMENT SYSTEM- ASSIGNMENT QUESTIONS

V.SREE RUTHIN REDDY
192324112

Question 1:

ER Diagram Question:

Traffic Flow Management System (TFMS) ER Diagram

TASKS

Task 1: Entity Identification and Attributes

Entities and Attributes:

1. ROADS

Attributes:

- RoadID (PK)
- RoadName
- Length (meters)
- SpeedLimit (km/h)

2. INTERSECTIONS

- Attributes:

- IntersectionID (PK)
- IntersectionName
- Latitude
- Longitude

3. TRAFFIC SIGNALS

- Attributes:

- SignalID (PK)

- SignalStatus (Green, Yellow, Red)
- Timer

4. TRAFFIC DATA

- **Attributes:**
- TrafficDataID (PK)
- Timestamp
- Speed (average speed on the road)
- CongestionLevel

Task 2: Relationship Modeling

Relationships:

1. Roads to Intersections

- Relationship: A road can be part of multiple intersections, and an intersection is formed by multiple roads.
- Cardinality: Many-to-Many
- Optionality: Mandatory (each intersection must be associated with at least one road)

2. Intersections to Traffic Signals

- Relationship: Each intersection can have multiple traffic signals.
- Cardinality: One-to-Many
- Optionality: Mandatory (each intersection must have at least one traffic signal)

3. Traffic Signals to Traffic Data

- Relationship: Traffic data is collected from sensors related to traffic signals.
- Cardinality: One-to-Many
- Optionality: Optional (traffic data may not always be available for every signal)



4. Roads to Traffic Data

- Relationship: Traffic data is collected for each road.

- Cardinality: One-to-Many
- Optionality: Optional (traffic data may not always be available for every road)

Task 3: ER Diagram Design

Here's a simplified ER Diagram:

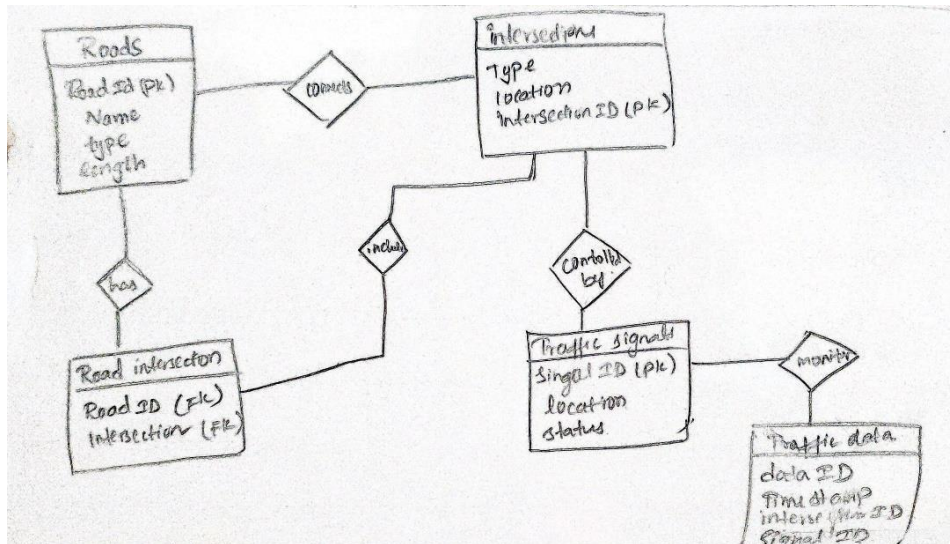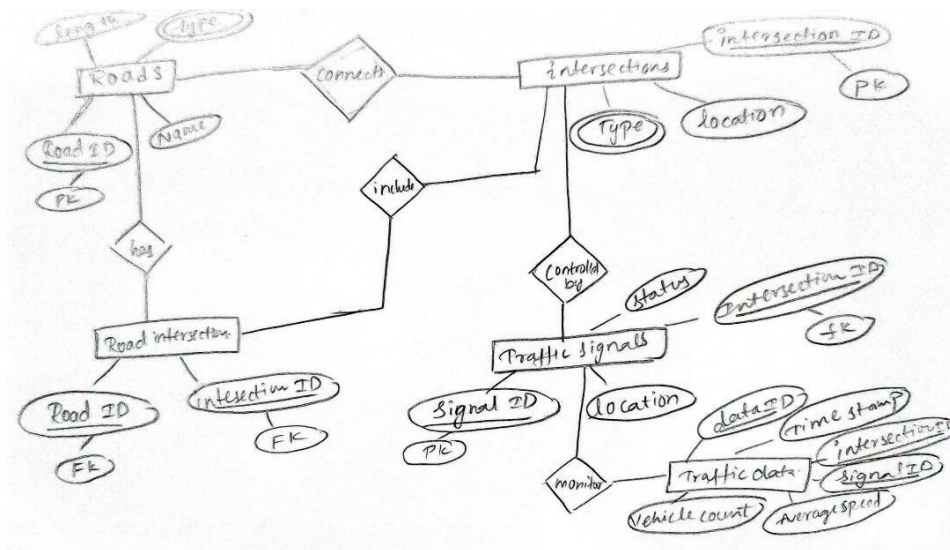

- Roads
- RoadID (PK)

- RoadName
- Length
- SpeedLimit

- Intersections

- IntersectionID (PK)
- IntersectionName
- Latitude
- Longitude

- Traffic Signals

- SignalID (PK)
- SignalStatus
- Timer
- IntersectionID (FK)

- Traffic Data

- TrafficDataID (PK)
- Timestamp
- Speed
- CongestionLevel
- RoadID (FK)
- SignalID (FK)

Relationships:

1. Roads to Intersections:

- Many-to-Many (through a junction table, e.g., RoadIntersection)

2. Intersections to Traffic Signals:

- One-to-Many (1 Intersection can have multiple Traffic Signals)

3. Traffic Signals to Traffic Data:

- One-to-Many (1 Traffic Signal can have multiple Traffic Data records)

4. Roads to Traffic Data:

- One-to-Many (1 Road can have multiple Traffic Data records)

Task 4: Justification and Normalization

1. Normalization Principles:

- 1NF (First Normal Form): Each table has a primary key, and attributes are atomic.
- 2NF (Second Normal Form): All non-key attributes are fully functional dependent on the primary key.
- 3NF (Third Normal Form): No transitive dependency (attributes are not dependent on other non-key attributes).

2. Design Justification:

- Scalability: The design supports adding new roads, intersections, and traffic signals without major schema changes.
- Real-Time Data Processing: Traffic Data entity captures real-time data for analysis and integration into traffic management algorithms.
- Efficient Traffic Management: The relationships and attributes facilitate efficient retrieval and manipulation of data for route optimization and signal control.

Question 2:

SQL Queries

Question 1: Top 3 Departments with Highest Average Salary

```
```sql
```

```
SELECT d.DepartmentID, d.DepartmentName, AVG(e.Salary) AS
```

```
AvgSalaryFROM Departments d
```

```
LEFT JOIN Employees e ON d.DepartmentID = e.DepartmentID
```

```
GROUP BY d.DepartmentID, d.DepartmentName
```

```
ORDER BY AVG(e.Salary)
```

```
DESCFETCH FIRST 3
```

```
ROWS ONLY;
```

```
```
```

Input

Run SQL

```
INSERT INTO Employees (EmployeeID, DepartmentID, Salary) VALUES
(1, 1, 50000),
(2, 1, 60000),
(3, 2, 80000),
(4, 2, 90000),
(5, 3, 70000);

-- Step 3: Execute Your Query
SELECT d.DepartmentID, d.DepartmentName, AVG(e.Salary) AS AvgSalary
FROM Departments d
LEFT JOIN Employees e ON d.DepartmentID = e.DepartmentID
GROUP BY d.DepartmentID, d.DepartmentName
ORDER BY AVG(e.Salary) DESC
LIMIT 3;
```

Output

| DepartmentID | DepartmentName | AvgSalary |
|--------------|----------------|-----------|
| 2 | Engineering | 85000 |
| 3 | Marketing | 70000 |
| 1 | HR | 55000 |

Explanation:

- `LEFT JOIN` ensures departments with no employees show NULL for `AvgSalary`.

- `GROUP BY` groups data by department.
- `ORDER BY` sorts departments by average salary in descending order.
- `FETCH FIRST 3 ROWS ONLY` limits the result to the top 3 departments.

Question 2: Retrieving Hierarchical Category Paths

```
```sql
```

```
WITH RECURSIVE CategoryPaths AS (
 SELECT CategoryID, CategoryName, CAST(CategoryName AS VARCHAR(255))
 AS PathFROM Categories
 WHERE ParentCategoryID IS NULL
 UNION ALL
 SELECT c.CategoryID, c.CategoryName, CONCAT(cp.Path, '> ', c.CategoryName)
 FROM Categories c
 JOIN CategoryPaths cp ON c.ParentCategoryID = cp.CategoryID
)
SELECT CategoryID, CategoryName,
PathFROM CategoryPaths;
```
```

Input

Run SQL

```

INSERT INTO Categories (CategoryID, CategoryName, ParentCategoryID) VALUES
(1, 'Electronics', NULL),
(2, 'Computers', 1),
(3, 'Laptops', 2),
(4, 'Desktops', 2),
(5, 'Smartphones', 1),
(6, 'Cameras', 1),
(7, 'DSLR', 6),
(8, 'Mirrorless', 6);

-- Step 4: Execute Recursive CTE Query
WITH RECURSIVE CategoryPaths AS (
    SELECT CategoryID, CategoryName, CAST(CategoryName AS VARCHAR(255)) AS Path
    FROM Categories
    WHERE ParentCategoryID IS NULL
    UNION ALL
    SELECT c.CategoryID, c.CategoryName, cp.Path || ' > ' || c.CategoryName
    FROM Categories c
    JOIN CategoryPaths cp ON c.ParentCategoryID = cp.CategoryID
)
SELECT CategoryID, CategoryName, Path
FROM CategoryPaths;

```

Output

| CategoryID | CategoryName | Path |
|------------|--------------|------------------------------------|
| 1 | Electronics | Electronics |
| 2 | Computers | Electronics > Computers |
| 5 | Smartphones | Electronics > Smartphones |
| 6 | Cameras | Electronics > Cameras |
| 3 | Laptops | Electronics > Computers > Laptops |
| 4 | Desktops | Electronics > Computers > Desktops |
| 7 | DSLR | Electronics > Cameras > DSLR |
| 8 | Mirrorless | Electronics > Cameras > Mirrorless |

Explanation:

- `WITH RECURSIVE` defines a CTE that recursively builds the hierarchical path.
- The `UNION ALL` combines the base case with recursive case results.
- `CONCAT` builds the path from parent to child.

Question 3: Total Distinct Customers by Month

```
```sql
```

```
SELECT TO_CHAR(purchase_date, 'Month') AS MonthName,
```

```
 COUNT(DISTINCT customer_id) AS CustomerCount
```

```
FROM Purchases
```

```
WHERE EXTRACT(YEAR FROM purchase_date) = EXTRACT(YEAR FROM CURRENT_DATE)
```

```
GROUP BY TO_CHAR(purchase_date, 'Month')
```

```
ORDER BY TO_DATE(TO_CHAR(purchase_date, 'Month'), 'Month') ASC;
```

```
```
```


Input

Run SQL

```

CREATE TABLE Purchases (
  purchase_id INT PRIMARY KEY,
  customer_id INT,
  purchase_date DATE
);

-- Step 3: Insert Sample Data
INSERT INTO Purchases (purchase_id, customer_id, purchase_date) VALUES
(1, 101, '2024-01-15'),
(2, 102, '2024-01-20'),
(3, 101, '2024-02-15'),
(4, 103, '2024-03-25'),
(5, 104, '2024-03-30');

-- Step 4: Execute Your Query
SELECT strftime('%m', purchase_date) AS MonthNumber,
       strftime('%m', purchase_date) || ' - ' || strftime('%Y', purchase_date) AS MonthName,
       COUNT(DISTINCT customer_id) AS CustomerCount
FROM Purchases
WHERE strftime('%Y', purchase_date) = strftime('%Y', 'now')
GROUP BY strftime('%m', purchase_date)
ORDER BY MonthNumber;

```

Output

| MonthNumber | MonthName | CustomerCount |
|-------------|-----------|---------------|
| 01 | 01 - 2024 | 2 |
| 02 | 02 - 2024 | 1 |
| 03 | 03 - 2024 | 2 |

Explanation:

- `TO_CHAR` converts dates to month names.
- `COUNT(DISTINCT customer_id)` counts unique customers.
- `EXTRACT` ensures only the current year's data is considered.
- `ORDER BY` sorts by month.

Question 4: Finding Closest Locations

```sql

```
SELECT LocationID, LocationName, Latitude, Longitude,
 (3959 * acos(cos(radians(:latitude)) * cos(radians(Latitude)) *
 cos(radians(Longitude) - radians(:longitude)) + sin(radians(:latitude)) *
 sin(radians(Latitude)))) AS Distance
FROM Locations
ORDER BY
Distance
FETCH FIRST 5 ROWS ONLY;
```
```

Input

Run SQL

```
SELECT LocationID, LocationName, Latitude, Longitude,
(3959 * acos(cos(radians(?)) * cos(radians(Latitude)) *
cos(radians(Longitude) - radians(?)) + sin(radians(?)) *
sin(radians(Latitude)))) AS Distance
FROM Locations
ORDER BY Distance
LIMIT 5;
-- Step 1: Drop Table if It Exists
DROP TABLE IF EXISTS Locations;

-- Step 2: Create Locations Table
CREATE TABLE Locations (
    LocationID INT PRIMARY KEY,
    LocationName VARCHAR(100),
    Latitude FLOAT,
    Longitude FLOAT
);

-- Step 3: Insert Sample Data
INSERT INTO Locations (LocationID, LocationName, Latitude, Longitude) VALUES
(1, 'Location 1', 40.712776, -74.005974),
(2, 'Location 2', 34.052235, -118.243683),
(3, 'Location 3', 41.878113, -87.629799),

Output
```

LocationID	LocationName	Latitude	Longitude	Distance
1	Location 1	40.712776	-74.005974	
2	Location 2	34.052235	-118.243683	
3	Location 3	41.878113	-87.629799	
4	Location 4	29.760427	-95.369804	
5	Location 5	33.448376	-112.074036	

LocationID	LocationName	Latitude	Longitude	Distance
1	Location 1	40.712776	-74.005974	
2	Location 2	34.052235	-118.243683	
3	Location 3	41.878113	-87.629799	

Input

Run SQL

```

-- Step 2: Create Orders Table
CREATE TABLE Orders (
  OrderID INT PRIMARY KEY,
  OrderDate DATE,
  CustomerID INT,
  Amount DECIMAL(10, 2)
);

-- Step 3: Insert Sample Data
INSERT INTO Orders (OrderID, OrderDate, CustomerID, Amount) VALUES
(1, DATE('now', '-1 day'), 101, 150.00),
(2, DATE('now', '-5 day'), 102, 200.00),
(3, DATE('now', '-8 day'), 103, 300.00),
(4, DATE('now', '-3 day'), 104, 100.00),
(5, DATE('now', '-7 day'), 105, 250.00);

-- Step 4: Execute Your Query
SELECT *
FROM Orders
WHERE OrderDate >= DATE('now', '-7 days')
ORDER BY OrderDate DESC;

```

Output

OrderID	OrderDate	CustomerID	Amount
1	2024-07-29	101	150
4	2024-07-27	104	100
2	2024-07-25	102	200
5	2024-07-23	105	250

Explanation:

- `SYSDATE - INTERVAL '7' DAY` retrieves orders from the last 7 days.
- `ORDER BY OrderDate DESC` sorts by the most recent orders.

--

Question 3:

PL/SQL Questions

Question 1: Handling Division Operation

```
```plsql
```

```
DECLA
```

```
RE
```

```
divisor NUMBER := &divisor_input;
```

```
dividend NUMBER :=
```

```
÷nd_input;result NUMBER;
```

```
BEGIN
```

```
IF divisor = 0 THEN
```

```

 DBMS_OUTPUT.PUT_LINE('Error: Division by zero is not
allowed. ');ELSE
 result := dividend / divisor;
 DBMS_OUTPUT.PUT_LINE('Result: ' || result);
 END IF;
EXCEPTI
ON
 WHEN ZERO_DIVIDE THEN
 DBMS_OUTPUT.PUT_LINE('Error: Division by
zero. ');END;

```

### Explanation:

- Handles division by zero using an `IF` statement and `ZERO\_DIVIDE` exception.
- `DBMS\_OUTPUT.PUT\_LINE` displays results or error messages.

## Question 2: Updating Rows with FORALL

```

```plsql
DECLA
RE
    TYPE emp_id_array IS TABLE OF
    Employees.EmployeeID%TYPE;TYPE salary_array IS TABLE OF
    NUMBER;
    l_emp_ids emp_id_array := emp_id_array(101, 102, 103);
    l_salaries salary_array := salary_array(500, 600, 700);
BEGIN
    FORALL i IN INDICES OF
        l_emp_idsUPDATE Employees
        SET Salary = Salary + l_salaries(i)
        WHERE EmployeeID =
        l_emp_ids(i);COMMIT;
END;
---
```

Explanation:

- `FORALL` is used for bulk updates, enhancing performance by reducing context switches between SQL and PL/SQL.

Question 3: Implementing Nested Table Procedure

```
```sql
CREATE OR REPLACE PROCEDURE GetEmployeesByDept(p_dept_id IN NUMBER,
p_employees OUT SYS_REFCURSOR) AS
BEGIN
 OPEN p_employees FOR
 SELECT * FROM Employees WHERE DepartmentID =
p_dept_id;END;
```
```

Explanation:

- A procedure that retrieves employees based on department ID and returns them as a cursor.

Question 4: Using Cursor Variables and Dynamic SQL

```
```sql
DECLA
RE
 TYPE emp_ref_cursor IS REF
 CURSOR; l_emp_cursor
 emp_ref_cursor;
 l_salary_threshold NUMBER := &salary_threshold;
BEGIN
 OPEN l_emp_cursor FOR
 'SELECT EmployeeID, FirstName,
 LastName FROM Employees
 WHERE Salary > :1'
 USING l_salary_threshold;
```

```

-- Use l_emp_cursor as needed
CLOSE l_emp_cursor;
END;
```

```

Explanation:

- Demonstrates use of REF CURSOR and dynamic SQL to query employees based on a salarythreshold.

Question 5: Designing P

ipelined Function for Sales Data

```

```plsql
CREATE OR REPLACE FUNCTION get_sales_data(p_month IN NUMBER, p_year IN
NUMBER)RETURN sales_data_tab_type PIPELINED AS
BEGIN
 FOR rec IN (
 SELECT OrderID, CustomerID,
 OrderAmountFROM Orders
 WHERE EXTRACT(MONTH FROM OrderDate) =
 p_monthAND EXTRACT(YEAR FROM OrderDate) =
 p_year
) LOOP
 PIPE ROW
 (rec);END
 LOOP;
END;
```

```

Explanation:

- `PIPELINED` function allows efficient processing of large datasets by returning rows incrementally.

DELIVERABLES

1. ER Diagram:

- Provides a visual representation of the TFMS entities, attributes, and relationships.

2. Entity Definitions:

- Clear descriptions of each entity and their attributes.

3. Relationship Descriptions:

- Details of relationships between entities, including cardinality and optionality.

4. Justification Document:

- Explanation of design choices, normalization adherence, and considerations for efficiency and scalability.