

A Dense Depth and Forground images dataset of Stray Animals (some name XYZ)

January 10, 2021

Abstract

Dataset creation
limitation lacking ground truth
Depth and foreground prediction

1 Introduction

we introduce XYZ, a dataset that contains millions of depth and forground images of stray animals derived from few hundreds of images. XYZ is the first dataset which has stray animals. The dataset is available for download atlink... This is an RGBDM dataset that pair images with depth and mask. The datasets which involve depth cannot be created using crowd source annotation, instead they rely on 3D range sensors. This XYZ is experimentally created with the help of existing depth predictors and foreground creators.

XYZ can also be used for automonous driving

Depth information is integral to many problems in robotics, including mapping, localization and obstacle avoidance for terrestrial and aerial vehicles, and in computer vision, including augmented and virtual reality[5]. The reason for using existing depth predictors for the creation of new dataset - depth sensors and monocular cameras are expensive. we used existing accurate depth predictor [reference]

if we can come up with limitations of existing rgbd datasets... then we can write This paper present the XYZ dataset in an effort to address the aforementioned limitations of exisitng RGBD datasets.

Figure 3 represents a few representative examples from XYZ

The most important feature of XYZ is

2 Related Work

[*** sentences need to be reframed with the help of Abhinav sir A variety of RGBD datasets in which images are paired with corresponding depth maps(D)



Figure (1) Sample Record which contains the background image, a cow overlaid on top of background, its mask and depth images

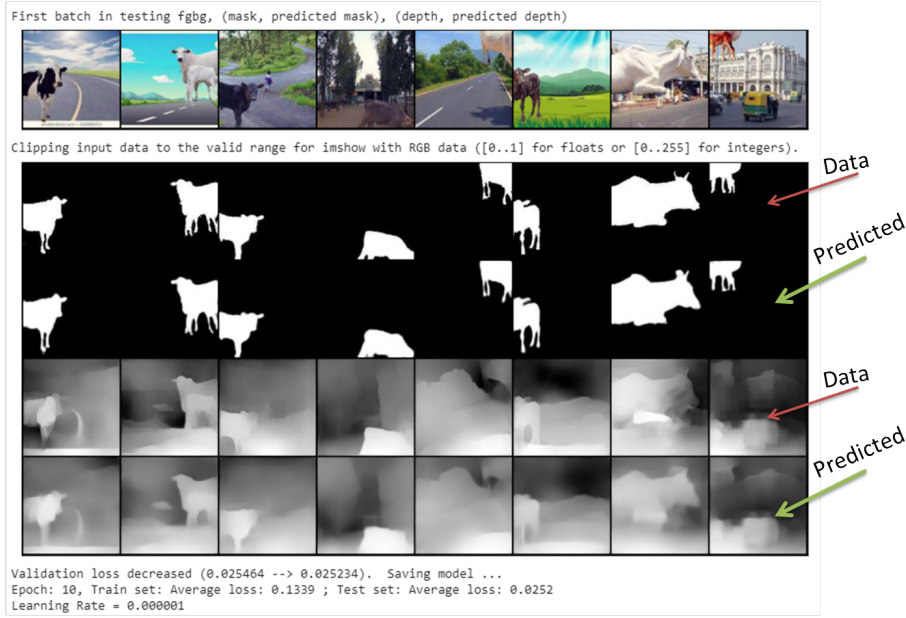


Figure (2) Sample Record which contains the background image, a cow overlaid on top of background, its mask and depth images

have been proposed through the years. Available RGBD datasets kitti dataset [1], the Synthia dataset [2], Make3D dataset [3], NYU dataset [4]

It is the best known RGBD dataset collected using a vehicle equipped with a sparse Velodyne VLP-64 LiDAR scanner and RGB cameras, and features street scenes in and around the German city of Karlsruhe. Primary application of this dataset involves perception tasks in the context of self-driving.

Synthia is a street scene dataset with depth maps of synthetic data, requiring domain adaptation to apply to real world settings.

Cityscapes [reference] provides a dataset of street scenes, albeit with more diversity than KITTI.

Sintel [reference] is another synthetic dataset which includes outdoor scenes.

Megadepth [reference] is a large-scale dataset of outdoor internet images,



Figure (3) Sample Record which contains the background image, a cow overlaid on top of background, its mask and depth images

with depth maps reconstructed using structure-from-motion techniques, but also lacking in ground truth depth and scale.

Make3D [reference] provides RGB and depth information for outdoor scenes

The NYUv2 dataset [reference] is widely used for monocular depth estimation in indoor environments. The data was collected with a Kinect RGBD camera, which provides sparse and noisy depth returns. These returns are generally inpainted and smoothed before they are used for monocular depth estimation tasks. As a result, while the dataset includes sufficient samples to train modern machine learning pipelines, the “ground-truth” depth does not necessarily correspond to true scene depth. ***]

3 The XYZ dataset

we designed the dataset with the following objectives... 1. dataset which dedicatedly include stray animals, as animals move without any restrictions in the small cities of India. 2. self driving cars should be able to identify animals 2. dataset should provide accurate dense depth maps. 4. dataset should provide foreground images

3.1 Data Acquisition

3.2 Data Curation and Processing

3.3 Data Statistics

4 Experiments

In this section, we provide a baseline for monocular depth estimation on the XYZ dataset

4.1 Model

4.2 Evaluation

4.3 Analysis

3.

5 Conclusion

6 Acknowledgement

This paper and the research behind it would not have been possible without the exceptional support and computing facilities of my Institution, Vishnu Institute of Technology.

References

- [1] Geiger, Andreas, et al. "Vision meets robotics: The kitti dataset." *The International Journal of Robotics Research* 32.11 (2013): 1231-1237.
- [2] Ros, German, et al. "The synthia dataset: A large collection of synthetic images for semantic segmentation of urban scenes." *Proceedings of the IEEE conference on computer vision and pattern recognition*. 2016.
- [3] Saxena, Ashutosh, Min Sun, and Andrew Y. Ng. "Make3D: Depth Perception from a Single Still Image." *AAAI*. Vol. 3. 2008.
- [4] Silberman, Nathan, et al. "Indoor segmentation and support inference from rgb-d images." *European conference on computer vision*. Springer, Berlin, Heidelberg, 2012.
- [5] Marchand, Eric, Hideaki Uchiyama, and Fabien Spindler. "Pose estimation for augmented reality: a hands-on survey." *IEEE transactions on visualization and computer graphics* 22.12 (2015): 2633-2651.