



22/22 243

01:25:30

Problems



Section: Database Easy

MCQ

1.00



Select your answer to the problem below

1

Meesho wants to enforce that every row in the orders table...

Database Ea... MCQ

1.00

2

Meesho has tables Suppliers(SupplierID,...

Database M... MCQ

2.00

3

Meesho chose an isolation level that eliminates non-repeatable...

Database H... MCQ

3.00

4

Meesho analyzed merge sort for sorting large product lists. What i...

Algorithms ... MCQ

1.00

Switch theme

Help

End test

< Previous

1/22

Next >

Meesho wants to enforce that every row in the orders table references a valid customer in the customers table, preventing orphaned orders. Which constraint enforces this referential integrity?

☐ Primary key

☐ Not-null constraint

☒ Foreign key

☐ Check constraint



22/22 243

01:25:24

Problems

Section: Database Medium MCQ 2.00

Select your answer to the problem below

1

Meesho wants to enforce that every row in the orders table...

Database Ea... MCQ 1.00

2

Meesho has tables Suppliers(SupplierID,...

Database ML... MCQ 2.00

3

Meesho chose an isolation level that eliminates non-repeatable...

Database H... MCQ 3.00

4

Meesho analyzed merge sort for sorting large product lists. What i...

Algorithms ... MCQ 1.00

Switch theme

Help

End test

Meesho has tables Suppliers(SupplierID, SupplierName) and Products(ProductID, SupplierID, ProductName). They want a result containing ONLY suppliers who have at least one product listed, with those product details. Which SQL JOIN fits best?

sridevinimmala13@gmail.com
2026-06-21 10:14 + UTC

☐ RIGHT JOIN

☐ FULL OUTER JOIN

☐ LEFT JOIN

☒ INNER JOIN

Res

< Previous

2/22

Next >



22/22 243

01:25:20

Problems



Section: Database Hard

MCQ

3.00



Select your answer to the problem below

1

Meesho wants to enforce that every row in the orders table...

Database Ea...

MCQ

1.00

2

Meesho has tables Suppliers(SupplierID,...

Database M...

MCQ

2.00

3

Meesho chose an isolation level that eliminates non-repeatable...

Database H...

MCQ

3.00

4

Meesho analyzed merge sort for sorting large product lists. What i...

Algorithms ...

MCQ

1.00

Switch theme

Help

End test

< Previous

3/22

Next >

Meesho chose an isolation level that eliminates non-repeatable reads (a row read twice returns the same data), but still allows phantom reads. Which isolation level matches this behavior?

☐ Serializable

☐ Read Uncommitted

☐ Read Committed

☒ Repeatable Read

sridevinimmala13@gmail.com
2026-06-21 10:15 • UTC

sridevinimmala13@gmail.com
2026-06-21 10:15 • UTC



22/22 243

01:25:16

Problems



Section: Algorithms Easy

MCQ

1.00



Select your answer to the problem below

1

Meesho wants to enforce that every row in the orders table...

Database Ea...

MCQ

1.00

2

Meesho has tables Suppliers(SupplierID,...

Database M...

MCQ

2.00

3

Meesho chose an isolation level that eliminates non-repeatable...

Database H...

MCQ

3.00

4

Meesho analyzed merge sort for sorting large product lists. What i...

Algorithms ...

MCQ

1.00

Switch theme

Help

< Previous

4/22

Next >


Meesho analyzed merge sort for sorting large product lists. What is its worst-case time complexity?

☐ $O(n^2)$

☐ $O(n)$

☐ $O(\log n)$

☒ $O(n \log n)$

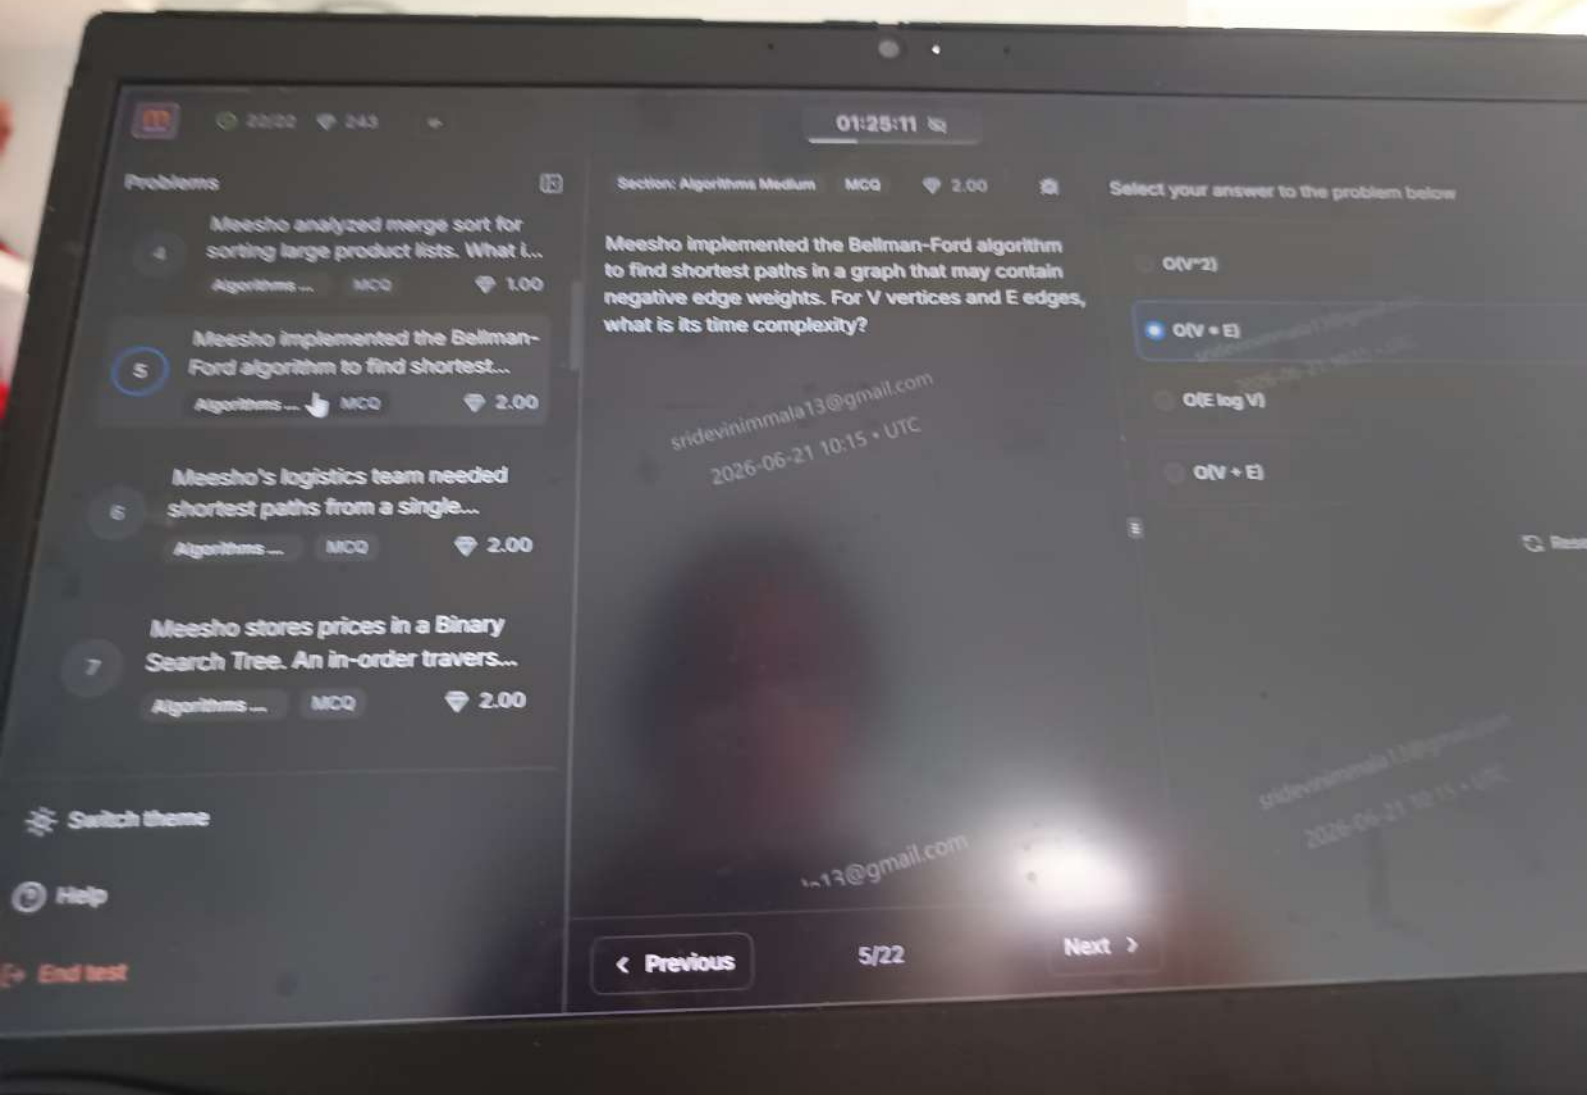



22/22 243

01:25:07

Problems



Section: Algorithms Medium

MCQ

2.00



Select your answer to the problem below

4 Meesho analyzed merge sort for sorting large product lists. What i...
Algorithms ... MCQ 1.00

5 Meesho implemented the Bellman-Ford algorithm to find shortest...
Algorithms ... MCQ 2.00

6 Meesho's logistics team needed shortest paths from a single...
Algorithms ... MCQ 2.00

7 Meesho stores prices in a Binary Search Tree. An in-order travers...
Algorithms ... MCQ 2.00

Switch theme

Help

ad test

Meesho's logistics team needed shortest paths from a single warehouse to all delivery hubs in a graph with non-negative edge weights, using Dijkstra's algorithm with a binary min-heap. For V vertices and E edges, what is the time complexity?

sridevinimmala13@gmail.com
2026-06-21 10:15 + UTC

- ☐ $O(V^2)$
- ☒ $O((V + E) \log V)$
- ☐ $O(VE)$
- ☐ $O(E \log E + V)$

Reset A

sridevinimmala13@gmail.com
2026-06-21 10:15 + UTC

< Previous

6/22

Next >

Algorithms ... MCQ 2.00

7 Meesho stores prices in a Binary Search Tree. An in-order traversal of a BST visits the nodes in what order?

Algorithms ... MCQ 2.00

8 Meesho needs the k-th smallest delivery time from an unsorted...

Algorithms ... MCQ 3.00

9 Meesho solves a 0/1 Knapsack for packing promo bundles with n...

Algorithms ... MCQ 3.00

Meesho's infra team explained how a domain name like

Switch theme

Help

End test

Algorithms Medium MCQ 2.00

Meesho stores prices in a Binary Search Tree. An in-order traversal of a BST visits the nodes in what order?

Select your answer to the problem below

- ☒ Ascending sorted order
- ☐ Descending sorted order
- ☐ Level-by-level order
- ☐ Random order

< Previous

7/22

Next >



22/22 243

01:24:57

Problems

Algorithms ... MCQ 2.00

7 Meesho stores prices in a Binary Search Tree. An in-order travers...

Algorithms ... MCQ 2.00

8 Meesho needs the k-th smallest delivery time from an unsorted...

Algorithms ... MCQ 3.00

9 Meesho solves a 0/1 Knapsack for packing promo bundles with n...

Algorithms ... MCQ 3.00

Meesho's infra team explained how a domain name like

Switch theme

Section: Algorithms Hard

MCQ

3.00

Select your answer to the problem below

Meesho needs the k-th smallest delivery time from an unsorted array of n values using the Quickselect algorithm. What is its average-case time complexity?

☐ $O(n \log n)$

☐ $O(n^2)$

☒ $O(n)$

☐ $O(\log n)$

Reset Answer

< Previous

8/22

Next >



22/22 243

01:24:45

Problems

Section: Algorithms Hard MCQ 3.00

Select your answer to the problem below

9

Meesho solves a 0/1 Knapsack for packing promo bundles with n...

Algorithms ... MCQ 3.00

10

Meesho's infra team explained how a domain name like...

Network an... MCQ 1.00

11

Meesho's security workshop: how should password storage be...

Network an... MCQ 2.00

12

Meesho's connection pool was exhausted during a spike becaus...

Network an... MCQ 3.00

Meesho solves a 0/1 Knapsack for packing promo bundles with n items and integer capacity W using dynamic programming. What is its time complexity?

☐ $O(2^n)$

☒ $O(n * W)$

☐ $O(n^2)$

☐ $O(n \log W)$

Reset Answer

Switch theme

Help

End test

< Previous

9/22

Next >



20/10 243

01:24:40

Problems

Section: Network and security Day: 10/10 1.00

Select your answer to the problem below

Meesho solves a Q/T Knapsack for packing promo bundles with n...

Algorithms 10/10 2.00

Meesho's infra team explained how a domain name like meesho.com gets translated to a server IP address. Which protocol/service performs this translation?

Network 10/10 1.00

Meesho's security workshop: how should password storage be...

Network 10/10 2.00

Meesho's connection pool was exhausted during a spike because...

Network 10/10 3.00

Meesho's infra team explained how a domain name like meesho.com gets translated to a server IP address. Which protocol/service performs this translation?

☒ DNS

☐ NAT

☐ DHCP

☐ ARP

Reset Answer

Switch theme

Help

Previous

10/10

End test



33/20 243

01:24:36

Problems



Section: Network and security Medium

MCQ 3.00

Select your answer to the problem below

9

Meesho solves a 0/1 Knapsack for packing promo bundles with n...

Algorithms ...

MCQ

3.00

10

Meesho's infra team explained how a domain name like...

Network an...

MCQ

1.00

11

Meesho's security workshop: how should password storage be...

Network an...

MCQ

2.00

12

Meesho's connection pool was exhausted during a spike becaus...

Network an...

MCQ

3.00

Switch theme

Help

End test

Previous

11/22

Next

Meesho's security workshop: how should password storage be handled so that even if the database leaks, identical passwords don't produce identical stored values? What technique adds a unique random value to each password before hashing?

sridevinimala13@gmail.com
2026-06-21 10:15 + UTC

Compression

Encryption with a shared key

Salting

Base64 encoding

Reset

sridevinimala13@gmail.com
2026-06-21 10:15 + UTC

11 Meesho's security workshop: how should password storage be...
Network an... MCQ 2.00

12 Meesho's connection pool was exhausted during a spike because...
Network an... MCQ 3.00

13 Meesho sequence puzzle: What number comes next in the series...
Aptitude Me... MCQ 2.00

14 Meesho operations puzzle: If 4 packers can pack 4 cartons in 8...
Aptitude Me... MCQ 2.00

Meesho's fraud detection 2K of

Switch theme

Help

End test

Section: Network and security Hard MCQ 3.00

Select your answer to the problem below

Meesho's connection pool was exhausted during a spike because many requests held connections far longer than needed. They want to cap how many requests can run concurrently so the system degrades gracefully instead of collapsing. Which resilience pattern fits?

☐ Retry with exponential backoff

☐ DNS round-robin

☒ Bulkhead (concurrency limiting)

☐ TLS termination

Reset Answer

12/22

Previous Next



22/22 243

01:24:27

Problems



Section: Aptitude Medium

MCQ

2.00



Select your answer to the problem below

11

Meesho's security workshop: how should password storage be...

Network an...

MCQ

2.00

12

Meesho's connection pool was exhausted during a spike becaus...

Network an...

MCQ

3.00

13

Meesho sequence puzzle: What number comes next in the series...

Aptitude Me...

MCQ

2.00

14

Meesho operations puzzle: If 4 packers can pack 4 cartons in 8...

Aptitude Me...

MCQ

2.00

Meesho's fraud analytics: 98% of

Meesho sequence puzzle: What number comes next in the series 2, 6, 12, 20, 30, ...?

36

44

40

42

Reset Answer

Switch theme

Help

End test

Previous

13/22

Next



22/22 243

01:24:22

Problems

Section: Aptitude Medium MCQ 2.00

Select your answer to the problem below

14 Meesho operations puzzle: If 4 packers can pack 4 cartons in 8 minutes, how long would 16 packers take to pack 16 cartons, working in parallel?
Aptitude Me... MCQ 2.00

Meesho operations puzzle: If 4 packers can pack 4 cartons in 8 minutes, how long would 16 packers take to pack 16 cartons, working in parallel?

- ☐ 16 minutes
- ☒ 8 minutes
- ☐ 2 minutes
- ☐ 32 minutes

Reset Answer

15 Meesho's fraud analytics: 2% of transactions are fraudulent. The...
Aptitude Hard MCQ 3.00

16 Meesho puzzle: You have 12 identical-looking balls; exactly o...
Aptitude Hard MCQ 3.00

17 What will be the output of this code?...

Switch theme

Help

End test

< Previous

14/22

Next >



22/22 243

01:24:17

Problems



Section: Aptitude Hard

MCQ

3.00



Select your answer to the problem below

14

Meesho operations puzzle: If 4 packers can pack 4 cartons in 8...

Aptitude Me...

MCQ

2.00

15

Meesho's fraud analytics: 2% of transactions are fraudulent. The...

Aptitude Hard

MCQ

3.00

16

Meesho puzzle: You have 12 identical-looking balls; exactly o...

Aptitude Hard

MCQ

3.00

17

What will be the output of this code?...

Switch theme

Help

End test

< Previous

15/22

Next >

Meesho's fraud analytics: 2% of transactions are fraudulent. The model flags 90% of true fraud and also flags 5% of legitimate transactions. If a transaction is flagged, what is the approximate probability it is actually fraudulent?

0.55

0.9

0.27

0.42

Reset Answer

sridevinimata13@gmail.com
2026-06-21 10:16 + UTC

sridevinimata13@gmail.com
2026-06-21 10:16 + UTC

sridevinimata13@gmail.com
2026-06-21 10:16 + UTC



22/22 243

01:24:11

Problems



Section: Aptitude Hard

MCQ

3.00



Select your answer to the problem below

16

Meesho puzzle: You have 12 identical-looking balls; exactly one is different weight (you don't know if heavier or lighter). Using a balance scale, what is the minimum number of weighings guaranteed to identify the odd ball?

Aptitude Hard

MCQ

3.00

Meesho puzzle: You have 12 identical-looking balls; exactly one is a different weight (you don't know if heavier or lighter). Using a balance scale, what is the minimum number of weighings guaranteed to identify the odd ball?

sridevinimala13@gmail.com
2026-06-21 10:16 + UTC

4

2

5

3

Reset Answer

17

What will be the output of this code?...

C programm...

MCQ

1.00

What is wrong with this code?

18

C programm...

MCQ

2.00

19

What will be the output of this code?...

C programm...

MCQ

2.00

Switch theme

Help

End test

< Previous

16/22

Next >

Problems



Section: C programming Easy MCQ 1.00

Select your answer to the problem below

16 Meesho puzzle: You have 12 identical-looking balls; exactly o...
Aptitude Hard MCQ 3.00

17 What will be the output of this code?...
C programm... MCQ 1.00

18 What is wrong with this code?
... C programm... MCQ 2.00

19 What will be the output of this code?...
C programm... MCQ 2.00

What will be the output of this code?

```
#include <stdio.h>
int main() {
    int a = 10, b = 3;
    printf("%d %d\n", a / b, a % b);
    return 0;
}
```

31

3.331

33

13

Reset Answer

Switch theme

Help

End test

< Previous

17/22

Next >



22/22 243

01:23:51

Problems



Section: C programming Medium MCQ 2.00

Select your answer to the problem below

16 Meesho puzzle: You have 12 identical-looking balls; exactly o...
Aptitude Hard MCQ 3.00

17 What will be the output of this code?...
C programm... MCQ 1.00

18 What is wrong with this code?
... MCQ 2.00

19 What will be the output of this code?...
C programm... MCQ 2.00

Switch theme

Help

End test

What is wrong with this code?

```
#include <stdio.h>
void resize(int *size) {
    size = size + 1;
}
int main() {
    int n = 10;
    resize(&n);
    printf("%d\n", n);
    return 0;
}
```

The function modifies a local copy of the pointer, so n stays 10

Null pointer dereference

Nothing wrong; prints 11

☒ Compilation error

Reset Answer

< Previous

18/22

Next >



22/22 243

01:23:46

Problems



Section: C programming Medium MCQ 2.00

Select your answer to the problem below

16 Meesho puzzle: You have 12 identical-looking balls; exactly o...
Aptitude Hard MCQ 3.00

17 What will be the output of this code?...
C programm... MCQ 1.00

18 What is wrong with this code? ...
C programm... MCQ 2.00

19 What will be the output of this code?...
C programm... MCQ 2.00

What will be the output of this code?

```
#include <stdio.h>
int main() {
    int arr[3] = {10, 20, 30};
    printf("%d\n", *arr + *(arr + 2));
    return 0;
}
```

30

50

60

40

Reset Answer

Switch theme

Help

End test

< Previous

19/22

Next >



22/22 243

01:23:39

Problems

C programm... MCQ 2.00

19 What will be the output of this code?...

C programm... MCQ 2.00

20 What will be the output of this code?...

C programm... MCQ 3.00

21 Longest Span Hitting a Target

Hands-on Programming 100.00

22 Order Windows Hitting a Target

Hands-on Programming 100.00

Switch theme

Help

and test

Section: C programming Hard MCQ 3.00

What will be the output of this code?

```
#include <stdio.h>
int main() {
    int i = 5;
    printf("%d\n", i++ + ++i);
    return 0;
}
```

sridevinimmala13@gmail.com
2026-06-21 10:16 + UTC

Select your answer to the problem below

12

10

☒ Undefined behavior

11

Reset Answer

< Previous

20/22

Next >

22/22 243

01:23:34

Problems

C programm... MCQ 2.00

What will be the output of this code?...

C programm... MCQ 2.00

What will be the output of this code?...

C programm... MCQ 3.00

Longest Span Hitting a Target

Hands-on Programming 100.00

Order Windows Hitting a Target

Hands-on Programming 100.00

Switch theme

est

Section: Hands-on Programming 100.00

Longest Span Hitting a Target

Meesho's growth team has n days of net new signups for a campaign; churn-heavy days can be negative. For a case-study chart they want to highlight the LONGEST unbroken stretch of days whose net signups add up to exactly a milestone figure T . Among all stretches that hit T exactly, they care only about the longest one's length, so the chart annotation spans as many days as possible. Given the daily net signups and the milestone T , report the length of the longest contiguous stretch summing to exactly T , or 0 if none does.

Input format

- Line 1: integers n
- Line 2: integer T
- Line 3: n space-separated integers $signup[i]$

[< Previous](#) 21/22 [Next >](#)

Python (python 2.7.16)

Run Submit

```
1 def longestSpanHittingTarget (n, target,
2   signup):
3     n=int(n)
4     target=int(target)
5     prefix_map={0:-1}
6     current_sum=0
7     max_length=0
8     for i in range(n):
9       current_val =int(signup[i])
10      current_sum+= current_val
11      diff=current_sum-target
12      if diff in prefix_map:
```

Autocomplete Ln 1, Col 1 Tab: 4 Spaces Visual Studio

Test cases Quick test Results

Test case 1

Sample Input 1

5
9
1 2 3 4 5

Sample Output 1

3

Problems

C programm... MCQ 2.00

What will be the output of this code?...

C programm... MCQ 2.00

What will be the output of this code?...

21 Longest Span Hitting a Target

Hands-on Programming 100.00

Order Windows Hitting a Target

Hands-on Programming 100.00

Switch theme

Help

End test

01:23:28

Section: Hands-on Programming 100.00

- Line 1: Integers n
- Line 2: Integer T
- Line 3: n space-separated integers signup[i] (may be negative).

Output format

A single integer: the length of the longest contiguous span summing to exactly T, or 0 if no span sums to T.

Constraints

- $1 \leq n \leq 200000$
- $-10^9 \leq \text{signup}[i] \leq 10^9$
- $-1e18 \leq T \leq 1e18$

Sample Input 1

Sample Output 1

< Previous

21/22

Next >

Python (python 2.7.18)

```
1 def longestSpanHittingTarget (n, target,
2     signup):
3     n=int(n)
4     target=int(target)
5     prefix_map={0:-1}
6     current_sum=0
7     max_length=0
8     for i in range(n):
9         current_val =int(signup[i])
10        current_sum+= current_val
11        diff=current_sum-target
12        if diff in prefix_map:
```

Autocomplete Ln 1, Col 1 Tab: 4 Spaces Word Shado

Test cases Quick test Results

Test case 1

Sample Input 1

5
9
1 2 3 4 5

Sample Output 1

3

22/22243

01:23:24

RunSubmit

Problems

C programm...MCQ2.00

What will be the output of this code?...

C programm...MCQ2.00

What will be the output of this code?...

C programm...MCQ3.00

21Longest Span Hitting a Target

Hands-onProgramming100.00

22Order Windows Hitting a Target

Hands-onProgramming100.00

Switch theme

Help

End test

Section: Hands-onProgramming100.00

- $-10^9 \leq \text{signup}[i] \leq 10^9$
- $-1e18 \leq T \leq 1e18$

Sample Input 1

Sample Output 1

3

100

1 2 3

Explanation

Sample input and sample output

Sample input 1 (in00.txt):

3

100

1 2 3

Sample output 1 (out00.txt):

3

Sample explanation: With T = 100, the longest span is 3.

< Previous

21/22

Next >

Python (python 2.7.18)

1def longestSpanHittingTarget (n, target, signup):

2 n=int(n)

3 target=int(target)

4 prefix_map={0:-1}

5 current_sum=0

6 max_length=0

7 for i in range(n):

8 current_val =int(signup[i])

9 current_sum+= current_val

10 diff=current_sum-target

11 if diff in prefix_map:

AutocompleteLn 1, Col 1Tab: 4 SpacesVisual Studio

Test casesQuick testResults

Test case 1

Sample Input 1

Sample Output 1

5

9

1 2 3 4 5

1



22/22 243

01:23:21

Problems

C programm... MCQ 2.00

What will be the output of this code?...

19

C programm... MCQ 2.00

What will be the output of this code?...

20

C programm... MCQ 3.00

Longest Span Hitting a Target

21

Hands-on Programming 100.00

Order Windows Hitting a Target

22

Hands-on Programming 100.00

Switch theme

Help

End test

Section: Hands-on

Programming

100.00

Note: Your code must be able to print the sample output from the provided sample input. However, your code is run against multiple hidden test cases. Therefore, your code must pass these hidden test cases to solve the problem statement.

Limits

Time Limit: 5.0 sec(s) for each input file

Memory Limit: 256 MB

Source Limit: 1024 KB

Scoring

Score is assigned if any testcase passes

Allowed Languages

Bash, C, C++14, C++17, Clojure, C#, D, Erlang, F#, Go, Groovy, Haskell, Java 8, Java 14, Java 17, JavaScript(Node.js), Julia, Kotlin, Lisp (SBCL), Lua, Objective-C, OCaml, Octave, Pascal, Perl, PHP, Python, Python 3, Python 3.8, R(RScript), Racket, Ruby, Rust, Scala, Swift, TypeScript, Visual Basic

Python (python 2.7.18)

```
1 def longestSpanHittingTarget (n, target,
  signup):
2     n=int(n)
3     target=int(target)
4     prefix_map={}
5     current_sum=0
6     max_length=0
7     for i in range(n):
8         current_val =int(signup[i])
9         current_sum+= current_val
10        diff=current_sum-target
11        if diff in prefix_map:
```

Autocomplete Ln 1, Col 1 Tab: 4 Spaces Visual Studio

Test cases Quick test Results

Test case 1

Sample Input 1

```
5
+
1 2 3 4 5
```

Sample Output 1

3

< Previous

21/22

Next >

01:23:10

Run

Submit

Section: Hands-on

Programming

100.00

歳

Note: Your code must be able to print the sample output from the provided sample input. However, your code is run against multiple hidden test cases. Therefore, your code must pass these hidden test cases to solve the problem statement.

Limits

Time Limit: 5.0 sec(s) for each input file

Memory Limit: 256 MB

Source Limit: 1024 KB

Scoring

Score is assigned if any testcase passes

Allowed Languages

Bash, C, C++14, C++17, Clojure, C#, D, Erlang, F#, Go, Groovy, Haskell, Java 8, Java 14, Java 17, JavaScript(Node.js), Julia, Kotlin, Lisp (SBCL), Lua, Objective-C, OCaml, Octave, Pascal, Perl, PHP, Python, Python 3, Python 3.8, R(RScript), Racket, Ruby, Rust, Scala, Swift, TypeScript, Visual Basic

Python (python 2.7.18)

```
1 def longestSpanHittingTarget (n, target,
  signup):
2     n=int(n)
3     target=int(target)
4     prefix_map={0:-1}
5     current_sum=0
6     max_length=0
7     for i in range(n):
8         current_val =int(signup[i])
9         current_sum+= current_val
10        diff=current_sum-target
11        if diff in prefix_map:
12            current_length=i-prefix_map[diff]
13            if current_length>max_length:
14                max_length=current_length
15        if current_sum not in prefix_map:
16            prefix_map[current_sum]=i
17    return max_length
18 > ...
```

Autocomplete

Ln 1, Col 1

Tab: 4 Spaces

Visual Studio

Test cases Quick test Results

Test case 1

Sample Input 1

Sample Output 1

L14

< Previous

21/22

Next >



22/22 243

01:23:04

Problems

C programm... MCQ 2.00

19 What will be the output of this code?...

C programm... MCQ 2.00

20 What will be the output of this code?...

C programm... MCQ 3.00

21 Longest Span Hitting a Target

Hands-on Programming 100.00

22 Order Windows Hitting a Target

Hands-on Programming 100.00

Switch theme

Help

Test

Section: Hands-on

Programming

100.00

Order Windows Hitting a Target

Meesho's reconciliation team is auditing a seller's ledger that lists, day by day, the net order amount booked on each of n consecutive days; refunds and chargebacks appear as negative entries. The auditors must flag, for manual review, every unbroken span of consecutive days whose net order amounts add up to exactly T rupees, because that figure matches a known settlement batch. Spans that start or end on different days count separately, even if they overlap. Before assigning reviewers, the lead wants the total number of qualifying spans. Given the daily amounts and the target T , count them.

Input format

- Line 1: integers n
- Line 2: integer T .

< Previous

22/22

Next >

Run

Submit

Python (python 2.7.18)

```
1 def orderWindowsHittingTarget (n, target, amount):
2     prefix_map={0:1}
3     current_sum=0
4     total_windows=0
5     for val in amount:
6         current_sum+=int(val)
7         total_windows+=prefix_map.get
8         (current_sum-int(target),0)
9         prefix_map[current_sum]=prefix_map
10        (current_sum,0)+1
11        return total_windows
```

Autocomplete Ln 1, Col 1 Tab: 4 Spaces View

Test cases Quick test Results

Test case 1

Sample Input 1

```
5
7
3 4 7 2 -1
```

Sample Output 1

2



22/22 243

01:22:59

Run

Problems

C programm... MCQ 2.00

What will be the output of this code?...

19

C programm... MCQ 2.00

What will be the output of this code?...

20

C programm... MCQ 3.00

Longest Span Hitting a Target

21

Hands-on Programming 100.00

Order Windows Hitting a Target

22

Hands-on Programming 100.00

Switch theme

Help

End test

Section: Hands-on

Programming

100.00

100

Input format

- Line 1: Integers n
- Line 2: Integer T.
- Line 3: n space-separated integers amount[i] (may be negative).

Output format

A single integer: the number of contiguous day-spans whose amounts sum to exactly T.

Constraints

- $1 \leq n \leq 200000$
- $-1_000_000_000 \leq \text{amount}[i] \leq 10^9$
- $-1e18 \leq T \leq 1e18$

Sample Input 1

Sample Output 1

< Previous

22/22

Next >

Python (python 2.7.18)

```
1 def orderWindowsHittingTarget (n, t, amount):
2     prefix_map={0:1}
3     current_sum=0
4     total_windows=0
5     for val in amount:
6         current_sum+=int(val)
7         total_windows+=prefix_map.get(current_sum-int(target),0)
8         prefix_map[current_sum]=prefix_map.get(current_sum,0)+1
9     return total_windows
```

Autocomplete

Ln 1, Col 1

Tab: 4

Test cases Quick test Results

Test case 1

Sample Input 1

```
5
7
3 4 7 2 -1
```

Sample Output 1

2

01:22:54

Problems

C programm... MCQ 2.00

19 What will be the output of this code?...

C programm... MCQ 2.00

20 What will be the output of this code?...

C programm... MCQ 3.00

21 Longest Span Hitting a Target

Hands-on Programming 100.00

22 Order Windows Hitting a Target

Hands-on Programming 100.00

Switch theme

Help

nd test

Section: Hands-on

Programming

100.00

Sample Input 1

```
4
0
0 0 0 0
```

Sample Output 1

```
10
```

Explanation

Sample input and sample output

Sample input 1:

```
5
7
3 4 7 2 -1
```

Sample output 1:

```
2
```

Sample explanation: With target 7 and windows [3, 4, 7, 2, -1], the spans [3, 4] and [7] each have 2 windows.

Sample input 2:

```
4
```

```
0
```

< Previous

22/22

Next >

Run

Submit

Python (python 2.7.18)

```
1 def orderWindowsHittingTarget (n, target, amount):
2     prefix_map={0:1}
3     current_sum=0
4     total_windows=0
5     for val in amount:
6         current_sum+=int(val)
7         total_windows+=prefix_map.get
8         (current_sum-int(target),0)
9         prefix_map[current_sum]=prefix_map
10        (current_sum,0)+1
11    return total_windows
```

Autocomplete

Ln 1, Col 1

Tab: 4 Spaces

Test cases Quick test Results

Test case 1

Sample Input 1

```
5
7
3 4 7 2 -1
```

Sample Output 1

```
2
```

Problems

C programm... MCQ 2.00

19 What will be the output of this code?...

C programm... MCQ 2.00

20 What will be the output of this code?...

C programm... MCQ 3.00

21 Longest Span Hitting a Target

Hands-on Programming 100.00

22 Order Windows Hitting a Target

Hands-on Programming 100.00

Switch theme

Help

End test

Section: Hands-on Programming 100.00

Note: Your code must be able to print the sample output from the provided sample input. However, your code is run against multiple hidden test cases. Therefore, your code must pass these hidden test cases to solve the problem statement.

Limits

Time Limit: 5.0 sec(s) for each input file

Memory Limit: 256 MB

Source Limit: 1024 KB

Scoring

Score is assigned if any testcase passes

Allowed Languages

Bash, C, C++14, C++17, Clojure, C#, D, Erlang, F#, Go, Groovy, Haskell, Java 8, Java 14, Java 17, JavaScript(Node.js), Julia, Kotlin, Lisp (SBCL), Lua, Objective-C, OCaml, Octave, Pascal, Perl, PHP, Python, Python 3, Python 3.8, R(RScript), Racket, Ruby, Rust, Scala, Swift, TypeScript, Visual Basic

Python (python 2.7.18)

```
1 def orderWindowsHittingTarget (n, amount):
2     prefix_map={0:1}
3     current_sum=0
4     total_windows=0
5     for val in amount:
6         current_sum+=int(val)
7         total_windows+=prefix_map
8         (current_sum-int(target),0)
9         prefix_map[current_sum]=
10    (current_sum,0)+1
11    return total_windows
```

Test cases Quick test Results

Test case 1

Sample Input 1

```
5
7
3 4 7 2 -1
```

Sample Output

2

< Previous

22/22

Next >

Section: Hands-on

Programming

100.00



Run

Submit

Note: Your code must be able to print the sample output from the provided sample input. However, your code is run against multiple hidden test cases. Therefore, your code must pass these hidden test cases to solve the problem statement.

Time Limit: 5.0 sec(s) for each input file
Memory Limit: 256 MB
Space Limit: 1024 KB

is assigned if any testcase passes

Supported Languages

C, C++14, C++17, Clojure, C#, D, Erlang, F#, Go, Haskell, Java 8, Java 14, Java 17, JavaScript (Node.js), Julia, Kotlin, Lisp (SBCL), Lua, Objective-C, OCaml, Octave, Pascal, Perl, PHP, Python, Python 3, Python 3.8, R(RScript), Racket, Ruby, Rust, Swift, TypeScript, Visual Basic

Python (python 2.7.18)

```
1 def orderWindowsHittingTarget (n, target,
2     amount):
3     prefix_map={0:1}
4     current_sum=0
5     total_windows=0
6     for val in amount:
7         current_sum+=int(val)
8         total_windows+=prefix_map.get
9         (current_sum-int(target),0)
10        prefix_map[current_sum]=prefix_map.get
11        (current_sum,0)+1
12    return total_windows
13 > ...
```

Autocomplete

Ln 1, Col 1

Tab: 4 Spaces

Visual Studio

Previous

22/22

Next >

Test cases Quick test Results

L14