

CloudFront & Route 53

1. Configure VPC peering in cross regions.

STEP 1: Create VPC in Mumbai Region

1. Login to AWS Console
2. Select Region: ap-south-1 (Mumbai)
3. Go to VPC Dashboard
4. Click Create VPC
5. Select VPC only
6. Name: Mumbai-VPC
7. CIDR: 10.0.0.0/16

Click Create

VPC → Create VPC

The screenshot shows the AWS Management Console interface for creating a new VPC. The breadcrumb navigation at the top indicates the path: VPC > Your VPCs > Create VPC. The page title is 'Create VPC' with an 'Info' link. A descriptive text states: 'A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.'

The 'VPC settings' section contains the following configuration options:

- Resources to create:** Two radio buttons are present. 'VPC only' is selected, and 'VPC and more' is unselected.
- Name tag - optional:** A text input field contains the value 'mumbai-vpc'. A small note below the field states: 'Creates a tag with a key of 'Name' and a value that you specify.'
- IPv4 CIDR block:** Two radio buttons are present. 'IPv4 CIDR manual input' is selected, and 'IPAM-allocated IPv4 CIDR block' is unselected.
- IPv4 CIDR:** A text input field contains the value '10.0.0.0/16'. A note below the field states: 'CIDR block size must be between /16 and /28.'
- IPv6 CIDR block:** Four radio buttons are present. 'No IPv6 CIDR block' is selected. The other three options are 'IPAM-allocated IPv6 CIDR block', 'Amazon-provided IPv6 CIDR block', and 'IPv6 CIDR owned by me', all of which are unselected.

Search [Alt+S] [Icons] Asia Pacific (Mumbai) Srihari (299582146630) Srihari

vpc-0b7408d4602f12dc3

You successfully created vpc-0b7408d4602f12dc3 / mumbai-vpc

vpc-0b7408d4602f12dc3 / mumbai-vpc

Actions

Details Info			
VPC ID vpc-0b7408d4602f12dc3	State Available	Block Public Access Off	DNS hostnames Disabled
DNS resolution Enabled	Tenancy default	DHCP option set dopt-06f9ef1cc1e355905	Main route table rtb-0c220e03b6f8e2079
Main network ACL acl-0a08842f5a67c4b4a	Default VPC No	IPv4 CIDR 10.0.0.0/16	IPv6 pool -
IPv6 CIDR (Network border group) -	Network Address Usage metrics Disabled	Route 53 Resolver DNS Firewall rule groups -	Owner ID 299582146630
Encryption control ID -	Encryption control mode -		

Resource map CIDRs Flow logs Tags Related resources Integrations

Resource map Info Show all details

STEP 2: Create VPC in Virginia Region

1. Change Region to us-east-1 (Virginia)
2. Go to VPC Dashboard
3. Click Create VPC
4. Name: Virginia-VPC
5. CIDR: 192.168.0.0/16
6. Click Create

Search [Alt+S] [Icons] United States (N. Virginia) Srihari (299582146630) Srihari

vpc-0a22ea1ac1492252f

You successfully created vpc-0a22ea1ac1492252f / virginia-vpc

vpc-0a22ea1ac1492252f / virginia-vpc

Actions

Details Info			
VPC ID vpc-0a22ea1ac1492252f	State Available	Block Public Access Off	DNS hostnames Disabled
DNS resolution Enabled	Tenancy default	DHCP option set dopt-0cf74ab7503438a83	Main route table rtb-0c0aa2aa1905fc5f8
Main network ACL acl-0b43053d20016dd91	Default VPC No	IPv4 CIDR 192.168.0.0/16	IPv6 pool -
IPv6 CIDR (Network border group) -	Network Address Usage metrics Disabled	Route 53 Resolver DNS Firewall rule groups -	Owner ID 299582146630
Encryption control ID -	Encryption control mode -		

Resource map CIDRs Flow logs Tags Related resources Integrations

Resource map Info Show all details

STEP 3: Create Peering Connection

1. Go to Mumbai Region
2. Open VPC Dashboard
3. Click Peering Connections
4. Click Create Peering Connection
5. Name: Cross-Region-Peering
6. Select Requester VPC: Mumbai-VPC
7. Select Another Region
8. Choose us-east-1
9. Select Virginia-VPC ID
10. Click Create

The screenshot displays the AWS VPC console interface. At the top, a green notification bar states: "A VPC peering connection pcx-02a0455d9aa239d98 / Cross-Region-Peering has been requested. Remember to change your region to us-east-1 to accept the peering connection." Below this, the page title is "pcx-02a0455d9aa239d98 / Cross-Region-Peering". The main content area is divided into two sections: "Details" and "DNS settings".

Details

Requester owner ID	Accepter owner ID	VPC Peering connection ARN
299582146630	299582146630	arn:aws:ec2:ap-south-1:299582146630:vpc-peering-connection/pcx-02a0455d9aa239d98
Peering connection ID	Requester VPC	Accepter VPC
pcx-02a0455d9aa239d98	vpc-0b7408d4602f12dc3 / mumbai-vpc	vpc-0a22ea1ac1492252f
Status	Requester CIDRs	Accepter CIDRs
Initiating Request to 299582146630	10.0.0.0/16	-
Expiration time	Requester Region	Accepter Region
Friday, July 24, 2026 at 19:12:26 GMT+5:30	Mumbai (ap-south-1)	N. Virginia (us-east-1)

DNS settings

Requester VPC ([vpc-0b7408d4602f12dc3 / mumbai-vpc](#))

Allow accepter VPC to resolve DNS of hosts in requester VPC to private IP addresses

Disabled

STEP 4: Accept Peering Connection

1. Switch to Virginia Region
2. Open VPC Dashboard
3. Click Peering Connections
4. Select Cross-Region-Peering
5. Click Actions
6. Click Accept Request
7. Status becomes Active

The screenshot shows the AWS VPC console interface. At the top, the region is set to 'United States (N. Virginia)'. The 'Peering connections' page is displayed, showing a table with one entry: 'pcx-02a0455d9aa239d98' with a status of 'Pending acceptance'. An 'Actions' dropdown menu is open, showing options like 'View details', 'Accept request', 'Reject request', 'Edit DNS settings', 'Manage tags', and 'Delete peering connection'. The 'Accept request' option is highlighted.

Below the table, the details for the peering connection 'pcx-02a0455d9aa239d98' are shown. The status is 'Pending acceptance'. The details include:

- Requester owner ID: 299582146630
- Requester VPC: vpc-0b7408d4602f12dc3
- Requester CIDRs: 10.0.0.0/16
- Requester Region: us-east-1
- Accepter owner ID: 299582146630
- Accepter VPC: vpc-0a22ea1ac1492252f / virginia-vpc
- Accepter CIDRs: 192.168.0.0/16
- VPC Peering connection ARN: arn:aws:ec2:us-east-1:299582146630:vpc-peering-connection/pcx-02a0455d9aa239d98

A green notification banner at the bottom states: 'Your VPC peering connection (pcx-02a0455d9aa239d98) has been established. To send and receive traffic across this VPC peering connection, you must add a route to the peered VPC in one or more of your VPC route tables.' A button 'Modify my route tables now' is present.

The details section is updated to show the status as 'Active'.

Footer: © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

ch

[Alt+S] Ask Amazon Q

United States (N. Virginia)

Srihari (299582146630)

Srihari

pcx-02a0455d9aa239d98

pcx-02a0455d9aa239d98

Actions

Details Info

Requester owner ID

299582146630

Peering connection ID

pcx-02a0455d9aa239d98

Status

Active

Expiration time

-

Accepter owner ID

299582146630

Requester VPC

vpc-0b7408d4602f12dc3

Requester CIDRs

10.0.0.0/16

Requester Region

Mumbai (ap-south-1)

VPC Peering connection ARN

arn:aws:ec2:us-east-1:299582146630:vpc-peering-connection/pcx-02a0455d9aa239d98

Accepter VPC

vpc-0a22ea1ac1492252f / virginia-vpc

Accepter CIDRs

192.168.0.0/16

Accepter Region

N. Virginia (us-east-1)

DNS

Route tables

Tags

DNS settings

Edit DNS settings

Requester VPC (vpc-0b7408d4602f12dc3) Info

aws

Search

[Alt+S] Ask Amazon Q

United States (N. Virginia)

Srihari (299582146630)

Srihari

VPC > Route tables > rtb-0c0aa2aa1905fc5f8 > Edit routes

Edit routes

Destination	Target	Status	Propagated	Route Origin	
192.168.0.0/16	local	Active	No	CreateRouteTable	
168.150.0.0/20	Peering Connection	Active	No	CreateRoute	Remove
0.0.0.0/16	Peering Connection	Active	No	CreateRoute	Remove

Add route

Cancel

Preview

Save changes

```
Amazon Linux 2023
https://aws.amazon.com/linux/amazon-linux-2023

c2-user@ip-10-0-1-70 ~$ ping 10.0.1.70
PING 10.0.1.70 (10.0.1.70) 56(84) bytes of data:
bytes from 10.0.1.70: icmp_seq=1 ttl=127 time=0.018 ms
bytes from 10.0.1.70: icmp_seq=2 ttl=127 time=0.032 ms
bytes from 10.0.1.70: icmp_seq=3 ttl=127 time=0.033 ms
bytes from 10.0.1.70: icmp_seq=4 ttl=127 time=0.032 ms
bytes from 10.0.1.70: icmp_seq=5 ttl=127 time=0.032 ms
bytes from 10.0.1.70: icmp_seq=6 ttl=127 time=0.033 ms
bytes from 10.0.1.70: icmp_seq=7 ttl=127 time=0.030 ms
bytes from 10.0.1.70: icmp_seq=8 ttl=127 time=0.031 ms
bytes from 10.0.1.70: icmp_seq=9 ttl=127 time=0.032 ms
bytes from 10.0.1.70: icmp_seq=10 ttl=127 time=0.031 ms
bytes from 10.0.1.70: icmp_seq=11 ttl=127 time=0.033 ms
bytes from 10.0.1.70: icmp_seq=12 ttl=127 time=0.030 ms
bytes from 10.0.1.70: icmp_seq=13 ttl=127 time=0.034 ms
bytes from 10.0.1.70: icmp_seq=14 ttl=127 time=0.034 ms
bytes from 10.0.1.70: icmp_seq=15 ttl=127 time=0.031 ms
```


2. Purchase one domain from GoDaddy.

Objective

To purchase and register a public domain name that will be used for hosting the website through CloudFront and Route 53.

Prerequisites

- GoDaddy account.
- Valid payment method.
- Unique domain name not already registered.
- Access to the email account used for domain registration.

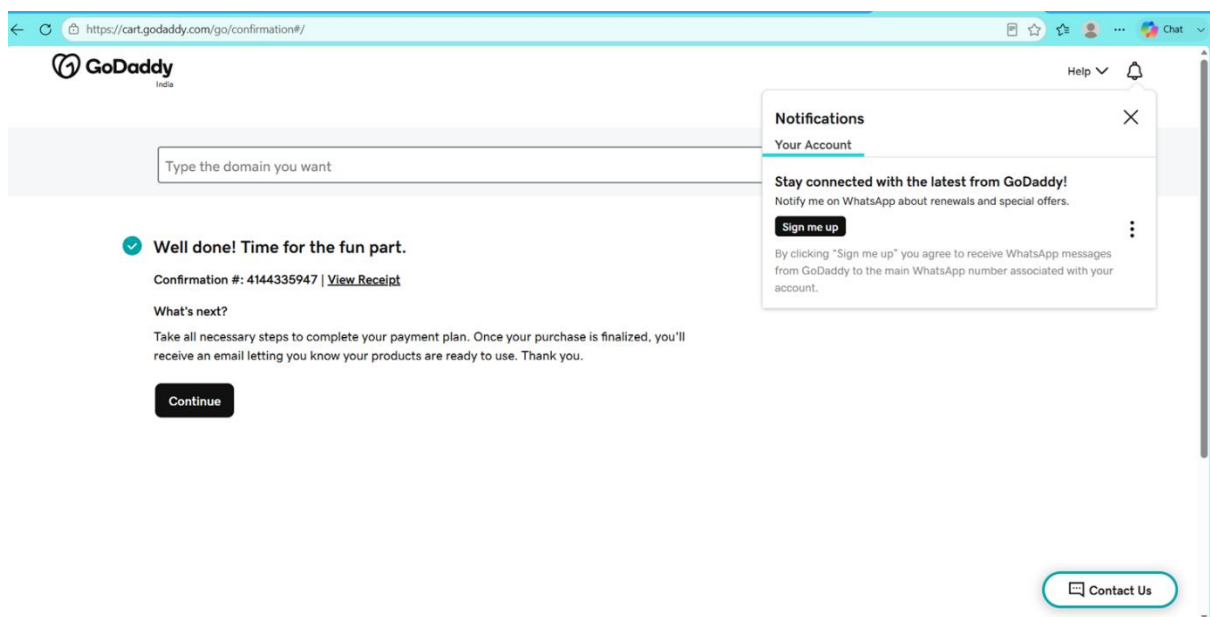

Outcome

Successfully purchased and registered a public domain through GoDaddy. The domain is active and ready to be integrated with Route 53 and CloudFront for website hosting.


3. Deploy static website in S3.

Step 1: Create an S3 Bucket

1. Login to AWS Console.
2. Go to **S3**.
3. Click **Create bucket**.
4. Enter a unique bucket name.
Example:

mywebsite-demo-123

5. Select your AWS Region.
6. **Uncheck** "Block all public access".
7. Acknowledge the warning.
8. Click **Create bucket**.

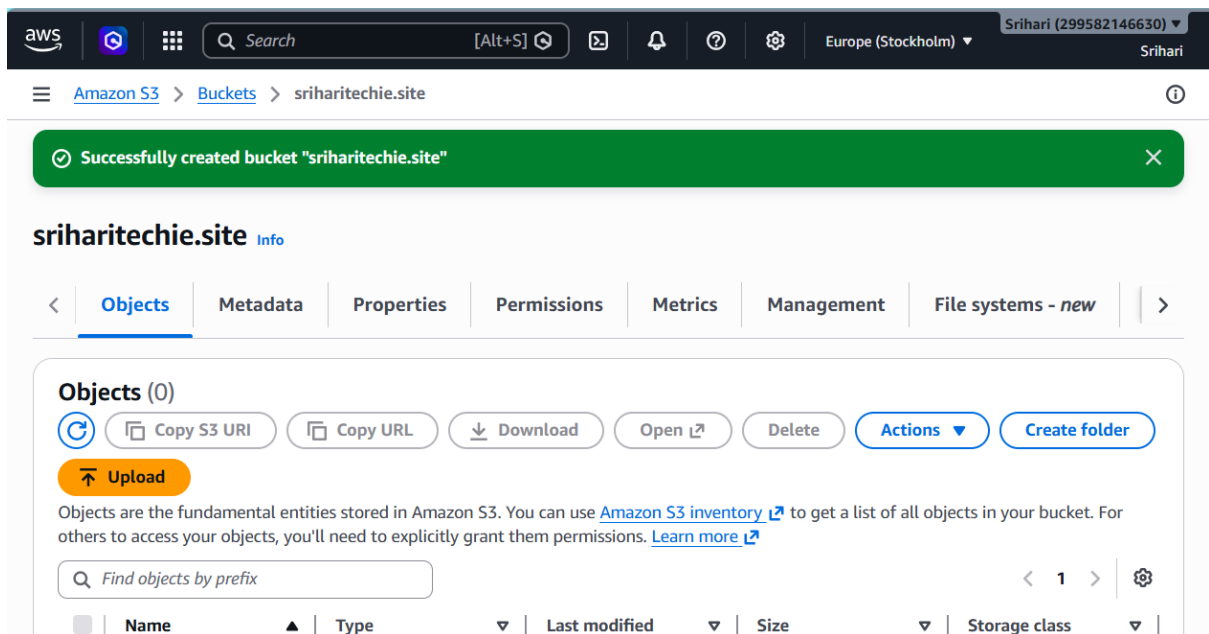


Step 2: Upload Website Files

Upload:

- index.html
- style.css (if any)
- images (if any)

Click **Upload** → **Add files** → **Upload**.

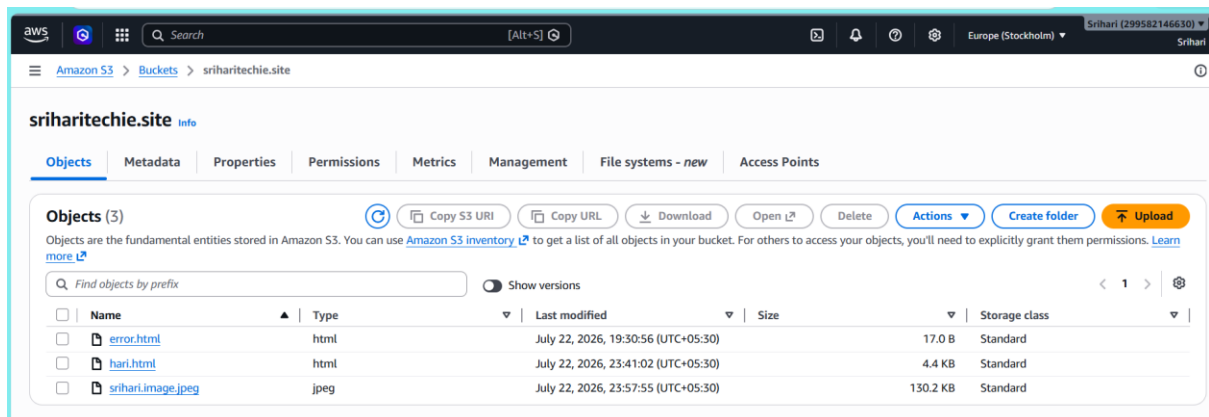

Step 3: Enable Static Website Hosting


1. Open the bucket.
2. Go to **Properties**.
3. Scroll to **Static website hosting**.
4. Click **Edit**.
5. Enable **Static website hosting**.
6. Choose **Host a static website**.
7. Index document:

index.html

8. Save.

You'll get an endpoint like:

<http://sriharitechie.site.s3-website.eu-north-1.amazonaws.com>

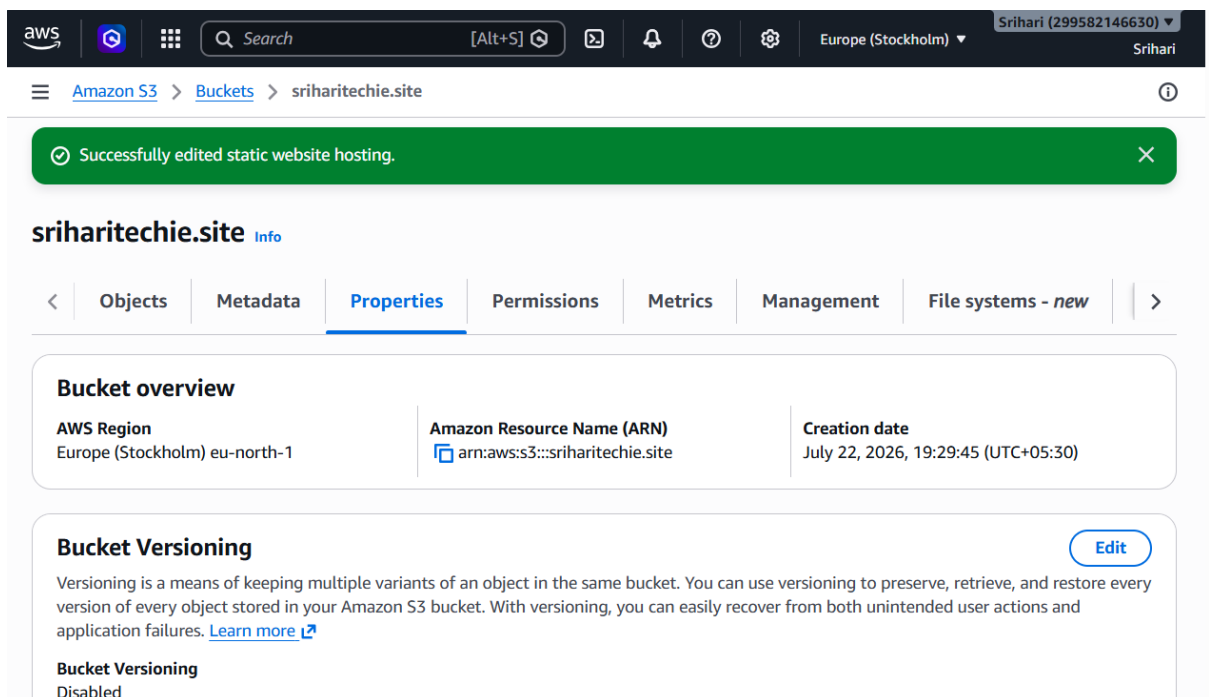

Step 4: Make Bucket Public

Go to

Permissions → Bucket Policy

Paste:

```
{  
  "Version": "2012-10-17",  
  "Statement": [{  
    "Sid": "PublicRead",  
    "Effect": "Allow",  
    "Principal": "*",  
    "Action": "s3:GetObject",  
    "Resource": "arn:aws:s3:::mywebsite-demo-123/*"  
  }]  
}
```

Replace the bucket name.

Test the S3 website endpoint.

aws [Search] [Alt+S] Europe (Stockholm) Srihari (299582146630) Srihari

Amazon S3 > Buckets > sriharitechie.site

Successfully edited bucket policy.

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "PublicRead",  
      "Effect": "Allow",  
      "Principal": "*",  
      "Action": "s3:GetObject",  
      "Resource": "arn:aws:s3:::sriharitechie.site/*"  
    }  
  ]  
}
```

Copy

4. Create a CDN and attach one SSL certificate.


Step 1

Go to

CloudFront

Click

Create Distribution

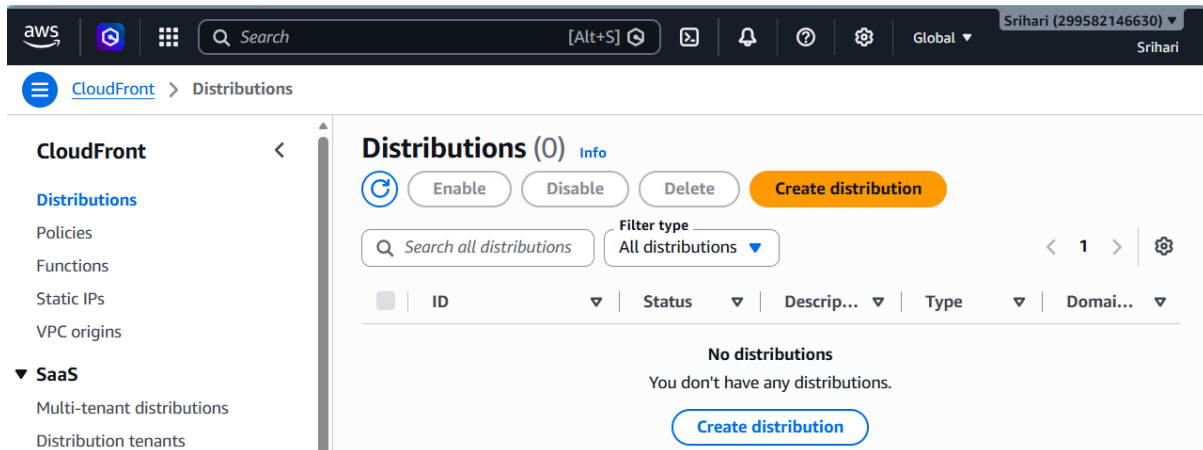


Step 2

Origin Domain

Select your S3 bucket.

If using static website hosting, select the **S3 Website Endpoint**, not the REST endpoint.

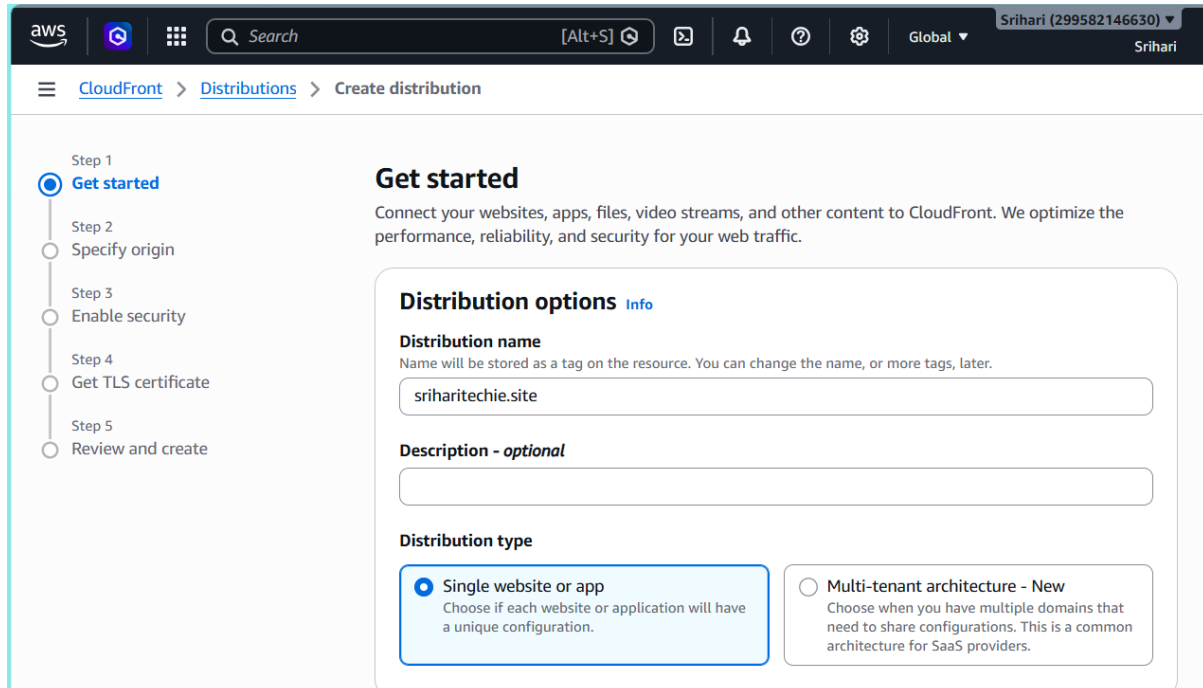

aws

Search

[Alt+S]

Global

Srihari (299582146630)

Srihari

CloudFront > Distributions > Create distribution

Step 2

Specify origin

Step 3

Enable security

Step 4

Review and create

Origin type

Your origin is where your content (such as a website or app) lives. CloudFront works with AWS-based origins and origins hosted on other cloud providers.

Origin type

☒ Amazon S3

Deliver static assets like files and images, statically generated websites or single page applications (SPA).

☐ Elastic Load Balancer

Deliver applications hosted behind ELB such as dynamic websites, web services, and APIs.

☐ API Gateway

Deliver API endpoints for REST APIs hosted on API Gateway.

☐ Elemental MediaPackage

Deliver end-to-end live events or video on demand (VOD).

☐ VPC origin

Deliver applications and content hosted within private VPCs, such as EC2 instances and Application Load Balancers.

☐ Other

Refer to any AWS or non-AWS origin through its publicly resolvable URL.

Origin

S3 origin

Choose an AWS origin, or enter your origin's domain name. [Learn more](#)

sriharitechie.site.s3.eu-north-1.amazonaws.com

aws

Search

[Alt+S]

Global

Srihari (299582146630)

Srihari

CloudFront > Distributions > Create distribution

Step 1

Get started

Step 2

Specify origin

Step 3

Enable security

Step 4

Review and create

Enable security

Web Application Firewall (WAF) Info

☐ Enable security protections

Keep your application secure from the most common web threats and security vulnerabilities using AWS WAF. Blocked requests are stopped before they reach your web servers.


☒ Do not enable security protections

Select this option if your application does not need security protections from AWS WAF.

Cancel

Previous

Next

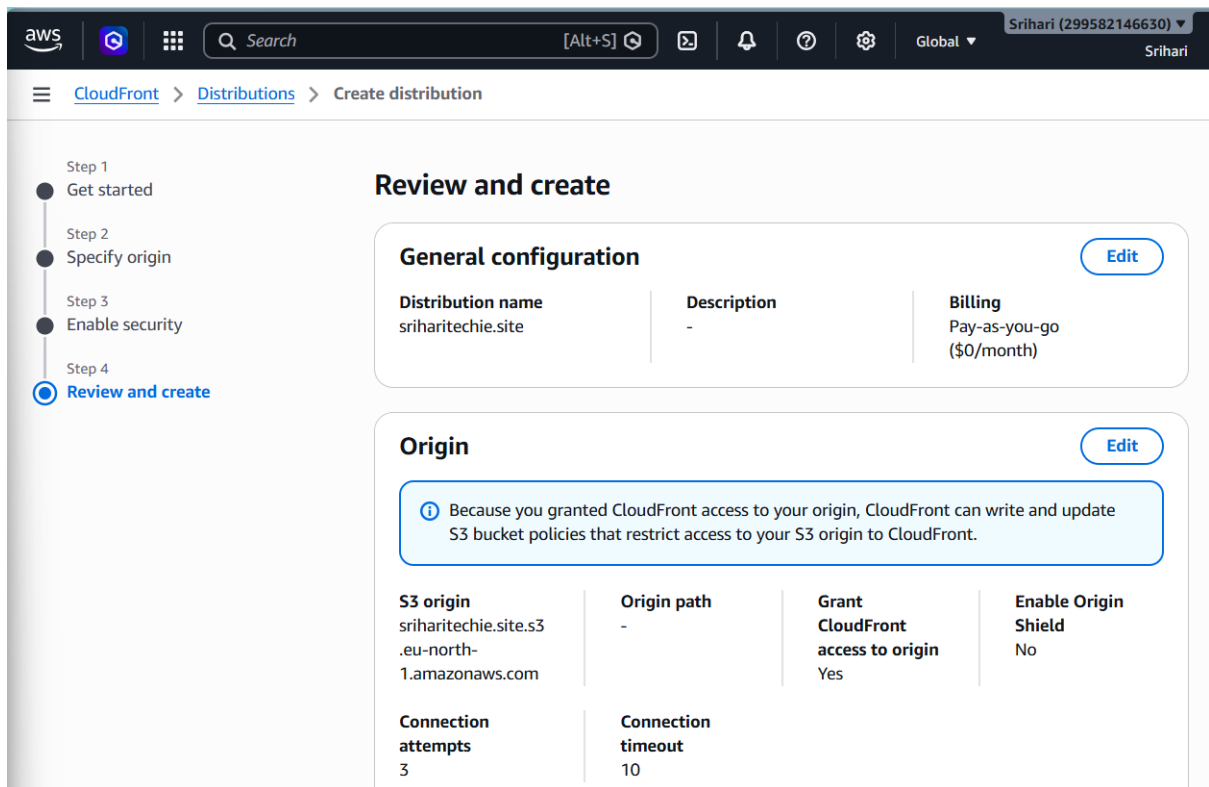

Step 3

Viewer Protocol Policy

Redirect HTTP to HTTPS

Step 4

Default Root Object

index.html

Step 5

Click

Create Distribution

Wait 10–20 minutes.

Example CloudFront URL:

<https://d39eroetgzce6r.cloudfront.net>

aws [Search] [Alt+S] Global Srihari (299582146630) Srihari

CloudFront > Distributions > E31ALO2OMYE2U3

Successfully created new distribution. X

sriharitechie.site Standard View metrics

Details

Distribution domain name d39eroetgzce6r.cloudfront.net	Billing Pay-as-you-go Switch to a plan	ARN arn:aws:cloudfront::299582146630:distribution/E31ALO2OMYE2U3	Last modified Deploying
--	---	--	-----------------------------------

General Security Origins Behaviors Error pages Invalidations Logging Tags

Settings Edit

Name sriharitechie.site	Alternate domain names - Add domain	Standard logging Off
Description -		Cookie logging Off
Price class Use all edge locations (best performance)		Default root object -

Important: CloudFront requires the certificate to be created in the **US East (N. Virginia) (us-east-1)** region.

1. Switch AWS Region to **US East (N. Virginia)**.
2. Open **AWS Certificate Manager (ACM)**.
3. Click **Request Certificate**.

aws [Search] [Alt+S] United States (N. Virginia) Srihari (299582146630) Srihari

AWS Certificate Manager (ACM)

- List certificates
- Request certificate
- Import certificate
- AWS Private CA

▼ ACME

- ACME certificates New
- Endpoints New

Security, Identity, & Compliance

AWS Certificate Manager

Easily provision, manage, deploy, and renew SSL/TLS certificates

New ACM managed certificate

Request a public certificate from Amazon or a private certificate from your organization's certificate authority (CA).

Request a certificate

4. Choose **Public Certificate**.

5. Enter your domain:

Sriharitechie.site

Request public certificate

Domain names
Provide one or more domain names for your certificate.

Fully qualified domain name [Info](#)

sriharitechie.site

[Add another name to this certificate](#)

You can add additional names to this certificate. For example, if you're requesting a certificate for "www.example.com", you might want to add the name "example.com" so that customers can reach your site by either name.

Allow export [Info](#)

☒ **Disable export**
Use this certificate only with integrated AWS services. The private key for this certificate will be disallowed for exporting from AWS.

☐ **Enable export**
Export this certificate and private key for use with any TLS workflow. ACM will charge your account based on the requested domains when the certificate is issued for the first time and for each renewal.

6. Choose **DNS Validation**.

7. Request the certificate.

8. Leave it pending until you add the validation record in Route 53.

AWS Certificate Manager (ACM)

Successfully requested certificate with ID **e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d**
A certificate request with a status of pending validation has been created. Further action is needed to complete the validation and approval of the certificate. [View certificate](#)

e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d [Delete](#)

Certificate status

Identifier e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d	Status Pending validation Info
ARN arn:aws:acm:us-east-1:299582146630:certificate/e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d	Key source AWS managed
Type Amazon Issued	

Domains (1) [Create records in Route 53](#) [Export to CSV](#)

Domain	Status	Renewal status	Type	CNAME name
sriharitechie.site	Pending validation	-	CNAME	_a5c8eb87b9f00244a6fed57fa219db22.sriharit

5. Create a Route 53 hosted zone and map the domain with the CDN.

- Create Route 53 Hosted Zone & Map Domain to CDN

Steps:

Go to Route 53 → Hosted Zones → Create Hosted Zone

- Enter domain name purchased from GoDaddy
- Type: Public Hosted Zone


Add Record


- Type: A – IPv4 address
- Alias: Yes → Alias target → Select your CloudFront distribution
- Save record

Update GoDaddy DNS

- Go to Domain Management → Nameservers
- Replace with Route 53 nameservers (NS records from hosted zone)

☒ Wait ~5–30 minutes for DNS propagation.

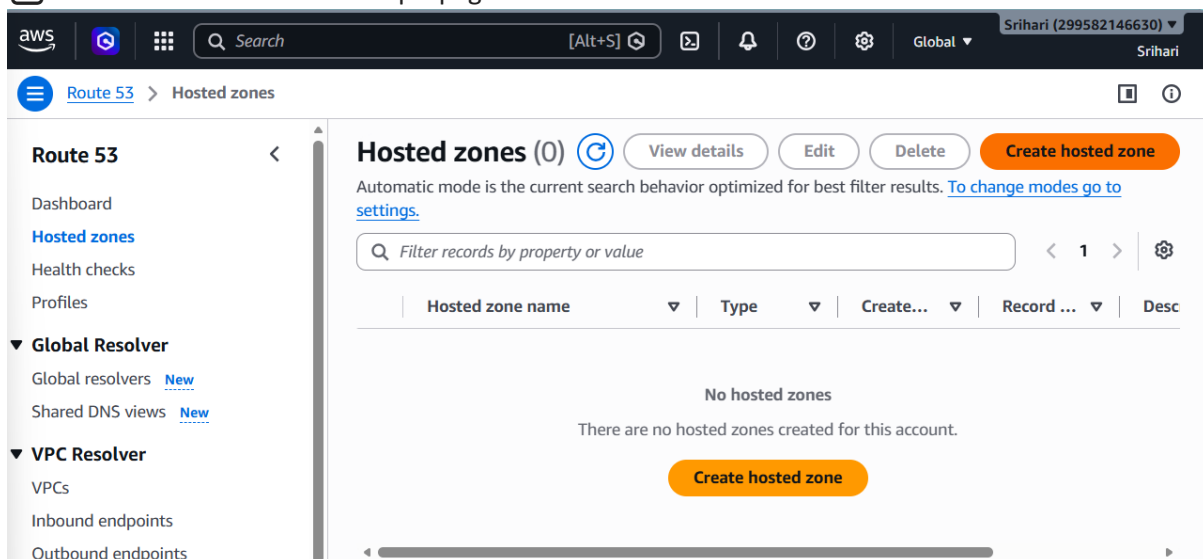

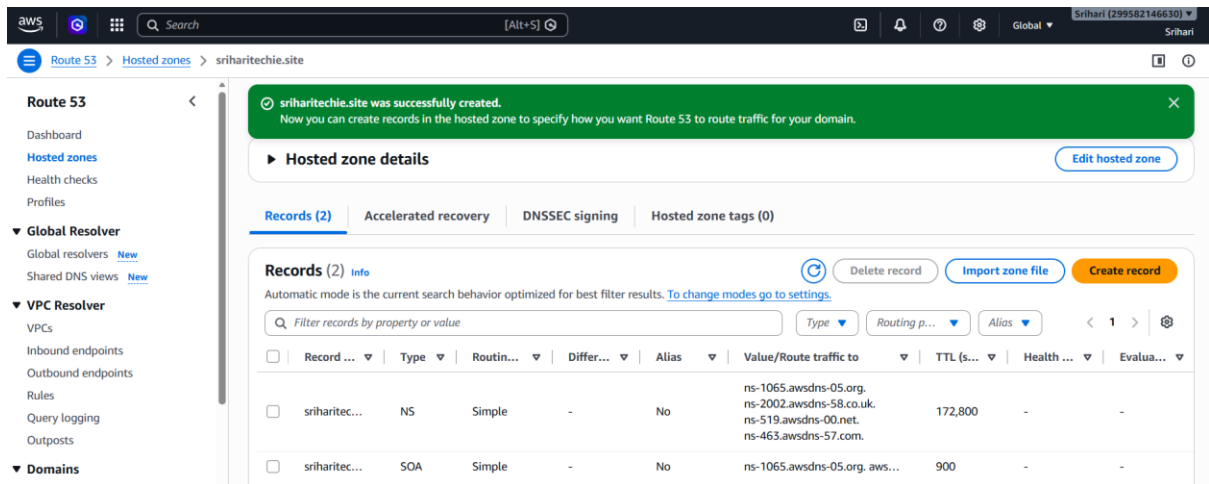

Update Domain Nameservers in GoDaddy

After creating the **Route 53 Hosted Zone** in AWS, the domain's nameservers in GoDaddy were updated to point the domain to AWS DNS.

Steps Performed

1. Logged in to the **GoDaddy** account.
2. Opened the **Domain Portfolio** and selected the domain **sriharitechie.site**.
3. Clicked **Manage DNS** → **Nameservers** → **Change**.
4. Selected **I'll use my own nameservers**.
5. Entered the four nameservers provided by the AWS Route 53 Hosted Zone:
 - ns-1065.awsdns-05.org
 - ns-2002.awsdns-58.co.uk
 - ns-519.awsdns-00.net
 - ns-463.awsdns-57.com
6. Clicked **Save** to update the nameservers.

×

Edit nameservers

Choose nameservers for **sriharitechie.site**

☐

GoDaddy Nameservers (recommended)

☒

I'll use my own nameservers

ns-1065.awsdns-05.org

✕

ns-2002.awsdns-58.co.uk

✕

ns-519.awsdns-00.net

✕

ns-463.awsdns-57.com

✕

+

Add Nameserver

Save

Cancel

Validate SSL Certificate

After creating the hosted zone:

1. Return to ACM.
2. Open your certificate.
3. Click **Create records in Route 53**.
4. Wait a few minutes.
5. Certificate status changes to Issued

The screenshot shows the AWS Certificate Manager (ACM) console. At the top, a green banner indicates "Successfully created DNS records" for certificate ID e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d. Below this, the certificate ID is displayed prominently. The "Certificate status" section shows the identifier, ARN, and type (Amazon Issued). The "Domains" section shows a table with one entry: sriharitechie.site, which is in a "Pending validation" status.

AWS Certificate Manager (ACM)

List certificates
Request certificate
Import certificate
AWS Private CA

ACME

ACME certificates [New](#)
Endpoints [New](#)

Successfully created DNS records
Successfully created DNS records in Amazon Route 53 for certificate with ID e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d.

e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d

Certificate status

Identifier
e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d

ARN
arn:aws:acm:us-east-1:299582146630:certificate/e7b859d2-f4b5-49cb-b696-4dcf9a9aaa0d

Type
Amazon Issued



Status
Pending validation [Info](#)

Key source
AWS managed

Domains (1)

[Create records in Route 53](#) [Export to CSV](#)

Domain	Status	Renewal status	Type	CNAME name
sriharitechie.site	Pending validation	-	CNAME	_a5c8eb87b9f00244a6fed57fa219db22.srihari

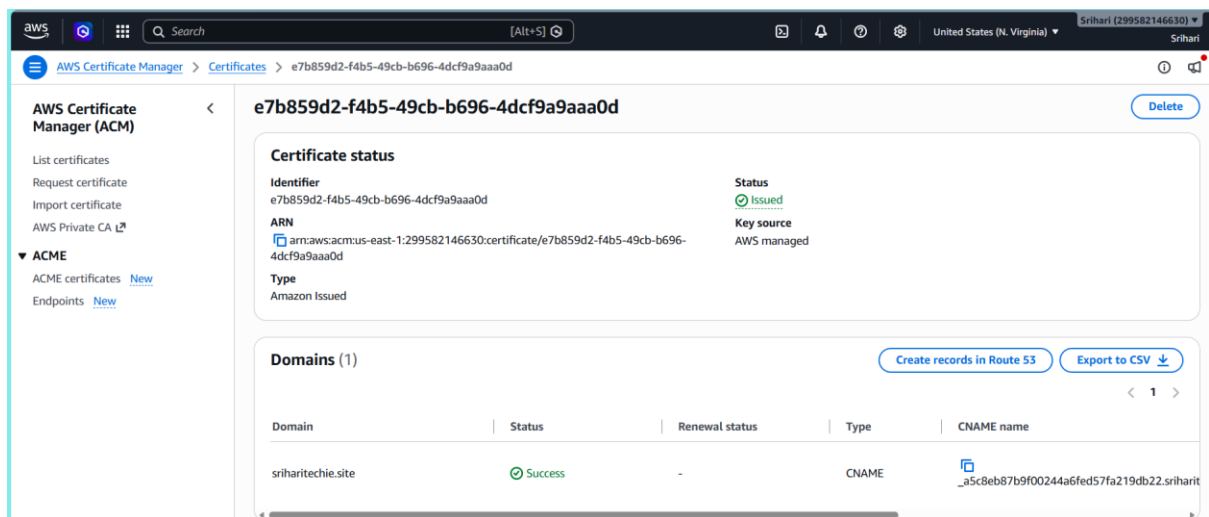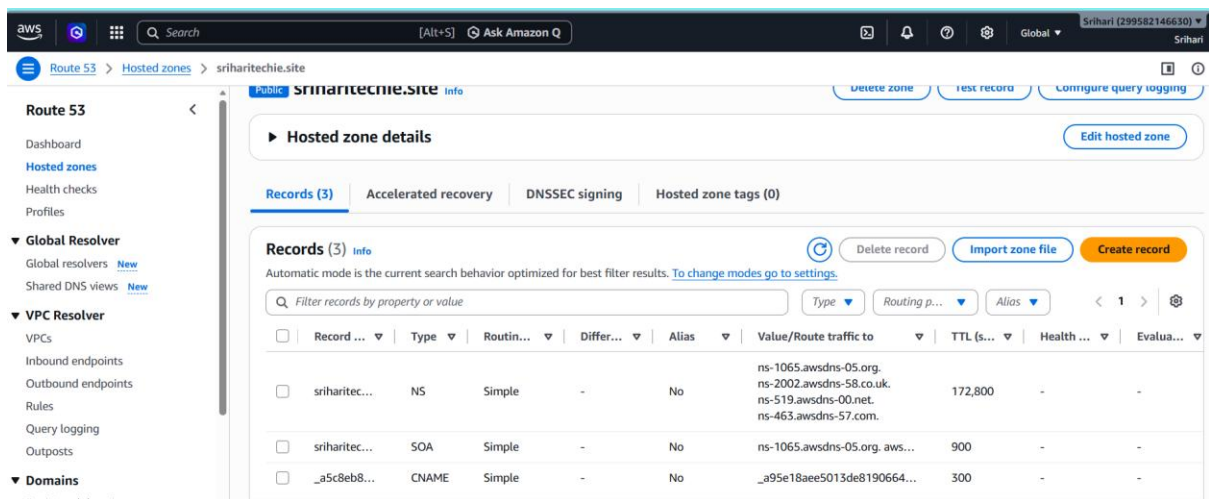

Go to CloudFront.

Edit Distribution.

Under

Alternate Domain Name (CNAME)

Enter

Sriharitechie.site


Under

Custom SSL Certificate

Select the ACM certificate.

Save.

Deployment takes about 10–20 minutes.

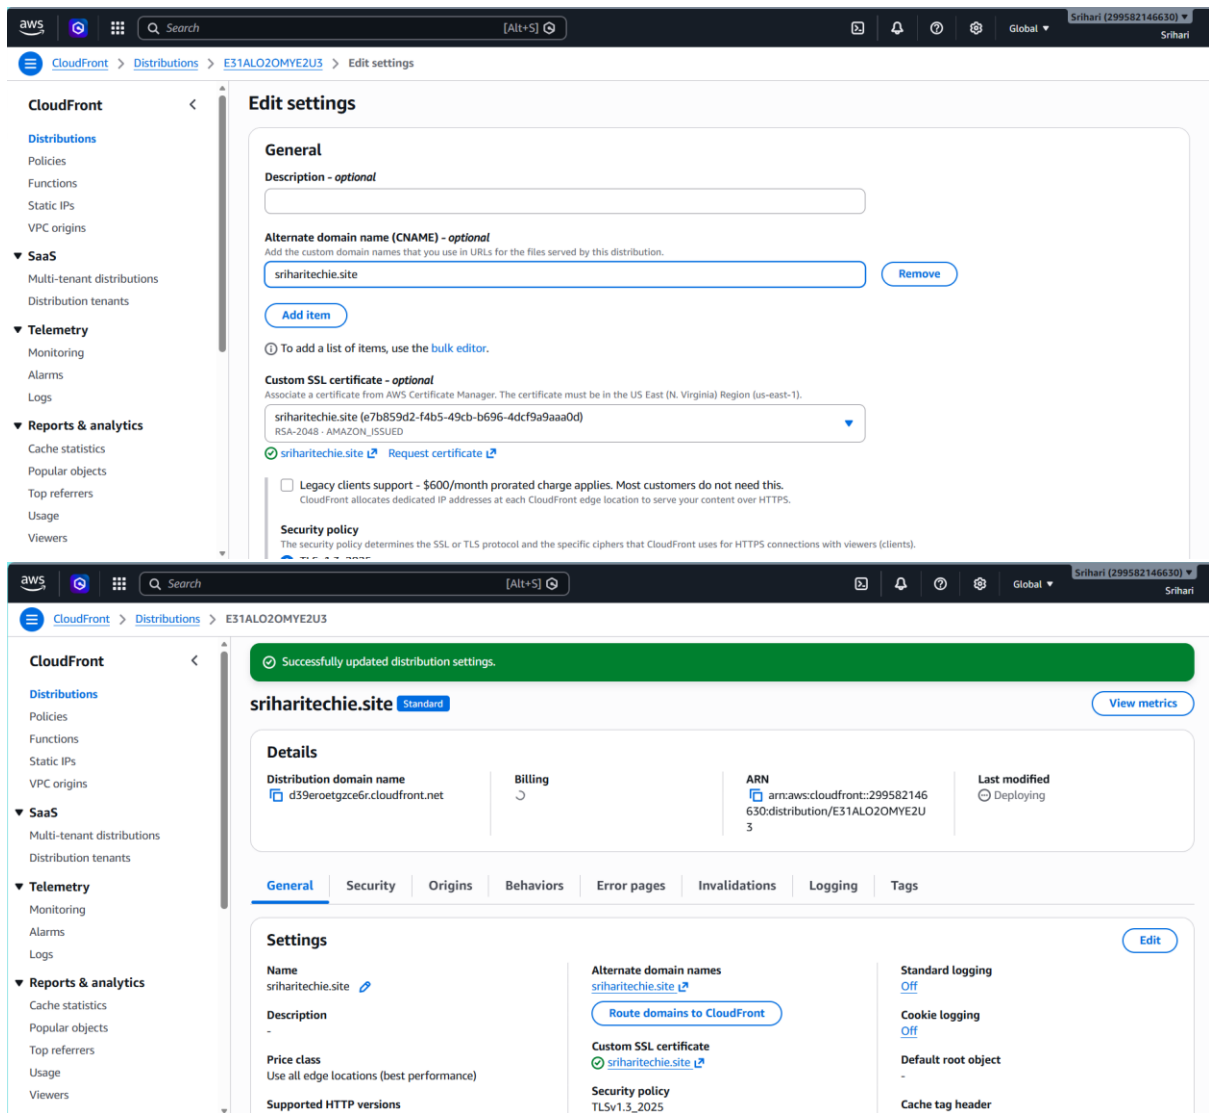

Go to Route 53.

Hosted Zone

Click

Create Record

Choose:

Alias

Yes

Alias Target

Select the CloudFront distribution.

Save.

Now open

<https://sriharitechie.site>

Your website should load.

Route 53 > **Hosted zones** > **sriharitechie.site**

Public sriharitechie.site [info](#) [Delete zone](#) [Test record](#) [Configure query logging](#)

Hosted zone details [Edit hosted zone](#)

Records (3) [Accelerated recovery](#) [DNSSEC signing](#) [Hosted zone tags \(0\)](#)

Records (3) [info](#) [Delete record](#) [Import zone file](#) [Create record](#)

Automatic mode is the current search behavior optimized for best filter results. [To change modes go to settings.](#)

Filter records by property or value [Type](#) [Routing p...](#) [Alias](#) < 1 > [Settings](#)

☐	Record ...	Type	Routin...	Differ...	Alias	Value/Route traffic to	TTL (s...	Health ...	Evalua...
☐	sriharitec...	NS	Simple	-	No	ns-1065.awsdns-05.org. ns-2002.awsdns-58.co.uk. ns-519.awsdns-00.net. ns-463.awsdns-57.com.	172,800	-	-
☐	sriharitec...	SOA	Simple	-	No	ns-1065.awsdns-05.org.aws...	900	-	-
☐	_a5c8eb8...	CNAME	Simple	-	No	_a95e18aee5013de8190664...	300	-	-

Create record [info](#)

Quick create record [Switch to wizard](#)

Record 1 [Delete](#)

Record name [info](#) sriharitechie.site

Keep blank to create a record for the root domain.

☒ **Alias**

Route traffic to [info](#) [Alias to CloudFront distribution](#)

US East (N. Virginia)

An alias to a CloudFront distribution and another record in the same hosted zone are global and available only in US East (N. Virginia).

[X](#)

Use: "d39eroetgzce6r.cloudfront.net"

sriharitechie.site ([d39eroetgzce6r.cloudfront.net](#))

[Add another record](#)

sriharitechie.site [info](#) [Delete zone](#) [Test record](#) [Configure query logging](#)

Hosted zone details [Edit hosted zone](#)

Records (4) [Accelerated recovery](#) [DNSSEC signing](#) [Hosted zone tags \(0\)](#)

Records (4) [info](#) [Delete record](#) [Import zone file](#) [Create record](#)

Automatic mode is the current search behavior optimized for best filter results. [To change modes go to settings.](#)


Filter records by property or value [Type](#) [Routing p...](#) [Alias](#) < 1 > [Settings](#)

☐	Record ...	Type	Routin...	Differ...	Alias	Value/Route traffic to	TTL (s...	Health ...	Evalua...
☐	sriharitec...	A	Simple	-	Yes	d39eroetgzce6r.cloudfront.net.	-	-	No
☐	sriharitec...	NS	Simple	-	No	ns-1065.awsdns-05.org. ns-2002.awsdns-58.co.uk. ns-519.awsdns-00.net. ns-463.awsdns-57.com.	172,800	-	-

6. Update the index.html in the S3 bucket and ensure the updated file is accessible using the domain name.

➤ Update index.html in S3 & Ensure Website Update

1. Go to **S3 bucket** → **Upload** → **Replace index.html**
2. **Invalidate CloudFront cache:**
 - Go to CloudFront → Select distribution → **Invalidations** → **Create Invalidation**
 - Enter **/*** to refresh all files
3. Access your domain (<https://sriharitechie.site>) to see the updated page.

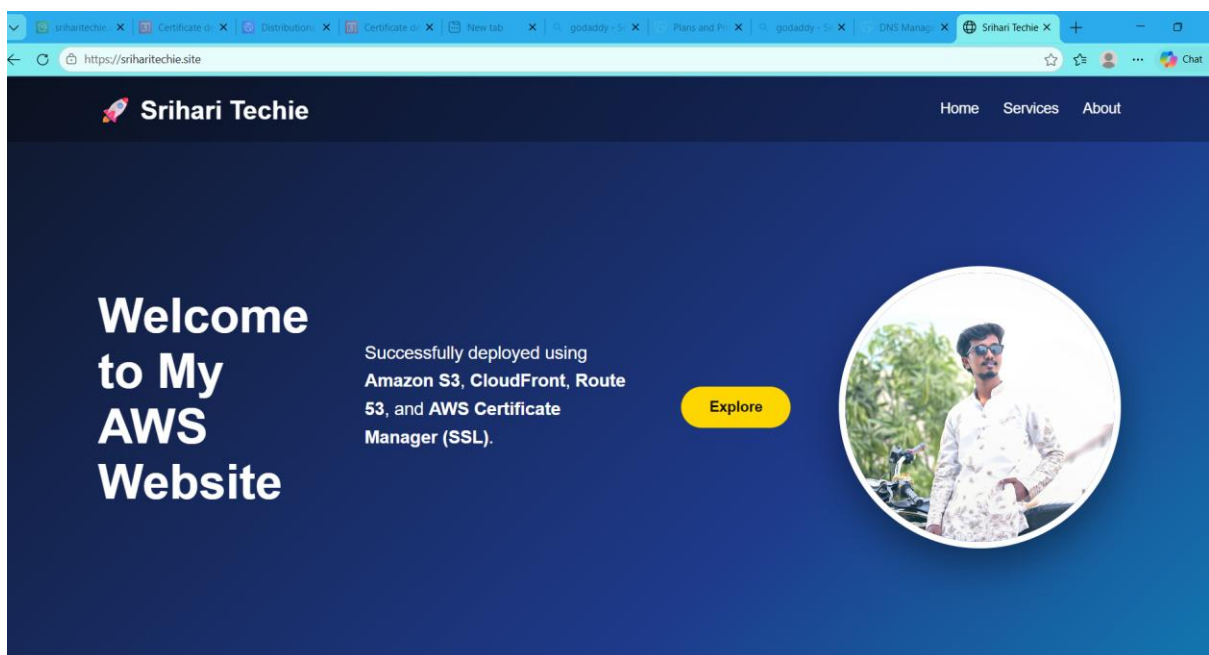

7. Share the domain name in Slack to test the connectivity.

Static website deployment completed.

URL: <https://sriharitechie.site>

Please verify the website connectivity.