Setting up Mac

1 Homebrew

1. Install Homebrew.
2. Open a new terminal window and copy and paste the following command:

```
/bin/bash -c "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/
   install/HEAD/install.sh)"
```

3. This may take a few minutes and may ask for your password. If there are issues, you can visit the Homebrew website.
4. After a successful install, follow the onscreen instructions to add Homebrew to your `PATH` variable. It will list two commands you need to copy and paste. This video may help you as well.
5. To check if installation was successful, type this command:

```
which brew
```

   If successful, the terminal should echo:

```
/usr/local/bin/brew
```

2 Install libraries


Once Homebrew is setup, you need to use it to install both SFML and Boost onto your system.

1. Starting with SFML, paste the following command. This will install SFML 3.

```
brew install sfml
```

2. It may take a minute and it may also install some extra dependencies. If successful, then the output of the following command should include `sfml`.

```
brew list
```

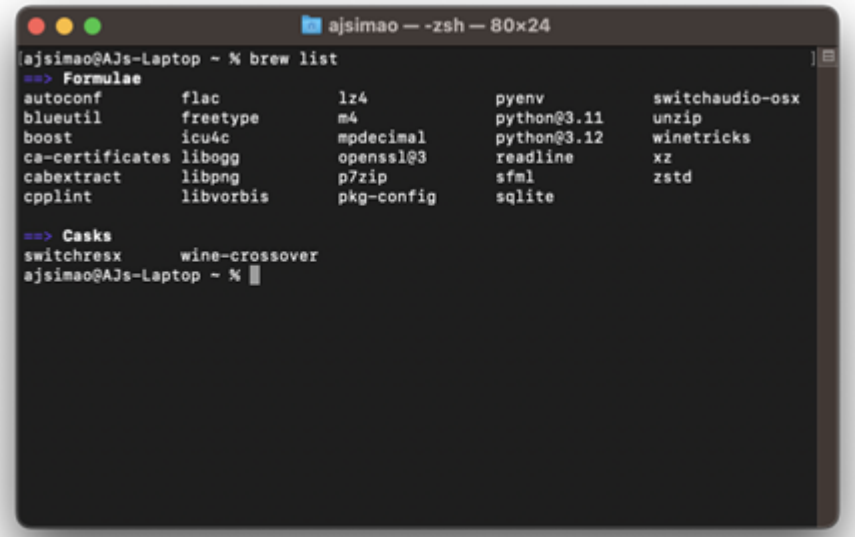

3. Next, you will install Boost. Paste the following command:

```
brew install boost
```

4. After completing, run the command from step 2 and confirm that both Boost and SFML appear on the resulting list.

3 Updating Paths

You will need to update your path variables so that the compiler will be able to find your libraries.

1. Use the following two commands to get the path where SFML and Boost are installed. Write the path down for each as you will need them in the next step.

```
brew --prefix sfml
brew --prefix boost
```

2. Open the `~/.zshrc` file in your favorite editor. This file may or not exist.
3. Add the following two lines to the end of the file, filling in the paths that you got in the previous step.

```
SFML_PATH="path/to/sfml"
BOOST_PATH="path/to/boost"
```

4. Add two more lines to the end of the file, after the ones you just added.

```
export CPATH="${SFML_PATH}/include:${BOOST_PATH}/include:${CPATH}"
export LIBRARY_PATH="${SFML_PATH}/lib:${BOOST_PATH}/lib:${LIBRARY_PATH}
    "
```

5. Close and reopen any existing terminals so that they receive the changes.
6. You should now be able to compile the SFML tutorial code with the provided `Makefile` using the following command (it will compile into `sfml-app`).

```
make
```

Acknowledgements

Special thanks to AJ Simao who provided the initial version of this document.