


Spring Data JPA Hands-on Outputs

Hands-on 1: Spring Data JPA Quick Example

Description:

- Created a Spring Boot project using Spring Data JPA and connected it to a MySQL database.
- Retrieved all country records using JpaRepository and displayed the results in the console.

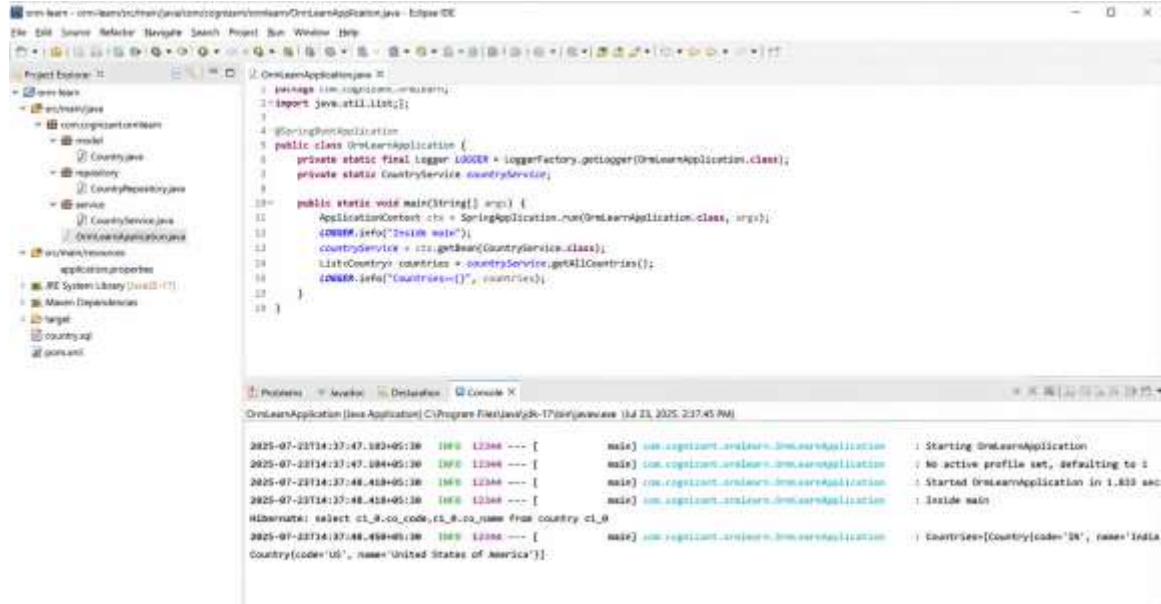

The screenshot displays an IDE window with the following components:

- Project Explorer:** Shows the project structure with packages like `com.cgizant.ondlearn` and files such as `Country.java`, `CountryRepository.java`, and `CountryService.java`.
- Source Editor:** Contains the `OnLearnApplication.java` file. The code is as follows:


```
1 package com.cgizant.ondlearn;
2 import java.util.List;
3
4 @SpringBootApplication
5 public class OnLearnApplication {
6     private static final Logger LOGGER = LoggerFactory.getLogger(OnLearnApplication.class);
7     private static CountryService countryService;
8
9     public static void main(String[] args) {
10         ApplicationContext ctx = SpringApplication.run(OnLearnApplication.class, args);
11         LOGGER.info("Inside main");
12         countryService = ctx.getBean(CountryService.class);
13         List<Country> countries = countryService.getAllCountries();
14         LOGGER.info("Countries={}", countries);
15     }
16 }
```
- Console:** Shows the execution output:

```
2025-07-23T14:37:47.880+05:30 [INFO] 12344 --- [main] com.cgizant.ondlearn.OnLearnApplication : Starting OnLearnApplication
2025-07-23T14:37:47.884+05:30 [INFO] 12344 --- [main] com.cgizant.ondlearn.OnLearnApplication : No active profile set, defaulting to default
2025-07-23T14:37:48.418+05:30 [INFO] 12344 --- [main] com.cgizant.ondlearn.OnLearnApplication : Started OnLearnApplication in 1.833 sec
2025-07-23T14:37:48.418+05:30 [INFO] 12344 --- [main] com.cgizant.ondlearn.OnLearnApplication : Inside main
Hibernate: select ct.cl_code,cs.cl_name from country ct, country cs
2025-07-23T14:37:48.490+05:30 [INFO] 12344 --- [main] com.cgizant.ondlearn.OnLearnApplication : Countries=[Country{code="IN", name="India"}, Country{code="US", name="United States of America"}]
```

Hands-on 2: Query Methods on Country Table

Description:

- Implemented Spring Data JPA Query Methods to search countries by name and starting letter.
- Verified query execution through the application console output.

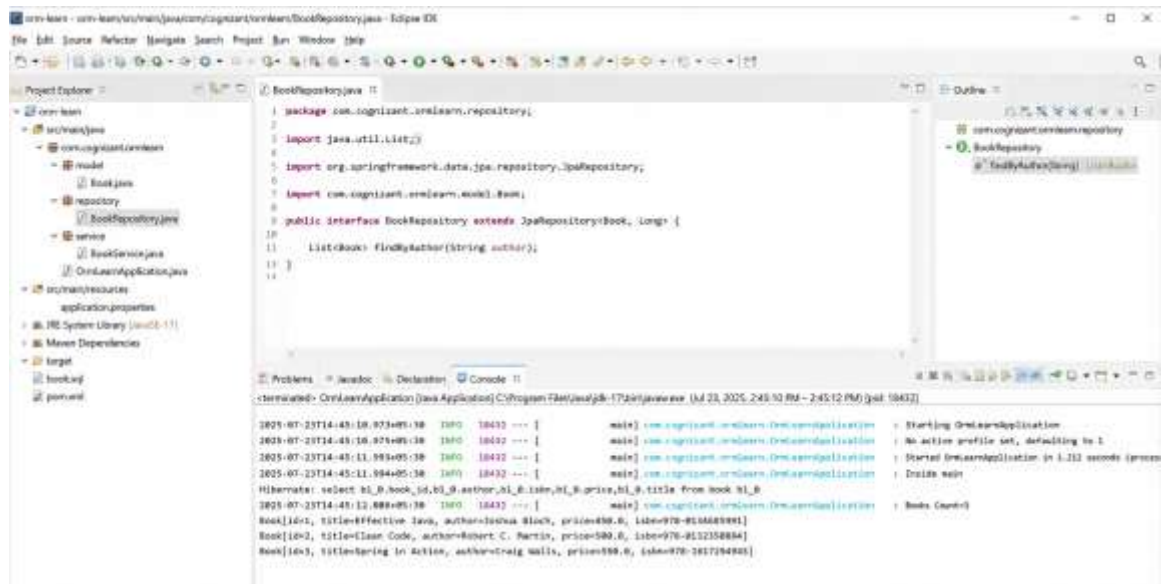

The screenshot shows an IDE with the following components:

- Project Explorer:** Shows the project structure with packages like `com.cognizant.orelearn`, `repository`, and `service`.
- BookRepository.java:** Contains the following code:

```
1 package com.cognizant.orelearn.repository;
2
3 import java.util.List;
4
5 import org.springframework.data.jpa.repository.JpaRepository;
6
7 import com.cognizant.orelearn.model.Book;
8
9 public interface BookRepository extends JpaRepository<Book, Long> {
10
11     List<Book> findByAuthor(String author);
12
13 }
14
```
- Console:** Shows the application output, including the start of `OnlineApplication`, the Hibernate SQL query `select bl_0.book_id,bl_0.author,bl_0.isbn,bl_0.price,bl_0.title from book bl_0`, and the resulting list of books:

```
Book[id=1, title=Effective Java, author=Joshua Bloch, price=49.0, isbn=978-0134685991]
Book[id=2, title=Clean Code, author=Robert C. Martin, price=59.0, isbn=978-0132350854]
Book[id=3, title=Spring in Action, author=Craig Walls, price=59.0, isbn=978-0177949881]
```